



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Fluid Power Seal Design Guide

Catalog EPS 5370



ENGINEERING YOUR SUCCESS.



WARNING:

Failure, improper selection or improper use of the products and/or systems described herein or related items can cause death, personal injury or property damage.

For safe and trouble-free use of these products, it is important that you read and follow the Parker Seal Group Product Safety Guide. This Safety Guide can be referenced and downloaded free of charge at www.parkerseals.com and can be ordered, without charge, as Parker Publication No. PSG 5004 by calling 1-800-C-PARKER.

This document, along with other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors, provides product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through his or her own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance are governed by the provisions stated on the separate page of this document entitled "Offer of Sale."

Fluid Power Seal Design Guide Table of Contents

See Appendices A through G for:

- A Design Action Request Form
- B English / Metric Conversions
- C Custom Groove Calculations
- D Chemical Compatibility
- E ASTM D2000 Compatibility
- F ISO Gland Tolerances
- G Other Parker EPS Products.



Parker Hannifin Corporation
Engineered Polymer Systems Division
Phone: 801 972 3000
Fax: 801 973 4019

www.parkerseals.com

Introduction

1

Engineering

2

Materials

3

Fluid Power Applications

4

Rod Seals

5

Symmetrical Seals

6

Piston Seals

7

Wipers

8

Wear Rings / Bearings

9

Back-ups

10

Urethane O-Rings / Head Seals


11

Introduction

Catalog EPS 5370/USA


Parker Hannifin is the industry leader for sealing system solutions for the fluid power industry.

Parker EPS Division provides the most complete selection of dynamic seals for both OEM and MRO hydraulic and pneumatic applications. Our expertise and complete product offering means Parker is your one source manufacturer and sealing solution partner. Our innovative technology and value added services allow us to engineer your success with leading edge material development, experienced design, high quality manufacturing, and outstanding customer service.

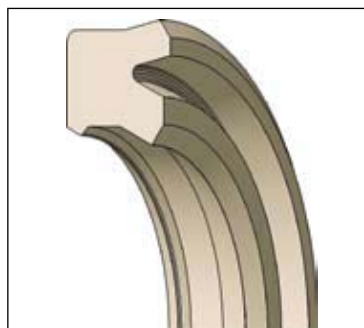


Rod Seals

Rod Seals, which guard against external leakage, are one of the most vital components of the sealing system. In recognition of their critical nature, Parker is pleased to offer the most complete range of materials and profiles in the industry. Our advanced plastic, rubber and PTFE material development delivers the highest performance in a wide variety of rod seal applications. Cutting edge technologies include multiple sealing lip systems, shock-load resistance, low friction and ultra-dry capability.

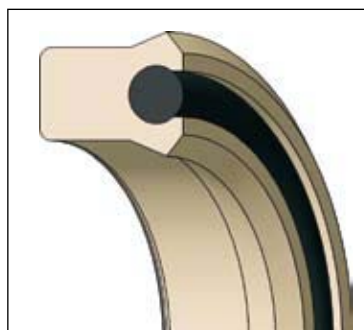


Symmetrical Seals

With thousands of available size and material combinations, Parker symmetrical profiles are designed to act as either rod or piston seals, allowing one part number to function in two applications. Often copied but never equaled, the PolyPak™ for hydraulic applications and the 8400 u-cup for pneumatic applications have revolutionized the fluid power industry and become trusted standards. Symmetrical u-cups and squeeze seals are available in a variety of lip shapes and materials.

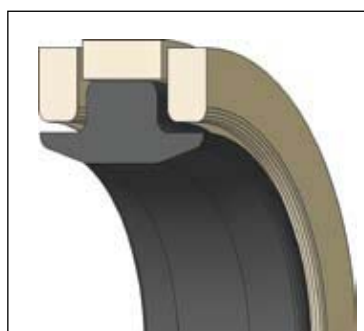

Piston Seals


Our diverse product line of piston seal profiles suits a broad range of hydraulic and pneumatic applications. Whatever the need, from low pneumatic pressures to extreme hydraulic shock loading, Parker has the solution. Profiles are available to meet the demands of uni-directional and bi-directional pressure, low friction, easy installation, port passing, and zero-drift scenarios.

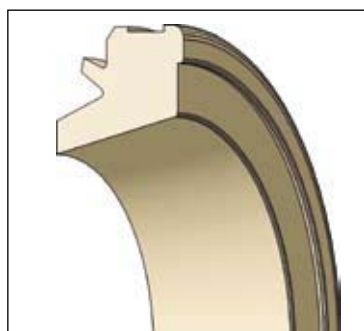

Wipers

Just as rod seals are designed to keep fluid in, Parker wipers perform to keep contamination out. Wipers work in conjunction with rod seals to form the first line of defense in protecting a system and keeping it free from dirt, mud, water, and other contaminants. Incorporating the latest technology in aggressive wiping lips and OD exclusion, Parker has solutions in press-in, snap-in, and double lip profiles.

09/01/07

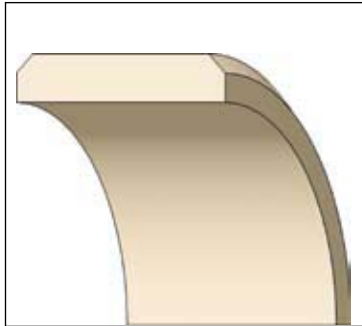

Wear Rings and Bearings

Parker offers a complete line of wear rings and bearing products to fit any application. The product offering meets the full spectrum of needs, from heavy duty hydraulic cylinders operating under the highest temperatures and pressures to pneumatic applications requiring low friction, long life and self-lubrication. No matter what the application demands, Parker's diverse bearing product line ensures that performance requirements are met with maximized value.
















































Back-up Rings

Parker back-up rings offer simple solutions to safely increase system pressure or solve an existing seal extrusion problem. Standard profiles are available in a variety of materials to complement virtually any Parker rod or piston profile.
































O-rings & Head Seals

Parker is pleased to offer the material advantages of the Resilon™ family of urethanes in standard and custom o-ring sizes. With high temperature Resilon o-rings, the need for back-ups can be eliminated, simplifying installation and reducing damage due to spiral failure. Static head seals are ideal for replacing o-rings and back-ups in hydraulic cylinder heads, fool-proofing installation and eliminating failures due to back-up pinching and blow-out.














| Rod Seals (See Section 5) | | | | | | |
|---------------------------|---|--|---|---|---|------|
| Profile | Description | Application (Duty) | | | | Page |
| | | Hydraulic | | | Pneumatic | |
| | | Light | Medium | Heavy | | |
| BD |  | Premium non-symmetrical o-ring energized rod seal with a knife trimmed primary lip and molded secondary lip. Standard materials are 4300, 4700, 5065. Available with positively actuated back-up. |  |  |  | 5-5 |
| BT |  | Premium non-symmetrical u-cup rod seal with a knife trimmed primary lip and molded secondary lip. Standard material is 4300 family. |  |  |  | 5-7 |
| BS |  | Non-symmetrical u-cup rod seal with knife trimmed primary lip and molded secondary lip. Standard materials are 4300 family, 4700, 5065. |  |  |  | 5-9 |
| B3 |  | Non-symmetrical u-cup with knife trimmed lip. Standard materials include 4300, 4700, 5065. |  |  | | 5-11 |
| UR |  | Standard non-symmetrical u-cup with trimmed lip. Standard material is 4615. |  |  | | 5-13 |
| E5 |  | Non-symmetrical low friction rounded lip pneumatic rod seal. Standard materials include 4274, 4180, 4208, 5065. |  | |  | 5-21 |
| TR |  | Bi-directional rod "T-seal" available in no back-up, single back-up, and two back-up groove sizes. Standard energizer materials include 4115, 4274, 4205, 4259. Back-ups available in PTFE, Nylon, PEEK. |  |  |  | 5-24 |
| ON |  | Bi-directional, rubber energized PTFE rod cap seal. Full range of energizer and PTFE materials available. |  |  | | 5-28 |
| CR |  | Bi-directional, low profile, rubber energized PTFE cap rod seal designed to fit standard o-ring glands. Full range of energizer and PTFE materials available. |  |  |  | 5-32 |
| OC |  | Standard bi-directional rubber energized PTFE rectangular cap rod seal. Full range of energizer and PTFE materials available. |  |  |  | 5-39 |
| BR |  | Premium knife trimmed buffer or secondary seal designed to work with a primary rod seal for heavy duty or zero-leak systems. Standard material is 4300. | |  |  | 5-45 |
| OD |  | Uni-directional rubber energized PTFE rod seal, typically used as a buffer or secondary rod seal. Full range of energizer and PTFE materials available. |  |  |  | 5-48 |
| V6 |  | Pneumatic cushion or check valve rod seal used to cushion the piston using internal pressure. Standard materials include 4622, 4180, 4181, 4208. |  | |  | 5-54 |
| OR |  | Bi-directional rubber energized PTFE rod seal used in rotary or oscillating applications. Full range of energizer and PTFE materials available. |  |  |  | 5-57 |

02/15/08

Symmetrical Seals for Rod or Piston Applications (See Section 6)














































| Profile | Description | Application (Duty) | | | | Page |
|--------------------|--|---|---|---|---|------|
| | | Hydraulic | | | Pneumatic | |
| | | Light | Medium | Heavy | | |
| SPP |  Standard PolyPak. A square shaped symmetrical squeeze seal with a knife trimmed scraper lip. Standard materials include 4615, 4622, 4651, 4263, 4207, 4266. |  |  |  | | 6-6 |
| DPP |  Deep PolyPak. A rectangular shaped symmetrical squeeze seal with a knife trimmed scraper lip. Standard materials include 4615, 4622, 4651, 4263, 4207, 4266. |  |  |  | | 6-8 |
| BPP |  Type B PolyPak. A rectangular shaped symmetrical squeeze seal with a knife trimmed beveled lip. Standard materials include 4615, 4622, 4651, 4263, 4207, 4266. |  |  |  | | 6-10 |
| SL |  A dual lip seal created by the combination of a standard PolyPak square shell and a rubber lip seal/energizer. Standard materials are a 4615 shell and 4180 lip seal/energizer. Also known as SCL-Pak. |  |  |  | | 6-39 |
| US |  Standard symmetrical u-cup with trimmed beveled lips. Standard material is 4615. |  |  | | | 6-42 |
| 8400 8500 |  Symmetrical rubber u-cups used primarily in pneumatic applications. 8400 series feature knife trimmed with a beveled lip. 8500 series feature a scraper lip. Standard materials include 4180, 4274, 4208. |  |  | |  | 6-49 |
| AN 6226 |  Industry standard symmetrical u-cups per the old Army Navy (AN) specification. Standard material is 4295. |  | | |  | 6-55 |
| SPI- RAL VEE |  Spiral v-packing rings typically sold in sets, also known as chevron packing. Made from a wide range of materials, v-packing may be cut to size, machined, or net molded. Most dynamic v-packing has been replaced with PolyPak seals or u-cups. | |  |  | | 6-59 |

Piston Seals (See Section 7)











































| | | | | | | |
|-----|---|---|---|---|--|------|
| BP |  Premium bi-directional rubber energized urethane piston cap seal. Standard material is 4304. | |  |  | | 7-5 |
| PSP |  Standard bi-directional rubber energized urethane piston cap seal. Standard materials include 4300, 4622. |  |  | | | 7-8 |
| CC |  ChemCast is a heavy duty bi-directional rubber energized hard plastic, step-cut piston cap seal. | | |  | | 7-11 |
| OK |  Bi-directional rubber energized nylon step-cut piston cap seal. | | |  | | 7-13 |
| PIP |  Bi-directional piston seal created by the combination of a Pressure Inverting Pedestal (PIP) back-up ring and Type B PolyPak. Standard material is a 4615 PolyPak with a 4617 PIP ring. | |  |  | | 7-15 |

09/01/07

Piston Seals (See Section 7)




















| Profile | Description | Application (Duty) | | | | Page |
|---------|--|---|---|---|---|------|
| | | Hydraulic | | | Pneumatic | |
| | | Light | Medium | Heavy | | |
| B7 |  Premium non-symmetrical u-cup with knife trimmed lip piston seal. Standard materials include 4300, 4700, 5065. |  |  | | | 7-19 |
| UP |  Standard non-symmetrical u-cup with trimmed beveled lip piston seal. Standard material is 4615. |  |  | | | 7-23 |
| E4 |  Non-symmetrical low friction rounded lip pneumatic piston seal. Standard materials include 4274, 4180, 4208, 5065. |  | | |  | 7-26 |
| BMP |  Low friction bumper and round lip seal profile for use in pneumatic applications. Standard materials include 4274 and 4208. |  | | |  | 7-29 |
| TP |  Bi-directional piston "T-seal" available in no back-up, single back-up, and two back-up grooves. Standard energizer materials include 4115, 4274, 4205, 4259. Back-ups available in PTFE, Nylon, PEEK. |  |  |  |  | 7-31 |
| S5 |  Economical medium duty bi-directional o-ring energized PTFE piston seal. Standard material is 15% fiberglass-filled PTFE with nitrile energizer. Split option available. |  |  | |  | 7-35 |
| R5 |  Medium to heavy duty bi-directional lathe cut energized PTFE piston seal. Full range of energizer and PTFE materials available. Split option available. | |  |  |  | 7-39 |
| CT |  Four piece capped "T-seal" piston seal made from molded rubber energizer, PTFE cap, and Nylatron back-ups. | | |  | | 7-43 |
| CQ |  Bi-directional three piece lathe cut energized PTFE cap piston seal with an integrated quad seal for zero drift. Also available with dual o-ring energizer. | |  |  | | 7-48 |
| OE |  Bi-directional, rubber energized PTFE piston cap seal. Full range of energizer and PTFE materials available. |  |  | | | 7-53 |
| CP |  Bi-directional low profile, rubber energized PTFE cap piston seal designed to fit standard o-ring glands. Full range of energizer and PTFE materials available. |  |  | |  | 7-62 |
| OA |  Standard bi-directional rubber energized PTFE rectangular cap piston seal. Full range of energizer and PTFE materials available. |  |  | |  | 7-68 |
| OQ |  Bi-directional rubber energized PTFE piston seal used in rotary or oscillating applications. Full range of energizer and PTFE materials available. |  |  | |  | 7-74 |

Wipers (See Section 8)

















| Profile | Description | Application (Duty) | | | | Page |
|----------|---|---|---|---|---|------|
| | | Hydraulic | | | Pneumatic | |
| | | Light | Medium | Heavy | | |
| YD |  Premium snap-in wiper with OD exclusion lip and a knife trimmed wiping lip. Standard material is 4300. | |  |  | | 8-5 |
| SHD |  Slotted heel snap-in wiper for pneumatics and light to medium duty hydraulics. Standard materials are 4615, 5065, 4263, 4208, 4207. |  |  | |  | 8-6 |
| SHX |  Slotted heel snap-in wiper with OD exclusion feature. Designed to upgrade SHD wipers without changing the groove. Standard materials are 4615, 5065. |  |  | |  | 8-7 |
| SH959 |  An industry standard slotted heel Army Navy (AN) wiper designed to fit MS-28776 (MS-33675) grooves. Standard materials are 4615, 5065, 4263, 4208, 4207. |  |  | |  | 8-11 |
| SX959 |  An industry standard slotted heel Army Navy (AN) wiper with an OD exclusion feature designed to fit MS-28776 (MS-33675) grooves. Designed to upgrade SH959 wipers without changing the groove. Standard materials are 4615, 5065, 4263, 4208, 4207. |  |  | |  | 8-12 |
| AH |  Double-lip, press in place, metal canned wiper with knife trimmed sealing lip for heavy duty hydraulics. Standard materials are 4300, 4700, 4615. | |  |  | | 8-15 |
| J |  Standard single-lip, press in place, metal canned wiper with a knife trimmed lip for medium and heavy duty hydraulics. Standard materials are 4300, 4700, 4615. | |  |  | | 8-17 |
| AY |  Premium snap-in place double-lip wiper for hydraulic applications. Standard materials are 4300, 4301, 4700. |  |  |  | | 8-19 |
| H / 8600 |  Standard snap-in place double-lip wiper. Standard materials for H wiper are 4615, 5065. Standard material for 8600 wiper is 4181. |  |  | |  | 8-21 |
| K |  Light load snap-in wiper with double-lip designed for low friction, light load applications. Standard material is 4615. |  | | | | 8-27 |
| AD |  Double acting, double-lip, rubber energized PTFE wiper. Full range of energizer and PTFE materials available. |  |  | |  | 8-30 |
| SG |  Metal scraper with rubber energizer for excluding abrasive contaminants. | |  |  | | 8-36 |

09/01/07











Wear Rings / Bearings (See Section 9)

| Profile | Description | Application (Duty) | | | | Page |
|---|--|---|---|---|---|------|
| | | Hydraulic | | | Pneumatic | |
| | | Light | Medium | Heavy | | |
| WPT  | Tight tolerance piston wear ring with chamfered corners. Standard material is 4733 WearGard™. |  |  |  | | 9-7 |
| WRT  | Tight tolerance rod wear ring with chamfered corners. Standard material is 4733 WearGard. |  |  |  | | 9-11 |
| WN  | Standard commercial wear ring for rod and piston applications. Standard material is 4650 MolyGard™. |  |  | | | 9-14 |
| PDT  | PTFE wear strip/bearing available cut to length or in bulk rolls. A variety of PTFE compounds are available. |  |  | |  | 9-18 |
| PDW  | Precision cut wear ring/bearing machined from PTFE billet material. Rod and piston chamfer may apply. |  |  | |  | 9-27 |

Back-ups (See Section 10)

| | | | | | | |
|--|---|---|---|---|--|-------|
| MB  | Heavy cross-section modular back-up for PolyPak seals. Standard materials are 4617, 4652. | |  |  | | 10-4 |
| 8700  | Light cross-section back-up for PolyPak and u-cup seals. Standard materials are 4651, 4729. |  |  | | | 10-10 |
| 5100  | Back-up rings designed for o-ring grooves. Standard materials are 4651, 4729. |  |  |  | | 10-13 |
| PAB  | Positively actuated back-up ring incorporated into common seal profiles to extend a seal's pressure range. Sold as an assembly with the seal. | |  |  | | 10-21 |
| PDB  | Anti-extrusion PTFE ring offered in solid and split configurations. Full PTFE material range applies. |  |  | | | 10-22 |






Urethane O-Rings & Head Seals (See Section 11)

| | | | | | | |
|---|--|---|---|---|---|-------|
| 568  | High performance urethane o-ring made from the Resilon™ family of high temperature, low compression set urethanes. |  |  |  |  | 11-2 |
| HS  | Static head seals designed to replace o-rings and back-up in static applications. Standard material is 4700. |  |  |  |  | 11-15 |

General Application Guidelines

Parker's selection of products is the broadest offering in the industry for hydraulic and pneumatic sealing systems. Table 1-1 provides "General Application Guidelines" to help define possible differences between light, medium and heavy duty applications. The product profile charts beginning on [page 1-4](#) show corresponding application duty recommendations for each profile.

Table 1-1. General Application Guidelines.

| Application Parameter | Hydraulic | | | Pneumatic | |
|-----------------------|--|---|--|--|--|
| |  Light Duty |  Medium Duty |  Heavy Duty |  Light Duty |  Heavy Duty |
| Pressure Range | <1200 psi (<83 bars) | <3500 psi (<241 bars) | >3500 psi (>241 bars) | 1 to 200 psi (0 to 14 bar) | Above 200 psi (Above 14 bars) |
| Pressure Spikes | None or low | Not to exceed twice the system pressure. Short duration such as valve shifting. | Pressure spikes that may be several times the system pressure and of a longer duration. These are often mechanically induced by forcing the rod in or out. | Because of the compressive nature of gases pressure spikes are typically not a problem. | Because of the compressive nature of gases pressure spikes are typically not a problem. |
| Temperature Range | 0°F to 160°F (-18°C to 71°C) | -20°F to 200°F (-29°C to 93°C) | -45°F to 225°F (-43°C TO 107°C) | 0°F to 72°F (-18°C to 22°) | Cryogenic to 450°F (232°C) |
| Contamination | Low or non existing | Moderate with cylinder in horizontal or inverted position. | Moderate to high with the cylinder upright - vertical | Low or non existing | Moderate to high with the cylinder upright - vertical |
| Side Loading | None to light with shorter stroke and vertical cylinder mount. | Moderate side load with cylinder mounted towards the vertical position. Medium stroke. | Longer stroke lengths. Cylinder mounted horizontal, heavy side loading. | None to light with shorter stroke and cylinder mount vertical. | Longer stroke lengths. Cylinder mounted horizontal, heavy side loading. |

It is not uncommon for the requirements of a sealing system to fall into multiple duty columns. When this situation occurs you should select the majority of your components from the lesser duty range.

When selecting a wiper, focus on contamination section.

In selecting a sealing component you will evaluate the temperature, pressure and pressure spike variables of the application. With a wear ring, you will want to look at the temperature and side loading section. This does not preclude the need to consider such things as fluid being sealed and stroke speed.

The Parker Advantage

Parker is the world's leading diversified manufacturer of motion and control technologies and systems, providing precision-engineered solutions for a wide variety of commercial, mobile, industrial and aerospace markets. The Engineered Polymer Systems (EPS) Division of Parker Seal Group, has over 40 years experience designing and manufacturing elastomeric, polymeric and plastic seals, materials, and sealing systems for dynamic applications. Working with Parker EPS Division gives you access to all of Parker's Seal Group in North America, Europe, and Asia.

Worldwide Manufacturing

Parker Seal Group and EPS Division's manufacturing facilities for dynamic seals include:

North America:

EPS Division Salt Lake City

Division Headquarters
Plastic & Rubber Operations
2220 South 3600 West
Salt Lake City, UT 84119

EPS Division Nacogdoches

Clipper Operations
Oilfield Rubber Operations
Expansion Joint Operations
403 Industrial Blvd.
Nacogdoches, TX 75964
Ph: (800) 233-3900

EPS Division PTFE Operations:

EPS Division, Elgin Operations
2565 Northwest Parkway
Elgin, IL 60124
Ph: (847) 783-4300

EPS Division, Marion Operations
3967 Buffalo Street
Marion, NY 14505
Ph: (315) 926-4211

EPS Division, Baja Operations
Baja, Mexico
Ph: (619) 671-3257



EPS Division Salt Lake City Operations



EPS Division Chicago (Elgin)



EPS Division Nacogdoches



EPS Division Marion



EPS Division Baja

09/01/07

Europe:**Packing Operations:**

Prädifa, Bietigheim, Germany
Ph: (+49) 7142 351-0

PTFE Operations:

Polar Seals ApS, Espergaerde, Denmark
Ph: (+45) 49 121700

Advanced Products NV, Boom, Belgium
Ph: (+32) 3 880 81 50

Sadska, Czech Republic
Ph: (+420) 325 555 111

Asia:

Parker Hannifin Motion & Control Co., Ltd.
Shanghai, China
Ph: (+86) 21 28995181

*Bietigheim**Denmark**Belgium**Czech Republic*

Manufacturing Excellence

Parker's manufacturing capabilities accommodate a wide range of dynamic sealing needs, providing the following value benefits to our customers:

- All manufacturing operations offer state of the art processes and procedures that enable Parker to provide world class products, in both standard and custom profiles.
- Specialized cellular manufacturing and lean concepts enable Parker to handle both low and high volume runs with equal efficiency.
- Breadth of tooling capability produces diameters as small as 1/16 inch and as large as 9 feet without splicing.
- Custom high speed trim machines ensure a sharp sealing edge for the ultimate seal performance wherever possible.

Rubber Operations

With over 400 unique rubber compounds, Parker has the largest selection of materials available in the industry. Our material offering includes custom blends of nitrile, ethylene propylene and fluorocarbons, among others. If an application demands unique material specifications, our in-house chemists have the expertise and capability to assist in specifying and validating optimal materials to meet system requirements. State of the art rubber molding processes such as compression, transfer, injection and injection-compression are used to manufacture the highest quality products.



Rubber Injection Press

Plastic Operations

Our plastics material offering includes such seal industry standards as Molythane™, PolyMyte™, WearGard™, MolyGard™, and many more. Parker's Resilon™ family offers the highest temperature

performance of any urethane in the industry. Our commitment to quality and research and development remains a top priority to ensure leading edge status in new material development. With in-house processing, from manufacturing the plastic pellet to molding the finished product, Parker maintains strict controls which ensure the delivery of quality products from quality materials — start to finish.



Plastic Manufacturing

PTFE Operations

Parker's PTFE operations manufacture high quality machined seals from ¼ inch to 72 inches in diameter, utilizing virgin and proprietary blends of filled PTFE. A wide variety of PTFE fluid power seals are manufactured on state of the art CNC equipment with live tooling and multi-axis capabilities. Automated processing allows the efficient handling of both low and high volume runs. PTFE production at Parker is entirely an internal system, from material blending and molding to sintering and CNC machining. Our commitment to quality and service is supported by investment in advanced technology, test and inspection methods.



PTFE Manufacturing

Applications Engineering

Our team of application engineers can help you find the most reliable, cost-effective sealing solution for your product. These engineers are experts, combining decades of sealing experience in real-world applications with a full complement of technology-driven tools to produce the answers you need.

FEA

Utilizing advanced non-linear Finite Element Analysis (FEA) software our engineers can perform extremely accurate virtual simulations of material performance based on actual physical test data. These simulations eliminate the need for multiple iterations of costly prototype tooling, and dramatically reduce development lead times. They also ensure first-time selection of the best material and geometry for your application.


Mechanical Test Lab

Parker's mechanical test lab is an important asset for validating new designs and qualifying seals to customers' performance specifications. Our sophisticated mechanical testing lab utilizes several breakthrough technologies, enabling engineers to validate seals and sealing systems for hydraulic, pneumatic and rotary systems. All product testing is carried out in accordance with ASTM and SAE specifications as well as customer-specific requirements.

Hydraulic testing capabilities include pressures up to 10,000 psi with environmental chambers to control temperatures from -40 to 300 °F. Tests can be performed on assembled cylinders or can be configured on test stands which isolate performance of rod seals, piston seals and wipers for troubleshooting and fine tuning. For heavy contamination situations, our dust chamber can be used to simulate the most rigorous operating environments, putting seals to the ultimate test.

Pneumatic testing is also environmentally controlled to simulate a variety of operating conditions. Endurance and life cycle tests can be performed on applications of all speeds and pressures, from automation and assembly cylinders to high speed pneumatic hand tools.

Rotary testing capabilities range from low speed, high pressure hydraulic swivels to high speed gear box and bearing applications in extreme operating conditions, validating seal performance across a wide range of industries.

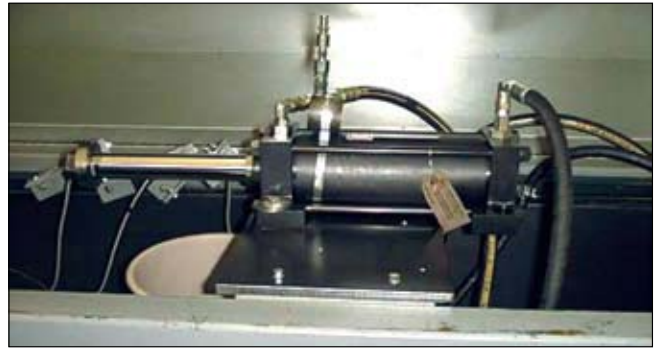

Low pressure life cycle testing



Pneumatic cylinder testing



High pressure hydraulic leakage testing



Rotary hydraulic testing

09/01/07

Introduction

1

Premier Customer Support

Worldwide and local support is just a phone call away. Our local Parker sales representatives provide a single point of contact for local sealing support. Our established worldwide network of over 300 distributor and service center locations combined with factory direct representatives, including global sales and engineering, ensures access to quality products and engineering services anytime, anywhere.

Customer service is a key component of the Parker package. Electronic ordering systems such as EDI and PHconnect make placing and tracking orders easy. Our knowledgeable customer service representatives are only a phone call away at 801 972 3000.



SmartScope™ inspection

Quality Commitment

Parker is committed to consistently delivering excellence in quality and service through continuous improvement of our people, products and systems. Our manufacturing facilities are registered to either AS9100, ISO/9000, or TS16949 standards.

Our commitment to quality and service is supported by our investment in advanced test and inspection methods and equipment. Parker constantly strives to improve customer satisfaction and product quality through the implementation of:

- Six Sigma
- Lean manufacturing
- Kaizen events
- TQM
- Advanced product quality planning (APQP)
- Feasibility studies



CMM: Coordinate measuring tool inspection

Parker is consistently willing to explore new ideas with the companies and individuals we serve. Customers come to Parker for different reasons, but our role is always the same . . . working to use our expertise and help our customers engineer their success.

Contents

| | |
|--|------|
| Sealing Theory | 2-1 |
| Static vs. Dynamic Sealing | 2-1 |
| Leakage Control | 2-2 |
| Lip vs. Squeeze Seals | 2-2 |
| Effects of Lip Geometries | 2-3 |
| Friction | 2-3 |
| Pressure Effects & Extrusion... | 2-4 |
| Seal Wear | 2-5 |
| Seal Stability | 2-6 |
| Surface Speed | 2-6 |
| Compression Set | 2-7 |
| Influence of Temperature | 2-7 |
| General Guidelines for Hardware Design | 2-8 |
| Hardware Surface Finish | |
| Surface Finish Guidelines | 2-9 |
| Surface Finish FAQs | 2-13 |
| Installation | |
| Considerations | 2-14 |
| Installation Tools - Piston | 2-16 |
| Installation Tools - Rod | 2-17 |
| Finite Element Analysis | 2-18 |

Parker Fluid Power Seals for All Application Technologies

Seals have been used since ancient times and have evolved into a wide variety of shapes and materials. For those who are not familiar with sealing technology, the number of options available can be confusing. Selecting the most suitable product for a given application can be difficult. This engineering section will assist in product selection by explaining the fundamentals of seal design and material technology.

Sealing Theory

Static vs. Dynamic Sealing

Every seal, whether static or dynamic, must seal against at least two contacting surfaces. In static applications, both surfaces are non-moving relative to one another. In dynamic applications at least one surface is in motion relative to the other sealing surface(s). For example, in a standard hydraulic cylinder, the rod and piston seals would be classified as dynamic seals, while the seal between the bore and the head gland would be considered a static seal.

In both static and dynamic applications, a certain amount of squeeze or compression is required upon installation to maintain contact with the sealing surfaces and prevent fluid leakage. Dynamic applications in particular involve other variables and require that additional factors be evaluated to ensure proper system performance. These variables are discussed in the following sections.



Fig. 2-1. Hydraulic cylinder

Leakage Control

When choosing a sealing system, the desired result is ultimately leakage control. Seal design and material improvements have made it possible not only to have seal combinations that provide zero leakage, but also provide extended life in a variety of applications. Aside from the seals themselves, a thorough understanding of system parameters is necessary to obtain the best results.

Optimal sealing is best achieved by taking a systems approach to the seal package rather than considering components individually. Our profiles have been designed specifically to complement one another to create high performance systems. For example, pairing a Parker rod seal with a Parker wiper minimizes fluid leakage and maximizes contamination exclusion. Our rod seals are designed with knife-trimmed lips to ensure the best possible film breaking. This dry rod technology permits the wiper to be extremely aggressive, excluding contamination without building up oil leakage around the wiper. Another systems approach to effectively control leakage is to incorporate multiple sealing lips. Parker's BR buffer ring, BT u-cup and AH double-lip canned wiper are designed to work together to give optimized performance and the driest sealing available in the industry (see Figure 2-2).

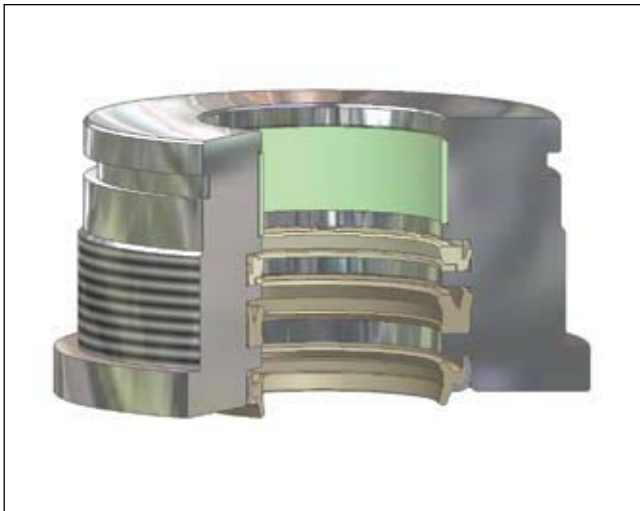


Figure 2-2. BR, BT, AH sealing system for leakage control

Even when appropriate seals are specified, it is still possible to experience leakage due to factors extending beyond the seals themselves. Examples are hardware considerations like surface finish and installation damage, seal storage, chemical wash downs, maintenance and contamination. Adhering to the design recommendations found herein not only for seals, but also for the mating hardware will provide the greatest likelihood of minimized leakage.

Lip vs. Squeeze Seals

The cross-sectional shape of a seal dramatically affects how it functions, especially at low pressure. The greatest trade-off in dynamic sealing is low friction performance vs. low pressure sealability. At low pressure, friction, wear and sealing ability are affected by whether or not the seal is a lip or squeeze profile (see Figure 2-3). With this in mind, seals are often categorized as either "lip seals" or "squeeze seals," and many fall somewhere in between. Lip seals are characterized by low friction and low wear; however, they also generate poor low pressure sealability. Squeeze seals are characterized by just the opposite: high friction and high wear, but better low pressure sealability.

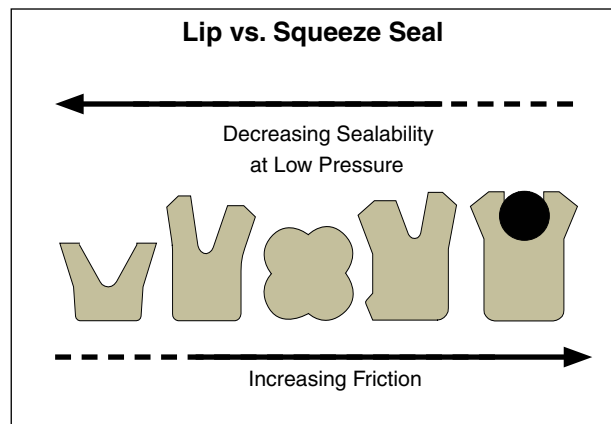


Figure 2-3. Lip seal vs. squeeze seal









As described above, a squeeze type seal will generate much more sealing force than a lip type seal. The assumption here is that both seals are under zero or low pressure. However, as fluid pressure increases, the differences between seal types become insignificant due to the force from the fluid pressure overcoming the designed squeeze. Pressure generally improves leakage control, but increases friction and its associated heat, wear and potential for extrusion.

In pneumatic applications, low friction is of the utmost importance. As such, lip seals are an excellent choice for these low pressure applications. Conversely, in hydraulic cylinders, where high system pressures easily overcome frictional forces, squeeze seals are often the appropriate choice. An example of a hydraulic application in which a squeeze seal would not be appropriate is a gravity returned hydraulic ram. In this case, a lip type hydraulic seal would generate lower friction, allowing the gravity return to function properly.

Effects of Lip Geometries

Lip geometry will determine several functions of the seal. Force concentration on the shaft, film breaking ability, hydroplaning characteristics and contamination exclusion are all factors dependent on lip shape. Table 2-1 shows four different lip shapes and provides helpful insights for choosing an appropriate lip geometry.

Table 2-1. Seal Lip Contact Shape

| Contact Shape | Rounded | Straight Cut | Beveled | Square |
|---------------------------------------|--|--|--|--|
| Seal Lip Shape |  |  |  |  |
| Shape of Contact Force/Stress Profile |  |  |  |  |
| Film Breaking Ability | Low | High | Very High | Medium |
| Contamination Exclusion | Low | Very High | Low | High |
| Tendency to Hydroplane | High | Very Low | Low | Medium |
| Typical Uses | Pneumatic U-cups | Wipers and Piston Seals | Rod Seals | Piston Seals |

Friction

Friction is a function of the radial force exerted by the seal and the coefficient of friction between the seal and the dynamic sealing surface. Reducing friction is generally desirable, but not always necessary. Friction

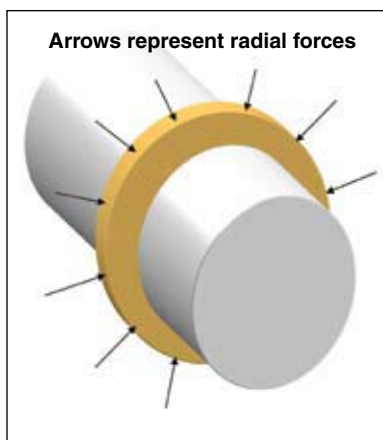


Figure 2-4. Radial force

is undesirable because of heat generation, seal wear and reduced system efficiency.

Factors that affect the radial force are:

- Pressure
- Material modulus
- Temperature
- Lip geometry
- Squeeze vs. lip seal

Factors that affect the coefficient of friction are:

- Seal material
- Dynamic surface roughness
- Temperature
- Lubrication

When the proper seal selection is made, most seals will function such that friction is not a concern. However, when friction becomes critical, there are several ways to reduce it:

- Reduce the lip cross-section
- Decrease lip squeeze
- Change seal material
- Evaluate the hardware's surface finish
- Reduce system pressure
- Improve lubrication

Lowering friction increases seal life by reducing wear, increasing extrusion resistance, decreasing compression set and the rate of chemical attack.

Breakaway friction must be overcome for movement to begin. It is influenced by the duration in which an application remains stationary. The longer the duration, the more lubrication will be forced out from between the seal and the contacting surface. The seal material then conforms to the profile of the surface finish. These events increase breakaway friction.

Stick-slip is characterized by distinct stop-start movement of the cylinder, and may be so rapid that it resembles severe vibration, high pitched noise or chatter. Seals are often thought to be the source of the stick-slip, but other components or hardware can create this issue.

Causes of stick-slip include swelling of wear rings or back-up rings, extreme side-loading, valve pulsation, poor fluid lubricity, external sliding surfaces or seal pressure trapping. This condition can be puzzling or difficult to resolve. Possible causes and troubleshooting solutions are listed in the following [Table 2-2](#).

Table 2-2. Stick-slip Causes & Troubleshooting Tips

| Possible Causes | Troubleshooting Tips |
|-------------------------------------|---|
| Surface finish out of specification | Verify surface is neither too smooth or too rough |
| Poor fluid lubricity | Change fluid or use oil treatments or friction reducers |
| Binding wear rings | Check gland dimensions, check for thermal or chemical swell |
| Side loading | Review cylinder alignment, incorporate adequate bearing area |
| Seal friction | Use material with lower coefficient of friction |
| Cycle speed | Slow movement increases likelihood of stick-slip |
| Temperature | High temperature softens seals, expands wear rings, and can cause thermal expansion differences within hardware |
| Valve pulsation | Ensure valves are properly sized and adjusted |
| External hardware | Review system for harmonic resonance |

Pressure Effects and Extrusion

Extrusion occurs when fluid pressure forces the seal material into the clearance gap between mating hardware. Dynamic motion further promotes extrusion, as surfaces in motion tend to pull material into the extrusion gap, generating additional frictional forces and heat. This can cause premature failure via several modes. Extruded seal material can break away and get caught underneath sealing lips, creating leak paths. As material continues to break away, seal geometry erodes, causing instability and eventual leakage. Additionally, heat generated from added friction will cause the seals to take a compression set, dramatically shortening their life.

Careful design considerations should be evaluated to prevent extrusion. For example, minimizing



Figure 2-5. Extrusion damage

clearance gaps and selecting a proper material based on system temperature, pressure and fluid are both helpful in reducing the risk of extrusion. As clearance gaps increase, less pressure is required in order for extrusion to occur. Higher temperatures can also play a role in this effect by causing seal materials to soften, encouraging extrusion at lower pressures. If the seal material chosen is not suitable to be used in the system fluid, softening due to chemical attack can also decrease its ability to resist extrusion.

The following Table 2-3 lists possible causes of extrusion and troubleshooting tips for preventative or corrective measures.

Table 2-3. Extrusion Causes and Troubleshooting Tips

| Possible Causes |
|---|
| Large extrusion gaps |
| High operating temperature |
| Soft materials |
| High system pressure |
| Pressure spikes |
| Side loading |
| Wear rings |
| Chemical compatibility |
| Troubleshooting Tips |
| Reduce extrusion gaps |
| Check gland dimensions |
| Replace commercial grade wear rings with tight tolerance wear rings |
| Incorporate back-up rings |
| Evaluate size and positioning of wear rings for side load resistance |
| Consider harder, higher modulus and tensile strength compound |
| Match seal compound for pressure, temperature and fluid compatibility |


By definition, the radial gap is one-half of the diametrical gap. The actual extrusion gap is often mistaken as the radial gap. This is too optimistic in most cases because side loading of the rod and piston will shift the diametrical clearance to one side. Often, gravity alone is sufficient for this to occur. Good practice is to design around worst case conditions so that extrusion and seal damage do not occur. Table 2-4 provides maximum radial extrusion gaps for various seal compounds.

As a general rule of thumb, the pressure rating of dynamic seals will be approximately one-half that of static seals.

09/01/07



Table 2-4. Typical Pressure Ratings for Standard Seal Compounds in Reciprocating Applications at 160°F (see Note)

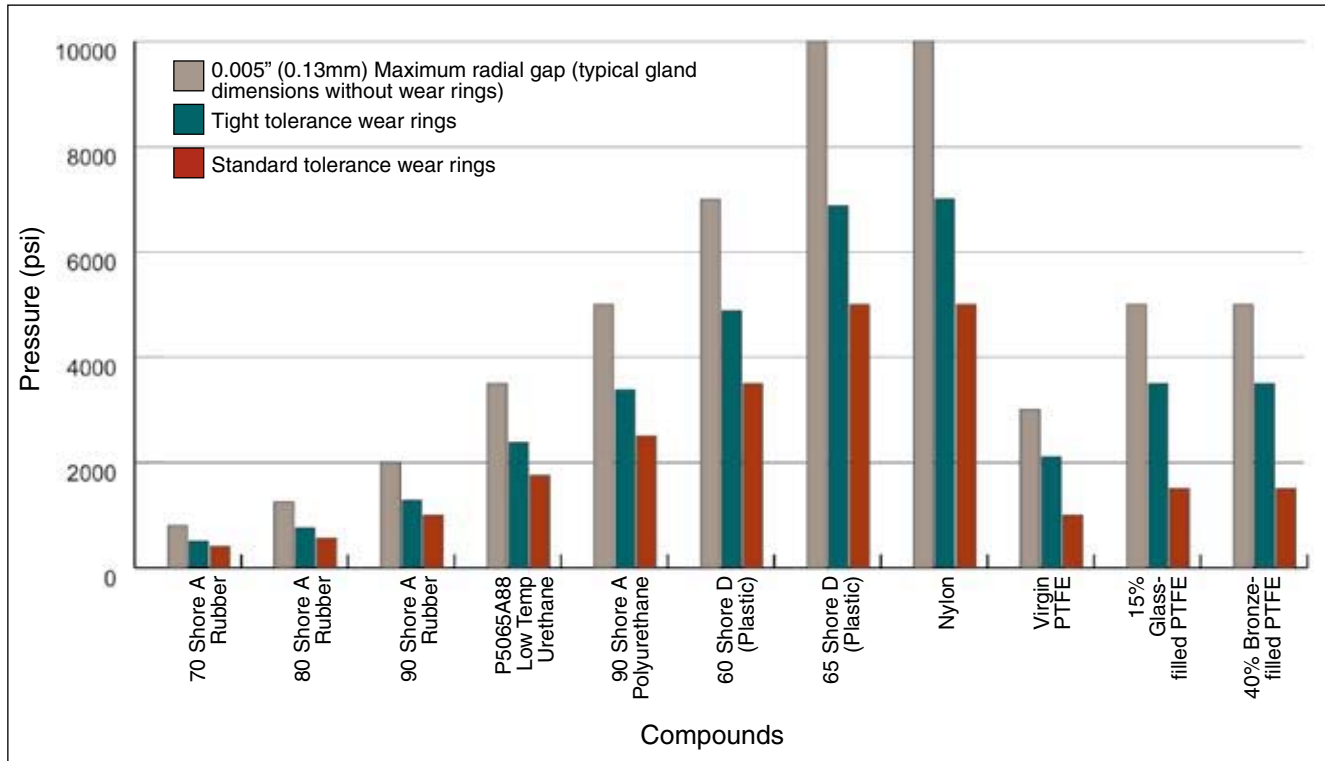

Note: Pressure ratings are based upon a test temperature of 160° F (70 °C). Lower temperatures will increase a material's pressure rating. Higher temperatures will decrease pressure ratings. Maximum radial gap is equal to the diametrical gap when wear rings are not used. Wear rings keep hardware concentric, but increase extrusion gaps to keep metal-to-metal contact from occurring, thereby decreasing pressure ratings when used.

As noted in Table 2-4, pressure ratings decrease when wear rings are used due to the larger extrusion gaps required to eliminate metal-to-metal contact. If wear rings are used, be sure to consult [Section 9 \(Wear Rings\)](#) and [Section 10 \(Back-ups\)](#) for appropriate hardware dimensions. **Wear ring hardware dimensions for the piston and rod throat diameters always supersede those dimensions called out for the seals themselves.**

Seal Wear

Seals will inevitably wear in dynamic applications, but with appropriate design considerations, this can be minimized. The wear pattern should be even and consistent around the circumference of the dynamic lip. A small amount of even wear will not drastically affect seal performance; however, if the wear patterns are uneven or grooved, or if the amount of wear is excessive, performance may be dramatically reduced. There are many factors that influence seal wear, many of which are described in the following Table 2-5.

Table 2-5. Factors Influencing Seal Wear

| Factors that Influence Seal Wear | |
|--|--|
| Rough surface finish | Excessive abrasion may occur above 12 µin Ra |
| Ultra smooth surface finish | Surface finishes below 2 µin Ra can create aggressive seal wear due to lack of lubrication |
| High pressure | Increases the radial force of the seal against the dynamic surface |
| High temperature | While hot, materials soften, thus reducing tensile strength |
| Poor fluid lubricity | Increases friction and temperature at sealing contact point |
| Tensile strength of seal compound | Higher tensile strength increases the material's resistance to tearing and abrading |
| Fluid incompatibility | Softening of seal compound leads to reduced tensile strength |
| Coefficient of friction of seal compound | Higher coefficient materials generate higher frictional forces |
| Abrasive fluid or contamination | Creates grooves in the lip, scores the sealing surface and forms leak paths |
| Extremely hard sealing surface | Sharp peaks on hard surfaces will not be rounded off during normal contact with the wear rings and seals, accelerating wear conditions |

Seal wear may be indicated by flattening out of the contact point, or, in extreme circumstances, may appear along the entire dynamic surface as shown in Figure 2-6.

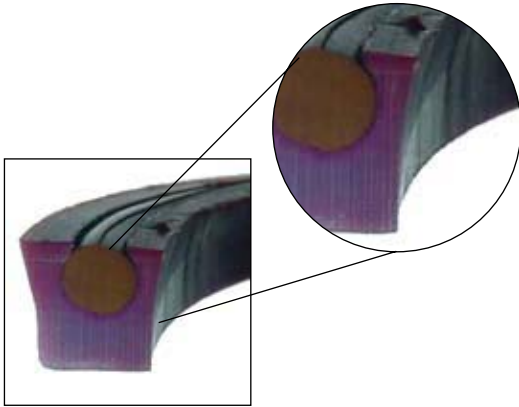


Figure 2-6. Seal wear on dynamic surface

Seal Stability

Dynamic stability is integral to a seal's performance, allowing the lip to effectively contact the sealing surface, eliminating rocking and pumping effects and promoting an even wear pattern at the sealing contact point. Instability can create leakage and seal damage. A typical instability malfunction known as "spiral failure" can occur when o-rings are used in reciprocating applications. Due to frictional forces that occur while the system is cycling, the o-ring will tend to roll or twist in the groove, causing leakage and even possible breakage. A square geometry will tend to resist this better than a round profile, but is not impervious to instability failure. Rectangular geometries provide the best stability in dynamic applications.

Other less obvious factors that influence the stability of a seal are:

- Percent gland fill
- Hardness or stiffness of the seal material



Fig. 2-7. Instability failure of a square profile piston seal

- Rough surfaces which create high friction
- Cross-section (larger is better)
- Design features of a seal (i.e. stabilizing lip, non-symmetrical design). Figure 2-8 illustrates how design features can make a seal more stable. In the first FEA plot, the seal is centered in the gland and does not incorporate a stabilizing lip. In the second plot, the seal is loaded against the static gland and includes a stabilizing lip. Stability has been enhanced by the design changes.

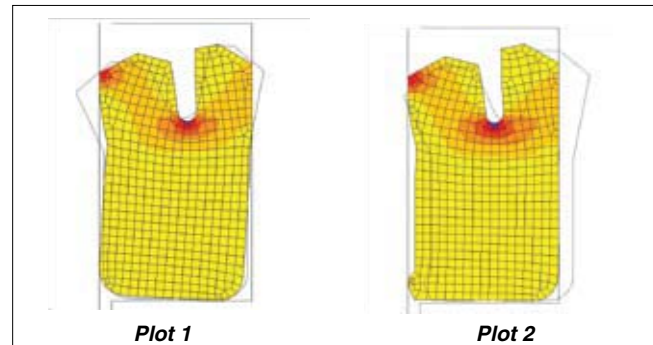


Figure 2-8. Design improvements for increased stability

Surface Speed

The surface speed of a reciprocating shaft can affect the function of a seal. Hydroplaning and frictional heat may occur with excessive speed, while stick-slip, discussed previously in the friction section, is most often associated with slow speed.

Hydroplaning occurs when hydrodynamic forces lift the sealing lip off of the dynamic surface, allowing fluid to bypass the seal. The lip geometry, as well as the overall force on the lip, will influence its ability to resist hydroplaning. Most hydraulic seals are rated for speeds up to 20 inches/second (0.5 m/second), but this may be too fast for certain lip geometries or when the seal has a lightly loaded design. [Table 2-1 on page 2-3](#) shows which lip geometries are subject to hydroplaning. Straight cut and beveled lip geometries are the most effective at resisting hydroplaning so long as sufficient lip loading is present to overcome the hydrodynamic forces.


High surface speeds can create excessive frictional heat. This can create seal problems when the dynamic surface is continuously moving. The under-lip temperature of the seal will become much hotter than the system fluid temperature, especially when the seal is under pressure. If the heat being generated cannot be dissipated, the seal will experience compression set, wear, extrusion and/or increased chemical attack.

Compression Set

Compression set is the inability of a seal to return to its original shape after being compressed. As defined by ASTM, it is the percent of deflection by which the seal fails to recover after a specific deflection, time and temperature. Compression set is calculated using the following equation:

$$\text{Compression Set} = \frac{H_i - H_R}{H_i - H_C} \times 100$$

where

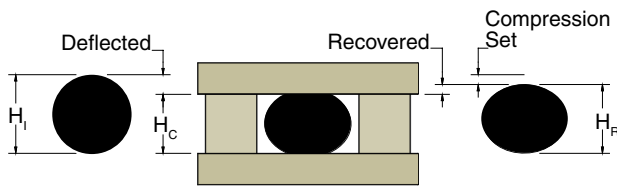

H_i = Initial height

H_c = Compressed height

H_R = Recovered height

Compression set reduces sealing forces, resulting in poor low pressure sealability. It takes place primarily because of excessive exposure to a high temperature. A material's upper end temperature limit may give an indication of its compression set resistance. Although compression set always reduces the seal's dimensions, chemical swell or shrinkage can either positively or negatively impact the final geometry of the seal. If material shrinkage occurs due to the system fluid, the deflection of the seal will decrease, accelerating leakage. If chemical swell is present, it can negate or offset the negative effects of compression set. While it is true that swelling can offset compression set, extreme fluid incompatibility can break down the polymer's chemical structure and cause the material to be reformed in its compressed state.

Lip wear is also a dimensional loss, but is not related to compression set. Dimensional loss due to lip wear will increase the final compression set value.

The seal shown in Figure 2-9 exhibits nearly 100% compression set with minimal wear. Note how the lips flare out very little.

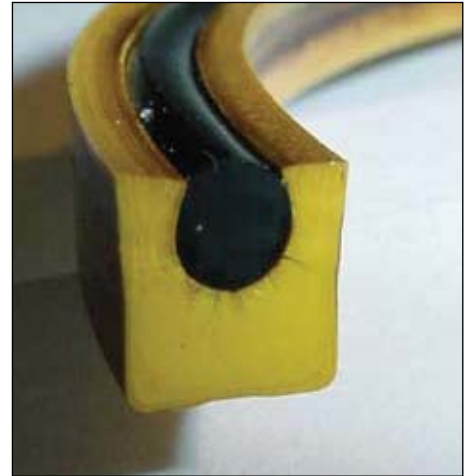


Figure 2-9. Seal exhibiting nearly 100% compression set

Influence of Temperature

All seal materials have a specified operating temperature range (see Section 3, Materials). These temperatures are provided as guidelines and should not be used as specification limits. It is wise practice to stay well within this range, knowing that physical properties are severely degraded as either limit is approached.

Temperature affects extrusion, wear, chemical resistance and compression set, which ultimately influences the sealing ability of a product. High temperatures reduce abrasion resistance, soften materials, allowing them to extrude at lower pressures, increase compression set and can accelerate chemical attack. Low temperatures can cause materials to shrink and harden, reducing resiliency and sealability. Some of these problems can be solved by using low temperature expanders or metal springs as a



Figure 2-10. Progressive effect (hydrolysis) of high temperature water on standard urethane seals (yellow) vs. Parker Resilon WR (4301) seals (aqua).

component of the seal selection (see Section 3, Materials).

General Guidelines for Hardware Design

For easy assembly and to avoid damage to the seal during assembly, Parker recommends that designers adhere to the tolerances, surface finishes, leading edge chamfers and dimensions shown in this catalog.

2

Table 2-6.

| Installation Chamfer, Gland Radius, and Taper | | |
|---|---------------|---------------|
| Seal Cross Section | "A" Dimension | "R" Dimension |
| 1/16 | 0.035 | 0.003 |
| 3/32 | 0.050 | 0.015 |
| 1/8 | 0.050 | 0.015 |
| 5/32 | 0.070 | 0.015 |
| 3/16 | 0.080 | 0.015 |
| 7/32 | 0.080 | 0.015 |
| 1/4 | 0.080 | 0.015 |
| 9/32 | 0.085 | 0.015 |
| 5/16 | 0.085 | 0.015 |
| 11/32 | 0.085 | 0.015 |
| 3/8 | 0.090 | 0.015 |
| 13/32 | 0.095 | 0.015 |
| 7/16 | 0.105 | 0.030 |
| 15/32 | 0.110 | 0.030 |
| 1/2 | 0.120 | 0.030 |
| 17/32 | 0.125 | 0.030 |

| Installation Chamfer, Gland Radius, and Taper | | |
|---|---------------|---------------|
| Seal Cross Section | "A" Dimension | "R" Dimension |
| 9/16 | 0.130 | 0.030 |
| 19/32 | 0.135 | 0.040 |
| 5/8 | 0.145 | 0.040 |
| 21/32 | 0.150 | 0.040 |
| 11/16 | 0.160 | 0.040 |
| 23/32 | 0.165 | 0.040 |
| 3/4 | 0.170 | 0.040 |
| 25/32 | 0.180 | 0.060 |
| 13/16 | 0.185 | 0.060 |
| 27/32 | 0.190 | 0.060 |
| 7/8 | 0.200 | 0.080 |
| 29/32 | 0.205 | 0.080 |
| 15/16 | 0.215 | 0.080 |
| 31/32 | 0.220 | 0.080 |
| 1 | 0.225 | 0.080 |

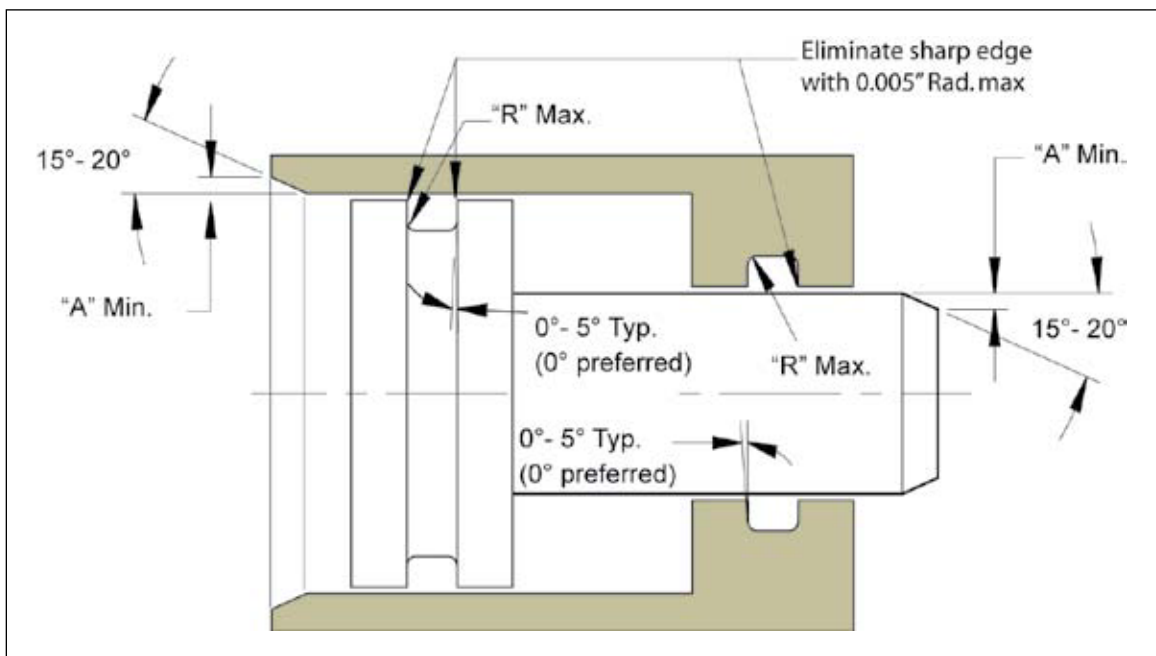


Figure 2-10.

Hardware Surface Finish

Understanding and applying the benefits of appropriate surface finish specifications can dramatically affect the longevity of a sealing system. In a dynamic surface, microscopic variations form recesses which hold an oil film between the seal lip and the moving surface. If the surface is too smooth, friction and seal wear will be high because this oil film will not be present. If the surface is too rough, the variations will create leak paths and accelerate lip wear. For these reasons, it is critical to have an in depth understanding of surface finishes as they pertain to dynamic sealing systems. As such, Parker recommends following the guidelines for surface finish as outlined below or conducting individual testing for specific applications to validate seal function and expected life.

Over the years, greater attention has been given to this subject as realizations about warranty savings and system life become more prevalent. As equipment required to measure and maintain a proper surface finish has evolved and improved, the subject of surface finish has become more complex. Traditional visual inspection gauges are no longer sufficient to effectively measure surface finish. Profilometers are now commonly used to achieve precise measurements with repeatable results. In the same way, the terms used to define a surface finish have also advanced.

For many years, a single surface parameter has often been used to quantify surface finish. RMS (also known as Rq) stands for Root Mean Square and has historically been the most typical value. In more recent years, the Arithmetic Average Roughness, Ra, has become more frequently specified. Using either of these parameters by itself is inadequate to define a proper reciprocating sealing surface. Figure 2-11 depicts why this parameter alone cannot accurately describe a surface finish.

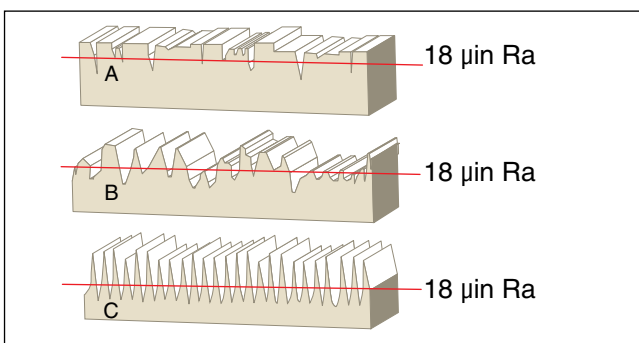


Figure 2-11. Different surface finishes yielding same Ra value

The three surface finishes shown in Figure 2-11 all have the same Ra value but very unique characteristics. The first profile (A) is an example of a proper surface finish for dynamic seals in which the sharp peaks have been minimized or removed. The second profile (B) will exhibit high wear characteristics because of the wide spacing between the peaks. The third profile (C) will also wear out the seals quickly because of its extremely sharp peaks.

Ra is sufficient to define the magnitude of surface roughness, but is insufficient to define a surface entirely in that it only describes the average deviation from the mean line, not the nature of the peaks and valleys in a profile. To obtain an accurate surface description, parameters such as Rp, Rz and Rmr (tp) can be used to define the relative magnitude of the peaks and the spacing between them. These parameters are defined in Table 2-7, and their combination can identify if a surface is too rough or even too smooth for reciprocating applications.

There are other parameters that can be considered for surface finish evaluation. For example, the limitation of Rt is that it considers only one measurement, while Rz, Rp and Rmr consider the full profile.

RMS = Rq. The Root Mean Square (RMS) as defined by ISO 4287:1997 and other standards is often defined as Rq. These terms are interchangeable.

Rq ≠ Ra. Confusion has typically surrounded surrounding these values, leading to misconceptions that they are interchangeable. Rq and Ra will never be equal on typical surfaces. Another misconception is that there is an approximate 11% difference between the two. *Ground and polished* surfaces can have Rq values that are 20 to 50 percent higher than Ra. The 11% difference would only occur if the surface being measured took the form of a true sine wave. A series of tests conducted at Parker have shown Rq to be 30% higher than Ra on average.

What's the Significance?
Specifications previously based on a maximum surface finish of 16 µin RMS for *ground and polished* rods should specify a maximum finish of **12 µin Ra**.

Table 2-7. Roughness Parameter Descriptions

Parameter Descriptions

Roughness parameters are defined per ISO 4287:1997 and ISO 4288:1996.

Ra* – Arithmetic average or mean deviation from the center line within a sampling length.

Rq* – Root mean square deviation from the center line within a sampling length.

Rp* – Maximum profile peak height within a sampling length. Also known as R_{pm} in ASME B46.1 – 2002.

Rv* – Maximum profile valley depth within a sampling length. Also known as R_{vm} in ASME B46.1 – 2002.

Rz* – Maximum height of profile within a sampling length ($Rz = Rp + Rv$).

NOTE: ISO 4287:1984, which measured five peaks and five valleys within a sampling length, is now obsolete. This value would be much lower because additional shorter peaks and valleys are measured. Over the years there have been several Rz definitions used. Care needs to be taken to identify which is used.

Rt – Maximum height of the profile within the evaluation length. An evaluation length is typically five sampling lengths.

Rmr – Relative material ratio measured at a given height relative to a reference zero line. Indicates the amount of surface contact area at this height. Also known as t_p (bearing length ratio) in ASME B46.1 – 2002.

*Parameters are first defined over a sampling length. When multiple sampling lengths are measured, an average value is calculated, resulting in the final value of the parameter. The standard number of sampling lengths per ISO 4287:1997 and ISO 4288:1996 is five.

Figure 2-12 graphically represents Ra. The shaded area, which represents the average height of the profile, Ra, is equal to the area of the hatched portion. The mean line, shown in red, splits the hatched area in half and forms the center line for Ra. The graph also shows Rq, which is higher than Ra.

Figure 2-13 shows the actual surface profile of a polished chrome rod.

Upon examination of the profile, it can be seen that the polishing operation has removed or rounded the peaks producing a positive affect on the characteristics of the sealing surface, as described below by Ra, Rp, Rz and Rmr.

- Ra = 8.9 μ m
- Rp = 14.8 μ m (which is 1.7 x Ra, less than the 3x guideline)
- Rz = 62.9 μ m (which is 7.1 x Ra, less than the 8x guideline)
- Rmr = 74%

Figure 2-13 also illustrates how Rp and Rz are calculated using the following equations:

$$Rp = \frac{Rp1 + Rp2 + Rp3 + Rp4 + Rp5}{5}$$

$$Rz = \frac{Rz1 + Rz2 + Rz3 + Rz4 + Rz5}{5}$$

NOTE: In the profile shown in Figure 2-13, $Rt = Rz2$ because the tallest peak and deepest valley occur in the same sampling length.

Figure 2-14 considers the same surface and illustrates how the Rmr value of 74% is determined. To accomplish this, locate the height of the curve at 5% material area (this is the reference line or “zero line”). From this height, move down a distance of 25% Rz and locate the new intersection point along the curve. This new intersection point is the actual Rmr value of 74%.

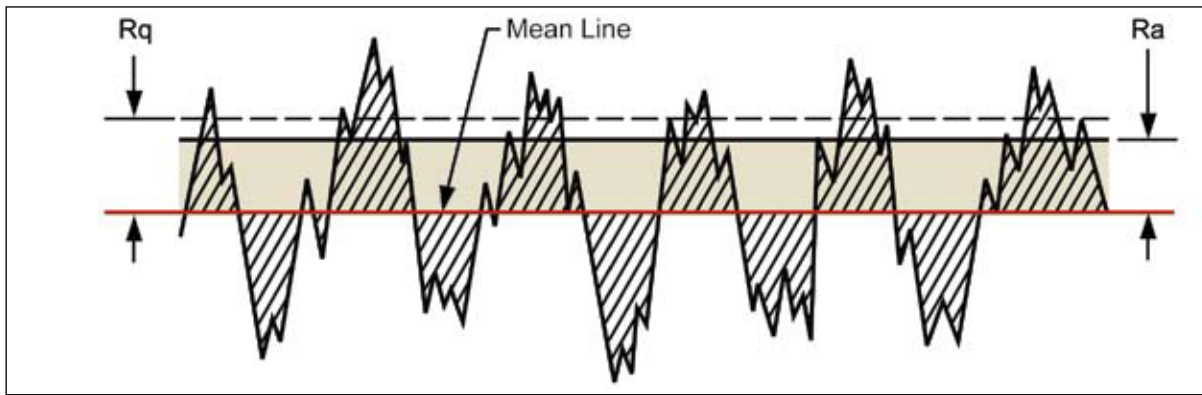


Figure 2-12.

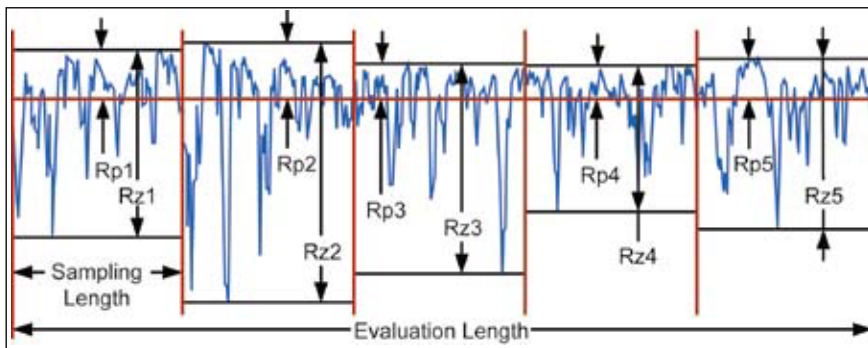


Figure 2-13.

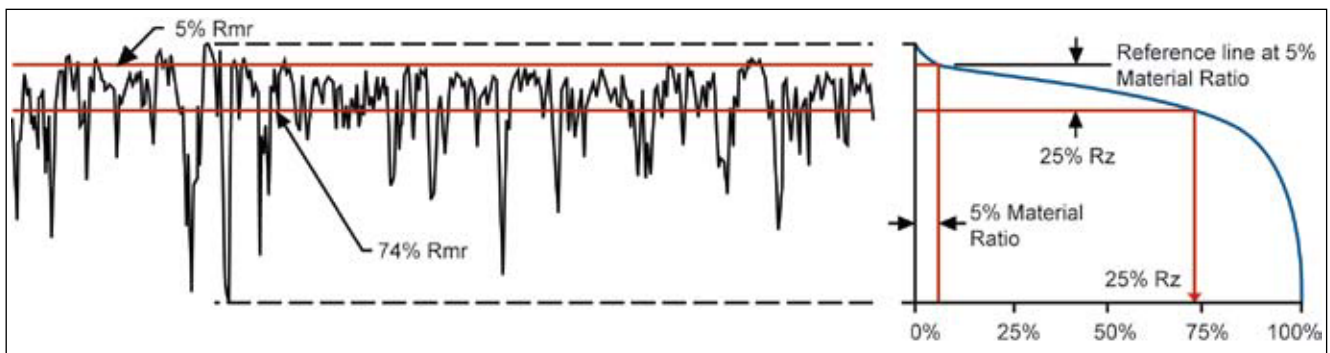


Figure 2-14.

Surface Finish Guidelines for Reciprocating Seals

Recommendations for surface roughness are different for static and dynamic surfaces. Static surfaces, such as seal groove diameters, are generally easier to seal and require less stringent roughness requirements; however, the type of fluid being sealed can affect the guidelines (see Table 2-8). It is important to remember that surface finish recommendations will vary depending upon the seal material of choice. PTFE seals require smoother finishes than seals made from polyurethane and most rubber compounds.

Four parameters have been selected to define a proper surface finish for hydraulic and pneumatic reciprocating applications. These parameters are Ra, Rp, Rz and Rmr. For descriptions of these parameters, please consult Table 2-8.

Grinding as a final process for dynamic sealing surfaces is rarely sufficient. In order to obtain an acceptable Rmr value, the surface must often be ground and polished. If the surface is not polished in addition to being ground, the ratio of Rp and Rz to Ra will be too high or Rmr ratio too low.

Table 2-8. Surface Finish Guidelines

| Ra Guidelines | | | | |
|--|---|----------------------------|---|----------------------------|
| Application | Thermoplastic and Rubber Seals | | PTFE Seals | |
| | Dynamic Surfaces | Static Surfaces | Dynamic Surfaces | Static Surfaces |
| Cryogenics | – | – | 4 µin (0.1 µm) Maximum | 8 µin (0.2 µm) Maximum |
| Helium Gas Hydrogen Gas Freon | 3 to 10 µin (0.08 to 0.25 µm) | 12 µin (0.3 µm) Maximum | 6 µin (0.15 µm) Maximum | 12 µin (0.3 µm) Maximum |
| Air Nitrogen Gas Argon Natural Gas Fuel (Aircraft and Automotive) | 3 to 12 µin (0.08 to 0.3 µm) | 16 µin (0.4 µm) Maximum | 8 µin (0.2 µm) Maximum | 16 µin (0.4 µm) Maximum |
| Water Hydraulic Oil Crude Oil Sealants | 3 to 12 µin (0.08 to 0.3 µm) | 32 µin (0.8 µm) Maximum | 12 µin (0.3 µm) Maximum | 32 µin (0.8 µm) Maximum |
| Rp Guidelines | | | | |
| Application | Thermoplastic and Rubber Seals | | PTFE Seals | |
| | Dynamic Surfaces | Static Surfaces | Dynamic Surfaces | Static Surfaces |
| All media/fluids | If Ra ≥ 5 µin (0.13 µm), then Rp ≤ 3 × Ra | – | If Ra ≥ 5 µin (0.13 µm), then Rp ≤ 3 × Ra | – |
| | If Ra < 5 µin (0.13 µm), then Rp ≤ 3.5 × Ra | | If Ra < 5 µin (0.13 µm), then Rp ≤ 3.5 × Ra | |
| | Example: If Ra = 4 µin, then Rp ≤ 14 µin. | | | |
| Rz Guidelines | | | | |
| Application | Thermoplastic and Rubber Seals | | PTFE Seals | |
| | Dynamic Surfaces | Static Surfaces | Dynamic Surfaces | Static Surfaces |
| All media/fluids | Rz ≤ 8 × Ra and 70 µin (1.8 µm) Maximum | Rz ≤ 6 × Ra | Rz ≤ 8 × Ra and 64 µin (1.6 µm) Maximum | Rz ≤ 6 × Ra |
| | Example: If Ra = 4 µin, then Rz ≤ 32 µin (dynamic calculation) | | | |
| | Note: Rz values above maximum recommendations will increase seal wear rate. | | | |
| Rmr Guidelines | | | | |
| Application | Thermoplastic and Rubber Seals | | PTFE Seals | |
| | Dynamic Surfaces | Static Surfaces | Dynamic Surfaces | Static Surfaces |
| All media/fluids | 45% to 70% (thermoplastic) | – | 60% to 90% | – |
| | 55% to 85% (rubber materials) | | | |
| | Rmr is measured at a depth of 25% of the Rz value based upon a reference level (zero line) at 5% material/bearing area. | | | |

Surface Finish FAQs

What is the difference between RMS (Rq) and Ra?

RMS which stands for Root Mean Square (and now known as Rq), is one way of quantifying the average height of a surface. The Arithmetic Average, Ra, quantifies the surface in a different manner, providing a true mean value. These parameters will almost always be different, but there is not an exact relationship between the two for a typical sealing surface of random peaks and valleys. If a surface were to perfectly resemble a sine wave, the result would place the RMS value 11% higher than Ra, but this is not a very realistic scenario. On various ground and polished surfaces, RMS has been observed to be as much as 50% higher than Ra, but on average, runs about 30% higher. If this 30% average difference is applied to a 16 μin RMS specification, the maximum recommended value would be 12 μin Ra.

Why are Rp and Rz specified as a function of Ra, and not simply a range?

Take a shaft with the minimum recommended value of Ra = 3 μin , for example. Using the formula for Rz, the maximum value would be calculated as 24 μin (8 x 3). If the requirement simply stated a range that allowed Rz values up to 70 μin , this large difference indicates that the surface profile could have many large, thin surface peaks which would abrade the seal quickly. By the same regard, a maximum Ra value of 12 μin would result in an Rz value of 96 μin (12 x 8), which is beyond the recommended maximum value of 70 μin . The same principle applies for Rp: peaks should be removed to reduce seal wear via a polishing process. Grinding without polishing can leave many abrasive surface peaks.

Why is Ry (also known as Rmax) not used in Parker's roughness specification?

Ry only provides a single measurement (a vertical distance from one peak to valley) within the whole evaluation length. In actuality, there may be several peaks and valleys of similar height, or there may only be one large peak or valley. Rp and Rz provide much more accurate results, showing the average of five peak to valley measurements (one measurement in each of the five sampling lengths). Furthermore, ISO 4287:1997 and ISO 4288:1996 standards no longer incorporate the use of Ry.

How can a dynamic surface finish be too smooth?

There are two areas of concern that have been observed on extremely smooth surfaces, the first being seal wear, the second being leakage. When surface finishes have been measured at or below 1 μin Ra, an extremely accelerated seal wear rate has been observed. A small jump to 1.8 to 2 μin Ra shows significant improvement, indicating that the extremely low range should be avoided. With higher values showing even greater life extension, the optimal range for Ra has been determined to be 3 to 12 μin .

Regarding leakage, some seal designs that function well with 6 to 12 μin Ra finishes begin to leak when the finish falls below 3 μin Ra. Due to technological advances, there are many suppliers who manufacture rods with finishes this smooth. It is always necessary to validate seal performance, especially if using an ultra-smooth dynamic surface.

When does a dynamic surface finish become too rough?

Although it is possible for some seals to function when running on rough finishes, there are always concerns with accelerated wear and leakage control. Certain seals have been able to function at 120 μin Ra finishes for short periods of time, but seal life in these cases can be reduced up to five or six times. On the contrary, some seals have failed at surface finishes as low as 16 μin Ra when pressure was insufficient to effectively energize the sealing lips as they rapidly wore out. Even though a rough finish is not a guaranteed failure mode, it is always best to stay within the recommended specifications. Remember that a proper finish also meets the recommendations for Rp, Rz and Rmr listed in the surface roughness guidelines.

Installation

2

Considerations

Installation techniques may vary considerably from case to case, depending on whether a seal is being replaced as a maintenance procedure or being installed in the original manufacture of reciprocating assemblies. Variations also arise from differences in gland design. A two-piece, split gland design, although rarely used, poses fewer problems than a “snap-in” groove positioned deep inside the body of a long rod gland. In production situations, or where frequent maintenance of similar or identical assemblies is performed, it is customary to utilize special tools to permit fitting a seal into its groove without overstressing it or subjecting it to nicks and cuts during insertion.

The common issues associated with all installation procedures are:

1. Cleanliness. The seal and the hardware it must traverse on its way into the groove, as well as the tools used to install the seal, must be cleaned and wiped with lint-free cloths.

2. Nick and Cut Protection. Threads, sharp corners and burrs can damage the seal. Care should be taken to avoid contact with these surfaces. Burrs must be removed, sharp corners should be blunted or radiused, and threads should be masked or shielded with special insertion tooling (see Figure 2-15). Although it is good practice to take extra care in the handling and manipulation of the seal, this is seldom sufficient and it usually requires either a safety tool or masking to protect the seal against such damage.

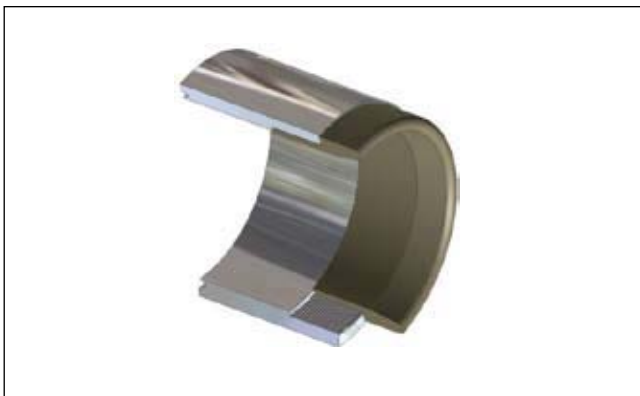


Figure 2-15. Thread protection installation tool cutaway view

3. Lubrication. Both the seal and its installation path must be lubricated prior to insertion. The lubricant should be selected for its compatibility with the seal compound and the working fluid it will later encounter. Often, the working fluid itself can be used as the lubricant (see Table 2-9).

Table 2-9. Seal Installation Lubricants

| Type | Temp. Range °F (°C) | Seal Use | Seal Material Compatibility |
|--|-------------------------|---|--|
| Petroleum base (Parker O Lube) | -20 to 180 (-29 to 82) | Hydrocarbon fluids; Pneumatic systems under 200 psi | Molythane, Resilon, Polymyte, Nitroxile, HNBR, NBR, FKM, (DO NOT use with EPR) |
| Silicone grease or oil (Parker Super O Lube) | -65 to 400 (-54 to 204) | General purpose; High pressure pneumatic | Molythane, Resilon, Polymyte, Nitroxile, HNBR, NBR, EPR, FKM |
| Barium grease | -20 to 300 (-29 to 149) | Pneumatic systems under 200 psi | Molythane, Resilon, Polymyte, Nitroxile, HNBR, NBR, FKM |
| Fluoro-carbon fluid | -65 to 400 (-54 to 204) | Oxygen service | EPR |

4. Lead-in Chamfer. A generous lead-in chamfer will act as a guide to aid in seal installation. With the proper lead-in chamfer, the seals can be installed without lip damage. Refer to Figure 2-16 below and Table 2-6 on page 2-8 for proper lead-in chamfer dimensions.

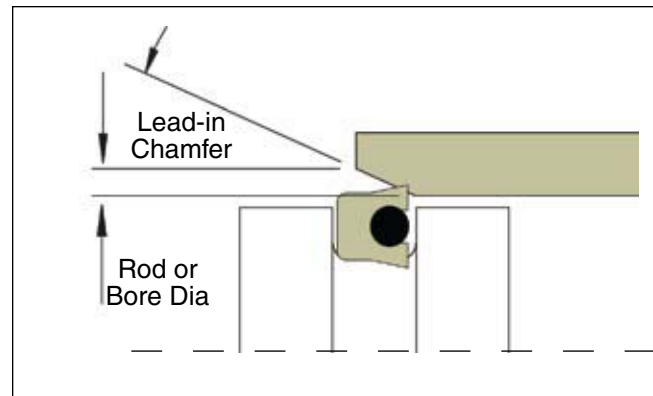


Figure 2-16. Seal installation lead-in chamfer

5. Heating. Where harder or fabric-reinforced compounds are used in snap-in applications, elasticity of the seal may fall short of that required for stretching or compressing onto (or into) the groove. Since seal compounds characteristically exhibit a high thermal coefficient of expansion, and tend to soften somewhat when heated, it is sometimes possible to “soak” the seals in hot lubricant to aid installation. Be sure to observe the compound temperature limits, and avoid heating the seals while stretched. Heating a seal while stretched will invoke the Gow-Joule effect and actually shrink the seal.

6. Cross Section vs. Diameter. Care must be taken to properly match a seal’s cross-section to its diameter. If the cross-section is too large in relation to the diameter, it will be difficult to snap-in or stretch the seal into the groove. This condition is typically only associated with polyurethane, PolyMyte and other high modulus materials. The data shown in Table 2-10 may be used as a guide to determine this relationship for ease of installation.

Table 2-10. Seal Cross Section vs. Diameter Installation Guide

| Installation Guide Cross Section vs. Diameter | | | | |
|--|---------------------------|-------------|------------------------------|-------------|
| Cross Section | Minimum Diameter Rod Seal | | Minimum Diameter Piston Seal | |
| | Poly-urethane | Polymyte | Poly-urethane | Polymyte |
| 1/8" | .750 I.D. | 1.000 I.D. | 1.250 I.D. | 1.750 I.D. |
| 3/16" | 1.000 I.D. | 1.750 I.D. | 1.750 I.D. | 2.750 I.D. |
| 1/4" | 1.750 I.D. | 2.750 I.D. | 3.000 I.D. | 4.500 I.D. |
| 3/8" | 3.000 I.D. | 5.000 I.D. | 6.000 I.D. | 8.000 I.D. |
| 1/2" | 6.000 I.D. | 8.000 I.D. | 10.000 I.D. | 12.000 I.D. |
| 3/4" | 8.000 I.D. | 9.000 I.D. | 15.000 I.D. | 17.000 I.D. |
| 1" | 10.000 I.D. | 10.000 I.D. | 20.000 I.D. | 25.000 I.D. |

7. Installation Tools. Use installation tools as recommended ([see pages 2-16 and 2-17](#)).

8. Itemize and Use a Check List. All components required to complete a sealing assembly should be itemized and checked off as they are installed. The absence of any single component can cause the entire system to fail.

**Installation Tools —
Piston Seals**

The installation of piston seals can be greatly improved with the use of installation tooling. Tooling not only makes the installation easier, but also safer and cost effective for high volumes as seals are less likely to be damaged when using proper tooling. For piston seal installation using tooling, use the following steps:

1. Inspect all hardware and tooling for any contamination, burrs or sharp edges. Clean, debur, chamfer, or radius where necessary. Make sure the piston and groove are undamaged.

2. If using a two-piece energized cap seal, install the o-ring or rubber energizer into the groove per vendor specifications.

3. Install the expanding mandrel onto the piston (Figure 2-17).

4. Place the seal onto the expanding mandrel, and using the pusher, gently push the seal up the ramp until it snaps into place (Figure 2-18).

5. If back-up rings are to be used, install split versions into their proper location or use the mandrel method in Step 4 for non-split rings.

6. For PTFE cap seals, slide the resizing tool over the seal to compress the seal to its original diameter (Figures 2-19, 2-20).

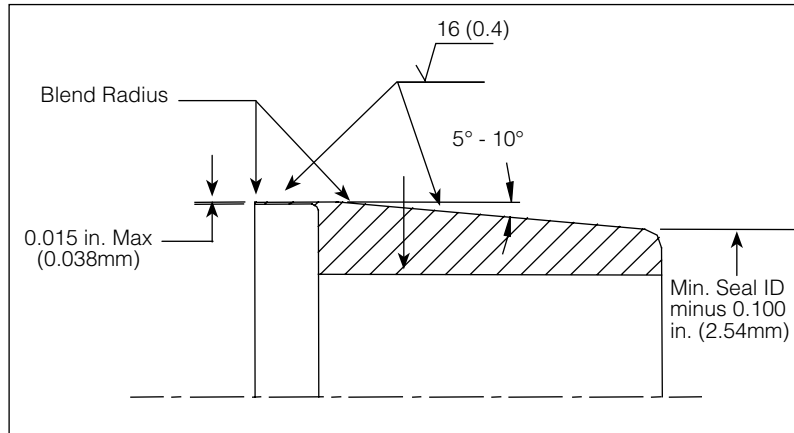


Figure 2-17. Expanding mandrel

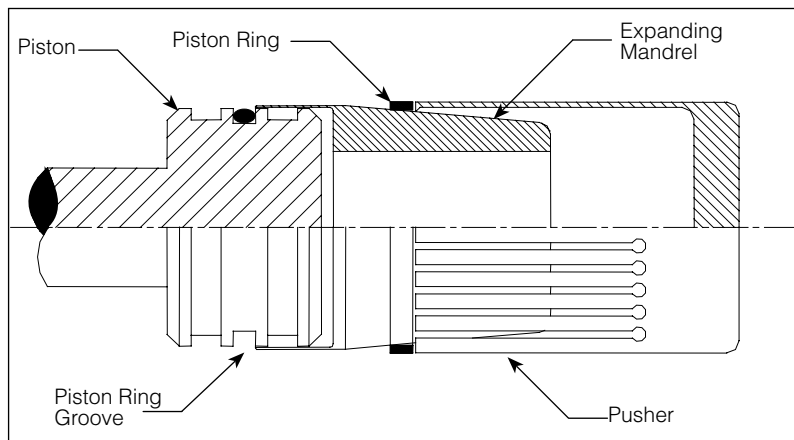


Figure 2-18. Installation of piston seal with tooling

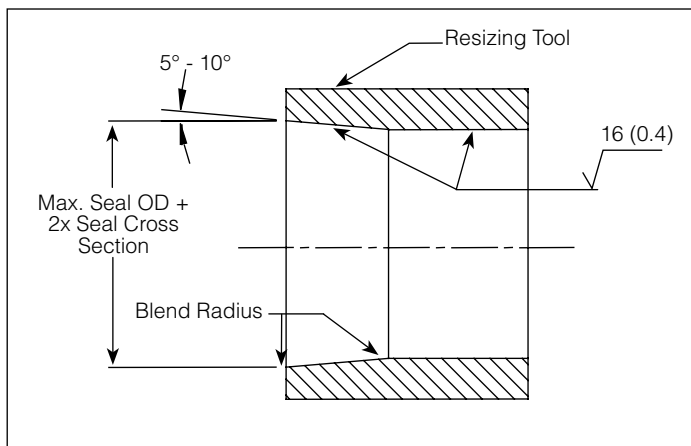


Figure 2-19. Resizing tool

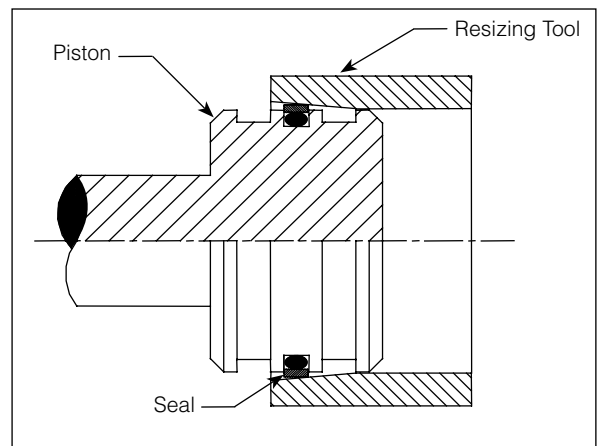


Figure 2-20. Resizing

Installation Tools — Rod Seals

Many rubber, plastic and PTFE rod seals can be manipulated by hand for installation into the seal groove. Small diameter parts or parts with large cross sections may require a two piece (split) groove for installation. Special tooling can be utilized to help the installation process; however, PTFE and PolyMyte seals in particular require caution to ensure the sealing component is not nicked, dented or damaged. The following guidelines provide the steps for proper rod seal installation. If needed, please call your local Parker representative for recommendations.

1. Inspect all hardware and tooling for any contamination, burrs or sharp edges. Clean, debur, chamfer or radius where necessary. Make sure the bore, groove and rod are undamaged.

2. If using a two-piece, energized cap seal, first carefully install the o-ring or rubber energizer into the groove to ensure proper seating.

3. By hand, gently fold the seal into a kidney shape (Figure 2-21) and install into the groove. For rubber and polyurethane seals, the use of a three-prong installation tool can be helpful for folding the seal and installing it into the groove (Figure 2-22).

4. Unfold the seal into the groove, and using your finger, feel the inside diameter of the seal to make sure it is properly seated.

5. For PTFE seals, after unfolding the seal in the groove, use a resizing tool (Figure 2-23) to re-expand the seal.

6. If a back-up ring is to be used with the rod seal, position the seal toward the internal side of the groove to allow space for the back-up installation.

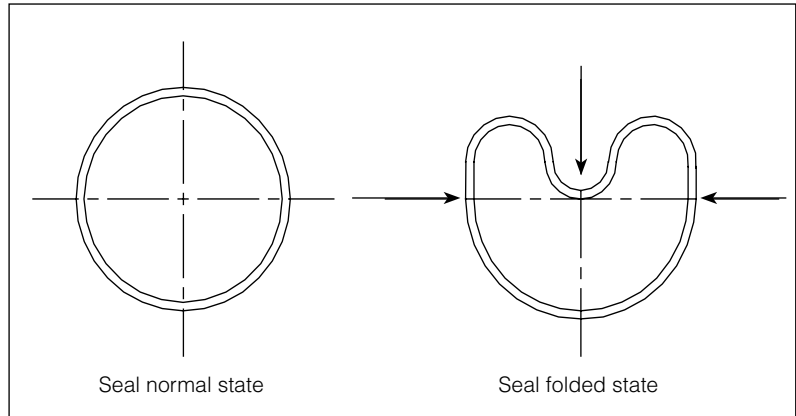


Figure 2-21. Rod seal folding

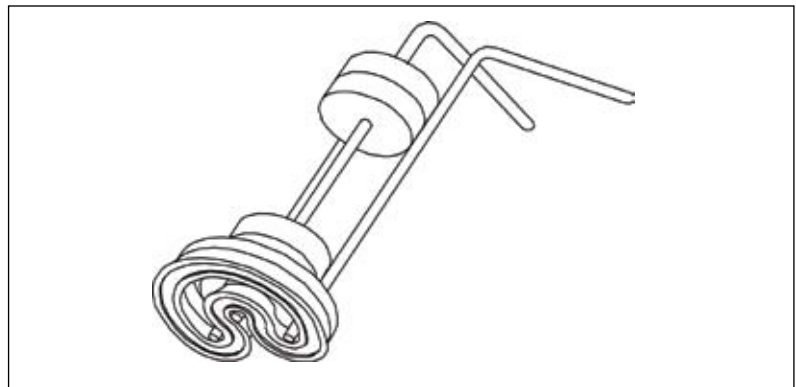


Figure 2-22. Three-leg installation tool for polyurethane and rubber seals

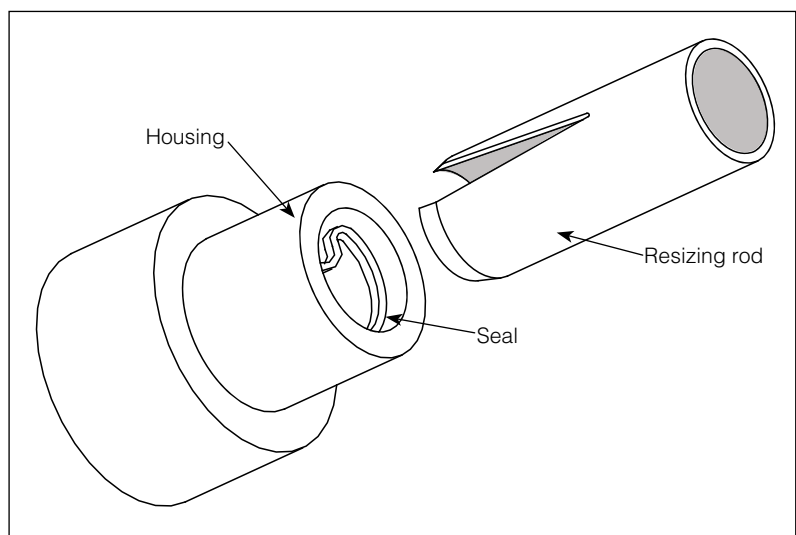


Figure 2-23. Rod seal installation

Finite Element Analysis

2

Finite Element Analysis (FEA) is a powerful computer simulation tool that allows engineers to evaluate product designs and materials and to consider “what if” scenarios in the development phase. FEA helps minimize time and cost by optimizing a design early in the process, reducing pre-production tooling and testing. Within the simulation program, the product being evaluated is divided into “finite elements,” and model parameters such as pressure and seal lip squeeze are defined. The program then repeatedly solves equilibrium equations for each element, creating an overall picture of seal deformation, stress and contact forces (see Figure 2-24). These results can then be linked to application testing to predict performance.

Precise material characterization is an essential component of accurately modeling elastomeric products with FEA. Due to the complex nature of elastomers, multiple tests must be performed in order to determine their behavior under stress and strain. Figure 2-25 shows the typical nonlinear stress-strain curves for elastomers compared to the linear property of steel. These nonlinear complexities make performing FEA for elastomers much more difficult than for metal materials. Advances in material characterization are continually being made to improve the ability to capture and predict thermoviscoelastic effects of elastomers.

FEA results must be linked with lab and field testing to create a baseline to predict seal performance. Once this baseline is established, design iterations can be performed within FEA until the desired results are achieved and an optimum design is predicted. This evaluation process enables engineers to anticipate the performance of new seal designs by minimizing the time and cost associated with prototype tooling investments (see Figure 2-26).

Like any computer simulation, FEA has its limitations. The cost of performing FEA should always be justified by its results. FEA can provide relative information on leakage performance and wear life, but cannot give concrete answers to questions like, “Will this seal leak, and if so, how much?” and “How many cycles can be expected before failure occurs?”

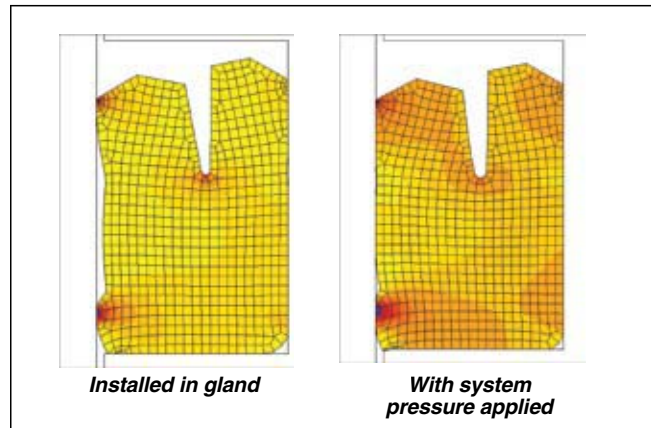


Figure 2-24

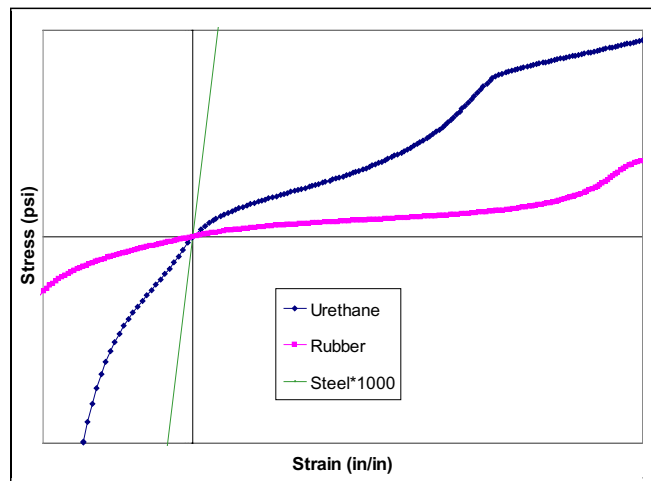


Figure 2-25. Stress/Strain relationship of steel vs. elastomers

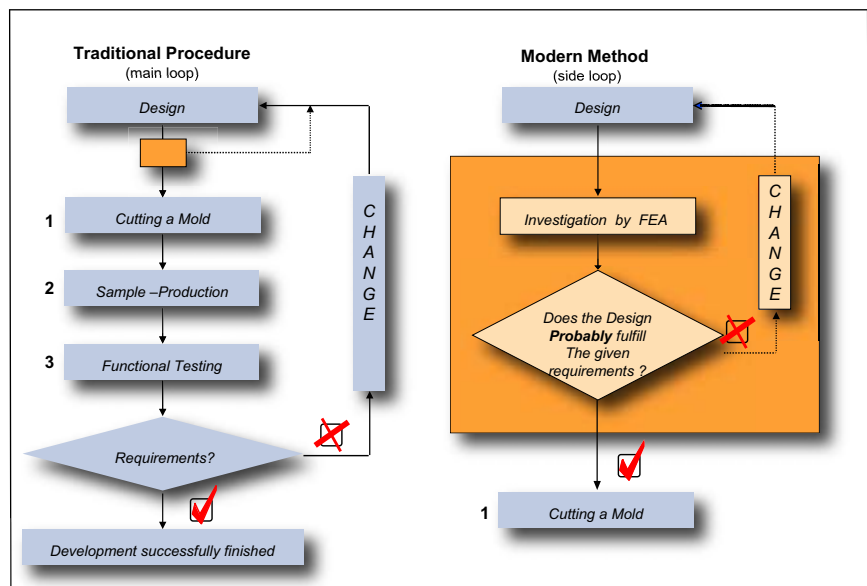


Figure 2-26. Traditional process vs. modern seal development process using FEA

Contents

Material Classifications..... 3-1

- Thermoplastics
- Elastomers 3-2
 - TPU - Polyurethanes
 - TPCE - PolyMyte
- Engineered Resins 3-3
 - Nylons
 - UltraCOMP
- Thermoset Elastomers
- Rubber..... 3-4
 - Nitriles (NBR)
 - Nitroxile (XNBR)
 - Hydrogenated Nitrile (HNBR)
 - Ethylene Propylene (EPR)
 - Fluorocarbon (FKM)
- PTFE 3-6
 - Non-filled PTFE
 - Filled PTFE

Typical Physical Properties..... 3-8

- Hardness 3-8
- Modulus of Elasticity..... 3-8
- Ultimate Tensile Strength..... 3-8
- Ultimate Elongation 3-9
- Resilience..... 3-9
- Compression Set..... 3-9

Parker Materials Typical Physical Properties

- Thermoplastics - Elastomers.... 3-11
- Thermoplastics - Resins..... 3-12
- Thermoset Elastomers 3-14
- PTFE 3-16
 - Energizers for PTFE seals ... 3-18
 - Back-ups for PTFE seals..... 3-19

Chemical Compatibility 3-20

Temperature Limits 3-20

Storage and Handling..... 3-20

Parker Engineered Materials for the Fluid Power Industry

There are two basic considerations in specifying a well-designed sealing system, both of which are equally integral to system performance: seal configuration, discussed in [Section 2](#), and material, discussed herein. When selecting from the wide range of material options that Parker offers, there are a number of considerations to be made:

- **Typical Physical Properties**
give a broad picture of a material's performance.
- **Chemical Compatibility**
matches the sealing material with the system fluid and operating environment.
- **Thermal Capabilities and Extrusion Resistance**
define limits of application parameters.
- **Friction and Wear**
help to determine the performance and life of the seal package.
- **Storage, Handling and Installation guidelines**
ensure seal integrity for optimal performance.

With in-house material development and compounding for thermoplastic, thermoset and PTFE materials, the ability to maintain control over all variables during the manufacturing process allows Parker to achieve optimal physical properties of its thermoplastic materials. Parker's commitment to offering the highest quality sealing materials is unsurpassed in the industry. To ensure long life and system integrity, it is critical to consider all variables in an application before specifying a material.



Materials Test Lab

Parker EPS Material Classifications

Classes of materials offered by Parker for fluid power profiles include:

- Thermoplastics — Elastomers & Engineered Resins
- Thermoset Elastomers — Rubber (Nitrile, Nitroxile, EPR, FKM, etc.)
- PTFE — Non-filled & filled TFE materials.

Thermoplastics

All thermoplastics are resins designed to soften and melt when exposed to heat. Utilizing an injection molding process, thermoplastics are melted at high temperature and injected into the mold. It is then cooled causing the plastic to solidify. If high heat is introduced again, the molded part will melt. The molecules of thermoplastics are held together by physical bonds rather than chemical bonding.

3

Elastomers — Polyurethane (TPU)

Polyurethanes exhibits outstanding mechanical and physical properties in comparison with other elastomers. Specifically, its wear and extrusion resistance make it a popular choice for hydraulic applications. Its temperature range is generally -65°F to +200°F (-54°C to +93°C), with some compounds, such as Resilon HT, having higher temperature ratings up to +275°F (+135°C). Polyurethanes are highly resistant to petroleum oils, hydrocarbon fuels, oxygen, ozone and weathering. On the other hand, they will deteriorate quickly when exposed to acids, ketones and chlorinated hydrocarbons. Unless specifically formulated to resist hydrolysis (Resilon WR), many types of polyurethanes are sensitive to humidity and hot water. Other acronyms polyurethane may be known by are AU, EU, PU, and TPU or may simply be known as urethanes. For typical physical properties, see [Table 3-1 on page 3-11](#).

P4300A90 — Resilon HT

90 Shore A hardness polyurethane manufactured by Parker specifically for sealing applications. This proprietary compound was developed to offer extended temperature capability, excellent resistance to compression set and high rebound characteristics that are unparalleled in the industry.

P4301A90 — Resilon WR

90 Shore A hardness polyurethane formulated for water resistance. This Parker proprietary compound can be used for both water and petroleum based fluids.

P4304D60 — Resilon ER

60 Shore D hardness polyurethane formulated to resist extrusion. This compound offers higher extrusion resistance for seals and anti-extrusion devices.



Figure 3-1. Resilon WR (P4301A90)

P4311A90 — Resilon HR

90 Shore A hardness polyurethane with high resilience. This formulation resists internal heat generated through hysteresis making this compound ideal for shock applications such as bumpers.

P4500A90 — Polyurethane

90 Shore A hardness polyurethane with good abrasion and extrusion resistance to improve the life of the seal. It also has excellent rebound which enhances response time to shock and side loading.

P4615A90 & P4617D65 — Molythane

P4615A90 is a 90 Shore A hardness, general purpose polyurethane, offering high abrasion and extrusion resistance and is an industrial standard sealing compound.

P4617D65 is a harder, 65 Shore D, version of Molythane ideal for use in anti-extrusion devices.

P4622A90 — Ultrathane

90 Shore A hardness polyurethane formulated with internal lubricants for lower friction to help reduce heat build-up and wear.

P4700A90 — Polyurethane

90 Shore A hardness polyurethane formulated to offer enhanced physical properties over Molythane with improved sealing capabilities due to lower compression set and higher rebound.

P5065A88 — Low Temperature Polyurethane

88 Shore A hardness polyether based polyurethane formulated for an improved low temperature range and higher resilience than Molythane. This compound offers a softer feel for easy installation and is a more cost effective option when compared to P4700A90.

P6000A94 — Polyurethane

94 Shore A hardness polyurethane formulated for an improved abrasion, extrusion, and compression set resistance, as well as higher temperature range than P4700A90.

Elastomers — PolyMyte (TPCE)

PolyMyte is a Parker proprietary polyester elastomer. It has exceptionally high tear strength, abrasion resistance, modulus, and a wide temperature range of -65°F to +275°F (-54°C to +135°C). PolyMyte is resistant to petroleum fluids, some phosphate ester and chlorinated fluids, common solvents and water below 180°F. It is not compatible with cresols, phenols, and highly concentrated acids. Due to its higher hardness and modulus, seals made from this material can be difficult to install. Also, care must be taken not to damage the seal lips during assembly into the gland.

Z4651D60 — PolyMyte

60 Shore D hardness PolyMyte is used for seals in applications requiring extended extrusion resistance and/or fluid compatibility.

Z4652D65 — PolyMyte

65 Shore D hardness PolyMyte is ideal for back-ups and other anti-extrusion devices.

Z4729D55 — Hytrel^{®1}

Standard 55 Shore D hardness Hytrel for back-ups and other anti-extrusion devices.

Engineered Resins

Engineered resins such as Nylons and P.E.E.K., sometimes called hard plastics, are generally categorized as compounds with hardness measured on the Rockwell M or R scale. These compounds exhibit high tensile and compressive strength and are typically used in wear rings for bearing support and in auxiliary devices for extrusion resistance. For typical physical properties, [see Table 3-2 on page 3-12](#).

Engineered Resins — Nylons**W4650 — MolyGard**

Heat stabilized, internally lubed, 30% glass-reinforced nylon for standard tolerance wear rings.

W4655 — Nylatron^{®2}

Wear resistant nylon loaded with molybdenum disulfide (MoS₂) for reduced friction. This compound is ideally suited for use in back-up rings. Nylatron is susceptible to water absorption.

W4733 — WearGard

Heat stabilized, internally lubricated, 35% glass reinforced nylon for tight-tolerance wear rings. WearGard is a dimensionally stable compound with high compressive strength and is featured in Parker's distinctive green color.

Engineered Resins — UltraCOMPTM (PEEK)

UltraCOMP engineered thermoplastics are semicrystalline materials manufactured for extreme temperatures, chemicals and pressures. Their excellent fatigue resistance and stability in high temperature environments make them the material of choice where other materials fail. With a melt temperature of over 600°F, UltraCOMP can be used at continuous operating temperatures of -65°F up to 500°F. Superior strength and wear resistance



Figure 3-2. UltraCOMP HTP

1 Hytrel[®] is a trademark of DuPont

2 Nylatron[®] is a trademark of Quadrant Engineering.

Materials

properties make it an ideal alternative to metal or metal alloys in applications where weight, metal-to-metal wear or corrosion issues exist. Such capabilities translate into reduced equipment down time and increased productivity. For example, UltraCOMP back-up rings exhibit optimum strength-flexibility for ease of installation and high tensile strength properties for premiere extrusion resistance. UltraCOMP is available in molded geometries, machined geometries and tube stock.

W4685 — UltraCOMP HTP

An unfilled engineered thermoplastic material specified for use in extreme conditions spanning multiple industries. Its excellent tensile strength facilitates its successful use as back-up rings and anti-extrusion devices. In addition, UltraCOMP HTP's elongation properties (>60% per ASTM D638) allow it to be flexed and twisted without breaking.

W4686 — UltraCOMP GF

30% glass filled blend provides enhanced compressive strength over UltraCOMP HTP.

W4737 — UltraCOMP CF

30% carbon fiber blend provides enhanced tensile and compressive strength over UltraCOMP GF.

W4738 — UltraCOMP CGT

10% carbon, 10% glass, and 10% PTFE blend for enhanced compressive strength and reduced friction.

Thermoset Elastomers — Rubber

Unlike thermoplastic elastomers, thermosetting elastomers gain their strength from an irreversible cross linking process that occurs when the compound is subjected to pressure and heat. During this process, or "cure", special chemical agents within the compound react to the heat and pressure to vulcanize the molecules together. Once cured, thermoset compounds obtain the necessary physical properties needed to function in fluid sealing applications. Reheating thermoset compounds will not cause them to melt as thermoplastics do. For typical physical properties, see [Table 3-3 on page 3-14](#).

Nitrile (NBR)

Nitrile rubber (NBR) is the general term for acrylonitrile butadiene copolymer. Nitrile compounds offer good resistance to abrasion, extrusion, and compression set. The acrylonitrile (ACN) content influences the physical properties of the compound. As the ACN content increases, oil and solvent resistance improve, tensile strength, hardness and abrasion resistance increase, while permeability, low temperature flexibility, and resilience decrease. Parker offers a variety of nitrile compounds, formulated with varying ACN content, to provide the best physical properties for a wide range of applications. Typical temperature ratings are -40°F to +250°F (-40°C to +121°C).



Figure 3-3. Thermoset elastomers

N4008A80 — NBR

80 Shore A hardness low temperature nitrile. This is a premium, low ACN nitrile for use when low temperature sealability is the primary requirement

N0304A75 — NBR

75 Shore A hardness low temperature nitrile. This is a low ACN nitrile with an extended upper end temperature formulated for aerospace T-seal applications. N0304A75 is compliant with AMS-P-83461 which supersedes MIL-P-25732.

N4115A75 — NBR

75 Shore A hardness general purpose nitrile with medium ACN content for use where a softer seal is needed.

N4180A80 — NBR

80 Shore A hardness general purpose nitrile with medium ACN content. N4180A80 has good chemical compatibility, sealability and moderate extrusion resistance. N4180A80 has excellent compression set resistance even at higher temperatures.

N4181A80 — NBR

80 Shore A hardness, medium ACN nitrile with fiber added for reinforcement. The fibers also help to retain lubrication for reduced friction. N4181A80 is often used in the 8600 wiper seal to resist extrusion.

N4121A90 — NBR

90 Shore A hardness, high ACN nitrile with an exceptionally high modulus which gives this compound outstanding extrusion resistance. N4121A90 also has good compression set properties.

Nitroxile™ (Carboxylated Nitrile) (XNBR)

Carboxylated nitriles are formed by exposing nitrile polymer to carboxylic acid groups during polymerization. This forms an improvement over nitrile by producing a more wear resistant seal compound with enhanced modulus and tensile strength. Nitroxile offers exceptionally low friction characteristics and has excellent resistance to petroleum oils, hydrocarbon fuels and water. The typical temperature range for Nitroxile is -10°F to +250°F (-23°C to +121°C).

N4257A85 — XNBR

85 Shore A hardness carboxylated nitrile that has an internal lubricant as an aid to reduce friction. It is ideal for pneumatic applications with excellent compression set properties.

N4274A85 — XNBR

85 Shore A hardness carboxylated nitrile that is formulated with a proprietary internal lubricant for exceptionally low friction operation. This is the premier carboxylated nitrile in the sealing industry.

N4263A90 — XNBR

90 Shore A hardness carboxylated nitrile that is formulated for increased hardness, modulus and tensile strength to provide extra toughness in applications requiring nitrile seals. This compound has excellent resistance to extrusion, explosive decompression and abrasion.

Hydrogenated Nitrile (HNBR)

Hydrogenated nitrile offers improved chemical compatibility and heat resistance over standard nitrile by using hydrogen in the formulation to saturate the backbone of the nitrile molecule. However, the compound usually becomes less flexible at low temperatures. This can be offset to some degree by adjusting the ACN content as is done with NBR. Typical temperature ratings are -25°F to +320°F (-32°C to +160°C).

N4032A80 (KB162)³ — HNBR

80 Shore A hardness hydrogenated nitrile.

N4031A85 (KB183) — HNBR

85 Shore A hardness hydrogenated nitrile formulated for low temperatures.

N4033A90 (KB163) — HNBR

90 Shore A hardness hydrogenated nitrile formulated for improved chemical compatibility.

N4007A90 — HNBR

90 Shore A hardness hydrogenated nitrile featuring excellent resistance to extrusion and explosive decompression to meet Norsok M-710.

Ethylene Propylene (EPR)

Ethylene propylene has excellent dimensional stability in water-based fluids and steam; however, it should never be exposed to petroleum lubricants, water / oil emulsions, solvents or other petroleum based fluids (CAUTION! Do not lubricate the seals with petroleum oils or greases during installation). Ethylene propylene rubber is compatible with Skydrol^{®4} and other phosphate ester fluids used in aircraft hydraulic systems. EPR is also the recommended seal material for automotive brake fluids (DOT 3, 4 and 5) as well as many commercial refrigerants. Ethylene propylene rubber is also useful in sealing weak alkalis, acids, and methyl ethyl ketone (MEK). The typical temperature range is -65°F to +300°F (-54°C to +149°C).

³ Compound numbers in parenthesis refer to Parker Seal Group material numbers.

⁴ Skydrol[®] is a registered trademark of Solutia Inc.

Materials

E4259A80 — EPR

80 Shore A hardness general purpose EPR with excellent dimensional stability in water-based fluids and steam. This compound has excellent chemical compatibility and compression set resistance.

E4207A90 — EPR

90 Shore A hardness general purpose EPR with excellent dimensional stability in water-based fluids and steam. With its additional hardness it is able to be used at higher pressures than the 80 Durometer compounds. It has excellent compression set properties as well as excellent compatibility with such fluids as DOT 3 brake fluid.

E4270A90 — EPR

90 Shore A hardness EPR formulated for steam/geothermal environments with an upper temperature range of +600°F (+315°C). Excellent compression set resistance.

Fluorocarbon Elastomers (FKM)

Fluorocarbon elastomers are highly specialized polymers that show the best resistance of all rubbers to chemical attack, heat and solvents. FKM is of critical importance in solving problems in aerospace, automotive, chemical and petroleum industries. FKM is suitable for use in most hydraulic fluids except Skydrol® types and ester-ether fluids. Standard temperatures range from -20°F to +400°F (-29°C to +204°C).

V4205A75 — FKM

75 Shore A hardness general purpose fluorocarbon.

V1289A75 — FKM

75 Shore A hardness fluorocarbon formulated for improved low temperature performance of -40°F to +400°F (-40°C to +204°C).

V4208A90 — FKM

90 Shore A hardness general purpose fluorocarbon.

V4266A95 — FKM

95 Shore A hardness extended wear and extrusion resistant fluorocarbon.



Figure 3-4. PTFE

PTFE

PTFE (Polytetrafluoroethylene) offers the following characteristics over thermoplastic and thermoset compounds, making it a unique problem solving solution for sealing applications:

- Low coefficient of friction
The low coefficient of friction (.06) of PTFE material results from low interfacial forces between its surface and other materials that come in contact. This behavior of PTFE material eliminates any possibility of stick-slip effects in dynamic sealing applications.
- Wide temperature range
PTFE's high melting point and morphological characteristics allow components made from the resin to be used continuously at service temperatures to 600°F (315°C). For sealing cryogenic fluids below -450°F (-268°C), special designs using PTFE and other fluoropolymers are available.
- Chemically inert
- Dry running capability
- Resist temperature cycling
- High surface speeds
- Low water absorption
- Low dielectric constant and dissipation factor

Enhancing Performance of PTFE with Fillers

In fluid power applications, it can be beneficial to add fillers to PTFE compounds in order to enhance its physical characteristics. Specific fillers can be incorporated to provide improved compression strength, wear, creep and extrusion resistance.

Non-Filled PTFE**0100 — Virgin PTFE**

Virgin PTFE has no fillers and is considered FDA and potable water safe.

Filled PTFE**0102 — Modified Virgin PTFE**

Virgin PTFE modified with custom pigmentation features similar basic properties as virgin, but offers increased wear and creep resistance and lower gas permeability.

0120 — Mineral Filled

Mineral is ideal for improved higher temperatures and offers low abrasion to soft surfaces. PTFE with this filler can easily be qualified to FDA and other food-grade specifications.

0203 — Fiberglass Filled

Glass fiber is the most common filler with a positive impact on creep performance of PTFE. Glass fiber adds wear resistance and offers good compression strength.

0204 / 0205 — Molybdenum Disulfide and Fiberglass Filled

Molybdenum disulfide (MoS_2) increases the hardness of the seal surface while decreasing friction. It is normally used in small proportions and combined with other fillers such as glass. MoS_2 is inert towards most chemicals.

0301 — Graphite Filled

Graphite filled PTFE has an extremely low coefficient of friction due to the low friction characteristics of graphite. Graphite is chemically inert. Graphite imparts excellent wear properties and high PV values to PTFE.

0307 — Carbon-Graphite Filled

Carbon reduces creep, increases hardness and elevates the thermal conductivity of PTFE. Carbon-graphite compounds have good wear resistance and perform well in non-lubricated applications.

0401 / 0402 — Bronze Filled

Bronze is a self lubricated, long-wearing material that offers superior frictional characteristics and high temperature capabilities.

0501 / 0502 — Carbon Fiber Filled

Carbon fiber lowers creep, increases flex and compressive modulus and raises hardness. Coefficient of thermal expansion is lowered and thermal conductivity is higher for compounds of carbon fiber filled PTFE. This is ideal for automotive applications in shock absorbers and water pumps.

0601 — Aromatic Polyester Filled

Aromatic polyester is excellent for high temperatures and has excellent wear resistance against soft, dynamic surfaces. This filler is not recommended for sealing applications involving steam.

Typical Physical Property Information

There are six significant typical physical properties that affect seal performance. It is important to understand how the physical properties of a compound relate to each sealing application and to know that the fluid being sealed may change these original characteristics. The six critical properties identified below each show detail concerning their impact on sealing as well as measurement techniques.

3

1 — Hardness.

Hardness, also referred to as durometer, is a property frequently associated with extrusion resistance (see Table 2-4 on page 2-5). It is not a good indication of extrusion resistance when comparing different material classifications. For example, a polyurethane and a nitrile compound with the same hardness will not share the same extrusion resistance. Hardness also relates to low pressure sealability, since the ability of a seal to conform to a mating surface depends, to a high degree, on the hardness of the material. The harder a material, the less it will conform to a sealing surface at low pressure. As hardness increases, modulus and compressive strengths typically increase as well. This means that harder seals are typically more difficult to install and often have greater friction.

Hardness is measured by how easily a specified surface is deformed by an indenter. “Shore A” and “Shore D” are the two most common scales for seal materials. Both scales use a rounded indenter to impact the surface being measured. Shore A is typically used to measure softer materials, while harder materials are measured on the Shore D scale. Although the Shore A scale has a max value of 100, it is recommended to switch to the Shore D scale past 95 Shore A. These two scales overlap one another as shown in Figure 3-5.

Standardized test methods for this physical property are ASTM 2240 and DIN 53505, which corresponds to ISO 48. This test procedure has a repeatability of ±5 points, because its accuracy is dependant on the flatness of the specimen and the skill of the technician. For this reason, measuring material hardness on a seal itself, with its irregular surface, is discouraged and can only be used with caution as a relative value.

A second method of measuring hardness that is seldom used and is only presented here for informational purposes is the International Rubber Hardness Degree (IRHD), as described in ASTM

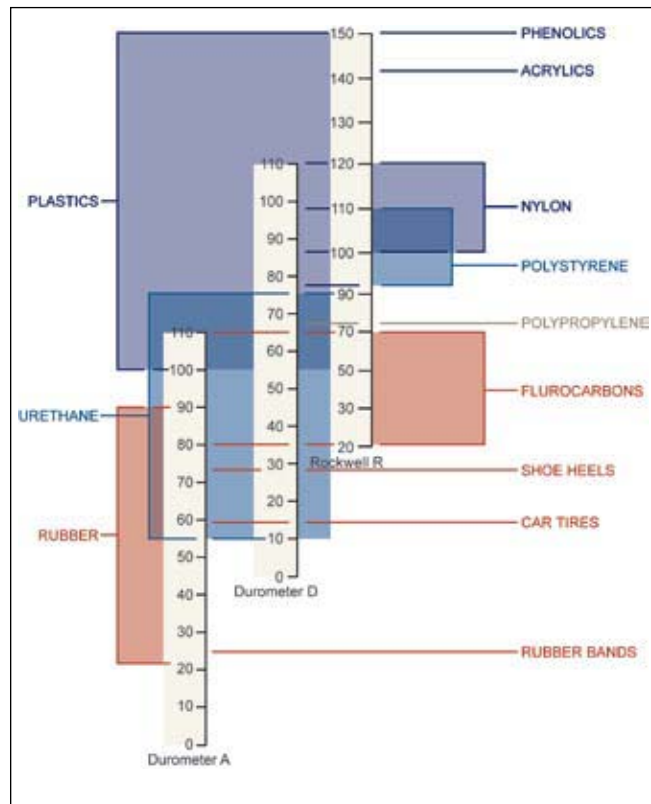


Figure 3-5. Hardness Scale Comparison Between Shore A, Shore D, and Rockwell R

1414/1415, Din 53519, and ISO 1400/1818. The IRHD and Shore methods do not provide comparable values and should not be used to relate one material to another.

2 — Modulus

Modulus is truly what gives a seal material its extrusion resistance. It is a measure of the force required to stretch an elastomer a certain percentage of its original length. Modulus of a material can more simply be thought of as its stiffness and is also an indication of the ease of installation. Higher modulus materials resist stretching and compression, increasing installation difficulty. (ASTM method D412)

3 — Ultimate Tensile Strength

Ultimate tensile strength is closely related to wear resistance, toughness and therefore service life of the seal. This property is the amount of force required to reach ultimate elongation, physically breaking the material. Polyurethane and filled PTFE compounds generally have very high tensile strength, providing the associated excellent tear and abrasion resistance. Most rubber compounds have much lower tensile strength values, often resulting in one fifth the wear life

Modulus of Elasticity measures the force per area to stretch a sample to a certain percentage of its original length.



Example: To stretch a 1 inch sample to 2 inches, is a 100% stretch.

Figure 3-6. Modulus of Elasticity

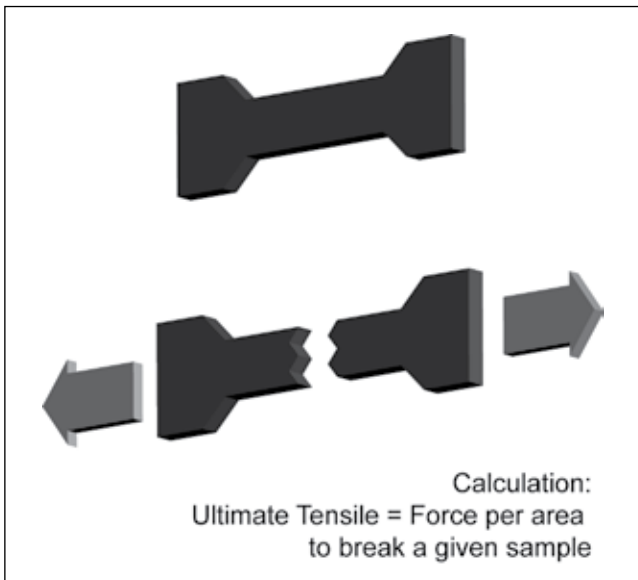


Figure 3-7. Tensile Strength

of higher tensile materials. (ASTM method D412 and DIN 53504) **It should be noted that values obtained from the DIN standard are typically higher than those from the ASTM standard as there is a difference in the test specimen and the pull rate.**

4 — Ultimate Elongation

Ultimate elongation is most closely associated with installation, but can also be a good indicator of chemical compatibility. This property is the distance a material will stretch before breaking, expressed as a percentage of its original length. It can be important in small diameter seals because it can limit the amount

of stretch available for installation. Elongation is also a good indicator of chemical compatibility. If changes are observed after a material sample is soaked in a fluid, it is possible that the seal is being adversely affected. In this situation, the fluid will typically attack and break the polymeric chain, reducing the ultimate elongation. (ASTM method D412)

5 — Resilience

Resilience, also known as rebound, strongly correlates to how quickly a seal will respond to changing conditions in a dynamic environment. This property measures the ability of a material to return to its original shape after being deformed, as well as the speed at which it can achieve this.

Examples of conditions that require seals to exhibit excellent resilience are out-of-round cylinders and rapid side loading situations that cause the rod to move sideways quickly. Applications with high vibration or high stroke speed can also benefit from high resiliency seals. (ASTM method D2632, DIN 53512)

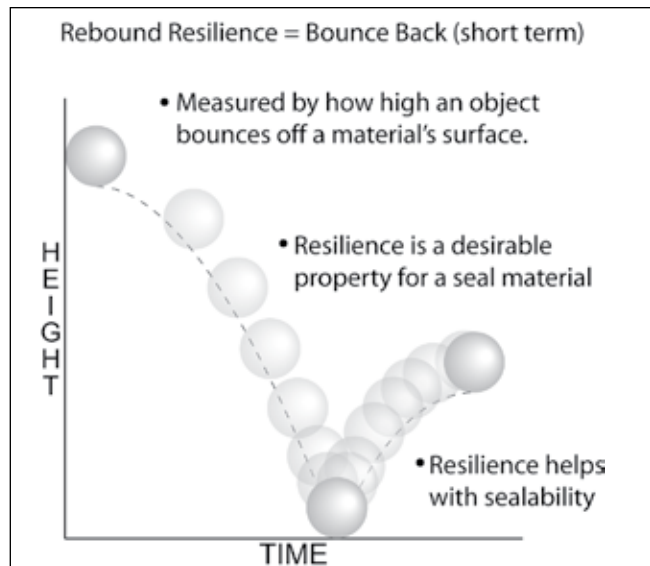


Figure 3-8. Rebound Resilience

6 — Compression Set

Compression set is the inability of a seal to return to its original shape after being compressed. It is associated with a sealing material's "long-term memory" and is considered to be one of the most critical properties of the seal. For a seal to maintain radial pressure and establish a continuous sealing line, it must resist stress relaxation during the time

Materials

and at the temperature to which it is exposed. As the seal begins to take a compression set, it loses its inherent ability to seal and may require other influences to maintain a positive sealing force. Examples of such factors would be system pressure or an expander working to energize the sealing lips. The lowest possible compression set value is always advantageous because it represents the least amount of lost sealing force over time.

3

As defined by ASTM, compression set is the percent of deflection by which the seal fails to recover after a specific deflection, time and temperature (see Figure 3-9). When comparing compression set values between two materials, it is important to note both the time and temperature of the tests being compared. Even though a typical compression set value is based on a 70 hour period, many times a 22 hour period may be used for time and convenience sake. A 22 hour compression set value will always be dramatically better than that of a 70 hour test under the same temperature condition. It is also important to know that each elastomer family is generally tested at a different temperature or series of temperatures. Be sure that the temperatures of the test data closely approximate the temperature the seal will be used in. (ASTM method D395, DIN 53517)

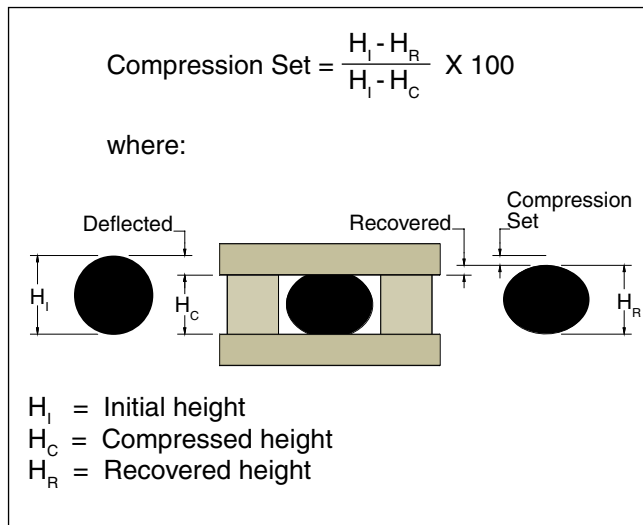


Figure 3-9. Compression set calculation

Parker Materials Typical Physical Properties

Typical physical properties for Parker fluid power product materials are shown in the corresponding tables:

| Material Classification | | Table (page) |
|---|--|------------------------------|
| Thermoplastics | | |
| Elastomers | | Table 3-1, (pg 3-11) |
| TPU Polyurethanes | | |
| TPCE PolyMyte | | |
| Engineered Resins | | Table 3-2, (pgs. 3-12, 3-13) |
| Nylons | | |
| UltraCOMP | | |
| Thermoset Elastomers | | |
| Rubber Nitriles Nitroxile Ethylene Propylene Fluorocarbon | | Table 3-3 (pgs. 3-14, 3-15) |
| PTFE for Fluid Power Seals | | |
| Non-filled PTFE Filled PTFE | | Table 3-4 (pgs. 3-16, 3-17) |
| Rubber energizer materials for PTFE fluid power seals | | Table 3-5 (pg 3-18) |
| Back-up ring materials for PTFE fluid power seals | | Table 3-6 (pg 3-19) |

Table 3-1. Typical Physical Properties: Thermoplastics — Elastomers

| Parker Material Code | Material Trade Name (Color) | Typical Applications & Description | Service Temperature Range °F (°C) | Tensile Strength at Break psi (MPa) | Ultimate Elongation | Shore Hardness | | 100% Modulus psi (MPa) | Compression Set | | Rebound | Abrasion Rating Best = 10 |
|---|-------------------------------------|---|-----------------------------------|-------------------------------------|---------------------|----------------|----|------------------------|-----------------|-----------|---------|---------------------------|
| | | | | | | A | D | | Set | at°F (°C) | | |
| Thermoplastic Elastomers — TPU, Polyurethanes | | | | | | | | | | | | |
| P4300A90 | Polyurethane Resilon HT (Tan) | Proprietary compound offering extended temperature range, high rebound. | -65 to +275 (-54 to +135) | 8625 (59.5) | 560% | 92 | - | 1793 (12.4) | 28.9% | 212 (100) | 63% | 10 |
| P4301A90 | Polyurethane Resilon WR (Aqua Blue) | For water or petroleum based fluids. | -35 to 225 (-37 to +107) | 7129 (49.2) | 514% | 90 | - | 2029 (13.9) | 24.8% | 158 (70) | 45% | 8.1 |
| P4304D60 | Polyurethane Resilon ER (Brown) | Offers higher extrusion resistance for seals and anti-extrusion devices. | -65 to +275 (-54 to +135) | 6521 (44.9) | 556% | - | 55 | 2940 (20.3) | 32.2% | 158 (70) | 46% | 7.3 |
| P4311A90 | Polyurethane Resilon HR (Red) | Formulation resists internal heat generated through hysteresis, ideal for shock applications. | -65 to +275 (-54 to +135) | 7229 (49.8) | 632% | 91 | - | 1732 (11.9) | 33.3% | 212 (100) | 63% | 8.2 |
| P4615A90 | Polyurethane Molythane (Black) | General purpose industrial polyurethane offering high abrasion resistance. | -65 to +200 (-54 to +93) | 8134 (56.1) | 565% | 95 | - | 1755 (12.1) | 30.8% | 158 (70) | 34% | 9.4 |
| P4617D65 | Polyurethane Molythane (Black) | General purpose industrial polyurethane offering high extrusion resistance. | -65 to +250 (-54 to +121) | 5973 (41.2) | 544% | - | 62 | 3914 (26.9) | - | - | - | 6.7 |
| P4622A90 | Polyurethane Ultrathane (Yellow) | Formulated with internal lubricants for lower friction to help reduce heat build up. | -65 to +225 (-54 to +107) | 6757 (46.6) | 466% | 94 | - | 1755 (12.1) | 31.0% | 158 (70) | 34% | 7.6 |
| P4500A90 | Polyurethane (Light Green) | Offers good abrasion and extrusion resistance with excellent rebound. | -65 to +200 (-54 to +93) | 6740 (46.5) | 586% | 92 | - | 1774 (12.2) | 32.9% | 158 (70) | 42% | 7.6 |
| P4700A90 | Polyurethane (Green) | Enhanced properties over 4615 to improve sealing capabilities from lower compression set. | -65 to +200 (-54 to +93) | 5660 (39.0) | 511% | 92 | - | 1665 (11.5) | 24.7% | 158 (70) | 35% | 6.3 |
| P5065A88 | Polyurethane (Dark Blue) | Formulated for an improved low temperature range and higher resilience than 4615. | -70 to +200 (57 to +93) | 5033 (34.7) | 660% | 86 | - | 1073 (7.4) | 27.2% | 158 (70) | 50% | 5.5 |
| P6000A90 | Polyurethane (Dark Gray) | Improved abrasion, extrusion and compression resistance as well as higher temp. than 4700. | -31 to +230 (-35 to +110) | 6513 (44.9) | 491% | 93 | - | 1941 (13.4) | 26.2% | 158 (70) | 44% | 7.3 |
| Thermoplastic Elastomers — TPCE, PolyMyte | | | | | | | | | | | | |
| Z4651D60 | PolyMyte (Orange) | Used in applications requiring extended extrusion resistance and fluid compatibility. | -65 to +275 (-54 to +135) | 5748 (39.6) | 775% | - | 58 | 2231 (15.4) | 43.0% | 158 (70) | - | 6.4 |
| Z4652D65 | PolyMyte (Orange) | Primarily used for back-up rings and other anti-extrusion devices. | -65 to +275 (-54 to +135) | 6175 (42.6) | 700% | - | 62 | 2611 (18.0) | 45.4% | 158 (70) | - | 6.9 |
| Z4729D55 | Hytrel (Tan) | Primarily used for back-up rings and other anti-extrusion devices. | -65 to +275 (-54 to +135) | 5609 (38.7) | 837% | - | 56 | 2212 (15.2) | 46.0% | 158 (70) | - | 6.9 |

02/15/08

Materials

Table 3-2. Typical Physical Properties: Thermoplastics — Engineered Resins

| Parker Material Code | Material | Color | Typical Applications & Description | Service Temperature Range °F (°C) | Tensile Strength at Break psi (MPa) | Flexural Strength Kpsi (MPa) |
|----------------------|------------------------------------|----------|---|-----------------------------------|-------------------------------------|------------------------------|
| Nylons | | | | | | |
| W4650 | MolyGard | Gray | Heat stabilized, internally lubed 30% glass-reinforced nylon for standard tolerance wear rings. | -65 to +275 (-54 to +135) | 17500 (121.0) | 22600 (156.0) |
| W4655 | Nylatron | Gray | Wear resistant nylon with molybdenum disulfide for lower friction, suited for back-up rings. | -65 to +275 (-54 to +135) | 13000 (89.6) | 16000 (110.3) |
| W4733 | WearGard | Green | High compressive strength, 35% glass-reinforced nylon for tight tolerance wear rings. | -65 to +275 (-54 to +135) | 18300 (126.0) | 25500 (176.0) |
| UltraCOMP | | | | | | |
| W4685 | UltraCOMP HTP | Tan | A homogenous engineered thermoplastic used for extreme conditions in many markets. | -65 to +500 (-54 to +260) | 14000 (97.0) | 23600 (163.0) |
| W4686 | UltraCOMP GF | Tan | 30% glass filled engineered thermoplastic with enhanced compressive strength. | -65 to +500 (-54 to +260) | 22600 (156.0) | 30700 (212.0) |
| W4737 | UltraCOMP CF | Black | 30% carbon fiber blend, provides enhanced tensile and compressive strength. | -65 to +500 (-54 to +260) | 32400 (224.0) | 43200 (298.0) |
| W4738 | UltraCOMP CGT | Gray | Thermoplastic material blended with carbon, glass and PTFE for reduced friction. | -65 to +500 (-54 to +260) | 20400 (141.0) | 26900 (186.0) |
| Composite Resins | | | | | | |
| 0871-0874 | Composite Fabric-Reinforced Resins | Multiple | Fabric-reinforced resins to handle severe sideloads, high heat and swell from moisture. | -40 to +250 (-40 to +121) | 9500 (65.5) | - |

3

Table 3-2. Typical Physical Properties: Thermoplastics — Engineered Resins (cont'd)

| Parker Material Code | Rockwell Hardness | | Notched IZOD Impact Strength Ft-Lbs/In. | Tensile Modulus Kpsi (MPa) | Shear Strength psi (MPa) | Flexural Modulus Kpsi (MPa) | Compressive Strength psi (MPa) | Permissible Compressive Load psi (MPa) | Water Absorption (24 Hour) % |
|----------------------|-------------------|-----|---|----------------------------|--------------------------|-----------------------------|--------------------------------|--|------------------------------|
| | M | R | | | | | | | |
| Nylons | | | | | | | | | |
| W4650 | 77 | 114 | 1.37 | 952 (6.6) | 9390 (65.0) | 860 (5929.0) | 21000 (145.0) | 21700 (150.0) | 0.50 to 0.70 |
| W4655 | - | 119 | 1.69 | 536 (3.7) | 9,500 (65.5) | 406 (2.8) | 12000 (82.7) | - | 0.50 to 1.40 |
| W4733 | 87 | 117 | 1.15 | 899 (6.2) | 9820 (68.0) | 1,100 (7584.0) | 21500 (148.0) | 21700 (150.0) | 0.50 to 0.70 |
| UltraCOMP | | | | | | | | | |
| W4685 | - | 126 | 2 | 507 (3.5) | 7687 (53.0) | 579 (4.0) | 17100 (118.0) | - | 0.50 |
| W4686 | - | 124 | 2 | 1653 (114.0) | 14068 (97.0) | 1334 (9.2) | 31100 (215.0) | - | 0.11 |
| W4737 | - | 124 | 2 | 3234 (22.3) | 12328 (85.0) | 2697 (18.6) | 34800 (240.0) | - | 0.06 |
| W4738 | - | 100 | 2 | 1464 (10.1) | - | 1189 (8.2) | 21700 (150.0) | - | 0.06 |
| Composite Resins | | | | | | | | | |
| 0871-0874 | 100 | - | 10 | 470 (3.24) | - | 280 (1.9) | 35000 (241.3) | 65200 (449.54) | 0.10 |

Table 3-3. Typical Physical Properties — Thermoset Elastomers

| Parker Material Code | Material | Color | Typical Applications & Description | Service Temperature Range °F (°C) | Tensile Strength at Break psi (MPa) | Ultimate Elongation | Shore A Hardness | 100% Modulus psi (MPa) | Compression Set | | Abrasion Rating (1) Worst to (10) Best |
|-------------------------------|-----------------|-------|---|-----------------------------------|-------------------------------------|---------------------|------------------|------------------------|-----------------|------------|--|
| | | | | | | | | | Set | at °F (°C) | |
| Nitrile (NBR) | | | | | | | | | | | |
| N4115A75 | Nitrile | Black | General purpose nitrile with medium ACN content for use where a softer seal is required. | -40 to +225 (-40 to +107) | 2215 (15.3) | 328% | 74 | 641 (4.4) | 23.6% | 212 (100) | 1.9 |
| N4180A80 | Nitrile | Black | General purpose nitrile with good chemical compatibility, seal ability and compression set. | -40 to +250 (-40 to +121) | 2199 (15.2) | 275% | 80 | 1007 (6.9) | 19.4% | 302 (150) | 1.9 |
| N4181A80 | Flocked Nitrile | Black | Fiber added reinforcement helps retain lubrication for reduced friction. Used in 8600 wipers. | -40 to +250 (-40 to +121) | 2437 (16.8) | 345% | 80 | 663 (4.6) | 19.4% | 302 (150) | 2.2 |
| N4121A90 | Nitrile | Black | High modulus for outstanding extrusion resistance plus good compression set. | -40 to +250 (-40 to +121) | 2415 (16.7) | 247% | 89 | 1447 (9.9) | 24.0% | 212 (100) | 2.2 |
| N4008A80 | Nitrile | Black | Premium, low ACN nitrile for use when low temperature sealability is required. | -70 to +275 (-57 to +135) | 2141 (14.8) | 177% | 79 | 1031 (7.1) | 26.4% | 212 (100) | 1.8 |
| N0304A75 | Nitrile | Black | Extended temperature range formulated for aerospace T-seal applications. | -65 to +275 (-54 to +135) | 1790 (12.3) | 213% | 75 | 567 (3.9) | 19.4% | 212 (100) | 1.4 |
| Carboxylated Nitroxile (XNBR) | | | | | | | | | | | |
| N4257A85 | Nitroxile | Black | XNBR with internal lubricant to reduce friction. Ideal for pneumatic applications. | 0 to +250 (-18 to +121) | 2845 (19.6) | 249% | 80 | 1223 (8.4) | 20.0% | 212 (100) | 2.7 |
| N4274A85 | Nitroxile | Black | Premier XNBR in the industry formulated with proprietary internal lubricant. | -10 to +250 (-23 to +121) | 3016 (20.8) | 241% | 83 | 1404 (9.7) | 31.0% | 212 (100) | 2.9 |
| N4263A90 | Nitroxile | Black | Extra tough XNBR with increased hardness, modulus and tensile strength. | -20 to +275 (-29 to +135) | 3103 (21.4) | 117% | 90 | 2902 (20.0) | 26.4% | 212 (100) | 3 |
| Hydrogenated Nitrile (HNBR) | | | | | | | | | | | |
| N4031A85 (KA183) | HNBR | Black | Equivalent to Seal Group compound KB183A85, offers low temperature improvement. | -40 to +320 (-40 to +160) | 1800 (12.4) | 100% | 88 | 1500 (10.3) | 25.0% | 212 (100) | 1.4 |
| N4032A80 (KB162) | HNBR | Black | Equivalent to Seal Group compound KB162A80 offering improved chemical compatibility. | -25 to +320 (-32 to +160) | 3335 (22.9) | 164% | 82 | 2358 (16.3) | 23.0% | 302 (150) | 3.3 |
| N4033A90 (KB163) | HNBR | Black | Equivalent to Seal Group compound KB163A90 offering improved chemical compatibility | -25 to +320 (-32 to +160) | 3219 (22.2) | 107% | 88 | 3329 (22.9) | 22.0% | 302 (150) | 3.2 |
| N4007A90 | HNBR | Black | Excellent extrusion resistance and explosive decompression to meet Norsok M-710 | -20 to +320 (-29 to +160) | 4698 (32.4) | 207% | 92 | 2006 (13.8) | 14.9% | 212 (100) | 5.0 |

09/01/07

Table 3-3. Typical Physical Properties — Thermoset Elastomers (cont'd)

| Parker Material Code | Material | Color | Typical Applications & Description | Service Temperature Range °F (°C) | Tensile Strength at Break psi (MPa) | Ultimate Elongation | Shore A Hardness | 100% Modulus psi (MPa) | Compression Set | | Abrasion Rating (1) Worst to (10) Best |
|-------------------------------|--------------------|-------|---|-----------------------------------|-------------------------------------|---------------------|------------------|------------------------|-----------------|------------|--|
| | | | | | | | | | Set | at °F (°C) | |
| Ethylene Propylene (EPR) | | | | | | | | | | | |
| E4207A90 | Ethylene Propylene | Black | General purpose 90A EPR, has excellent dimensional stability in water-based fluids and steam. | -65 to +300 (-54 to +149) | 2285 (15.8) | 135% | 87 | 1453 (10.0) | 13.0% | 257 (125) | 2.0 |
| E4259A80 | Ethylene Propylene | Black | General purpose 80A EPR, has excellent dimensional stability in water-based fluids and steam. | -65 to +300 (-54 to +149) | 2142 (14.8) | 162% | 79 | 1057 (7.3) | 12.8% | 257 (125) | 1.8 |
| E4270A90 | Ethylene Propylene | Black | Formulated for geothermal environments and steam up to +600°F. | -65 to +400 (-54 to +204) | 3047 (21.0) | 145% | 89 | 1800 (12.4) | 27.1% | 302 (150) | 3.0 |
| Fluorocarbon Elastomers (FKM) | | | | | | | | | | | |
| V1289A75 | Fluoroelastomer | Black | Fluorocarbon material formulated for improved low temperature applications. | -40 to +400 (-40 to +204) | 1497 (10.3) | 163% | 78 | 920 (6.3) | 17.0% | 392 (200) | 1.0 |
| V4205A75 | Fluoroelastomer | Black | 70 Shore A general purpose fluorocarbon resistant to chemical attack and heat. | -20 to +400 (-29 to +204) | 2161 (14.9) | 202% | 76 | 803 (5.5) | 6.5% | 302 (150) | 1.8 |
| V4208A90 | Fluoroelastomer | Black | 90 Shore A general purpose fluorocarbon resistant to chemical attack and heat. | -5 to +400 (-21 to +204) | 1954 (13.5) | 152% | 90 | 1327 (9.2) | 13.4% | 302 (150) | 1.6 |
| V4266A95 | Fluoroelastomer | Black | Features extended wear and extrusion resistance over general purpose fluorocarbons. | -5 to +400 (-21 to +204) | 2442 (16.8) | 102% | 92 | 2210 (15.2) | 17.6% | 302 (150) | 2.2 |

Materials

Table 3-4. Typical Physical Properties — PTFE

| Parker Material Code | Material | Color | Typical Applications & Description | Service Temperature Range °F (°C) | Tensile Strength in psi at Break (bar) | Elongation in % | Hardness Shore D |
|----------------------|--------------------------------|-----------|--|-----------------------------------|--|-----------------|------------------|
| Non-Filled PTFE | | | | | | | |
| 0100 | Virgin PTFE | White | Excellent for cryogenic applications. Good for gases. | -425 to 450 (-254 to 233) | 4575 (316) | 400 | 60 |
| Filled PTFE | | | | | | | |
| 0102 | Modified PTFE | Turquoise | Lower creep, reduced permeability and good wear resistance. | -320 to 450 (-195 to 282) | 4600 (317) | 390 | 60 |
| 0120 | Mineral Filled PTFE | White | Excellent low abrasion to soft surfaces & improved upper temperature performances. FDA materials. | -250 to 550 (-157 to 288) | 4070 (281) | 270 | 65 |
| 0203 | Fiberglass Filled PTFE | Gold | Excellent compressive strength and good wear resistance. | -200 to 575 (-129 to 302) | 3480 (240) | 190 | 67 |
| 0204 | Fiberglass & Moly Filled PTFE | Gray | Excellent for extreme conditions such as high pressure, temperature and longer wear life on hardened dynamic surfaces. | -200 to 575 (-129 to 302) | 3100 (214) | 245 | 62 |
| 0205 | Fiberglass & Moly Filled PTFE | Gray | Improved compressive strength and wear in rotary applications | -200 to 575 (-129 to 302) | 3480 (240) | 190 | 67 |
| 0301 | Graphite Filled PTFE | Black | Excellent for corrosive service. Low abrasion to soft shafts. Good in unlubricated service. | -250 to 550 (-157 to 288) | 3200 (221) | 260 | 60 |
| 0307 | Carbon-Graphite Filled PTFE | Black | Excellent wear resistance and reduces creep. | -250 to 575 (-157 to 302) | 2250 (155) | 100 | 64 |
| 0401 | Bronze Filled PTFE | Bronze | Excellent extrusion resistance and high compressive loads. | -200 to 575 (-129 to 302) | 3200 (221) | 250 | 63 |
| 0502 | Carbon Fiber Filled PTFE | Brown | Good for strong alkali and hydrofluoric acid. Good in water service. | -200 to 550 (-129 to 288) | 3200 (221) | 150 | 60 |
| 0601 | Aromatic Polyester Filled PTFE | Tan | Excellent high temperature capabilities and excellent wear resistance. | -250 to 550 (-157 to 285) | 2500 (172) | 200 | 61 |

09/01/07

Table 3-4. Typical Physical Properties — PTFE (cont'd)

| Parker Material Code | Coefficient of Friction | Thermal Conductivity (in W/mK) | Coefficient of Thermal Expansion (in/in/°F x 10 ⁻⁵ at 203°F) | Permanent Deformation Under Load (70°F 2000 psi in %) | Chemical Compatibility Rating | Wear Resistance Rating | High Pressure Extrusion Resistance Rating | FDA/NSF Compliant |
|----------------------|-------------------------|--------------------------------|---|---|-------------------------------|------------------------|---|-------------------|
| | | | | | | | | |
| Non-Filled PTFE | | | | | | | | |
| 0100 | 0.05 - 0.10 | 0.30 | 6.1 | 7.0 | 5 | 1 | 1 | Y |
| Filled PTFE | | | | | | | | |
| 0102 | 0.05 - 0.10 | 0.29 | 6.1 | 6.9 | 5 | 2 | 2 | Y |
| 0120 | 0.08 - 0.12 | 0.23 | 5.6 | 4.2 | 5 | 3 | 4 | Y |
| 0203 | 0.08 - 0.12 | 0.27 | 5.6 | 6.0 | 5 | 5 | 5 | N |
| 0204 | 0.08 - 0.12 | 0.28 | 6.1 | 6.0 | 5 | 4 | 4 | N |
| 0205 | 0.08 - 0.12 | 0.27 | 5.6 | 6.0 | 5 | 5 | 5 | N |
| 0301 | 0.07 - 0.09 | 0.39 | 6.1 | 3.5 | 5 | 4 | 3 | N |
| 0307 | 0.08 - 0.11 | 0.35 | 4.4 | 2.5 | 5 | 4 | 4 | N |
| 0401 | 0.18 - 0.22 | 0.45 | 5.6 | 4.4 | 4 | 4 | 4 | N |
| 0502 | 0.09 - 0.12 | 0.31 | 7.2 | 1.8 | 4 | 5 | 5 | N |
| 0601 | 0.09 - 0.13 | 0.32 | 5.0 | 5.5 | 4 | 4 | 4 | N |

Note: We emphasize that this tabulation should be used as a guide only.

The above data is based primarily on laboratory and service tests, but does not take into account all variables that can be encountered in actual use. Therefore, it is always advisable to test the material under actual service conditions before specifying. If this is not practical, tests should be devised that simulate service conditions as closely as possible.

Parker also offers unique material blends and recipes along with a wide variety of other PTFE filler combinations and colors to enhance seal performance in the most extreme application needs. For guidance on material selection for extreme applications, please contact Application Engineering at 801-972-3000.

09/01/07



Materials

The following table lists material codes that apply to the rubber energizer used with PTFE fluid power seals. List the corresponding material code in the appropriate location in the part number. Parker has a full range of rubber compounds to suit various temperature, pressure and chemical compatibility requirements. If your application requires an alternate rubber compound, not listed, please consult a Parker application engineer.

Table 3-5. Typical Application Ranges & Recommendations — Rubber Energizers for PTFE Fluid Power Seals

| Material Code | Material Description | Shore A Hardness | Temperature Range | Recommended Use | Not Recommend For Use |
|---------------|----------------------------------|------------------|------------------------------------|--|--|
| A | Nitrile (NBR) | 70 | -30°F to 250°F (-34°C to 121°C) | <ul style="list-style-type: none"> Petroleum oils and fluids Diesel fuel and fuel oils Cold water Silicone oil and grease Mineral oil and grease Vegetable oil HFA, HFB and HFC fluids | <ul style="list-style-type: none"> Aromatic hydrocarbons Chlorinated hydrocarbons Polar solvents (MEK, ketone, acetone) Phosphate ester fluids Strong acids Automotive brake fluid |
| B | Low Temperature Nitrile (NBR) | 75 | -65°F to 225°F (-55°C to 107°C) | | |
| C | Clean Grade Nitrile (NBR) | 70 | -30°F to 250°F (-34°C to 121°C) | | |
| D | Hydrogenated Nitrile (HNBR) | 70 | -23°F to 300°F (-32°C to 149°C) | | |
| F | Fluorocarbon (FKM) | 70 | -15°F to 400°F (-26°C to 205°C) | <ul style="list-style-type: none"> Petroleum oils and fluids Cold water Silicone greases and oils Aliphatic hydrocarbons Aromatic hydrocarbons Fuels Fuels with methanol content | <ul style="list-style-type: none"> Glycol based brake fluids Ammonia gas, amines, alkalis Superheated steam Low molecular organic acids |
| H | Silicone HT (VMQ) | 70 | -65°F to 450°F (-55°C to 232°C) | <ul style="list-style-type: none"> Engine and transmission oil Animal and vegetable oil and grease Brake fluid Fire-resistant hydraulic fluid Ozone, aging and weather resistant | <ul style="list-style-type: none"> Superheated steam Acids and Alkalis Aromatic mineral oil Hydrocarbon-based fuels Aromatic hydrocarbons |
| K | Ethylene Propylene Rubber (EPDM) | 70 | -70°F to 250°F (-57°C to 121°C) | <ul style="list-style-type: none"> Hot water Glycol based brake fluids Many organic and inorganic acids Cleaning agents Soda and potassium alkalis Phosphate ester based fluids Many polar solvents | <ul style="list-style-type: none"> Petroleum oils and fluids Mineral oil products |
| L | Ethylene Propylene Rubber (EPDM) | 80 | -70°F to 250°F (-57°C to 121°C) | | |

3

The following table is a list of back up ring materials for use with PTFE fluid power seals. List the corresponding back up ring material code in the appropriate location in the part number.

Table 3-6. Typical Application Ranges & Recommendations — Back-up Rings for PTFE Fluid Power Seals

| Material Code | Material Description | Pressure Rating * | Temperature Range | Recommended Use |
|---------------|-------------------------------------|----------------------|----------------------------------|---|
| A | Nylon, Molybdenum Di-Sulfide Filled | 7,500 psi (517 bar) | -40°F to 250°F (-40°C to 121°C) | <ul style="list-style-type: none"> Petroleum oils and fluids Diesel fuel and fuel oils Phosphate ester fluids Silicone oil and grease Mineral oil and grease |
| B | Nylon Glass Filled | 7,500 psi (517 bar) | -40°F to 275°F (-40°C to 135°C) | <ul style="list-style-type: none"> Reduced water absorption Improved thermal stability |
| C | Acetal | 6,000 psi (414 bar) | -40°F to 250°F (-40°C to 121°C) | <ul style="list-style-type: none"> HFA, HFB and HFC fluids Water Petroleum oils and fluids Diesel fuel and fuel oils Mineral oil and grease |
| D | PTFE PPS Filled | 5000 psi (345 bar) | -100°F to 450°F (-73°C to 232°C) | <ul style="list-style-type: none"> Extended temperature, pressure and media resistance |
| • E | PEEK Virgin | 10,000 psi (690 bar) | -40°F to 450°F (-40°C to 232°C) | <ul style="list-style-type: none"> Extended temperature, pressure and media resistance |

* Pressure ratings are a general guide only. Pressure ratings are reduced if wear rings are used.

Table 3-7. Standard (■) vs. Optional (□) materials for PTFE fluid power seal profiles

| PTFE Material Code | PTFE Fluid Power Seal Profile | | | | | | | | | | | | | |
|--------------------|-------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | S5 | R5 | CT | CQ | OE | CP | OA | OD | ON | CR | OC | AD | OQ | OR |
| 0100 | | | | | | □ | | | | □ | | □ | | |
| 0102 | | | | | | □ | ■ | □ | | □ | ■ | | | |
| 0120 | □ | □ | | | □ | □ | | □ | □ | □ | | | □ | □ |
| 0203 | ■ | ■ | | □ | □ | | | | □ | | | | | |
| 0204 | | | □ | | | | □ | | | | □ | | □ | □ |
| 0205 | | | | | | | | | | | | | ■ | ■ |
| 0301 | | | | | □ | | | | □ | | | | □ | □ |
| 0307 | | | □ | | □ | | | □ | □ | | | | □ | □ |
| 0401 | □ | □ | ■ | ■ | ■ | ■ | | ■ | ■ | ■ | □ | ■ | | |
| 0502 | | | | | | | | | | | | □ | □ | □ |
| 0601 | | | | | □ | | | | □ | | | | | |

09/01/07

Chemical Compatibility

It is essential to select seal compounds that are compatible with the environment in which they are used. Even if the proper seal material is chosen based on system temperature and pressure, exposure to certain fluids can drastically reduce seal performance by altering a compound's typical physical properties.

Parker has tested thousands of fluids and is continuously testing many new, popular chemicals to ensure seal material compatibility. Appendix D shows the results of many common seal materials in popular test fluids. This information compares the changes in physical properties of each seal material after it has been soaked in a specific fluid for a given temperature and time. For additional compatibility reports not shown, please contact your local Parker representative.

Temperature Limits

When selecting a seal material, temperature is a key factor. Heat affects the seal material in several ways:

- Softens the material which accelerates wear
- Accelerates any chemical reaction between the fluid and the seal
- Damages the bond structure of the material
- Increases compression set
- Higher temperatures for extended periods of time may harden thermoset (rubber) materials

Lower end temperature may be as important as the upper end temperature. This is especially true in mobile hydraulics. As the temperature lowers, the following takes place:

- The seal hardens and is less responsive.
- The coefficient of thermal expansion and contraction is approximately ten times that of metals. Therefore the seal lips could start to pull away from the surface of the bore. This loss of lip compression against the colder sealing surfaces can be offset by seal design and proper material selection.
- The opposite is also true. As a bearing or wear ring heats up, binding can occur if there is not a gap designed into the wear ring.

Storage and Handling

In 1998, the Society of Automotive Engineers (SAE) issued an Aerospace Recommended Practice (ARP) for the storage of elastomer seals and seal assemblies prior to installation. ARP 5316 has been considered by many as the industry standard; however, Parker has taken a conservative approach to ensure to our customers the highest quality. Both the ARP 5316 and Parker standards for shelf life are shown below in Table 3-8.

Table 3-8. Recommended Storage Standards

| Chemical Name | Polymer | ARP 5316 | Parker |
|-------------------------|-----------------|-----------|-----------|
| Aflas® | FEPM | Unlimited | 7 Years |
| Ethylene Propylene | EP, EPR, EPDM | Unlimited | 7 Years |
| Fluorocarbon | FKM | Unlimited | 7 Years |
| Nitrile | NBR, HNBR, XNBR | 15 Years | 7 Years |
| Polyurethane | AU or EU | - | 10 Years |
| PolyMyte | TPCE | - | 10 Years |
| Polytetrafluoroethylene | PTFE | - | Unlimited |

The values above assume that proper guidelines for storage conditions are followed. If plastic and rubber products are stored improperly, their physical properties may change. Prior to use, all parts should be checked for hardness, surface cracking or peeling. If any of these conditions are observed, the parts should be discarded. Some compounds can exhibit a build-up of powdery film on their surface over time. This natural occurrence is referred to as bloom and does not in any way negatively impact the function of the seal. Guidelines for proper seal storage are shown in [Table 3-9, page 3-21](#).

Table 3-9. Seal storage & handling guidelines

| Seal Storage & Handling Guidelines | |
|---|--|
| Records | Records should be kept to ensure that stock is rotated such that the first seals in are the first out (FIFO). |
| Temperature | Seals must be stored away from heat sources such as direct sunlight and heating appliances. Maximum storage temperature is 100°F (38°C). Low temperatures do not typically cause permanent damage to seals, but can result in brittleness, making them susceptible to damage if not handled carefully. Ideally, seals should not be stored at temperatures less than 50°F (10°C) and should be warmed to room temperature before installation. |
| Ultra Violet | Seal must be protected from direct sunlight and any artificial light that generates ultra violet radiation. |
| Humidity | Care should be taken to ensure seals are always stored in an environment with a relative humidity of less than 65%. Polyurethane seals in particular are very susceptible to damage from exposure to moisture and should be stored in air-tight containers. |
| Oxygen and Ozone | Ozone-generating equipment and oxygen exposure can be detrimental to seal compounds. Seals should be stored in air-tight containers. Any electrical equipment that generates a spark should not be used near seal storage. |
| Contamination | Keeping seals free from contamination will assist promote service life. Good house-keeping practices should be maintained. |
| Distortion | Large seals should be stored flat when possible and not suspended, which may cause distortion over time. Do not store seals on hooks, nails or pegboard. |

Notes

3

09/01/07



Contents

- Fluid Power Applications 4-1
- Single Acting Hyd. Ram 4-2
- Single Acting Pneu. Cyl. 4-3
- Double Acting Cylinder 4-3
- Telescoping Cylinder 4-4
- Cushioned Double Acting Cyl..... 4-5
- Dual-Fluid Power Cylinder 4-5
- Ram Pressure Intensifier 4-6
- Double Acting Intensifier..... 4-7
- Piston-Type Accumulator..... 4-7
- Energy Absorbing Cylinder..... 4-8
- High Shock Cylinder 4-8
- Linear-to-Rotary Converter..... 4-9
- Cartridge Valve 4-10
- Spool Valve 4-11
- Piston Pump 4-11
- Diaphragm Pump..... 4-11

Fluid Power Applications

When selecting a sealing system for a fluid power application it can be helpful to review sealing components used in similar products. While there are numerous designs of fluid power devices, many share similar characteristics based upon their dynamic motion and function. The following section provides a general overview of common fluid power products along with a description of the sealing systems that are typically used. Despite their considerable variety, reciprocating and oscillating fluid power products fall into relatively few categories. These include:

| | |
|----------------------------|---|
| Power Cylinders | Single-Acting Hydraulic (RAM) Single-Acting Pneumatic Double-Acting Telescoping Cushioned Dual Fluid |
| Pumping Cylinders | Pressure Intensifier Single Acting Double-Acting |
| Accumulators | Piston Type |
| Specialty Cylinders | Energy Absorbing Linear / Rotary Converter |
| Valves | Cartridge Spool |
| Pumps | Piston Diaphragm |

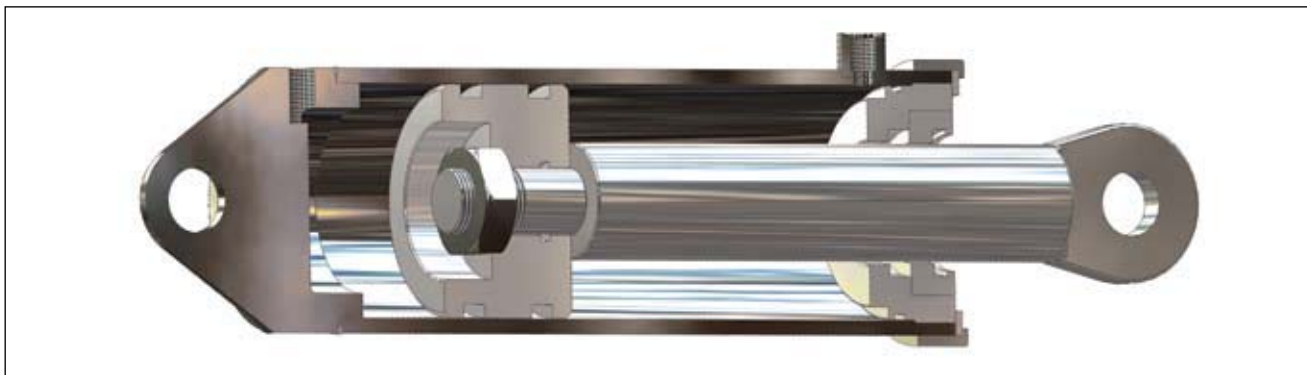


Figure 4-1. Typical Hydraulic Cylinder

Applications

Single Acting Hydraulic Ram Concept

Hydraulic rams are single-acting power cylinders that do not utilize a conventional piston. Instead, fluid pressure is applied to the end of the rod (ram) to create force for extension and either gravity or an external force is applied for retraction. The principal appeal of this design is its low manufacturing cost for large sized rams. Lower manufacturing costs are attributed to the fact that the cylinder bore does not require a close tolerance or a smooth surface finish. Only the ram itself needs to be ground and polished. Clearances are only important between the ram O.D. and gland I.D.

Rams that are retracted by gravity alone, customarily use low-friction lip-type seals, such as u-cups or squeeze seals made from PTFE. Low-pressure sealing problems, characteristic of lip-type seals, are seldom significant as the throttled exhaust creates back pressure to energize the seal. Hydraulic rams installed in an upward vertical orientation collect contamination around the rod seal housing.

To prevent contamination from entering the cylinder, snap-in wipers are recommended. Wear rings or bearings are frequently required to prevent contact between polished rams and gland housings. Never rely on seals or wipers to provide lateral support.

If the ram is downward-acting, a spring or external retraction cylinder is used to return the ram into the cylinder. Normally, retraction cylinders are single-acting and apply no force to the load. They can, however, be double-acting and add their force to that of the ram. In many applications, the ram is powered hydraulically, while the retraction cylinders are fast-acting pneumatic units.

Externally retracted rams have more latitude in seal selection since the return force can overcome the extra friction of squeeze-type seals. Downward-acting rams typically have low pressure return strokes which may produce leakage if lip type seals are used. Pressures are usually low during the down stroke until the ram contacts the load.



Figure 4-2. Single Acting Hydraulic Ram

Single Acting Pneumatic Cylinder

Single-acting cylinders, as in the case of hydraulic rams, rely on mechanical means to retract or extend the rod. The cylinder shown is a typical pneumatic design, using an internal spring to extend the rod and air pressure to retract. The spring and pressure port arrangement could be reversed to provide power extension and spring retraction. The piston seal is typically a rubber u-cup profile. To maintain pre-lubricated surfaces a rounded lip profile can be selected for sealing the piston, and the rod if required.

To reduce cost, o-rings are sometimes considered for pneumatic applications. This can be problematic

since o-rings will wipe away pre-lubrication and are prone to instability, spiral failure, high friction, and rapid wear. Selecting u-cup seals will eliminate these problems.

Snap-in wipers are typically used to prevent contamination from entering the cylinder. These can be either polyurethane or rubber depending on the environment. Bearings for these types of cylinders typically do not see heavy side loads. Filled PTFE wear rings or strips are an excellent choice to ensure low friction performance.

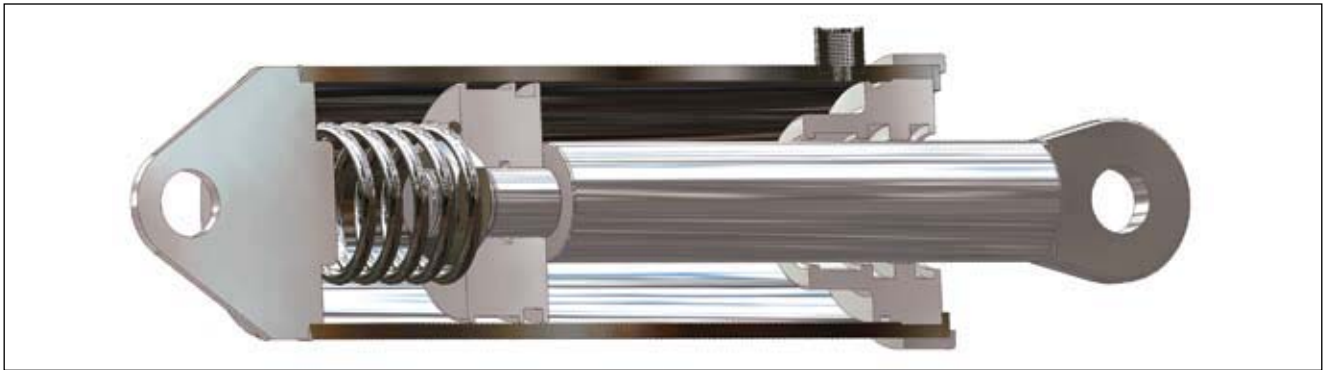


Figure 4-3. Single Acting Pneumatic Cylinder

Double Acting Power Cylinder

In double acting cylinders fluid pressure is applied to either side of a piston to extend or retract the rod. This is typical of many fluid power cylinders used for hydraulic or pneumatic service at low to high pressures. As shown in Figure 4-4, seals are required for both the piston and rod glands. Clevis mountings at each end of the cylinder permit alignment with external linkages without bending the rod.

There are many options available to seal double-acting cylinders. Dual grooves shown in the piston are designed for a pair of uni-directional (single-acting) seals installed “back-to-back” such that their sealing

lips face away from one another. This orientation allows any fluid that passes by the pressurized seal to easily leak past the unpressurized seal, thus preventing pressure trapping. Never install seals back-to-back with their sealing lips facing one another. This orientation will leak fluid into the space between the seals and pressure trapping will occur. Do not install dual seals in the same groove. The unpressurized seal will not support the pressurized seal resulting in instability and extrusion damage.

The other option to seal the piston is to install a bi-directional seal into a single groove. A single

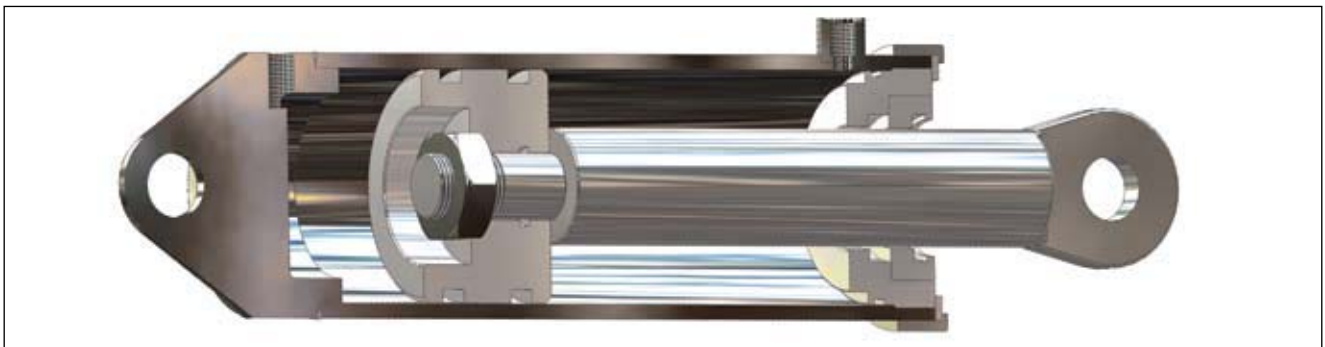


Figure 4-4. Double Acting Power Cylinder

09/01/07

Applications

bi-directional seal eliminates installation confusion and the possibility of pressure trapping. Selecting a bi-directional seal allows more room on the piston for a wear ring to protect against piston and bore contact. Typically, the wear ring is located on the end cap side of the piston to maximize distance between piston and rod bearing surfaces.

In low to medium-pressure cylinders anti-extrusion back-up rings are not normally required. High pressure may cause the cylinder to expand (breath) allowing the seals to extrude into the clearance gap between the piston and the bore. This may also occur at lower pressures in thin-wall, lightweight cylinders. To protect the seals, back up rings are recommended.

Rod seals may be either uni- or bi-directional, squeeze- or lip-type, depending on the application. As pressure requirements increase, and/or stroke and cycle rates increase, the use of multiple profile sealing systems (buffer and rod seal) are recommended. Rod wipers should be selected to match the application. Moving from snap-in wiper profiles to press fit profiles increases contamination protection. The wiper gland, shown in Figure 4-4, makes it easy to remove and inspect or replace the rod seal. To protect the seals from side loading, the internal side of the rod seal housing can be extended to make room for rod wear rings. Normally such side load forces should be avoided due to their tendency to bend the rod, accelerate wear, and restrict freedom of motion.

Telescoping Power Cylinder

Telescoping cylinders are usually single-acting cylinders which require an external force, such as gravity or a connected load, for retraction. Through a series of staged extensions this cylinder type provides a long stroke from a much shorter retracted length. They are used extensively to raise hinged beams or booms and dump truck bodies.

When a telescoping cylinder begins to extend, for most designs, the largest-diameter tube will move first at low speed, and the smallest tube will extend last at a higher speed. Control of input flow can regulate extension speed for more uniformity, which may be helpful when acceleration could cause instability in the connected load. It is also characteristic that the cylinder force diminishes as each successive tube reaches the end of its stroke. These force variations must be considered when matching the cylinder to the application.

The telescoping design shown in Figure 4-5 utilizes an internal collar to hold the seal and an external collar to hold the wiper. As each stage extends the internal collar bottoms out against the external collar. This prevents overextension of the tubes. Both collars are designed to also act as bearings. Since such cylinders usually control retraction speed by throttling the exhaust fluid, low-pressure leakage may be minimized enough to permit the use of lip-type seals with virtually no loss of fluid.

The design shown utilizes the inside diameter of each tube as a sealing surface and is never exposed directly to outside contamination. A piston-type profile is required to seal against the tube I.D. Wiper rings become extremely important in telescoping cylinders because so much surface area is exposed to contamination. If the wipers are properly maintained, external contamination will be kept away from the sealing surfaces indefinitely.

Figure 4-5 shows collars made of bearing metals which would be compatible with the tubing metal. Grooves to hold wear rings can also be designed into the collars. In rod type telescoping cylinders where O.D. sealing is employed, it is simpler to maintain lubrication of these bearing surfaces since both seal and wiper ring would be located in the outboard collar, and the bearings could be immersed permanently in the fluid.



Figure 4-5. Telescoping Power Cylinder

Cushioned Double Acting Cylinder

Cushioned cylinders provide a means of decelerating the piston during the last part of its stroke. This prevents hard impacts which could be destructive to the cylinder and the connected load. While this feature may be provided in many ways, a common design uses a deceleration cavity through which the fluid exhausts during retraction and extension. To reduce fluid flow a rod extension (end cap side of piston) and enlarged rod (spud) are added to obstruct the exhaust cavity at each end of the stroke. In the design shown, the remaining exhaust is forced through a metering valve which can be adjusted for the desired deceleration. When flow is reversed, check valves in each end of the cylinder by-pass the obstructed flow, permitting rapid acceleration. This is further improved when the rod extension or spud clears the port.

To further control the cushioning effect, uniquely designed cushion seals can be incorporated to prevent flow between the rod extension or spud and the deceleration cavity. These cushion seals are highly effective in pneumatic cylinders but are not recommended in most hydraulic cylinders due to extrusion and spiral failure. Pneumatic cushion seals are uni-directional, designed with a series of slots and pedestals to allow gas to easily flow back into the cylinder. Cushion seals eliminate the need for check valves in pneumatic cylinders.

As for other areas of the cylinder that require dynamic seals, they would be selected based on the application parameters. Seals, wipers and wear rings for the piston and rod follow the guidelines described for dual acting cylinders.

Dual-Fluid Power Cylinder

In some applications it is desirable to utilize one fluid (such as compressed air) to drive a cylinder, along with a second fluid (hydraulic fluid) to regulate the cylinder speed. Being virtually incompressible, hydraulic fluid makes a better regulating fluid than compressible gas. The basic design in Figure 4-7 shows a cylinder in which the rod end is pneumatically driven, and the blind end is hydraulically restrained and regulated. A metering or throttling valve may be adjusted to control the retraction speed. If the hydraulic fluid is transferred into a low-volume accumulator with a captive volume of pressurizing gas, travel will slow down as the reservoir fills and back-pressure builds. If the accumulator is large in relation to the cylinder volume, stroke speed can be held nearly constant for the full travel.

The bi-directional throttling valve shown provides a slow return stroke as well as a regulated power stroke. If fast return is desired, a check valve provision such as that in Figure 4-6 (cushioned cylinder) would by-pass the throttling valve. Another frequent strategy is to use un-metered heads on the cylinder, and provide speed control by means of an external needle valve. If fast return is desired, an external check valve connected to by-pass the throttle can be utilized.

While some lubrication assistance is provided by the hydraulic fluid, it is not prudent to rely on it for the total lubrication of the pneumatic end of the cylinder. If long seal life is required, internally lubricated compounds are recommended.

To create a gas spring or dampening effect, it is possible to reverse the ends of the cylinder to apply

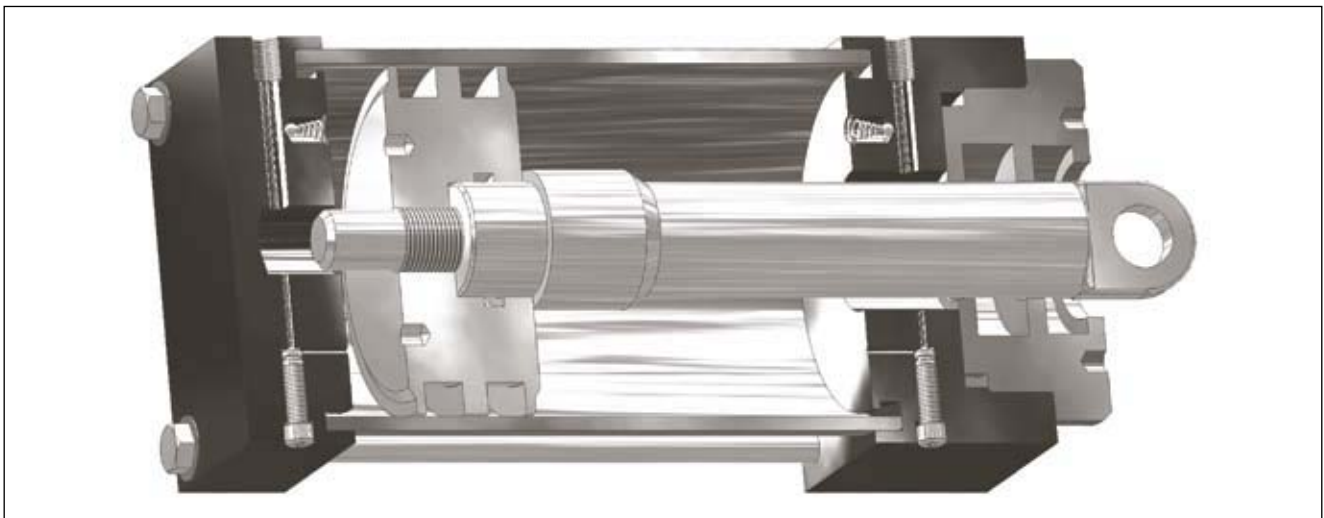


Figure 4-6. Cushioned Double Acting Cylinder

Applications

4

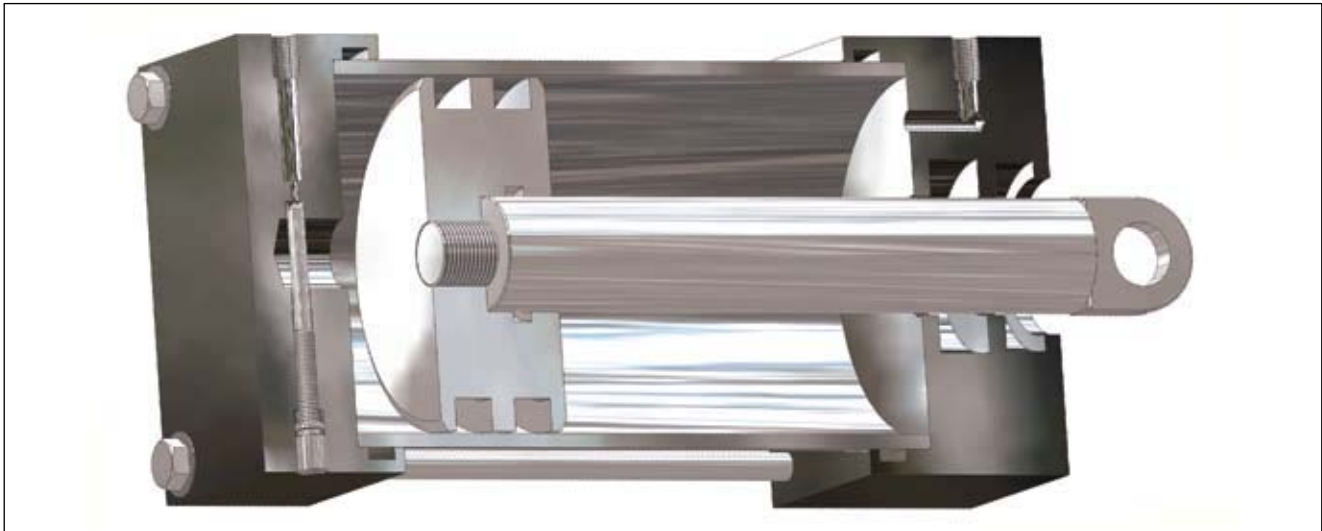


Figure 4-7. Dual-Fluid Power Cylinder

pneumatic pressure to the blind end, achieving a larger net area and consequently higher force while making it a “push” cylinder. With hydraulic fluid at the rod end, the rod seals are constantly lubricated. Also, since the hydraulic fluid is continuously under pressure, it is possible to use lip-type seals with negligible low-pressure sealing problems.

Ram-Type Pressure Intensifier

Pressure intensifiers utilize the area ratio between the power piston and the ram as a means to multiply output fluid pressure. Inversely, the volume of the output fluid is reduced by the same ratio. Numerous pressure intensifier designs have been mass-produced. The great majority are of the ram type, similar to that in Figure 4-8. They may be powered by the same fluid as that being boosted to a higher

pressure, or by a different fluid. Typical examples include combinations of air, water, steam and oil.

In the design shown, a double-acting power cylinder provides both the pumping and suction stroke to a ram, which is isolated from the primary fluid by multiple seals. Where very high pressures are created, it may be desirable to add an intermediate-pressure fluid, with good lubricating properties, between the primary and secondary fluid seals. This decreases the pressure drop across the seals to help reduce extrusion, wear and leakage.

To ensure extrusion resistance, care should be taken when selecting seals for the intensified fluid. It may be necessary to include an anti-extrusion device to protect the high pressure seal from extrusion.

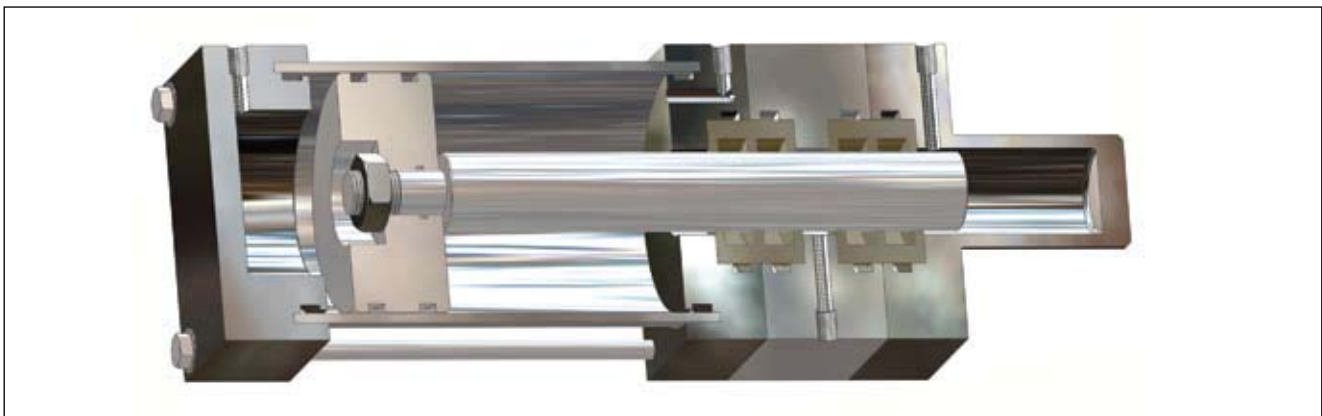


Figure 4-8. Ram-Type Pressure Intensifier

Double Acting Annulus-Type Pressure Intensifier

A popular design for pressure intensifiers is the annulus-type, which utilizes an enlarged rod diameter to provide differing piston effective areas on opposite piston faces. The net effective area on the rod side equals the full piston area minus the rod area. The ratio of the full piston area to the net area of the rod side establishes the intensification ratio.

A significant difference exists between this design and the ram-type intensifiers previously discussed. The pressure direction across the piston seals is reversed. Note that the lower fluid pressure acts on the larger piston face and the intensified pressure is on the inboard annular face. This means that the seals, if uni-directional, must be oriented with their sealing lips facing inboard. It also means that if the seals are installed in piston grooves, the direction of seal drag will encourage extrusion by adding to the intensified pressure. By installing the piston seals in wall grooves, as shown, friction is subtracted from the pressure forces, thereby minimizing the extrusion tendency. By the same logic, if the seals for the rod are installed in wall grooves, the direction of seal drag along with pressure act together to increase the extrusion tendency.

If the intensification chamber (the annular volume) is recharged by fluid under pressure, the double acting version shown will produce higher intensified pressure. This is achieved by adding the force developed in the annulus. The intensified output pressure would be:

$$\text{Output Pressure} = \frac{A_a + A_p \times P_p}{A_a}$$

If the annulus is recharged by a fluid at a different pressure than that of the power fluid (P_p), the intensified output pressure would be:

$$\text{Output Pressure} = \frac{(A_a P_p + A_p P_p)}{A_a}$$

In these equations:

A_a = Annulus Area

A_p = Piston Area

P_a = Recharging Pressure

P_p = Power Fluid Supply Pressure

As with the ram-type intensifiers, it is often preferred to mount this type vertically to minimize side loads, thereby reducing the size of the bearings.

When the annulus is recharged under pressure (i.e., not by a suction stroke), the piston seals may be lip style with their bases outboard and their sealing face toward the annular volumes. This is possible because pressure in the annulus will always exceed that in the piston area. For the grooved rod, a bi-directional seal may be the better choice, since the pressure directions alternate and considerably more space would be required for a pair of uni-directional seals in separate grooves.

Piston-Type Accumulator

In a fluid power system, piston-type accumulators are used to store pressurized fluid for use when additional fluid volume is required. As shown in Figure 4-9, a wide floating piston separates a compressible gas from a liquid. In this example, pressurized gas is located on the cavity side of the piston. A floating piston also allows for pressure fluctuation in the system.

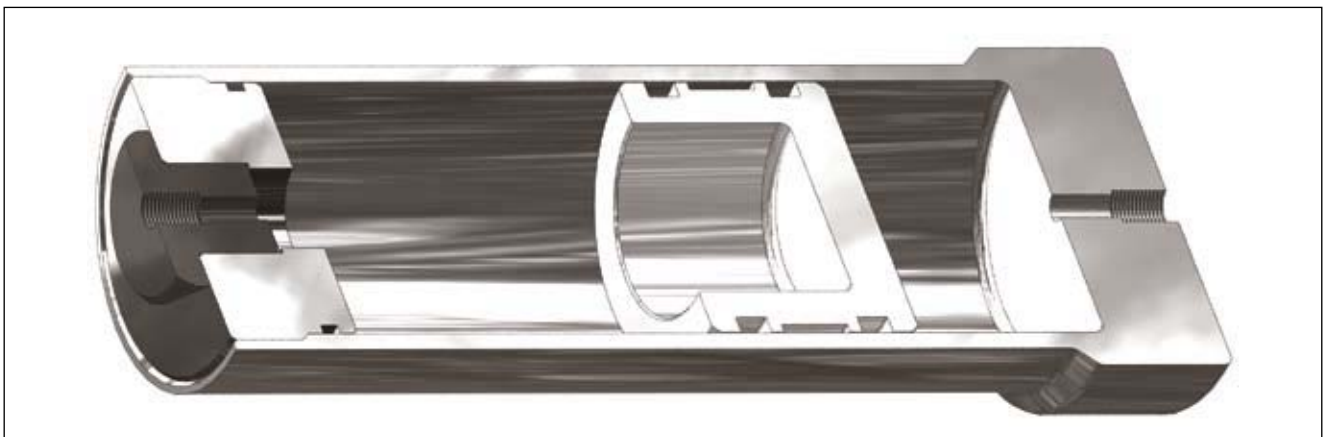


Figure 4-9. Double Acting Piston-Type Accumulator

Applications

Piston-type accumulators are unique in that there is very little pressure drop across their seals, even though the system pressure may be very high. Actually, the principal source of pressure drop across the seal is the friction between the seal and the cylinder (plus bearing friction, where used) until the piston reaches the end of its travel. Designing the system so that there is insufficient fluid to top out the piston is a simple method of preventing high pressures across the seals.

Low friction is not necessarily a design objective in selecting a seal. Squeeze seals, which offer improved low pressure sealing, are desired so long as they provide smooth travel with low wear. If a bi-directional seal is used, additional space is made available for a wider wear ring. The wear ring should be located on the lubricated side of the piston. To help prevent contamination that can damage the seals or increase wear, accumulators should be mounted in the vertical position.

Energy Absorbing Cylinder

Concentric double walls provide both the transfer channel and space for gas “spring” to accommodate the differential volumes in opposite ends of this energy absorbing design. When a moving mass engages the large rod, it drives the piston against the coil spring. Displaced hydraulic fluid passes through the fixed orifices, through the annular channel, and into the volume on the opposite side of the piston. As the piston covers the orifice ports, flow becomes progressively restricted near the end of the stroke. When the last port is covered, the only exit from the pressurized end is through the small clearance gap between the piston and the cylinder, which provides effective final dampening action. Since the

rod diameters in the opposite ends of the cylinder are different, the change in volume on the opposite sides of the piston is not directly proportional (that is, more fluid is displaced than there is room for on the receiving side). This difference is absorbed by the volume of gas trapped in the top of the annular space.

Some versions of this design utilize a piston seal facing the spring-end of the cylinder, but the shock loading on impact can twist the seal in its groove and set up a high-probability extrusion situation. Where severe impacts are anticipated, choose seals for their high stability and ensure the seal does not travel over the orifice ports.

The return stroke is usually provided by the compressed spring alone. In this design, the return stroke will be slow since the flow must pass through the same fixed orifices in the reverse direction with only the spring energy to drive it. In other designs, the load may also power the return stroke.

High Shock Energy Absorbing Cylinder

Where it is possible to use an external hydraulic accumulator or connect into a hydraulic system with its own accumulator, a ram-type, energy absorbing cylinder may be safer and easier to regulate than the previous design (shown in Figure 4-10). This design utilizes a snug-fitting ram to isolate the rod seal from shock pressures developed on the ram face. Note that any leakage past the snug-fitting ram will bleed off through the oil return passage with fluid from the orifice plugs. As shown in Figure 4-11, only a single rod seal is required. A wide variety of rod seals could be used in this application with the principal deciding factors being the pressure range of the connected hydraulic accumulator, and the friction at the rod and seal interface.

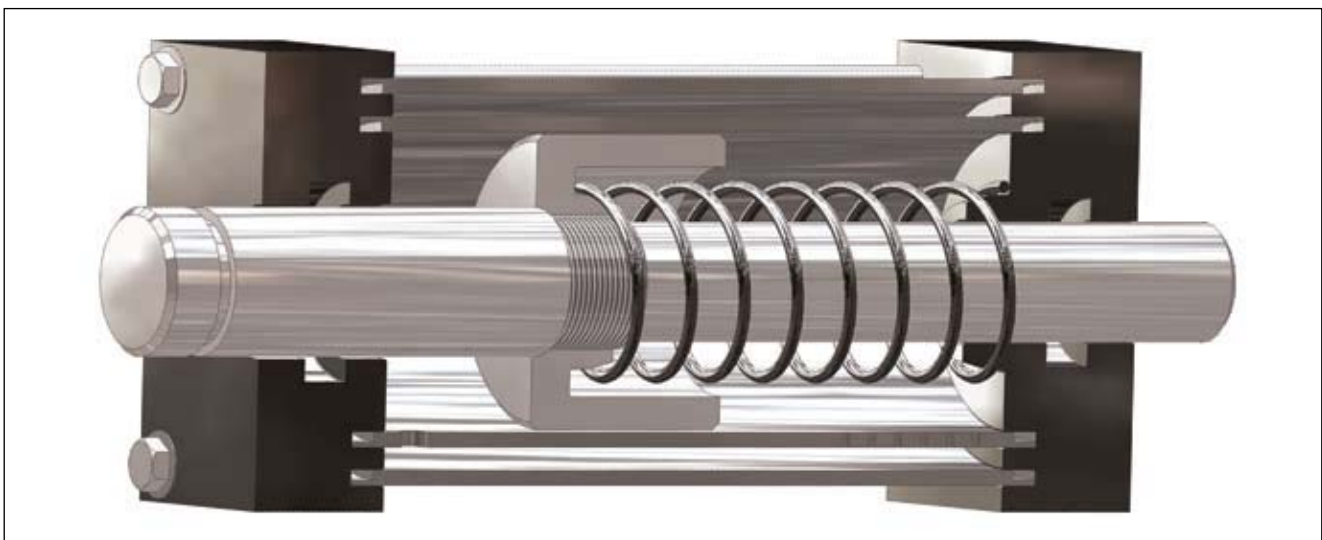


Figure 4-10. Energy Absorbing Cylinder

09/01/07

To avoid excessively slow return after compression, a check valve in the blind head will permit oil to by-pass the orifice plugs under pressure from the accumulator. The rate of energy absorption (and its conversion to heat energy) can be varied by adjusting variable orifice plugs (not shown) or by changing the fixed plugs (shown) to plugs with higher or lower clearances.

Linear-to-Rotary Motion Converter

A linear-to-rotary motion converter is a rack and pinion type design that utilizes a fluid power linear actuator to drive rotary motion. As shown in [Figure 4-12](#) the rod and piston are fixed, while the cylinder bore and end glands move in reciprocating motion. A toothed rack engages a pinion gear, which rotates as the cylinder strokes.

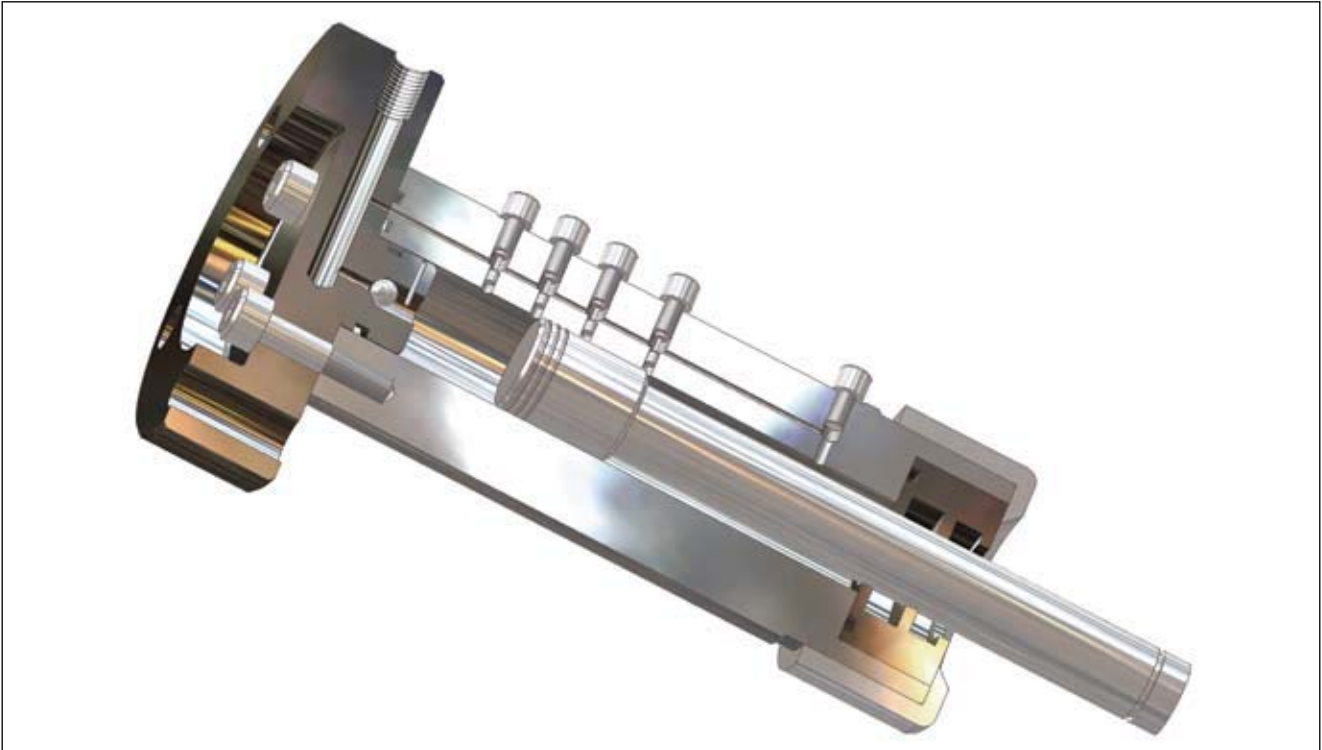


Figure 4-11. High Shock Energy Absorbing Cylinder

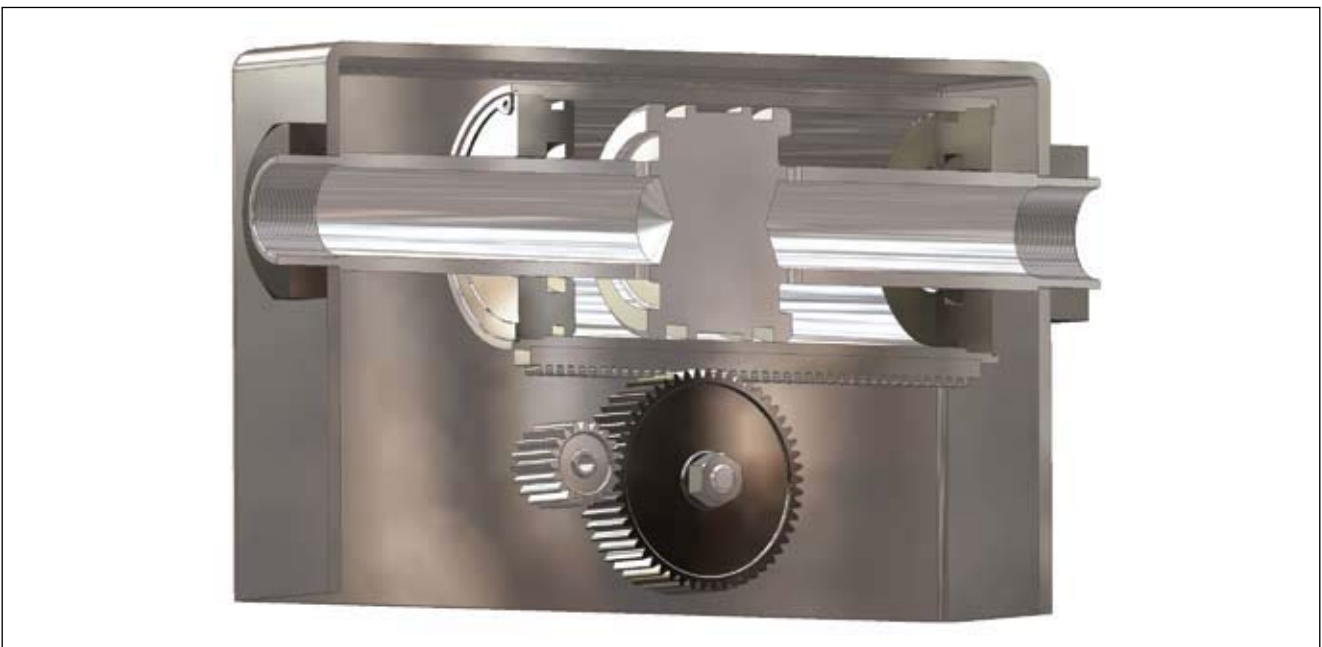


Figure 4-12. Linear-to-Rotary Motion Converter

09/01/07

Applications

Since the rod is fixed, it may be possible to feed the input and exhaust fluid through a hollow portion of the rod as shown. Ports located deep in the rod allow fluid to flow through the cylinder. The fixed double-ends of the cylinder help to maintain a firm, precision engagement between the rack and pinion. Since this engagement generates some lateral force, a piston bearing may be required to maintain concentricity of the piston in the cylinder. Typically, the piston always remains directly above the pinion, so additional rod bearings may not be required. In applications where an off-center load is imparted by the pinion, it may be necessary to add rod bearings to the end caps to resist the torque on the cylinder. Dual lip seals or a single bi-directional seal can be selected for the piston. Both the piston and rod seals should be selected based on the operating parameters of the application. Although the cylinder shown is positioned in an enclosed area, it may be necessary to add rod wipers to provide additional protection from contamination.

Cartridge Valve

Cartridge valves can be thought of as “bodyless”—valves without an integral housing—because they consist of only the internal moving elements of the valves. After a cartridge is inserted into a cavity, such as a manifold with appropriate flow passageways, the resulting valve performs like any conventional valve. Slip-in cartridges are held in the cavity by a cover plate or can be designed to screw directly into the cavity (see Figure 4-13). Another type of insertable cartridge valve has circumferential grooves. After it is inserted into the cavity, it is held in place by swaging internally with a tapered pin that expands the cartridge diameter into interference contact with the bore.

Historically, an o-ring and a single back up comprise the two piece sealing system used in most cartridge valves. Sealing against a dynamic surface, an o-ring can twist and fail. A single, stable polyurethane profile designed to directly retrofit the traditional groove provides easier installation, improved stability and better extrusion resistance.

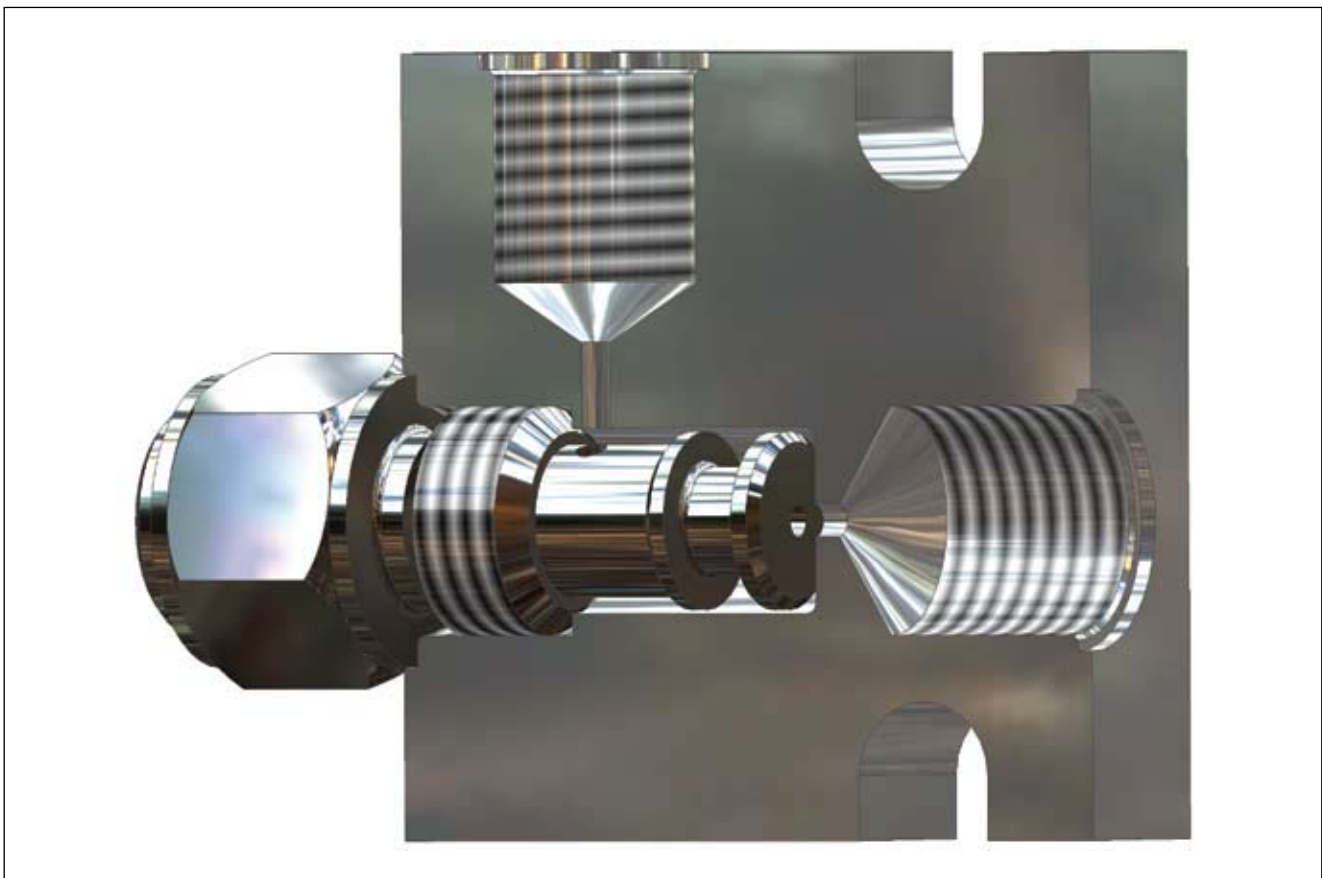


Figure 4-13. Cartridge Valve

Spool Valve

A spool valve is a directional-control valve in which a spool slides axially in a bore to direct the flow of system fluid. The valve element slides back and forth to block and uncover ports in the housing. Sometimes called a piston type, the sliding-spool valve has a piston of which the inner areas are equal. Pressure from the inlet ports acts equally on both inner piston areas regardless of the position of the spool. Internal sealing is done by a machine fit between the spool and valve body or sleeve. A lip seal and wiper are recommended to seal the external end of the spool.

Spool valves are often classified according to the flow conditions created when it is in the normal or neutral position. A closed-center spool blocks all valve ports from each other when in the normal position. In an open-center spool, all valve ports are open to each other when the spool is in the normal position. Spool valves (see Figure 4-14) are popular on modern hydraulic systems because they:

- Can be precision-ground for fine-oil metering.
- Can be made to handle flows in many directions by adding extra lands and oil ports.
- Stack easily into one compact control package, which is important on mobile systems.

Piston Pump

Piston pumps and plunger pumps are reciprocating pumps that use a plunger or piston to move media through a cylindrical chamber. The plunger or piston is actuated by a steam powered, pneumatic, hydraulic, or electric drive. Piston pumps and plunger pumps are also called well service pumps, high pressure pumps, or high viscosity pumps.

Seals are an integral part of piston pumps and plunger pumps to separate the power fluid from the media that is being pumped. A stuffing box or packing is used to seal the joint between the vessel where the media is transferred and the plunger or piston. A stuffing box may be composed of bushings, packing or seal rings, and a gland.

The difference between piston pumps and plunger pumps as compared to rotary piston pumps is the actual mechanism used to transfer the fluid. The piston elements moving along an axis are called axial piston pumps. Rotary piston pumps typically have an internal rotating mechanism that moves the piston.

Diaphragm Pump

Diaphragm pumps (not shown) are common industrial pumps that use positive displacement to move liquids. These devices typically include a single

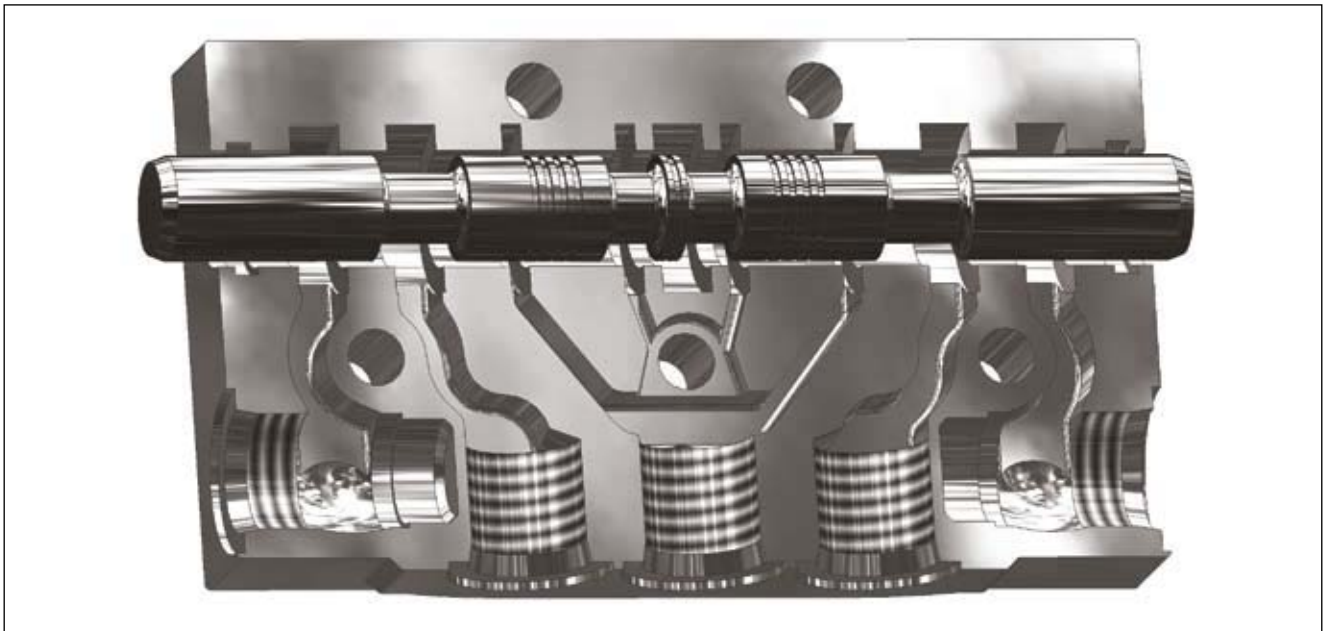


Figure 4-14. Spool Valve

Applications

diaphragm and chamber, as well as suction and discharge check valves to prevent backflow. Pistons are either coupled to the diaphragm, or used to force hydraulic oil to drive the diaphragm. Diaphragm pumps are highly reliable because they do not include internal parts that rub against each other. In fact, prolonged diaphragm life may be possible if the diaphragm pump is run dry to prime. Typically, wear on the diaphragm or flap is due to the corrosive properties of media fluids or gases and/or excessive

air supply pressures. Diaphragm materials such as ethylene propylene (EPDM), polytetrafluoroethylene (PTFE), plastic, rubber, and elastomers provide resistance to chemicals, sunlight, weathering, and ozone. Housing materials include aluminum, brass or bronze, cast iron, plastic and stainless steel. Rugged diaphragm pump housings can withstand high temperatures and may be exposed to various grades of water, oils, and other solvents.

4

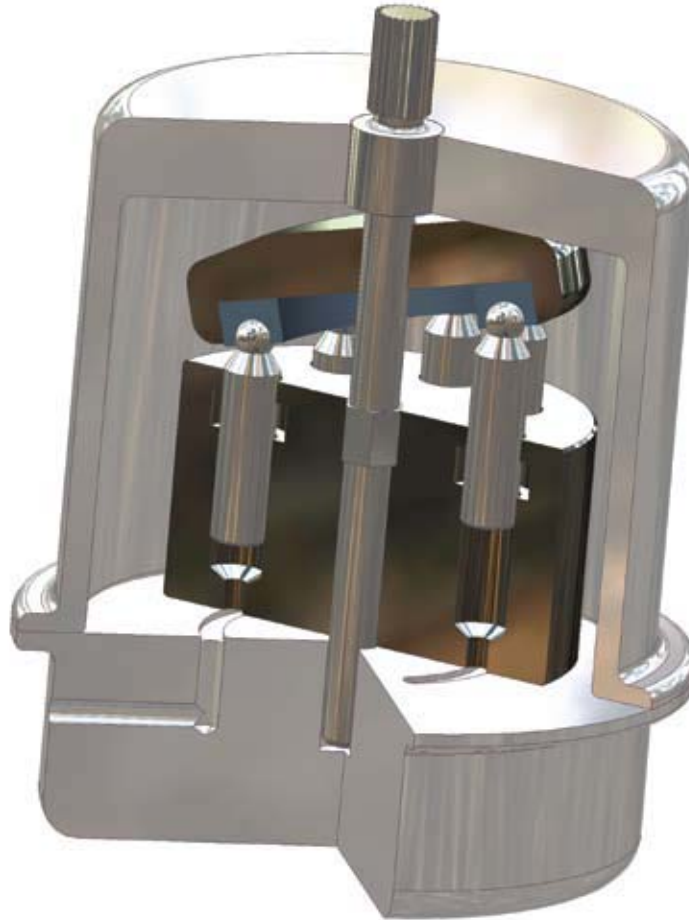


Figure 4-15. Piston Pump

Contents

| | |
|------------------------|------|
| Product Offering | 5-2 |
| Decision Tree | 5-3 |
| Rod Seal Profiles | |
| BD | 5-5 |
| BT | 5-7 |
| BS | 5-9 |
| B3 | 5-11 |
| UR | 5-13 |
| E5 | 5-21 |
| TR | 5-24 |
| ON | 5-28 |
| CR | 5-32 |
| OC | 5-39 |
| BR | 5-45 |
| OD | 5-48 |
| V6 | 5-54 |
| OR | 5-57 |

Rod Seals


















































Parker offers a wide range of hydraulic and pneumatic rod seal profiles to meet the broad demands of the fluid power industry. These rod seals are offered in a variety of compounds and lip geometries for the best possible solution for a given application. A majority of Parker rod seals are manufactured utilizing a precision knife trim process to ensure the sealing contact with the dynamic surface yields the best possible performance. When combined with other Parker profiles, including bearings, buffer seals, dirt excluders, and static gland seals, Parker rod seals have proven to provide long life and leak free performance.

Rod Seal Product Offering

Catalog EPS 5370/USA

Profiles

Table 5-1: Product Profiles


| Series | Description | Application (Duty) | | | | Page | Series | Description | Application (Duty) | | | | Page | |
|--------|---|---|---|---|-----------|------|--------|---|---|---|---|---|---|------|
| | | Light | Medium | Heavy | Pneumatic | | | | Light | Medium | Heavy | Pneumatic | | |
| BD |  Premium O-ring Energized Lip Seal (available with optional back-up) |  |  |  | | 5-5 | ON |  | PTFE Rod Cap Seal |  |  | | | 5-28 |
| BT |  Premium U-cup Rod Seal with Secondary Stabilizing Lip |  |  |  | | 5-7 | CR |  | PTFE Rod Cap Seal to Retrofit O-ring Glands |  |  | |  | 5-32 |
| BS |  U-cup Rod Seal with Secondary Stabilizing Lip |  |  |  | | 5-9 | OC |  | Compact PTFE Rod Cap Seal |  |  | |  | 5-39 |
| B3 |  U-cup Rod Seal |  |  | | | 5-11 | BR |  | Premium Buffer Seal | |  |  | | 5-45 |
| UR |  Industrial U-cup Rod Seal |  |  | | | 5-13 | OD |  | PTFE Buffer Seal |  |  |  | | 5-48 |
| E5 |  Premium Rounded Lip U-cup Rod Seal |  | | | | 5-21 | V6 |  | Cushion Seal |  | | |  | 5-54 |
| TR |  Compact Seal with Anti-Extrusion Technology |  |  |  | | 5-24 | OR |  | Rotary PTFE Cap Seal |  |  | |  | 5-57 |

5

09/01/07




Rod Seal Decision Tree

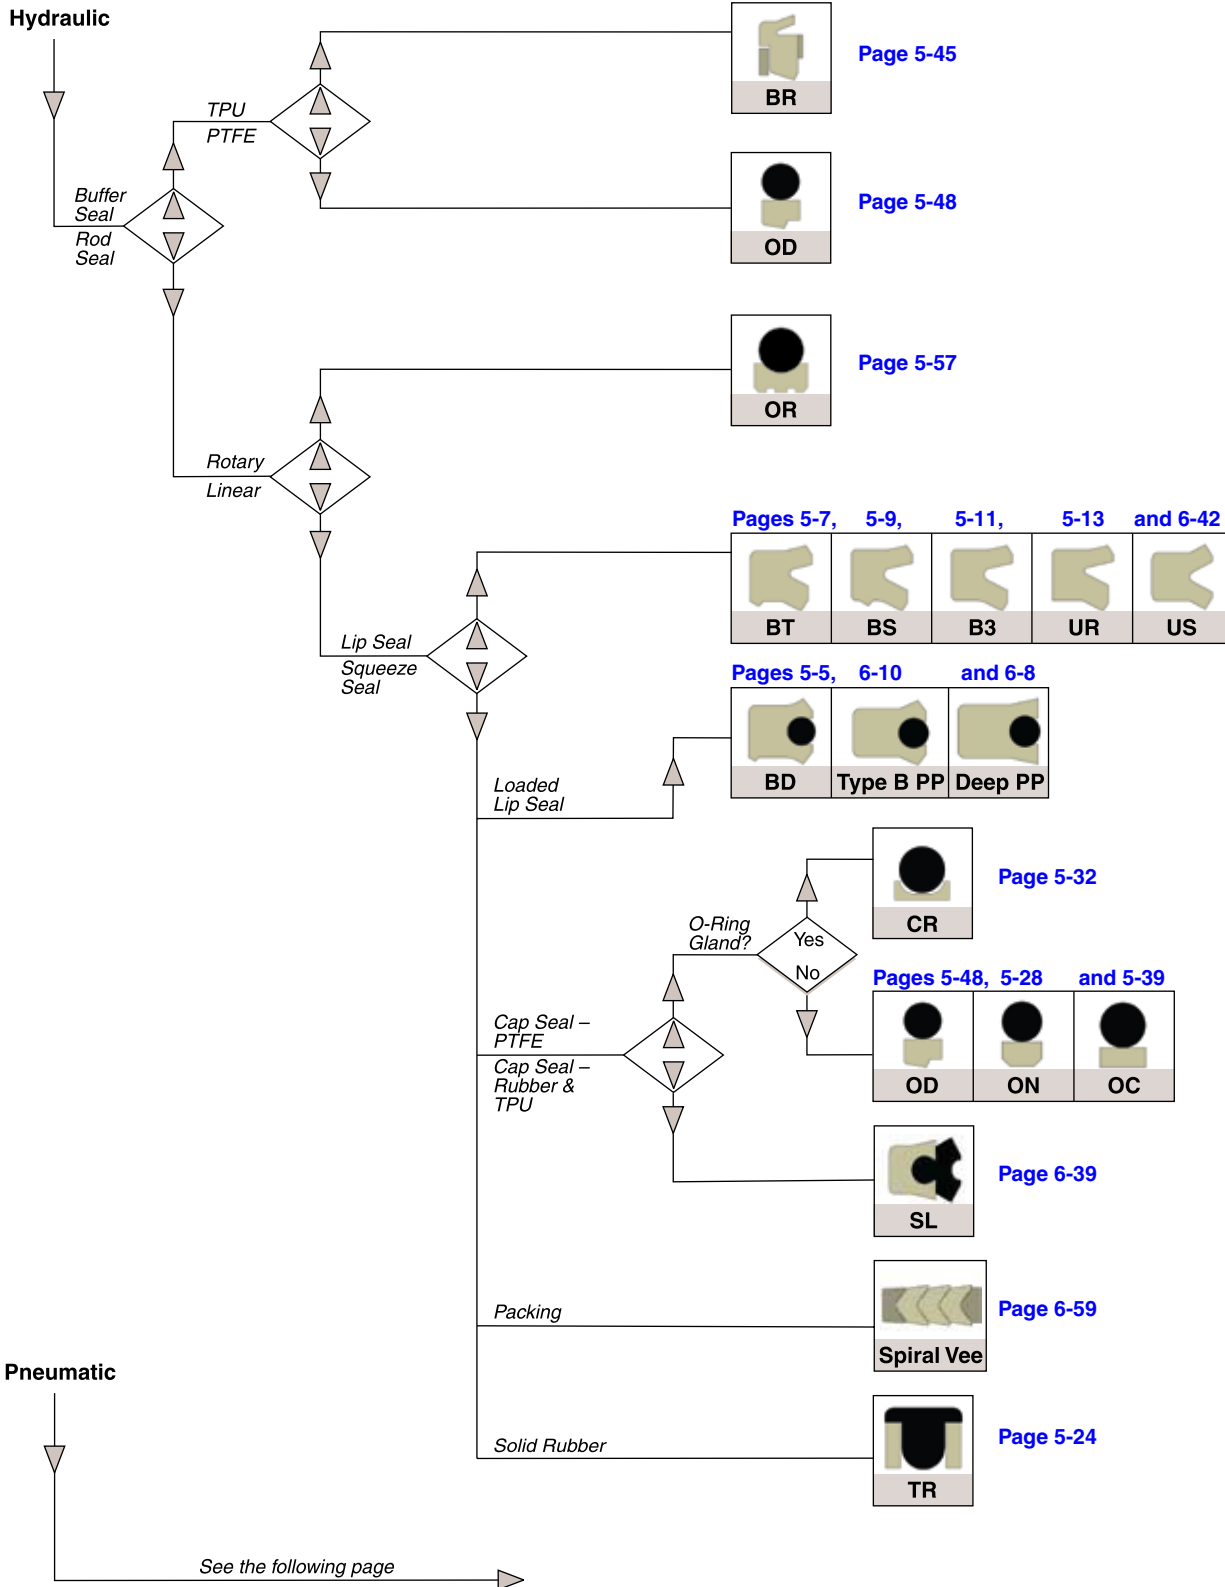

Rod Seals

Non-Symmetrical Rod Decision Tree (continued)

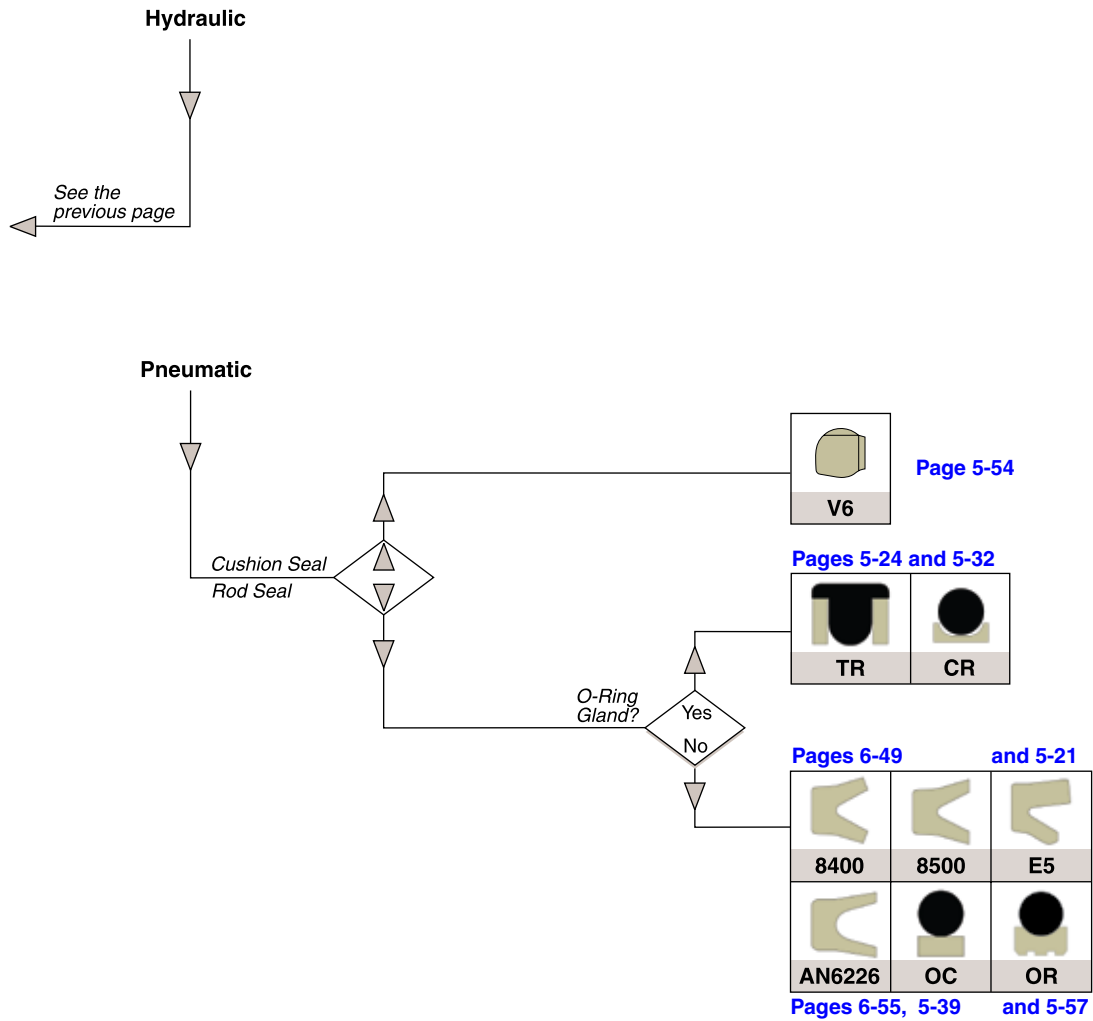

5

Rod Seal BD Profile

Catalog EPS 5370/USA



BD Profile, Premium O-ring Energized Lip Seal

The BD profile is a non-symmetrical profile rod seal. Its rectangular shaped cross section ensures stability in the gland. The o-ring energizer functions as a spring to maintain sealing contact under low pressure or vacuum applications. The knife trimmed, beveled lip does an excellent job wiping fluid film. A secondary sealing lip is located below the primary sealing lip, just above the base of the seal, to provide enhanced sealing performance and ensure a tight, stable fit in the gland. Available in Parker's proprietary urethanes, the BD profile provides long life, extrusion resistance, low compression set, shock load resistance and increased sealing performance at zero pressure. The BD profile is designed to be used as a stand alone rod seal or for use with the BR or OD profile buffer seals for more critical sealing applications. Also available with a positively-activated back-up.

5

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4301A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4700A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 3500 psi (241 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


†Pressure Range without wear rings (see Table 2-4, page 2-5).

Pressure Range with positively-activated back-up to 10,000 psi (688 bar).


Options: A back-up ring located in the heel of the BD profile can be provided for enhanced extrusion protection. See part number nomenclature for designating this option. Contact your local Parker Seal representative for price and availability.



BD Cross-Section



BD Cross-Section
with Back-up

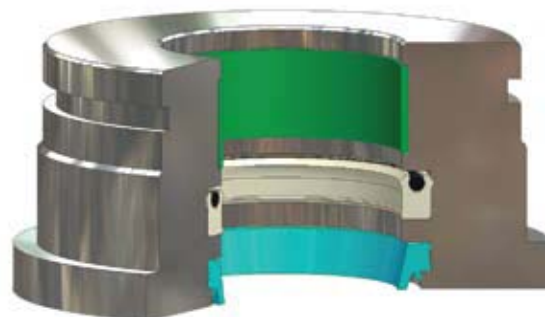


BD Installed in Rod Gland

09/01/07

BD Profile

Part Number Nomenclature — BD Profile

Table 5-2. BD Profile — Inch

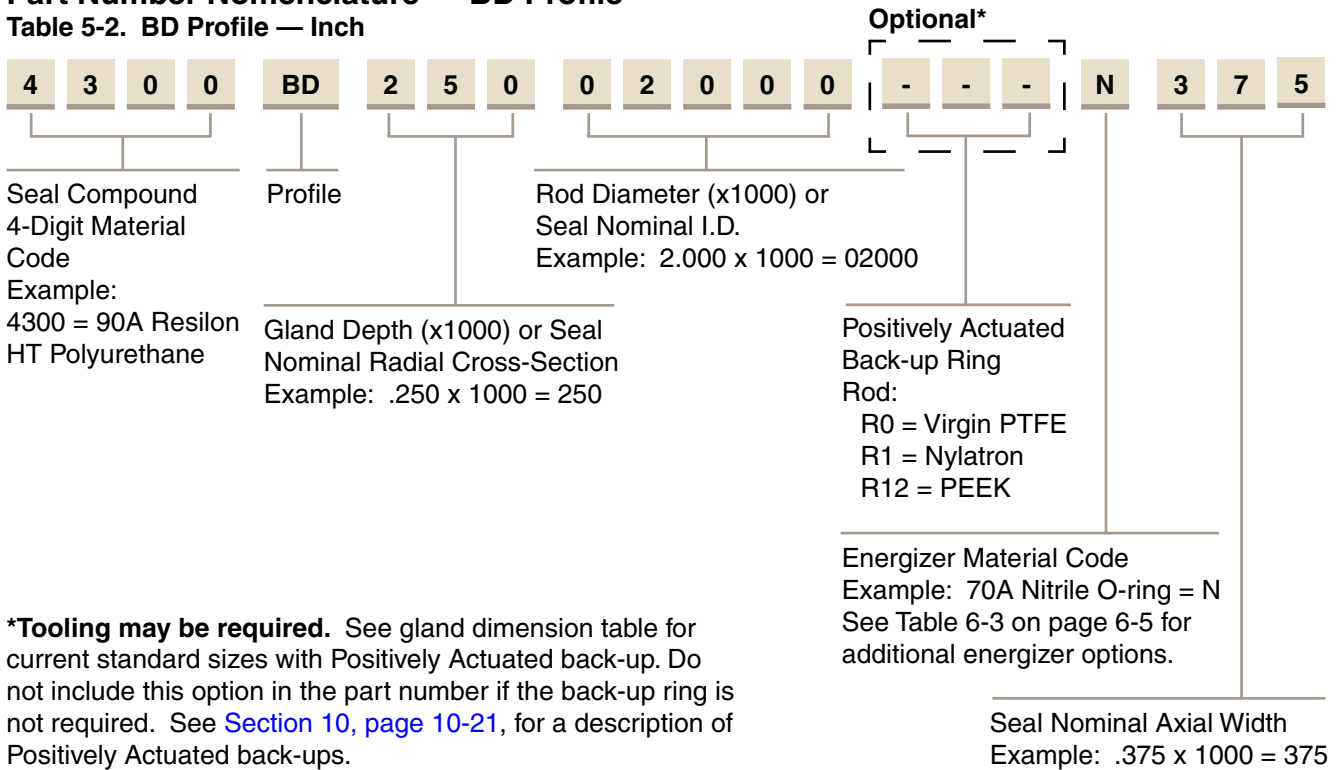


5

***Tooling may be required.** See gland dimension table for current standard sizes with Positively Actuated back-up. Do not include this option in the part number if the back-up ring is not required. See [Section 10, page 10-21](#), for a description of Positively Actuated back-ups.

Part Number Nomenclature — BD Profile

Table 5-3. BD Profile — Metric

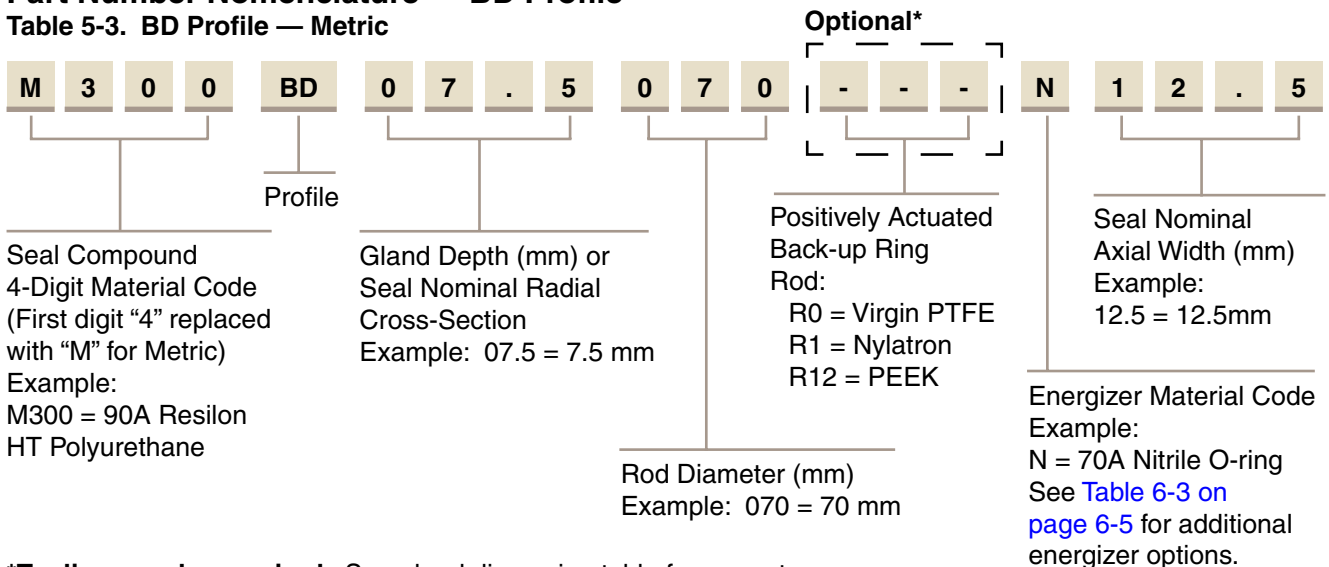

***Tooling may be required.** See gland dimension table for current standard sizes with Positively Actuated back-up. Do not include this option in the part number if the back-up ring is not required. See [Section 10, page 10-21](#), for a description of Positively Actuated back-ups.

Gland Dimensions — BD Profile

BD gland dimensions are provided in [Tables 5-12 on page 5-15](#) and [5-13 on page 5-19](#).

02/15/08



Rod Seal BT Profile

Catalog EPS 5370/USA



BT Profile, Premium U-cup Rod Seal with Secondary Stabilizing Lip

The BT profile is a non-symmetrical design for use in hydraulic rod sealing applications. Using Finite Element Analysis, the BT profile was designed to provide improved sealing performance and stability in the gland. A knife trimming process is used to form the beveled lip which is best for removing fluid from the rod. By design, the BT profile has a more robust primary sealing lip than the BS profile and the secondary lip is located at the base of the heel. The standard compound for the BT profile is Parker's proprietary Resilon compound. The BT profile provides long life, extrusion resistance, low compression set, shock load resistance and increased sealing performance at zero pressure. The BT profile is designed for use as a stand alone rod seal or for use with the BR or OD profile buffer seals for more critical sealing applications.

5

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4301A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).



BT Cross-Section

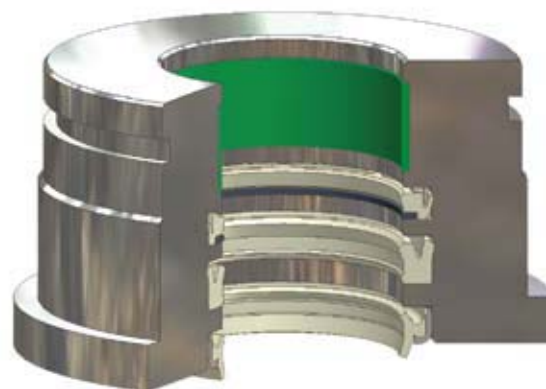


BT Installed in Rod Gland

09/01/07

BT Profile


Part Number Nomenclature — BT Profile

Table 5-4. BT Profile — Inch

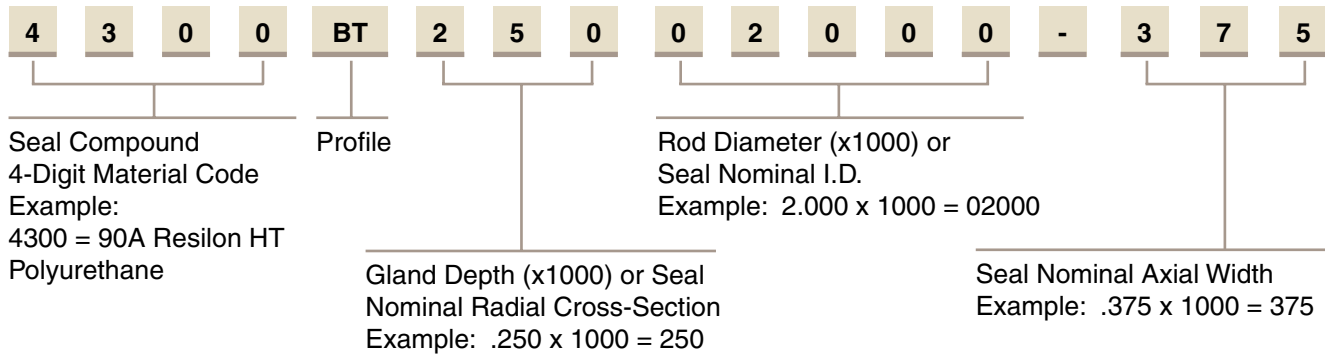

Part Number Nomenclature — BT Profile

Table 5-5. BT Profile — Metric

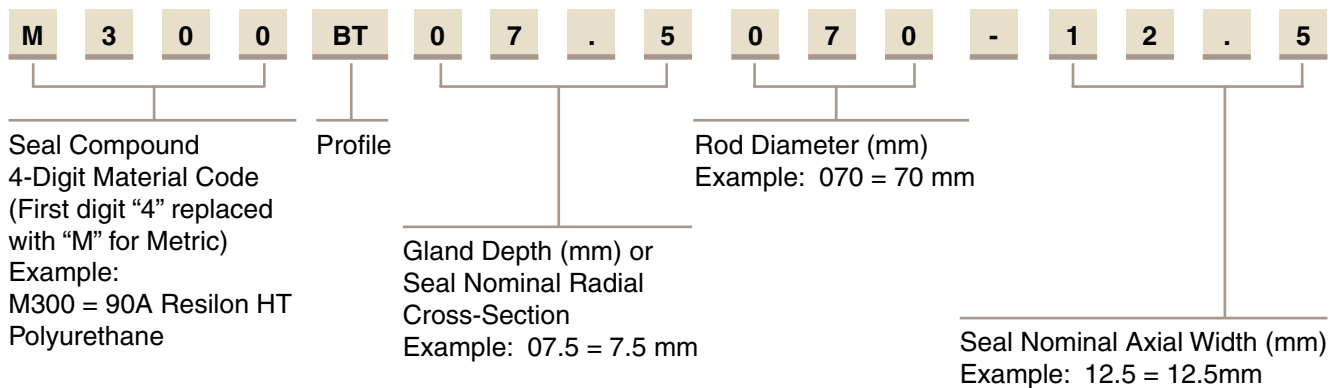

Gland Dimensions — BT Profile

BT gland dimensions are provided in [Tables 5-12 on page 5-15](#) and [5-13 on page 5-19](#).

Rod Seal BS Profile

Catalog EPS 5370/USA

BS Profile, U-cup Rod Seal with Secondary Stabilizing Lip



The BS profile is a non-symmetrical profile designed for use in hydraulic rod sealing applications. A knife trimmed beveled sealing lip does an excellent job wiping fluid from the rod. In addition, a secondary sealing lip is located just above the base of the seal to provide enhanced sealing performance and ensure a tight, stable fit in the gland. Available in Parker proprietary urethanes, the BS profile provides long life, extrusion resistance, low compression set, shock load resistance and increased sealing performance at zero pressure. The BS profile is designed to be used as a stand alone rod seal or for use with the BR or OD profile buffer seals for more critical sealing applications.




BS Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4700A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 3500 psi (241 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

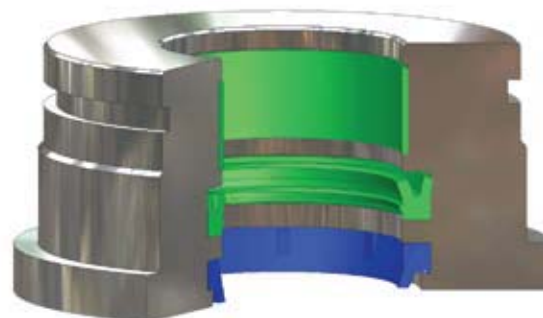

BS Installed in Rod Gland


5

09/01/07

BS Profile


Part Number Nomenclature — BS Profile

Table 5-6. BS Profile — Inch

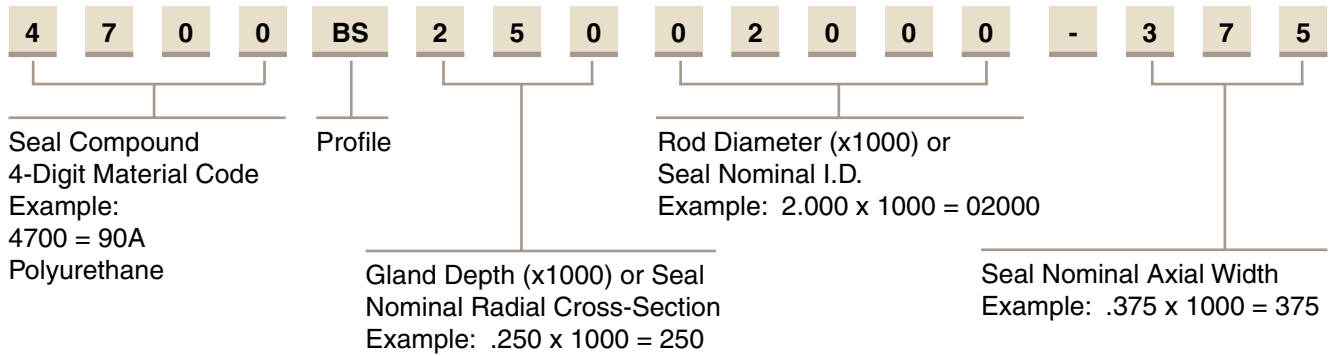

Part Number Nomenclature — BS Profile

Table 5-7. BS Profile — Metric

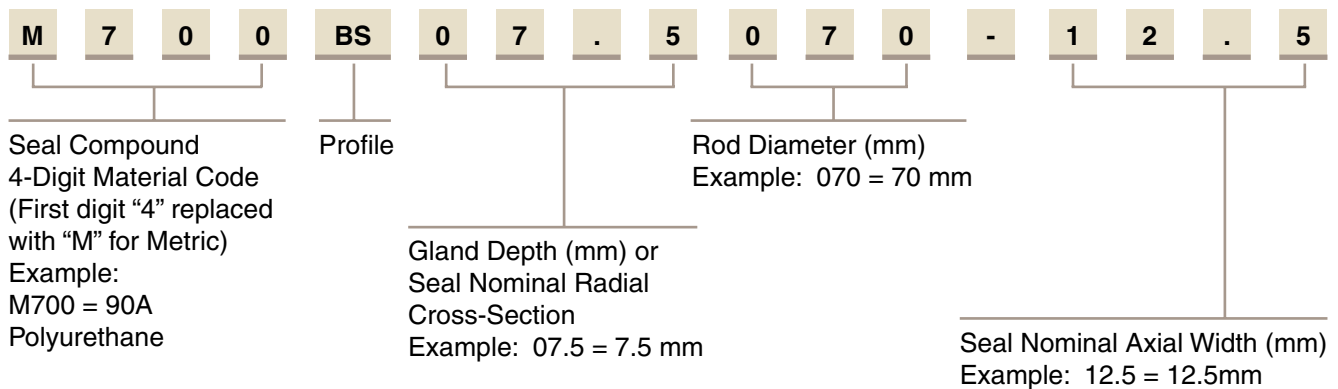

Gland Dimensions — BS Profile

BS gland dimensions are provided in [Tables 5-12 on page 5-15](#) and [5-13 on page 5-19](#).

Rod Seal B3 Profile

Catalog EPS 5370/USA



B3 Cross-Section

B3 Profile, U-cup Rod Seal

The B3 profile is a non-symmetrical design for use in hydraulic rod sealing applications. The diameter of the B3 profile is designed to ensure a tight static side seal when installed. The knife trimmed, beveled lip does an excellent job wiping fluid film. The B3 profile is available in Parker proprietary compounds offering extrusion resistance, long wear, and low compression set. The B3 profile is designed for use as a stand alone rod seal and can be used with Parker's BR or OD profile buffer seals for more critical sealing applications. The B3 profile does not utilize a secondary sealing lip and can be used with a double lip wiper seal, such as the AY profile, to provide a multiple lip, rod sealing system without trapping pressure.


5

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4301A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4700A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 3500 psi (241 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

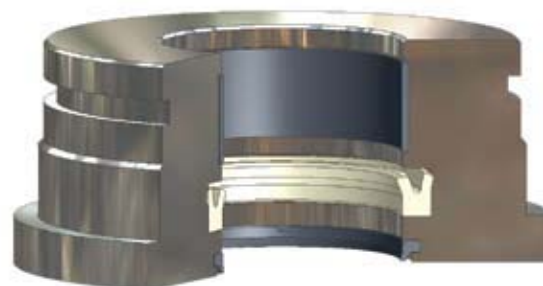


B3 Installed in Rod Gland

09/01/07

B3 Profile

Part Number Nomenclature — B3 Profile


Table 5-8. B3 Profile — Inch

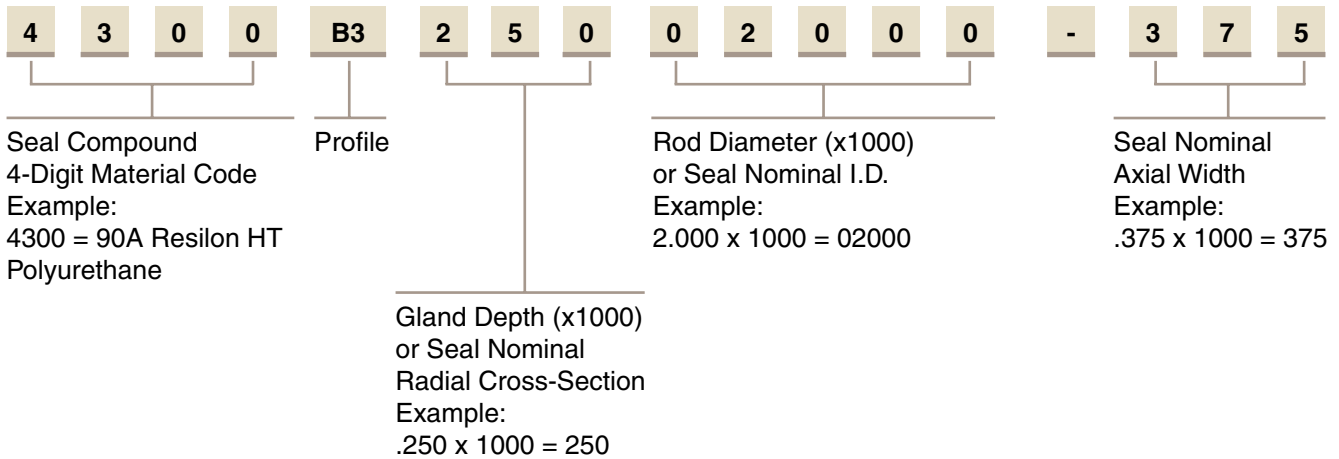

5

Part Number Nomenclature — B3 Profile

Table 5-9. B3 Profile — Metric

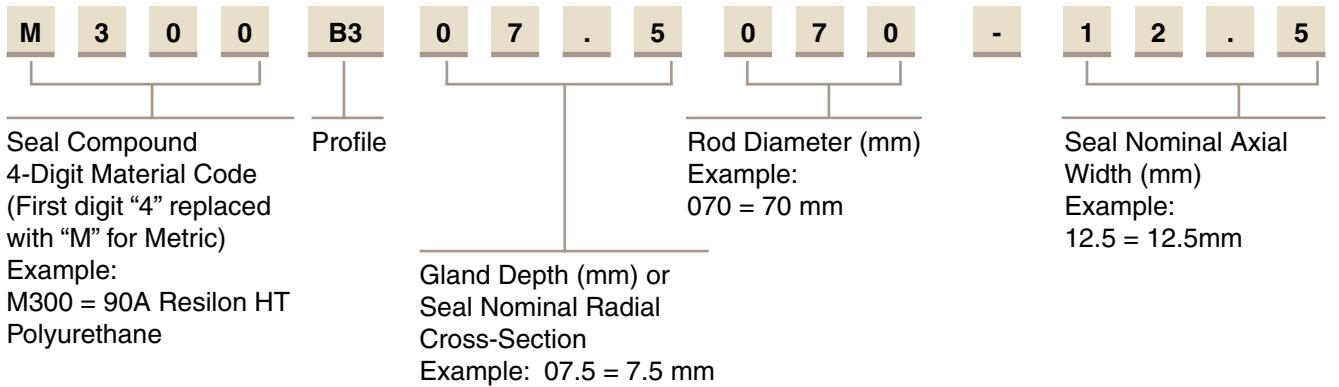

Gland Dimensions — B3 Profile

B3 gland dimensions are provided in [Tables 5-12 on page 5-15](#) and [5-13 on page 5-19](#).

Rod Seal UR Profile


Catalog EPS 5370/USA

UR Profile, Industrial U-cup Rod Seal

The UR profile is a non-symmetrical, hydraulic cylinder rod seal. The knife trimmed, beveled lip faces the rod to provide enhanced low to high pressure sealing and wiping action. The UR profile is an economical choice, available in Parker's wear and extrusion resistant Molythane compound.



UR Cross-Section

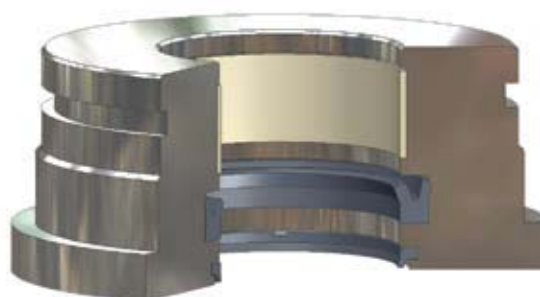

UR Installed in Rod Gland

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|-----------------------------------|-----------------------|-------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).


5

09/01/07

UR Profile

Part Number Nomenclature — UR Profile

Table 5-10. UR Profile — Inch

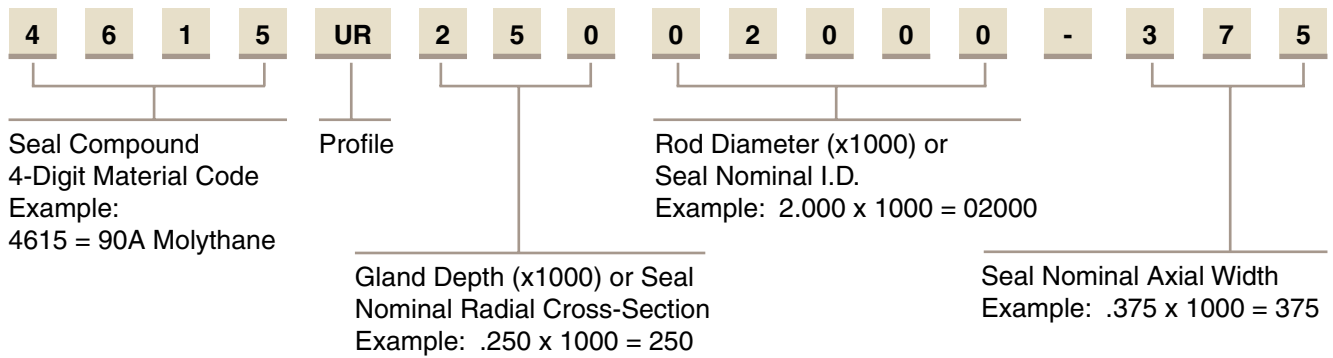

Gland Dimensions — UR Profile

UR gland dimensions are provided in [Tables 5-12 on page 5-15](#) and [5-13 on page 5-19](#).

5

Rod Seal

BD, BT, BS, B3 and UR

Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — BD, BT, BS, B3 and UR Profiles — Inch

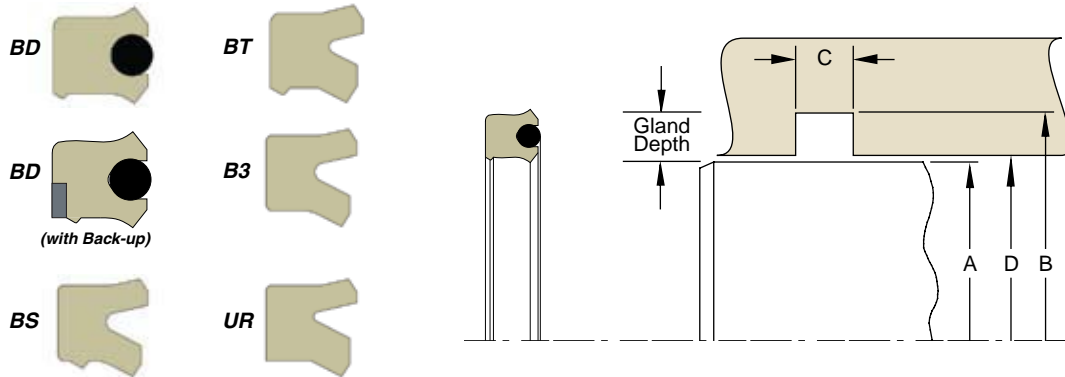


Table 5-11. Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

5

Table 5-12. BD, BT, BS, B3 and UR Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | | | | | | | Part Number | | | | | | |
|----------------|-------------------|----------------|--------------------|-----------------------------------|------|------|--------------|------|------|------|------|------|------|-------------|------|---------------|--------------|----------------------|---|-----|
| | | | | BD | | | | BT | | BS | | | B3 | | UR | Compound Code | Profile Code | Ener-gizer Code (BD) | | |
| | | | | 4300 | 4700 | 5065 | With Back-up | 4300 | 4300 | 4700 | 4615 | 5065 | 4300 | 5065 | 4615 | | | | | |
| 0.219 | 0.469 | 0.248 | 0.220 | | | | | X | | | | | | | | XXXX | xx | 12500219 | - | 225 |
| 0.250 | 0.500 | 0.206 | 0.251 | X | | X | | X | | | | | | | X | XXXX | xx | 12500250 | - | 187 |
| 0.312 | 0.562 | 0.206 | 0.313 | X | | X | | X | | | | | | | | XXXX | xx | 12500312 | - | 187 |
| 0.375 | 0.625 | 0.206 | 0.376 | | | | | X | | | | | | | | XXXX | xx | 12500375 | - | 187 |
| 0.437 | 0.687 | 0.138 | 0.438 | | | | | | | | | | | | X | XXXX | xx | 12500437 | - | 125 |
| 0.437 | 0.687 | 0.206 | 0.438 | | | | | X | | | | | | | | XXXX | xx | 12500437 | - | 187 |
| 0.500 | 0.687 | 0.172 | 0.501 | | | | | | | | X | | | | | XXXX | xx | 09300500 | - | 156 |
| 0.500 | 0.750 | 0.206 | 0.501 | X | | X | X | X | X | | | X | | | | XXXX | xx | 12500500 | - | 187 |
| 0.500 | 0.750 | 0.275 | 0.501 | | | | | X | X | | | X | | | | XXXX | xx | 12500500 | - | 250 |
| 0.500 | 1.000 | 0.413 | 0.501 | | | | | | | X | | X | | | | XXXX | xx | 25000500 | - | 375 |
| 0.562 | 0.812 | 0.275 | 0.563 | | | | | | X | | | X | | | | XXXX | xx | 12500562 | - | 250 |
| 0.625 | 0.875 | 0.275 | 0.626 | | | | | X | X | | X | X | | | X | XXXX | xx | 12500625 | - | 250 |
| 0.625 | 1.000 | 0.303 | 0.626 | | | | | X | | | | | | | | XXXX | xx | 18700625 | - | 275 |
| 0.625 | 1.000 | 0.343 | 0.626 | X | | X | | X | | | | | | | | XXXX | xx | 18700625 | - | 312 |

*If used with wear rings, refer to wear ring throat diameter, see [Section 9](#).
For custom groove calculations, see [Appendix C](#).

09/01/07



Table 5-12. BD, BT, BS, B3 and UR Gland Dimensions — Inch (Continued)

| A Rod Dia- meter | B Groove Dia- meter | C Groove Width | D Throat Dia- meter* | Compounds (X = Standard Offering) | | | | | | | | | | | | Part Number | | | | | | |
|---------------------------|------------------------------|----------------------|-------------------------------|-----------------------------------|------|------|-----------------|------|------|------|------|------|------|------|------|-----------------------|-----------------|--------------------------------|----|----------|---|-----|
| | | | | BD | | | | BT | BS | | | | B3 | | UR | Com- pound Code | Profile Code | Ener- gizer Code (BD) | | | | |
| | | | | 4300 | 4700 | 5065 | With Back-up | 4300 | 4300 | 4700 | 4615 | 5065 | 4300 | 5065 | 4615 | | | | | | | |
| 0.687 | 1.062 | 0.206 | 0.626 | | | | | | | | | | | | | | X | XXXX | xx | 18700687 | - | 187 |
| 0.750 | 1.000 | 0.275 | 0.751 | X | | X | | | X | X | | X | X | | | | X | XXXX | xx | 12500750 | - | 250 |
| 0.750 | 1.125 | 0.275 | 0.751 | | | | | X | | | | | | | | | | XXXX | xx | 18700750 | - | 250 |
| 0.750 | 1.125 | 0.343 | 0.751 | | | | | | | | | | | | | | X | XXXX | xx | 18700750 | - | 312 |
| 0.812 | 1.187 | 0.206 | 0.813 | | | | | | | | | | | | | | X | XXXX | xx | 18700812 | - | 187 |
| 0.812 | 1.187 | 0.275 | 0.813 | | | | | X | | | | | | | | | | XXXX | xx | 18700812 | - | 250 |
| 0.875 | 1.125 | 0.275 | 0.876 | | | | | X | | X | | X | | | | | X | XXXX | xx | 12500875 | - | 250 |
| 0.875 | 1.250 | 0.275 | 0.876 | | | | | | | X | X | X | | | | | | XXXX | xx | 18700875 | - | 250 |
| 0.937 | 1.312 | 0.343 | 0.938 | | | | | | | X | | X | | | | | | XXXX | xx | 18700937 | - | 312 |
| 1.000 | 1.250 | 0.206 | 1.001 | | | | | X | X | X | X | X | | | | | | XXXX | xx | 12501000 | - | 187 |
| 1.000 | 1.250 | 0.275 | 1.001 | X | X | X | X | X | X | X | X | X | | | | | X | XXXX | xx | 12501000 | - | 250 |
| 1.000 | 1.312 | 0.241 | 1.001 | | | | | X | | | | | | | | | | XXXX | xx | 15601000 | - | 219 |
| 1.000 | 1.312 | 0.275 | 1.001 | | | | | | | X | X | X | | | | | | XXXX | xx | 15601000 | - | 250 |
| 1.000 | 1.375 | 0.275 | 1.001 | | | | | | | X | X | X | | | | | X | XXXX | xx | 18701000 | - | 250 |
| 1.000 | 1.375 | 0.343 | 1.001 | X | | X | X | X | X | X | X | X | | | | | X | XXXX | xx | 18701000 | - | 312 |
| 1.000 | 1.500 | 0.275 | 1.001 | | | | | | | | | | | | | | X | XXXX | xx | 25001000 | - | 250 |
| 1.000 | 1.500 | 0.413 | 1.001 | | | | | X | | X | | | | | | | X | XXXX | xx | 25001000 | - | 375 |
| 1.125 | 1.375 | 0.138 | 1.126 | | | | | | | | | | | X | X | | | XXXX | xx | 12501125 | - | 125 |
| 1.125 | 1.375 | 0.275 | 1.126 | | | | | X | | | | X | | | | | | XXXX | xx | 12501125 | - | 250 |
| 1.125 | 1.500 | 0.275 | 1.126 | | | | | X | | | | | | | | | X | XXXX | xx | 18701125 | - | 250 |
| 1.125 | 1.500 | 0.343 | 1.126 | X | | X | X | X | | X | X | X | | | | | X | XXXX | xx | 18701125 | - | 312 |
| 1.125 | 1.500 | 0.413 | 1.126 | X | | X | | | | | | | | | | | | XXXX | xx | 18701125 | - | 375 |
| 1.125 | 1.625 | 0.413 | 1.126 | | | | | X | | | | | | | | | | XXXX | xx | 25001125 | - | 375 |
| 1.187 | 1.562 | 0.343 | 1.188 | | | | | | | | | | | | | | X | XXXX | xx | 18701187 | - | 312 |
| 1.250 | 1.500 | 0.275 | 1.251 | | | | | X | X | | | X | | | | | X | XXXX | xx | 12501250 | - | 250 |
| 1.250 | 1.562 | 0.240 | 1.251 | | | | | X | | | | | | | | | | XXXX | xx | 15601250 | - | 218 |
| 1.250 | 1.625 | 0.275 | 1.251 | | | | | | | | | | | | | | X | XXXX | xx | 18701250 | - | 250 |
| 1.250 | 1.625 | 0.343 | 1.251 | X | X | X | X | X | X | X | X | X | | | | | X | XXXX | xx | 18701250 | - | 312 |
| 1.250 | 1.625 | 0.413 | 1.251 | | | | | | | X | | X | | | | | | XXXX | xx | 18701250 | - | 375 |
| 1.250 | 1.750 | 0.413 | 1.251 | | | | | X | | X | | X | | | | | X | XXXX | xx | 25001250 | - | 375 |
| 1.375 | 1.625 | 0.206 | 1.376 | | | | | | | X | X | X | | | | | | XXXX | xx | 12501375 | - | 187 |
| 1.375 | 1.625 | 0.275 | 1.376 | | | | | | | X | | X | X | | | | X | XXXX | xx | 12501375 | - | 250 |
| 1.375 | 1.687 | 0.241 | 1.376 | | | | | X | | | | | | | | | | XXXX | xx | 15601375 | - | 219 |
| 1.375 | 1.687 | 0.275 | 1.376 | | | | | | | X | X | X | | | | | | XXXX | xx | 15601375 | - | 250 |
| 1.375 | 1.687 | 0.343 | 1.376 | | | | X | X | | | | | | | | | | XXXX | xx | 15601375 | - | 312 |
| 1.375 | 1.750 | 0.275 | 1.376 | | | | | X | | | | | | | | | X | XXXX | xx | 18701375 | - | 250 |
| 1.375 | 1.750 | 0.343 | 1.376 | X | X | X | | X | | X | X | X | | | | | X | XXXX | xx | 18701375 | - | 312 |
| 1.375 | 1.875 | 0.413 | 1.376 | | | | | X | X | | | X | | | | | X | XXXX | xx | 25001375 | - | 375 |
| 1.500 | 1.750 | 0.206 | 1.501 | X | | X | | | X | X | X | X | | | | | | XXXX | xx | 12501500 | - | 187 |
| 1.500 | 1.750 | 0.275 | 1.501 | | | | | X | | | | | | | | | | XXXX | xx | 12501500 | - | 250 |
| 1.500 | 1.875 | 0.275 | 1.501 | | | | | X | | | | | | | | | X | XXXX | xx | 18701500 | - | 250 |
| 1.500 | 1.875 | 0.309 | 1.501 | | | | | | | X | | X | | | | | | XXXX | xx | 18701500 | - | 281 |
| 1.500 | 1.875 | 0.343 | 1.501 | | | | | | | | X | | | | | | X | XXXX | xx | 18701500 | - | 312 |
| 1.500 | 1.875 | 0.413 | 1.501 | X | X | X | X | X | | X | | X | | | | | X | XXXX | xx | 18701500 | - | 375 |
| 1.500 | 2.000 | 0.343 | 1.501 | | | | | | | | | | | | | | X | XXXX | xx | 25001500 | - | 312 |
| 1.500 | 2.000 | 0.413 | 1.501 | X | | X | X | X | X | X | X | X | | | | | X | XXXX | xx | 25001500 | - | 375 |
| 1.562 | 1.937 | 0.343 | 1.563 | | | | | | X | | | X | | | | | | XXXX | xx | 18701562 | - | 312 |
| 1.625 | 2.000 | 0.309 | 1.626 | | | | | | | | X | | | | | | | XXXX | xx | 18701625 | - | 281 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.



Table 5-12. BD, BT, BS, B3 and UR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | | | | | | | | Part Number | | | | | | |
|----------------|-------------------|----------------|--------------------|-----------------------------------|------|------|--------------|------|------|------|------|------|------|------|-------------|---------------|--------------|----|----------------------|---|-----|
| | | | | BD | | | | BT | BS | | | | B3 | | UR | Compound Code | Profile Code | | Ener-gizer Code (BD) | | |
| | | | | 4300 | 4700 | 5065 | With Back-up | 4300 | 4300 | 4700 | 4615 | 5065 | 4300 | 5065 | 4615 | | | | | | |
| 1.625 | 2.000 | 0.413 | 1.626 | X | | X | X | X | X | X | | X | X | | | X | XXXX | xx | 18701625 | - | 375 |
| 1.625 | 2.125 | 0.413 | 1.626 | | | | | | X | | | | | | | X | XXXX | xx | 25001625 | - | 375 |
| 1.750 | 2.125 | 0.275 | 1.751 | | | | | X | | | | | | | | | XXXX | xx | 18701750 | - | 250 |
| 1.750 | 2.125 | 0.343 | 1.751 | | | | | X | | | X | | | | | | XXXX | xx | 18701750 | - | 312 |
| 1.750 | 2.125 | 0.413 | 1.751 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 18701750 | - | 375 |
| 1.750 | 2.250 | 0.413 | 1.751 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 25001750 | - | 375 |
| 1.750 | 2.375 | 0.550 | 1.752 | | | | | X | | | | | | | | | XXXX | xx | 31201750 | - | 500 |
| 1.875 | 2.250 | 0.343 | 1.876 | | | | | | X | | | X | | | | | XXXX | xx | 18701875 | - | 312 |
| 1.875 | 2.250 | 0.413 | 1.876 | X | | X | X | X | X | | X | X | | | | | XXXX | xx | 18701875 | - | 375 |
| 2.000 | 2.250 | 0.206 | 2.001 | | | | | | | X | X | X | | | | | XXXX | xx | 12502000 | - | 187 |
| 2.000 | 2.375 | 0.275 | 2.001 | | | | | X | | | | | | | | | XXXX | xx | 18702000 | - | 250 |
| 2.000 | 2.375 | 0.309 | 2.001 | | | | | | | X | | X | | | | | XXXX | xx | 18702000 | - | 281 |
| 2.000 | 2.375 | 0.343 | 2.001 | | | | | X | | | X | | X | X | X | | XXXX | xx | 18702000 | - | 312 |
| 2.000 | 2.375 | 0.413 | 2.001 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 18702000 | - | 375 |
| 2.000 | 2.500 | 0.413 | 2.001 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 25002000 | - | 375 |
| 2.000 | 2.625 | 0.550 | 2.002 | | | | | | X | | | X | | | | | XXXX | xx | 31202000 | - | 500 |
| 2.125 | 2.500 | 0.413 | 2.126 | | | | | | | | X | | | | | | XXXX | xx | 18702125 | - | 375 |
| 2.125 | 2.625 | 0.413 | 2.126 | | | | | X | | X | | X | | | | | XXXX | xx | 25002125 | - | 375 |
| 2.250 | 2.625 | 0.206 | 2.251 | | | | | | | | | | X | X | | | XXXX | xx | 18702250 | - | 187 |
| 2.250 | 2.625 | 0.309 | 2.251 | | | | | | | | | | | | X | | XXXX | xx | 18702250 | - | 281 |
| 2.250 | 2.625 | 0.343 | 2.251 | | | | | X | | | | | | | | | XXXX | xx | 18702250 | - | 312 |
| 2.250 | 2.625 | 0.413 | 2.251 | X | | X | X | | X | X | X | X | | | | | XXXX | xx | 18702250 | - | 375 |
| 2.250 | 2.750 | 0.413 | 2.251 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 25002250 | - | 375 |
| 2.250 | 2.875 | 0.413 | 2.252 | | | | | | | X | | X | | | | | XXXX | xx | 31202250 | - | 375 |
| 2.250 | 2.875 | 0.550 | 2.252 | | | | | | | X | | X | X | X | X | | XXXX | xx | 31202250 | - | 500 |
| 2.250 | 2.875 | 0.877 | 2.252 | | | | | X | | | | | | | | | XXXX | xx | 31202250 | - | 797 |
| 2.375 | 2.875 | 0.413 | 2.376 | | | | | X | | | | | | | | | XXXX | xx | 25002375 | - | 375 |
| 2.500 | 2.875 | 0.413 | 2.501 | X | X | X | X | X | X | | X | | | | X | | XXXX | xx | 18702500 | - | 375 |
| 2.500 | 2.937 | 0.309 | 2.501 | | | | | X | | | | | | | | | XXXX | xx | 21802500 | - | 281 |
| 2.500 | 2.937 | 0.343 | 2.501 | | | | | X | | | | | | | | | XXXX | xx | 21802500 | - | 312 |
| 2.500 | 2.937 | 0.413 | 2.501 | | | | | X | | | | | | | | | XXXX | xx | 21802500 | - | 375 |
| 2.500 | 3.000 | 0.413 | 2.501 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 25002500 | - | 375 |
| 2.500 | 3.125 | 0.550 | 2.502 | | | | | | X | X | X | X | X | X | X | | XXXX | xx | 31202500 | - | 500 |
| 2.625 | 3.000 | 0.413 | 2.626 | | | | | | X | | | X | | | | | XXXX | xx | 18702625 | - | 375 |
| 2.625 | 3.125 | 0.413 | 2.626 | X | | X | | X | X | | X | X | | | | | XXXX | xx | 25002625 | - | 375 |
| 2.750 | 3.125 | 0.309 | 2.751 | | | | | | | X | | X | X | X | | | XXXX | xx | 18702750 | - | 281 |
| 2.750 | 3.250 | 0.413 | 2.751 | X | X | X | X | X | | X | X | X | | | X | | XXXX | xx | 25002750 | - | 375 |
| 2.750 | 3.375 | 0.550 | 2.752 | | | | | | X | X | X | X | X | X | | | XXXX | xx | 31202750 | - | 500 |
| 2.750 | 3.500 | 0.688 | 2.752 | | | | | | X | X | X | X | | | | | XXXX | xx | 37502750 | - | 625 |
| 2.875 | 3.250 | 0.206 | 2.876 | | | | | | | | | | X | X | | | XXXX | xx | 18702875 | - | 187 |
| 2.875 | 3.250 | 0.413 | 2.876 | | | | | X | | | | | | | | | XXXX | xx | 18702875 | - | 375 |
| 2.875 | 3.375 | 0.413 | 2.876 | X | | X | | | | | | | | | | | XXXX | xx | 25002875 | - | 375 |
| 3.000 | 3.375 | 0.309 | 3.001 | | | | | | | X | | X | | | | | XXXX | xx | 18703000 | - | 281 |
| 3.000 | 3.375 | 0.413 | 3.001 | | | | | X | | | | | | | | | XXXX | xx | 18703000 | - | 375 |
| 3.000 | 3.437 | 0.309 | 3.001 | | | | | X | | | | | | | | | XXXX | xx | 21803000 | - | 281 |
| 3.000 | 3.500 | 0.413 | 3.001 | X | X | X | X | X | X | X | X | X | | | X | | XXXX | xx | 25003000 | - | 375 |
| 3.000 | 3.625 | 0.550 | 3.002 | | | | | | X | | | X | | | X | | XXXX | xx | 31203000 | - | 500 |
| 3.000 | 3.750 | 0.550 | 3.002 | | | | | | X | | | X | | | | | XXXX | xx | 37503000 | - | 500 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.



Table 5-12. BD, BT, BS, B3 and UR Gland Dimensions — Inch (Continued)

| A Rod Dia- meter | B Groove Dia- meter | C Groove Width | D Throat Dia- meter* | Compounds (X = Standard Offering) | | | | | | | | | | | Part Number | | | | | |
|---------------------------|------------------------------|----------------------|-------------------------------|-----------------------------------|------|------|-----------------|------|------|------|------|------|------|------|-----------------------|-----------------|--------------------------------|----------|------|-----|
| | | | | BD | | | | BT | BS | | | B3 | | UR | Com- pound Code | Profile Code | Ener- gizer Code (BD) | | | |
| | | | | 4300 | 4700 | 5065 | With Back-up | 4300 | 4300 | 4700 | 4615 | 5065 | 4300 | 5065 | | | | | 4615 | |
| 3.000 | 3.750 | 0.688 | 3.002 | | | | | | | | X | X | | | | XXXX | xx | 37503000 | - | 625 |
| 3.250 | 3.625 | 0.413 | 3.251 | | | | | | | | X | X | | | | XXXX | xx | 18703250 | - | 375 |
| 3.250 | 3.750 | 0.413 | 3.251 | | X | | | X | X | X | X | | | | X | XXXX | xx | 25003250 | - | 375 |
| 3.500 | 3.875 | 0.309 | 3.501 | | | | | | | X | X | | | | | XXXX | xx | 18703500 | - | 281 |
| 3.500 | 3.875 | 0.413 | 3.501 | | | | | X | | | | | | | | XXXX | xx | 18703500 | - | 375 |
| 3.500 | 4.000 | 0.343 | 3.501 | | | | | X | | | | | | | | XXXX | xx | 25003500 | - | 312 |
| 3.500 | 4.000 | 0.413 | 3.501 | | | | | X | X | X | X | | | X | | XXXX | xx | 25003500 | - | 375 |
| 3.500 | 4.125 | 0.550 | 3.502 | | | | | | X | | X | | | | | XXXX | xx | 31203500 | - | 500 |
| 3.500 | 4.250 | 0.550 | 3.502 | | | | | | | | | | | X | | XXXX | xx | 37503500 | - | 500 |
| 3.500 | 4.250 | 0.688 | 3.502 | | | | | | X | X | X | | | X | | XXXX | xx | 37503500 | - | 625 |
| 3.750 | 4.250 | 0.413 | 3.751 | | | | | X | | | | | | | | XXXX | xx | 25003750 | - | 375 |
| 3.750 | 4.375 | 0.550 | 3.752 | | | | | X | | | | | | | | XXXX | xx | 31203750 | - | 500 |
| 3.875 | 4.250 | 0.343 | 3.876 | | | | | X | | | | | | | | XXXX | xx | 18703785 | - | 312 |
| 3.875 | 4.750 | 0.825 | 3.877 | | | | | | | X | | | | | | XXXX | xx | 43703875 | - | 750 |
| 4.000 | 4.375 | 0.413 | 4.001 | | | | | X | | | | | | | | XXXX | xx | 18704000 | - | 375 |
| 4.000 | 4.500 | 0.343 | 4.001 | | | | | X | | | | | | | | XXXX | xx | 25004000 | - | 312 |
| 4.000 | 4.500 | 0.413 | 4.001 | X | X | X | X | X | X | X | X | X | X | X | X | XXXX | xx | 25004000 | - | 375 |
| 4.000 | 4.500 | 0.618 | 4.001 | | | | | X | X | X | X | | | X | | XXXX | xx | 25004000 | - | 562 |
| 4.000 | 4.625 | 0.413 | 4.002 | | | | | X | | | | | | | | XXXX | xx | 31204000 | - | 375 |
| 4.000 | 4.750 | 0.688 | 4.002 | | | | | X | X | X | X | | | X | | XXXX | xx | 37504000 | - | 625 |
| 4.250 | 4.625 | 0.309 | 4.251 | | | | | | X | X | X | | | | | XXXX | xx | 18704250 | - | 281 |
| 4.250 | 4.750 | 0.413 | 4.251 | X | | X | | | X | X | X | | | | | XXXX | xx | 25004250 | - | 375 |
| 4.250 | 4.750 | 0.618 | 4.251 | | | | | X | X | X | X | | | | | XXXX | xx | 25004250 | - | 562 |
| 4.250 | 5.000 | 0.688 | 4.252 | | | | | X | | | | | | | | XXXX | xx | 37504250 | - | 625 |
| 4.250 | 5.000 | 0.784 | 4.252 | | | | | X | | | | | | | | XXXX | xx | 37504250 | - | 713 |
| 4.500 | 5.000 | 0.343 | 4.501 | | | | | X | | | | | | | | XXXX | xx | 25004500 | - | 312 |
| 4.500 | 5.000 | 0.413 | 4.501 | | | | | | X | X | X | | | | | XXXX | xx | 25004500 | - | 375 |
| 4.500 | 5.125 | 0.413 | 4.502 | | | | | X | | | | | | | | XXXX | xx | 31204500 | - | 375 |
| 4.500 | 5.125 | 0.550 | 4.502 | | | | | | | | | | | X | | XXXX | xx | 31204500 | - | 500 |
| 4.500 | 5.250 | 0.688 | 4.502 | | | | | X | X | | X | | | | | XXXX | xx | 37504500 | - | 625 |
| 4.625 | 5.250 | 0.688 | 4.627 | | | | | | X | X | X | | | | | XXXX | xx | 31204625 | - | 625 |
| 4.750 | 5.375 | 0.550 | 4.752 | | | | | X | | | | | | | | XXXX | xx | 31204750 | - | 500 |
| 4.750 | 5.625 | 0.825 | 4.752 | | | | | | | X | | | | | | XXXX | xx | 43704750 | - | 750 |
| 5.000 | 5.375 | 0.309 | 5.001 | | | | | | X | X | X | | | | | XXXX | xx | 18705000 | - | 281 |
| 5.000 | 5.375 | 0.413 | 5.001 | | | | | X | | | | | | | | XXXX | xx | 18705000 | - | 375 |
| 5.000 | 5.500 | 0.413 | 5.001 | | | | | X | X | X | X | | | | | XXXX | xx | 25005000 | - | 375 |
| 5.000 | 5.500 | 0.618 | 5.001 | | | | | X | | | | | | | | XXXX | xx | 25005000 | - | 562 |
| 5.000 | 5.500 | 0.792 | 5.001 | | | | | | X | X | X | | | | | XXXX | xx | 25005000 | - | 720 |
| 5.000 | 5.562 | 0.378 | 5.001 | | | | | X | | | | | | | | XXXX | xx | 28105000 | - | 344 |
| 5.000 | 5.562 | 0.550 | 5.001 | | | | | | | | | | | X | | XXXX | xx | 28105000 | - | 500 |
| 5.000 | 5.750 | 0.550 | 5.002 | | | | | | | X | | | | | | XXXX | xx | 37505000 | - | 500 |
| 5.000 | 5.750 | 0.688 | 5.002 | | | | | X | | | | | | X | | XXXX | xx | 37505000 | - | 625 |
| 5.250 | 6.000 | 0.688 | 5.252 | | | | | X | X | | X | | | | | XXXX | xx | 37505250 | - | 625 |
| 5.500 | 6.125 | 0.413 | 5.502 | | | | | X | | | | | | | | XXXX | xx | 31205500 | - | 375 |
| 5.500 | 6.250 | 0.688 | 5.502 | | | | | X | | | | | | | | XXXX | xx | 37505500 | - | 625 |
| 5.750 | 6.250 | 0.413 | 5.751 | | | | | | X | X | X | | | | | XXXX | xx | 25005750 | - | 375 |
| 6.000 | 6.500 | 0.618 | 6.001 | | | | | X | X | X | X | | | | | XXXX | xx | 25006000 | - | 562 |
| 6.000 | 6.500 | 0.792 | 6.001 | | | | | | X | X | X | | | | | XXXX | xx | 25006000 | - | 720 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.



Table 5-12. BD, BT, BS, B3 and UR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | | | | | | | Part Number | | | | | | | |
|----------------|-------------------|----------------|--------------------|-----------------------------------|------|------|--------------|------|------|------|------|------|------|-------------|------|---------------|--------------|----|----------------------|---|-----|
| | | | | BD | | | | BT | BS | | | | B3 | | UR | Compound Code | Profile Code | | Ener-gizer Code (BD) | | |
| | | | | 4300 | 4700 | 5065 | With Back-up | 4300 | 4300 | 4700 | 4615 | 5065 | 4300 | 5065 | 4615 | | | | | | |
| 6.000 | 6.750 | 0.688 | 6.002 | | | | | | X | | | X | | | | | XXXX | xx | 37506000 | - | 625 |
| 6.500 | 7.000 | 0.413 | 6.501 | | | | | | | | X | | | | | | XXXX | xx | 25006500 | - | 375 |
| 6.500 | 7.500 | 0.688 | 6.502 | | | | | X | | | | X | | | | | XXXX | xx | 50006500 | - | 625 |
| 6.750 | 7.375 | 0.550 | 6.752 | | | | | X | | | | | | | | | XXXX | xx | 31206750 | - | 500 |
| 6.750 | 7.500 | 0.688 | 6.752 | | | | | X | | | | | | | | | XXXX | xx | 37506750 | - | 625 |
| 7.000 | 7.500 | 0.618 | 7.001 | | | | | | X | | | X | | | | | XXXX | xx | 25007000 | - | 562 |
| 7.000 | 8.000 | 0.825 | 7.002 | | | | | X | | | | X | | | | | XXXX | xx | 50007000 | - | 750 |
| 7.500 | 8.250 | 0.688 | 7.502 | | | | | | | | | X | | | | | XXXX | xx | 37507500 | - | 625 |
| 7.500 | 8.500 | 0.688 | 7.502 | | | | | | | | | X | X | | | | XXXX | xx | 50007500 | - | 625 |
| 8.000 | 8.750 | 0.688 | 8.002 | | | | | X | | | | | | | | | XXXX | xx | 37508000 | - | 625 |
| 8.500 | 9.000 | 0.413 | 8.501 | | X | X | | | | | | | | | | | XXXX | xx | 25008500 | - | 375 |
| 8.500 | 9.250 | 0.688 | 8.502 | | | | | X | | | | | | | | | XXXX | xx | 37508500 | - | 625 |
| 8.500 | 9.500 | 0.688 | 8.502 | | | | | | X | | | X | | | | | XXXX | xx | 50008500 | - | 625 |
| 9.000 | 9.500 | 0.413 | 9.001 | | X | X | | | | | | | | | | | XXXX | xx | 25009000 | - | 375 |
| 9.000 | 10.000 | 0.825 | 9.002 | | | | | X | | | | | | | | | XXXX | xx | 50009000 | - | 750 |
| 9.500 | 10.250 | 0.688 | 9.502 | | | | | X | | | | | | | | | XXXX | xx | 37509500 | - | 625 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
 For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Gland Dimensions — BD, BT, BS, B3 and UR Profiles — Metric

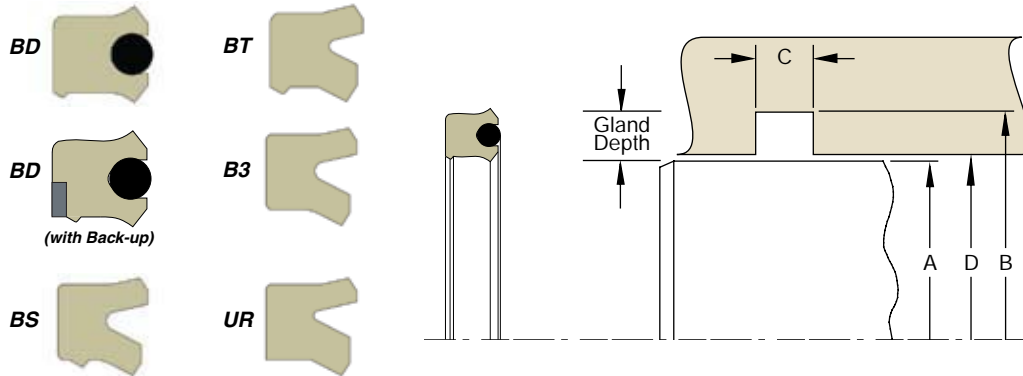


Table 5-13. BD, BT, BS, B3 and UR Gland Dimensions — Metric

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | | | | | | | Part Number | | | | | | | |
|---|-------------------|----------------|--------------------|-----------------------------------|------|------|--------------|------|------|------|------|------|------|-------------|------|---------------|--------------|----|----------------------|---|-----|
| | | | | BD | | | | BT | BS | | | | B3 | | UR | Compound Code | Profile Code | | Ener-gizer Code (BD) | | |
| | | | | M300 | M700 | M065 | With Back-up | M300 | M300 | M700 | M615 | M065 | M300 | M065 | M615 | | | | | | |
| f7 | H9 | +0.25/-0.00 | H8 | | | | | | | | | | | | | | | | | | |
| For ISO tolerances refer to Appendix F. | | | | | | | | | | | | | | | | | | | | | |
| 12.0 | 19.0 | 5.6 | 12.0 | | | | | | X | | | | | | | | XXXX | xx | 03.5012 | - | 5 |
| 12.0 | 20.0 | 7.0 | 12.0 | | | | | | X | | | | | | | | XXXX | xx | 04.0012 | - | 6 |
| 22.0 | 30.0 | 6.3 | 22.0 | | | | | | | | | | | X | X | | XXXX | xx | 04.0022 | - | 5.7 |
| 25.0 | 31.0 | 5.6 | 25.0 | | | | | | | | | | | X | X | | XXXX | xx | 03.0025 | - | 5 |
| 25.0 | 35.0 | 8.0 | 25.0 | | | | | X | | | | | | | | | XXXX | xx | 05.0025 | - | 7.3 |
| 28.0 | 38.0 | 8.0 | 28.0 | | | | | X | | | | | | | | | XXXX | xx | 05.0028 | - | 7.3 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
 For custom groove calculations, [see Appendix C](#).

Table 5-13. BD, BT, BS, B3 and UR Gland Dimensions — Metric (Continued)

| A Rod Dia- meter | B Groove Dia- meter | C Groove Width | D Throat Dia- meter* | Compounds (X = Standard Offering) | | | | | | | | | | | Part Number | | | | | | |
|--|------------------------------|----------------------|-------------------------------|-----------------------------------|------|------|-----------------|------|------|------|------|------|------|------|-------------|-----------------------|-----------------|--------------------------------|----|---------|--------|
| | | | | BD | | | | BT | BS | | | | B3 | | UR | Com- pound Code | Profile Code | Ener- gizer Code (BD) | | | |
| | | | | M300 | M700 | M065 | With Back-up | M300 | M300 | M700 | M615 | M065 | M300 | M065 | M615 | | | | | | |
| f7 | H9 | +.25/- .00 | H8 | | | | | | | | | | | | | | | | | | |
| For ISO tolerances refer to Appendix F. | | | | | | | | | | | | | | | | | | | | | |
| 30.0 | 40.0 | 8.0 | 30.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0030 | - 7.3 |
| 32.0 | 42.0 | 8.0 | 32.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0032 | - 7.3 |
| 32.0 | 42.0 | 11.0 | 32.0 | | | | | | | X | X | X | | | | | | XXXX | xx | 05.0032 | - 10 |
| 35.0 | 45.0 | 8.0 | 35.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0035 | - 7.3 |
| 35.0 | 45.0 | 11.0 | 35.0 | | | | | | | X | | X | | | | | | XXXX | xx | 05.0035 | - 10 |
| 36.0 | 46.0 | 8.0 | 36.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0036 | - 7.3 |
| 40.0 | 50.0 | 8.0 | 40.0 | | | | | | | X | | X | | | X | X | | XXXX | xx | 05.0040 | - 7.3 |
| 40.0 | 50.0 | 9.0 | 40.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0040 | - 8 |
| 40.0 | 50.0 | 9.0 | 40.0 | | | | | | X | | | X | | | | | | XXXX | xx | 05.0040 | - 8.18 |
| 40.0 | 50.0 | 11.0 | 40.0 | | | | | | | X | | X | | | | | | XXXX | xx | 05.0040 | - 10 |
| 41.0 | 51.0 | 11.0 | 41.0 | | | | | | | X | X | X | | | | | | XXXX | xx | 05.0041 | - 10 |
| 45.0 | 55.0 | 7.0 | 45.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0045 | - 6 |
| 45.0 | 55.0 | 8.0 | 45.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0045 | - 7.3 |
| 45.0 | 60.0 | 11.0 | 45.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5045 | - 10 |
| 45.0 | 60.0 | 12.5 | 45.0 | | | | | | | X | | X | | | | | | XXXX | xx | 07.5045 | - 11.4 |
| 48.0 | 58.0 | 11.0 | 48.0 | | | | | | | X | X | X | | | | | | XXXX | xx | 05.0048 | - 10 |
| 50.0 | 60.0 | 8.0 | 50.0 | | | | | | X | X | | X | | | | | | XXXX | xx | 05.0050 | - 7.3 |
| 55.0 | 65.0 | 8.0 | 55.0 | | | | | | X | | | | | | X | X | | XXXX | xx | 05.0055 | - 7.3 |
| 55.0 | 70.0 | 13.0 | 55.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5055 | - 12 |
| 60.0 | 70.0 | 8.0 | 60.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0060 | - 7.3 |
| 60.0 | 75.0 | 11.0 | 60.0 | | | | | | | | | X | | | | | | XXXX | xx | 07.5060 | - 10 |
| 60.0 | 75.0 | 13.0 | 60.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5060 | - 12 |
| 64.0 | 76.0 | 10.0 | 64.0 | | | | | | | | | | | | X | X | | XXXX | xx | 06.0064 | - 9 |
| 65.0 | 75.0 | 8.0 | 65.0 | | | | | | | | | | | | X | X | | XXXX | xx | 05.0065 | - 7.3 |
| 65.0 | 80.0 | 11.0 | 65.0 | | | | | | | X | X | | X | | | | | XXXX | xx | 07.5065 | - 10 |
| 70.0 | 80.0 | 13.0 | 70.0 | | | | | | | | | | | | | X | | XXXX | xx | 05.0070 | - 12 |
| 70.0 | 82.0 | 10.2 | 70.0 | | | | | | | | | | | | X | X | | XXXX | xx | 06.0070 | - 9.2 |
| 70.0 | 83.0 | 11.0 | 70.0 | | | | | | X | | | | | | | | | XXXX | xx | 06.5070 | - 10 |
| 70.0 | 85.0 | 12.5 | 70.0 | | | | | | | X | | X | | | | | | XXXX | xx | 07.5070 | - 11.4 |
| 75.0 | 88.0 | 11.0 | 75.0 | | | | | | X | | | | | | | | | XXXX | xx | 06.5075 | - 10 |
| 75.0 | 90.0 | 11.0 | 75.0 | | | | | | | | | | | | X | X | | XXXX | xx | 07.5075 | - 10 |
| 80.0 | 93.0 | 11.0 | 80.0 | | | | | | X | | | | | | | | | XXXX | xx | 06.5080 | - 10 |
| 80.0 | 95.0 | 12.5 | 80.0 | | | | | | | X | | X | | | | | | XXXX | xx | 07.5080 | - 11.4 |
| 85.0 | 100.0 | 10.0 | 85.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5085 | - 9 |
| 85.0 | 100.0 | 11.0 | 85.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5085 | - 10 |
| 85.0 | 100.0 | 13.2 | 85.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5085 | - 12 |
| 90.0 | 105.0 | 11.0 | 90.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5090 | - 10 |
| 95.0 | 110.0 | 12.5 | 95.0 | | | | | | | X | X | X | | | | | | XXXX | xx | 07.5095 | - 11.4 |
| 155.0 | 170.0 | 10.0 | 155.0 | | | | | | X | | | | | | | | | XXXX | xx | 07.5155 | - 9 |
| 195.0 | 207.0 | 17.0 | 195.0 | | | | | | | X | | X | | | | | | XXXX | xx | 06.0195 | - 15.5 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Rod Seal E5 Profile

Catalog EPS 5370/USA



E5 Cross-Section

E5 Profile, Premium Rounded Lip U-cup Rod Seal


Parker's E5 profile is a non-symmetrical rod seal designed to seal both lubricated and non-lubricated air. To ensure that critical surfaces retain lubrication, the radius edge of the lip is designed to hydroplane over pre-lubricated surfaces. The standard compound for the E5 profile is Parker's proprietary Nitroxile ELF compound N4274A85. This compound is formulated with proprietary internal lubricants to provide "Extreme Low Friction" and excellent wear resistance. This compound provides extended cycle life over standard nitrile and carboxylated nitrile compounds.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|---------------------|---------------------|
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| N4180A80 | -40°F to 250°F (-40°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

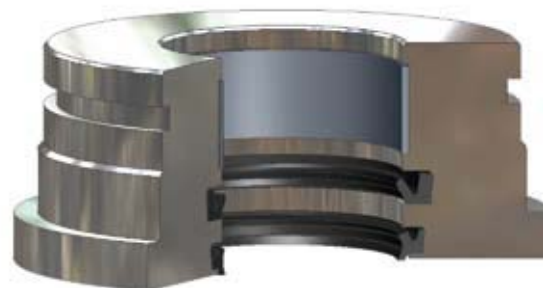

E5 Installed in Rod Gland


5

09/01/07

E5 Profile

Part Number Nomenclature — E5 Profile

Table 5-14. E5 Profile — Inch

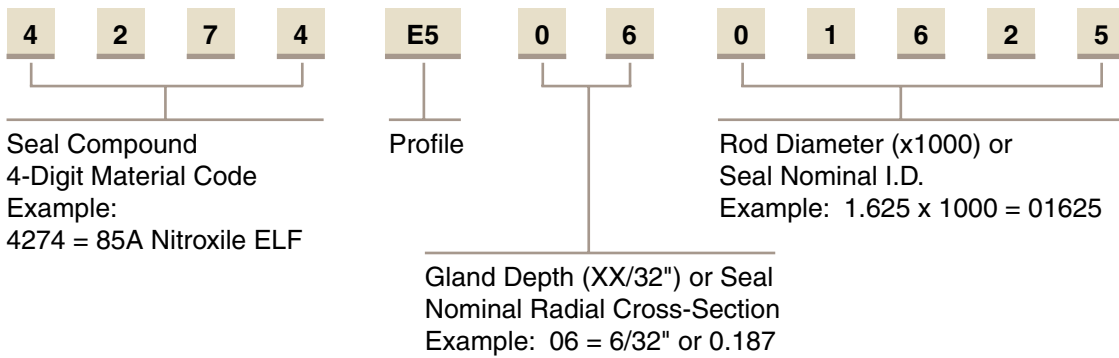

Gland Dimensions — E5 Profile

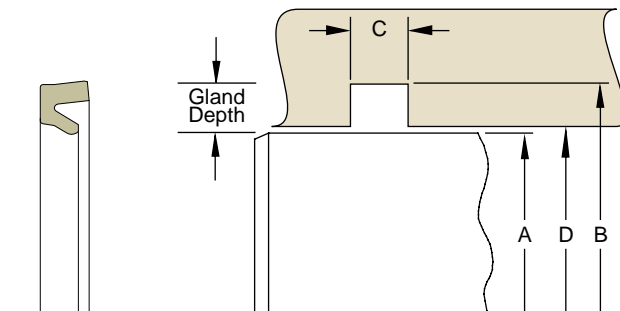


Table 5-15. Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-16. E5 Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | Part Number | |
|----------------|-------------------|----------------|--------------------|-----------------------------------|------|------|------|---------------|-----------|
| | | | | 4180 | 4274 | 4208 | 5065 | Compound Code | |
| 0.125 | 0.375 | 0.156 | 0.126 | | X | | | XXXX | E50400125 |
| 0.187 | 0.375 | 0.125 | 0.188 | | X | | | XXXX | E50300187 |
| 0.250 | 0.500 | 0.156 | 0.251 | | X | | | XXXX | E50400250 |
| 0.375 | 0.625 | 0.156 | 0.376 | | X | | | XXXX | E50400375 |
| 0.500 | 0.750 | 0.156 | 0.501 | X | X | X | | XXXX | E50400500 |
| 0.625 | 0.875 | 0.156 | 0.626 | X | X | X | X | XXXX | E50400625 |
| 0.750 | 1.000 | 0.156 | 0.751 | X | X | X | X | XXXX | E50400750 |
| 0.875 | 1.125 | 0.156 | 0.876 | | X | | | XXXX | E50400875 |

*If used with wear rings, refer to wear ring throat diameter, see [Section 9](#).
For custom groove calculations, see [Appendix C](#).

Table 5-16. E5 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | Part Number | |
|----------------------|-------------------------|----------------------|--------------------------|-----------------------------------|------|------|------|------------------|-----------|
| | | | | 4180 | 4274 | 4208 | 5065 | Compound Code | |
| 1.000 | 1.250 | 0.156 | 1.001 | | X | X | X | XXXX | E50401000 |
| 1.000 | 1.312 | 0.188 | 1.001 | | X | X | X | XXXX | E50501000 |
| 1.250 | 1.500 | 0.156 | 1.251 | | X | | | XXXX | E50401250 |
| 1.250 | 1.562 | 0.188 | 1.251 | X | X | | | XXXX | E50501250 |
| 1.375 | 1.687 | 0.188 | 1.376 | | X | X | | XXXX | E50501375 |
| 1.375 | 1.750 | 0.218 | 1.377 | X | X | X | X | XXXX | E50601375 |
| 1.500 | 1.875 | 0.218 | 1.502 | | X | | | XXXX | E50601500 |
| 1.750 | 2.125 | 0.218 | 1.752 | | X | X | | XXXX | E50601750 |
| 2.000 | 2.375 | 0.218 | 2.002 | | X | X | | XXXX | E50602000 |
| 2.500 | 2.875 | 0.218 | 2.502 | | X | | | XXXX | E50602500 |


*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — E5 Profile

Table 5-17. E5 Profile — Metric

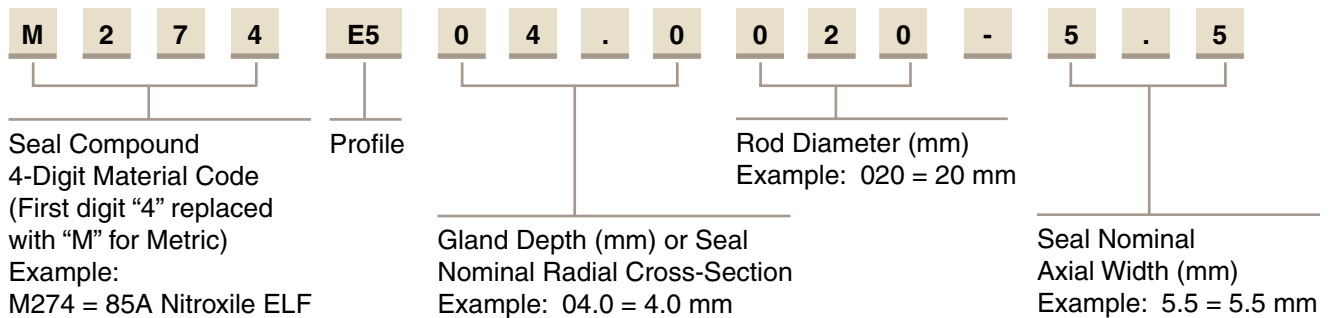

Gland Dimensions — E5 Profile

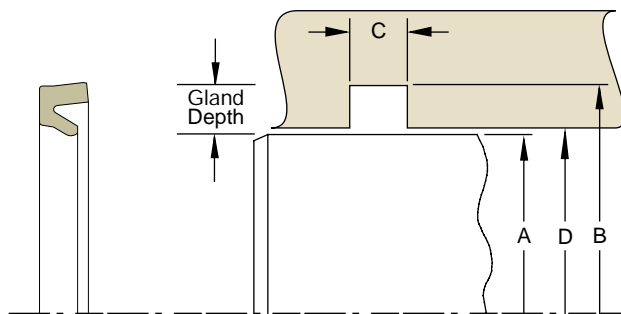


Table 5-18. E5 Gland Dimensions — Metric (mm)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Compounds (X = Standard Offering) | | | | Part Number | |
|---|-------------------------|----------------------|--------------------------|-----------------------------------|------|------|------|------------------|---------------|
| | | | | M180 | M274 | M208 | M065 | Compound Code | |
| f7 | H9 | +.25/-00 | H8 | | | | | | |
| For ISO tolerances refer to Appendix F. | | | | | | | | | |
| 14.0 | 22.0 | 5.5 | 14.0 | X | | | | XXXX | E504.0014-5 |
| 20.0 | 28.0 | 6.0 | 20.0 | | X | | | XXXX | E504.0020-5.5 |
| 25.0 | 35.0 | 7.5 | 25.0 | | X | | | XXXX | E505.0025-7 |
| 30.0 | 38.0 | 5.0 | 30.0 | | X | | | XXXX | E504.0030-4.3 |
| 50.0 | 60.0 | 10.5 | 50.0 | | X | X | | XXXX | E505.0050-9.5 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07





TR Profile (Rod T-seal) Compact Seal with Anti-Extrusion Technology

Parker's rod T-seal is designed to retrofit o-rings in no back-up, single back-up and two back-up standard industrial reciprocating glands. Its compact design provides improved stability and extrusion resistance in dynamic fluid sealing applications. The flange or base of the T-seal forms a tight seal in the gland and supports the anti-extrusion back-up rings. When energized, the back-up rings bridge the extrusion gap to protect the rubber sealing element from extrusion and system contamination. The rod T-seal eliminates the spiral or twisting failure that can occur when o-rings are used against a dynamic surface. Parker offers the rod T-seal in a variety of elastomer and back-up ring compounds to cover a wide range of fluid compatibility, pressure and temperature requirements.

- Profile **TR0** for **no** back-up o-ring gland (standard offering)
- Profile **TRS** for **single** back-up o-ring gland
- Profile **TRT** for **two** back-up o-ring gland

The TR profile is sold only as an assembly (elastomer and back-ups).

Technical Data


Standard Materials



TR Cross-Section

| Base Elastomer* | Temperature Range | Surface Speed |
|-----------------|---------------------------------|----------------------|
| N4115A75 | -40°F to 225F (-40°C to 107°C) | < 1.6 ft/s (0.5 m/s) |
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | < 1.6 ft/s (0.5 m/s) |
| V4205A75 | -20°F to 400°F (-29°C to 204°C) | < 1.6 ft/s (0.5 m/s) |
| E4259A80 | -65°F to 300°F (-54°C to 149°C) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

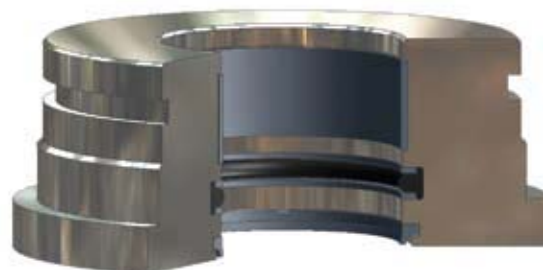

TR Installed in Rod Gland

Technical Data (Continued)

Standard Materials

Back-up Rings**


| Back-up Rings** | Temperature Range | Pressure Range† |
|--------------------|---------------------------------|----------------------|
| B001 (Nylatron) | -65°F to 250°F (-54°C to 121°C) | 5,000 psi (344 bar) |
| B011 (Virgin PTFE) | -20°F to 250°F (-29°C to 121°C) | 3,000 psi (206 bar) |
| B085 (PEEK) | -65°F to 500°F (-54°C to 260°C) | 10,000 psi (689 bar) |

**Alternate Materials: For applications that may require an alternate material, please see Section 3 for alternate materials.


†Pressure Range without wear rings (see Table 2-4, page 2-5).

Part Number Nomenclature — TR Profile

Table 5-19. TR Profile — Inch

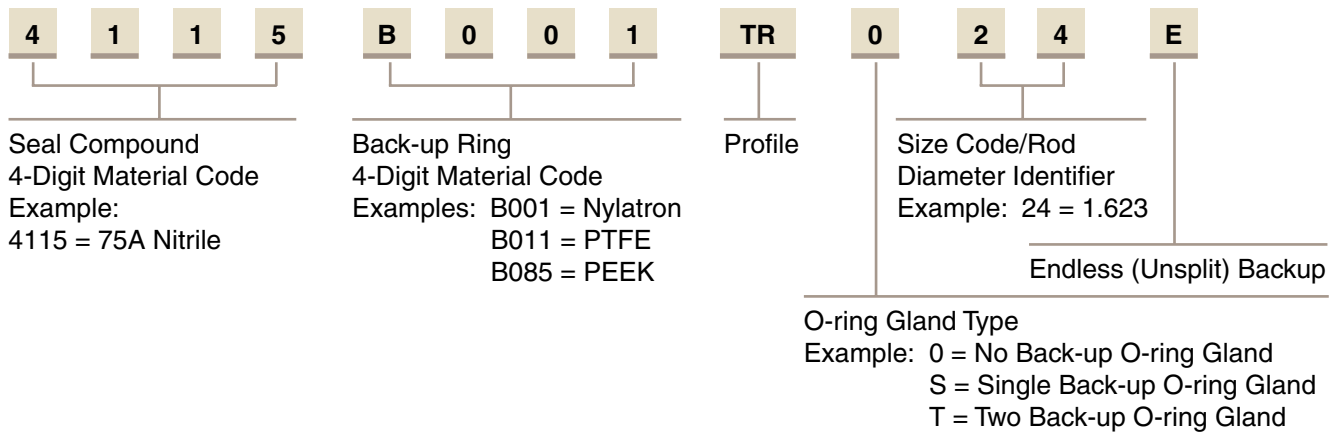

Gland Dimensions — TR Profile

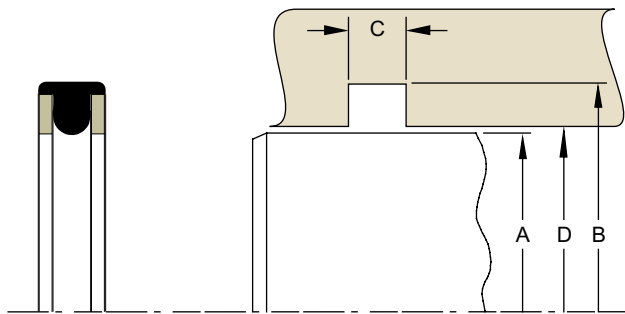

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 5-20. TR Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C | | | D Throat Diameter* | Ref O-ring Dash Number | Compounds (X = Standard Offering) | | | | Part Number | | | | |
|----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|---------------------------------|--------------------------------------|------|------|------|-----------------------|-------------------------|---------------------------|--------------|--|
| | | TR0 Groove Width | TRS Groove Width | TRT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Com- pound Code | Back-up Ring Code | Groove Width Code** | Size Code | |
| +0.00/ -0.02 | +0.002/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.001/ -0.000 | | | | | | | | | | |
| 0.186 | 0.362 | 0.140 | 0.171 | 0.238 | 0.188 | 106 | X | | X | | XXXX | B0XX | TR0 | 01 | |
| 0.249 | 0.425 | 0.140 | 0.171 | 0.238 | 0.251 | 108 | X | | X | | XXXX | B0XX | TR0 | 02 | |
| 0.311 | 0.487 | 0.140 | 0.171 | 0.238 | 0.313 | 109 | X | | X | | XXXX | B0XX | TR0 | 03 | |
| 0.373 | 0.615 | 0.187 | 0.208 | 0.275 | 0.376 | 204 | X | X | X | | XXXX | B0XX | TR0 | 04 | |

* If used with wear rings, refer to wear ring throat diameter, see Section 9.

**Chart reflects availability for TR0 only. For availability of TRS and TRT, please contact your local Parker Seal representative.

For custom groove calculations, see Appendix C.

Table 5-20. TR Gland Dimensions — Inch (Continued)**

| A Rod Diameter | B Groove Diameter | C | | | D Throat Diameter* | Ref O-ring Dash Number | Compounds (X = Standard Offering) | | | | Part Number | | | | | | |
|----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|---------------------------------|--------------------------------------|------|------|------|-----------------------|-------------------------|---------------------------|--------------|--|----|--|
| | | TR0 Groove Width | TRS Groove Width | TRT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Com- pound Code | Back-up Ring Code | Groove Width Code** | Size Code | | | |
| +0.000/ -0.002 | +0.002/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.001/ -0.000 | | | | | | | | | | | | |
| 0.435 | 0.677 | 0.187 | 0.208 | 0.275 | 0.438 | 205 | X | | X | | | XXXX | BOXX | TR0 | | 05 | |
| 0.498 | 0.740 | 0.187 | 0.208 | 0.275 | 0.501 | 206 | X | X | X | | | XXXX | BOXX | TR0 | | 06 | |
| 0.560 | 0.802 | 0.187 | 0.208 | 0.275 | 0.563 | 207 | X | | X | | | XXXX | BOXX | TR0 | | 07 | |
| 0.623 | 0.865 | 0.187 | 0.208 | 0.275 | 0.626 | 208 | X | X | X | X | | XXXX | BOXX | TR0 | | 08 | |
| 0.685 | 0.927 | 0.187 | 0.208 | 0.275 | 0.688 | 209 | X | | | | | XXXX | BOXX | TR0 | | 09 | |
| 0.748 | 0.990 | 0.187 | 0.208 | 0.275 | 0.751 | 210 | X | X | X | X | | XXXX | BOXX | TR0 | | 10 | |
| 0.810 | 1.052 | 0.187 | 0.208 | 0.275 | 0.813 | 211 | X | | X | | | XXXX | BOXX | TR0 | | 11 | |
| 0.873 | 1.065 | 0.187 | 0.208 | 0.275 | 0.876 | 212 | X | | X | | | XXXX | BOXX | TR0 | | 12 | |
| 0.935 | 1.177 | 0.187 | 0.208 | 0.275 | 0.938 | 213 | X | | X | | | XXXX | BOXX | TR0 | | 13 | |
| 0.998 | 1.240 | 0.187 | 0.208 | 0.275 | 1.001 | 214 | X | X | X | | | XXXX | BOXX | TR0 | | 14 | |
| 1.060 | 1.302 | 0.187 | 0.208 | 0.275 | 1.063 | 215 | X | | | | | XXXX | BOXX | TR0 | | 15 | |
| 1.123 | 1.365 | 0.187 | 0.208 | 0.275 | 1.126 | 216 | X | | X | X | | XXXX | BOXX | TR0 | | 16 | |
| 1.185 | 1.427 | 0.187 | 0.208 | 0.275 | 1.188 | 217 | X | | X | | | XXXX | BOXX | TR0 | | 17 | |
| 1.248 | 1.490 | 0.187 | 0.208 | 0.275 | 1.251 | 218 | X | X | X | X | | XXXX | BOXX | TR0 | | 18 | |
| 1.310 | 1.552 | 0.187 | 0.208 | 0.275 | 1.313 | 219 | X | | | | | XXXX | BOXX | TR0 | | 19 | |
| 1.373 | 1.615 | 0.187 | 0.208 | 0.275 | 1.376 | 220 | X | | X | X | | XXXX | BOXX | TR0 | | 20 | |
| 1.435 | 1.677 | 0.187 | 0.208 | 0.275 | 1.438 | 221 | X | X | | | | XXXX | BOXX | TR0 | | 21 | |
| 1.498 | 1.740 | 0.187 | 0.208 | 0.275 | 1.501 | 222 | X | X | X | X | | XXXX | BOXX | TR0 | | 22 | |
| 1.498 | 1.868 | 0.281 | 0.311 | 0.410 | 1.501 | 325 | X | | X | | | XXXX | BOXX | TR0 | | 23 | |
| 1.623 | 1.993 | 0.281 | 0.311 | 0.410 | 1.626 | 326 | X | X | | | | XXXX | BOXX | TR0 | | 24 | |
| 1.748 | 2.118 | 0.281 | 0.311 | 0.410 | 1.751 | 327 | X | X | X | | | XXXX | BOXX | TR0 | | 25 | |
| 1.873 | 2.243 | 0.281 | 0.311 | 0.410 | 1.876 | 328 | X | X | | | | XXXX | BOXX | TR0 | | 26 | |
| 1.998 | 2.368 | 0.281 | 0.311 | 0.410 | 2.001 | 329 | X | | X | X | | XXXX | BOXX | TR0 | | 27 | |
| 2.123 | 2.493 | 0.281 | 0.311 | 0.410 | 2.126 | 330 | X | | X | | | XXXX | BOXX | TR0 | | 28 | |
| 2.248 | 2.618 | 0.281 | 0.311 | 0.410 | 2.251 | 331 | X | X | | | | XXXX | BOXX | TR0 | | 29 | |
| 2.373 | 2.743 | 0.281 | 0.311 | 0.410 | 2.376 | 332 | X | | X | | | XXXX | BOXX | TR0 | | 30 | |
| 2.498 | 2.868 | 0.281 | 0.311 | 0.410 | 2.501 | 333 | X | X | X | | | XXXX | BOXX | TR0 | | 31 | |
| 2.623 | 2.993 | 0.281 | 0.311 | 0.410 | 2.626 | 334 | X | | X | | | XXXX | BOXX | TR0 | | 32 | |
| 2.748 | 3.118 | 0.281 | 0.311 | 0.410 | 2.751 | 335 | X | X | X | | | XXXX | BOXX | TR0 | | 33 | |
| 2.873 | 3.243 | 0.281 | 0.311 | 0.410 | 2.876 | 336 | X | | | | | XXXX | BOXX | TR0 | | 34 | |
| 2.998 | 3.368 | 0.281 | 0.311 | 0.410 | 3.001 | 337 | X | | | | | XXXX | BOXX | TR0 | | 35 | |
| 3.123 | 3.493 | 0.281 | 0.311 | 0.410 | 3.126 | 338 | X | | | | | XXXX | BOXX | TR0 | | 36 | |
| 3.248 | 3.618 | 0.281 | 0.311 | 0.410 | 3.251 | 339 | X | | X | | | XXXX | BOXX | TR0 | | 37 | |
| 3.373 | 3.743 | 0.281 | 0.311 | 0.410 | 3.376 | 340 | X | | X | | | XXXX | BOXX | TR0 | | 38 | |
| 3.498 | 3.868 | 0.281 | 0.311 | 0.410 | 3.501 | 341 | X | | | | | XXXX | BOXX | TR0 | | 39 | |
| 3.623 | 3.993 | 0.281 | 0.311 | 0.410 | 3.626 | 342 | X | | | | | XXXX | BOXX | TR0 | | 40 | |
| 3.748 | 4.118 | 0.281 | 0.311 | 0.410 | 3.751 | 343 | X | | X | | | XXXX | BOXX | TR0 | | 41 | |
| 3.873 | 4.243 | 0.281 | 0.311 | 0.410 | 3.876 | 344 | X | | | | | XXXX | BOXX | TR0 | | 42 | |
| 3.998 | 4.368 | 0.281 | 0.311 | 0.410 | 4.001 | 345 | X | | X | | | XXXX | BOXX | TR0 | | 43 | |
| 4.123 | 4.493 | 0.281 | 0.311 | 0.410 | 4.126 | 346 | X | | | | | XXXX | BOXX | TR0 | | 44 | |
| 4.248 | 4.618 | 0.281 | 0.311 | 0.410 | 4.251 | 347 | X | | X | | | XXXX | BOXX | TR0 | | 45 | |
| 4.373 | 4.743 | 0.281 | 0.311 | 0.410 | 4.376 | 348 | X | | | | | XXXX | BOXX | TR0 | | 46 | |
| 4.498 | 4.868 | 0.281 | 0.311 | 0.410 | 4.501 | 349 | X | | X | | | XXXX | BOXX | TR0 | | 47 | |
| 4.997 | 5.471 | 0.375 | 0.408 | 0.538 | 5.001 | 429 | X | | X | X | | XXXX | BOXX | TR0 | | 48 | |
| 5.247 | 5.721 | 0.375 | 0.408 | 0.538 | 5.251 | 431 | X | | | | | XXXX | BOXX | TR0 | | 49 | |
| 5.497 | 5.971 | 0.375 | 0.408 | 0.538 | 5.501 | 433 | X | | | | | XXXX | BOXX | TR0 | | 50 | |

* If used with wear rings, refer to wear ring throat diameter, see Section 9.

**Chart reflects availability for TR0 only. For availability of TRS and TRT, please contact your local Parker Seal representative. For custom groove calculations, see Appendix C.



Table 5-20. TR Gland Dimensions — Inch** (Continued)

| A Rod Diameter | B Groove Diameter | C | | | D Throat Diameter* | Ref O-ring Dash Number | Compounds (X = Standard Offering) | | | | Part Number | | | |
|----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|---------------------------------|--------------------------------------|------|------|------|-----------------------|-------------------------|---------------------------|--------------|
| | | TR0 Groove Width | TRS Groove Width | TRT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Com- pound Code | Back-up Ring Code | Groove Width Code** | Size Code |
| + .000/ - .002 | + .002/ - .000 | + .005/ - .000 | + .005/ - .000 | + .005/ - .000 | + .001/ - .000 | | | | | | | | | |
| 5.622 | 6.096 | 0.375 | 0.408 | 0.538 | 5.626 | 434 | X | | | | XXXX | B0XX | TR0 | 51 |
| 5.997 | 6.471 | 0.375 | 0.408 | 0.538 | 6.001 | 437 | X | | | | XXXX | B0XX | TR0 | 52 |
| 6.247 | 6.721 | 0.375 | 0.408 | 0.538 | 6.251 | 438 | X | | | | XXXX | B0XX | TR0 | 53 |
| 6.497 | 6.971 | 0.375 | 0.408 | 0.538 | 6.501 | 439 | X | | X | | XXXX | B0XX | TR0 | 54 |
| 6.747 | 7.221 | 0.375 | 0.408 | 0.538 | 6.751 | 440 | X | | | | XXXX | B0XX | TR0 | 55 |
| 6.997 | 7.471 | 0.375 | 0.408 | 0.538 | 7.001 | 441 | X | | | | XXXX | B0XX | TR0 | 56 |
| 7.247 | 7.721 | 0.375 | 0.408 | 0.538 | 7.251 | 442 | X | | | | XXXX | B0XX | TR0 | 57 |
| 7.497 | 7.971 | 0.375 | 0.408 | 0.538 | 7.501 | 443 | X | | X | | XXXX | B0XX | TR0 | 58 |
| 7.997 | 8.471 | 0.375 | 0.408 | 0.538 | 8.001 | 445 | X | | | | XXXX | B0XX | TR0 | 59 |
| 8.997 | 9.471 | 0.375 | 0.408 | 0.538 | 9.001 | 447 | X | | | | XXXX | B0XX | TR0 | 60 |
| 9.497 | 9.971 | 0.375 | 0.408 | 0.538 | 9.501 | 448 | X | | | | XXXX | B0XX | TR0 | 61 |
| 9.997 | 10.471 | 0.375 | 0.408 | 0.538 | 10.001 | 449 | X | | | | XXXX | B0XX | TR0 | 62 |
| 10.997 | 11.471 | 0.375 | 0.408 | 0.538 | 11.001 | 451 | X | | | | XXXX | B0XX | TR0 | 63 |
| 11.497 | 11.971 | 0.375 | 0.408 | 0.538 | 11.501 | 452 | | | | | XXXX | B0XX | TR0 | 64 |
| 11.997 | 12.471 | 0.375 | 0.408 | 0.538 | 12.001 | 453 | X | | | | XXXX | B0XX | TR0 | 65 |

* If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**Chart reflects availability for TR0 only. For availability of TRS and TRT, please contact your local Parker Seal representative. For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Rod Seal ON Profile

Catalog EPS 5370/USA

5



ON Cross-Section

ON Profile, PTFE Rod Cap Seal

The Parker ON profile is a bi-directional PTFE rod seal for use in low to medium duty hydraulic systems. The ON profile is a simple two piece design comprised of a standard size Parker o-ring energizing a wear resistant PTFE cap. The ON profile offers long wear and low friction, and because of its short assembly length, requires minimal space in the rod housing. The seal is commonly used in applications such as mobile hydraulics, machine tools, injection molding machines and hydraulic presses. Parker's ON profile will retrofit non-Parker seals of similar design.

The ON profile may be ordered without the energizer by omitting the energizer code. See part number nomenclature.

Technical Data

| Standard Materials* | | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------|--------------------------------------|-----------------------|------------------------|
| Cap | | | | |
| 0401 | 40% bronze-filled PTFE | -200°F to 575°F (-129°C to 302°C) | 5000 psi (344 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | | |
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |


***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE (Table 3-4) and energizer (Table 3-5) materials.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

Options

Notched side walls: Notches can be added to the side walls of the PTFE cap. This can help to optimize the seal's response to fluid pressure. Notched side walls help ensure that fluid pressure fills the cavity between the side face of the seal and the side face of the seal gland. Consult your local Parker Seal representative for the availability and cost to add side notches to the ON profile.

N = Notched walls 

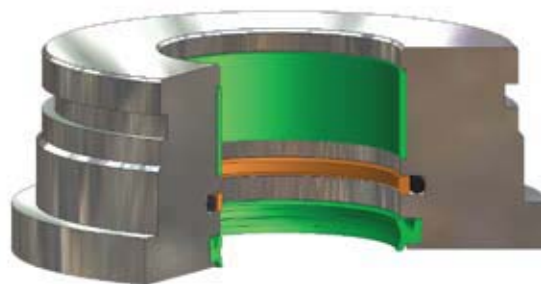


ON installed in Rod Gland


09/01/07

Part Number Nomenclature — ON Profile

Table 5-21. ON Profile — Inch

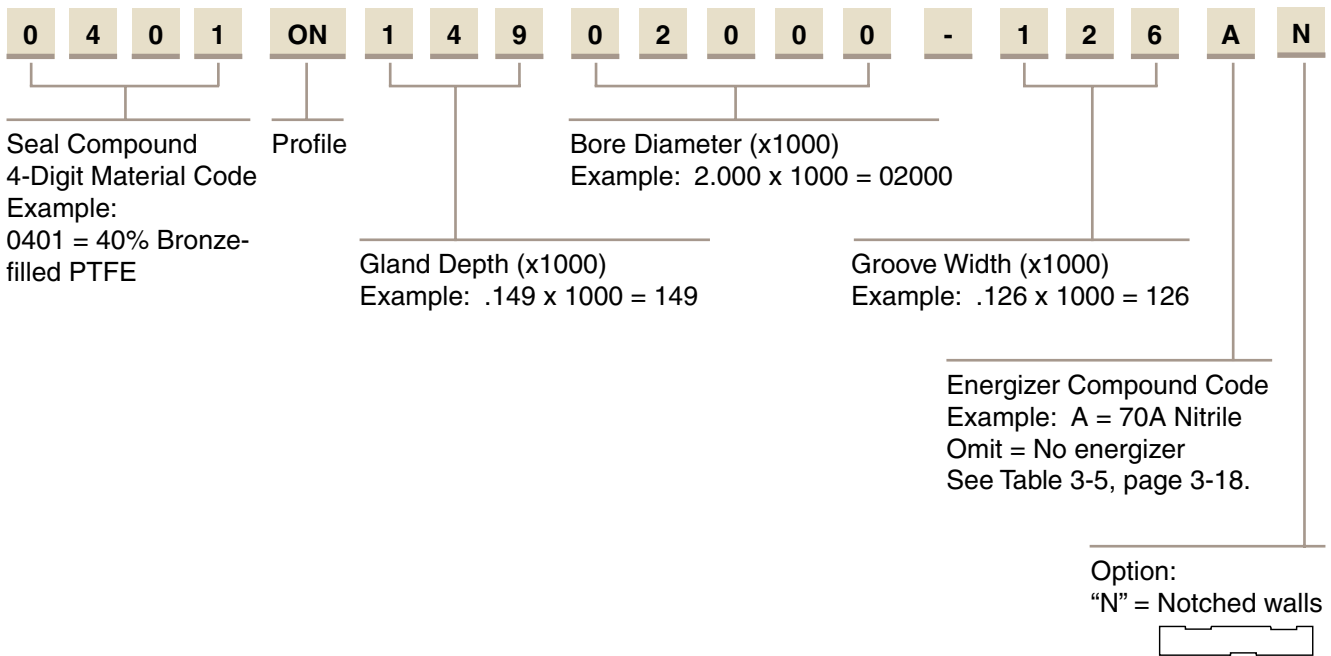

Gland Dimensions — ON Profile

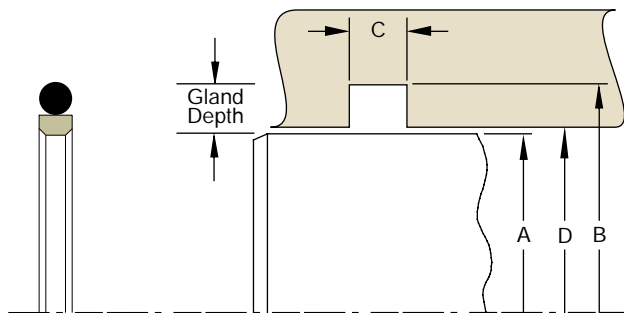

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-23. ON Profile — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------|-------------------|----------------|--------------------|--------------------|---------------------|
| + .000/- .001 | + .001/- .000 | + .005/- .000 | + .001/- .000 | | |
| 0.500 | 0.674 | 0.081 | 0.501 | 015 | 0401ON08700500-081A |
| 0.562 | 0.736 | 0.081 | 0.563 | 016 | 0401ON08700562-081A |
| 0.625 | 0.799 | 0.081 | 0.626 | 017 | 0401ON08700625-081A |
| 0.687 | 0.861 | 0.081 | 0.688 | 018 | 0401ON08700687-081A |
| 0.750 | 0.924 | 0.081 | 0.751 | 019 | 0401ON08700750-081A |
| 0.812 | 0.986 | 0.081 | 0.813 | 020 | 0401ON08700812-081A |
| 0.875 | 1.049 | 0.081 | 0.876 | 021 | 0401ON08700875-081A |
| 0.937 | 1.111 | 0.081 | 0.938 | 022 | 0401ON08700937-081A |

*If used with wear rings, refer to wear ring throat diameter, see [Section 9](#).
For custom groove calculations, see [Appendix C](#).

Table 5-23. ON Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .002/- .000 | | |
| 1.000 | 1.298 | 0.126 | 1.001 | 122 | 0401ON14901000-126A |
| 1.062 | 1.360 | 0.126 | 1.063 | 123 | 0401ON14901062-126A |
| 1.125 | 1.423 | 0.126 | 1.126 | 124 | 0401ON14901125-126A |
| 1.187 | 1.485 | 0.126 | 1.188 | 125 | 0401ON14901187-126A |
| 1.250 | 1.548 | 0.126 | 1.251 | 126 | 0401ON14901250-126A |
| 1.312 | 1.610 | 0.126 | 1.313 | 127 | 0401ON14901312-126A |
| 1.375 | 1.673 | 0.126 | 1.376 | 128 | 0401ON14901375-126A |
| 1.437 | 1.735 | 0.126 | 1.438 | 129 | 0401ON14901437-126A |
| 1.500 | 1.798 | 0.126 | 1.501 | 130 | 0401ON14901500-126A |
| 1.562 | 1.860 | 0.126 | 1.563 | 131 | 0401ON14901562-126A |
| 1.625 | 1.923 | 0.126 | 1.626 | 132 | 0401ON14901625-126A |
| 1.687 | 1.985 | 0.126 | 1.688 | 133 | 0401ON14901687-126A |
| 1.750 | 2.048 | 0.126 | 1.751 | 134 | 0401ON14901750-126A |
| 1.875 | 2.173 | 0.126 | 1.876 | 136 | 0401ON14901875-126A |
| + .000/- .003 | + .003/- .000 | + .005/- .000 | + .003/- .000 | | |
| 2.000 | 2.424 | 0.166 | 2.001 | 228 | 0401ON21202000-166A |
| 2.125 | 2.549 | 0.166 | 2.126 | 228 | 0401ON21202125-166A |
| 2.250 | 2.674 | 0.166 | 2.251 | 229 | 0401ON21202250-166A |
| 2.375 | 2.799 | 0.166 | 2.376 | 230 | 0401ON21202375-166A |
| 2.500 | 2.924 | 0.166 | 2.501 | 231 | 0401ON21202500-166A |
| 2.625 | 3.049 | 0.166 | 2.626 | 232 | 0401ON21202625-166A |
| 2.750 | 3.174 | 0.166 | 2.751 | 233 | 0401ON21202750-166A |
| 2.875 | 3.299 | 0.166 | 2.876 | 234 | 0401ON21202875-166A |
| 3.000 | 3.424 | 0.166 | 3.001 | 235 | 0401ON21203000-166A |
| 3.125 | 3.549 | 0.166 | 3.126 | 236 | 0401ON21203125-166A |
| 3.250 | 3.674 | 0.166 | 3.251 | 237 | 0401ON21203250-166A |
| 3.375 | 3.799 | 0.166 | 3.376 | 238 | 0401ON21203375-166A |
| 3.500 | 3.924 | 0.166 | 3.501 | 239 | 0401ON21203500-166A |
| 3.625 | 4.049 | 0.166 | 3.626 | 240 | 0401ON21203625-166A |
| 3.750 | 4.174 | 0.166 | 3.751 | 241 | 0401ON21203750-166A |
| 3.875 | 4.299 | 0.166 | 3.876 | 242 | 0401ON21203875-166A |
| + .000/- .004 | + .004/- .000 | + .005/- .000 | + .004/- .000 | | |
| 4.000 | 4.616 | 0.247 | 4.002 | 347 | 0401ON30804000-247A |
| 4.125 | 4.741 | 0.247 | 4.127 | 348 | 0401ON30804125-247A |
| 4.250 | 4.866 | 0.247 | 4.252 | 349 | 0401ON30804250-247A |
| 4.375 | 4.991 | 0.247 | 4.377 | 350 | 0401ON30804375-247A |
| 4.500 | 5.116 | 0.247 | 4.502 | 351 | 0401ON30804500-247A |
| 4.625 | 5.241 | 0.247 | 4.627 | 352 | 0401ON30804625-247A |
| 4.750 | 5.366 | 0.247 | 4.752 | 353 | 0401ON30804750-247A |
| 4.875 | 5.491 | 0.247 | 4.877 | 354 | 0401ON30804875-247A |
| 5.000 | 5.616 | 0.247 | 5.002 | 355 | 0401ON30805000-247A |
| 5.125 | 5.741 | 0.247 | 5.127 | 356 | 0401ON30805125-247A |
| 5.250 | 5.866 | 0.247 | 5.252 | 357 | 0401ON30805250-247A |
| 5.375 | 5.991 | 0.247 | 5.377 | 358 | 0401ON30805375-247A |
| 5.500 | 6.116 | 0.247 | 5.502 | 359 | 0401ON30805500-247A |
| 5.625 | 6.241 | 0.247 | 5.627 | 360 | 0401ON30805625-247A |
| 5.750 | 6.366 | 0.247 | 5.752 | 361 | 0401ON30805750-247A |
| 5.875 | 6.491 | 0.247 | 5.877 | 361 | 0401ON30805875-247A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

Table 5-23. ON Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| + .000/- .004 | + .004/- .000 | + .005/- .000 | + .004/- .000 | | |
| 6.000 | 6.616 | 0.247 | 6.002 | 362 | 0401ON30806000-247A |
| 6.125 | 6.741 | 0.247 | 6.127 | 362 | 0401ON30806125-247A |
| 6.250 | 6.866 | 0.247 | 6.252 | 363 | 0401ON30806250-247A |
| 6.375 | 6.991 | 0.247 | 6.377 | 363 | 0401ON30806375-247A |
| 6.500 | 7.116 | 0.247 | 6.502 | 364 | 0401ON30806500-247A |
| 6.750 | 7.366 | 0.247 | 6.752 | 365 | 0401ON30806750-247A |
| 7.000 | 7.616 | 0.247 | 7.002 | 366 | 0401ON30807000-247A |
| 7.250 | 7.866 | 0.247 | 7.252 | 367 | 0401ON30807250-247A |
| 7.500 | 8.116 | 0.247 | 7.502 | 368 | 0401ON30807500-247A |
| 7.750 | 8.366 | 0.247 | 7.752 | 369 | 0401ON30807750-247A |
| + .000/- .005 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 8.000 | 8.830 | 0.320 | 8.002 | 445 | 0401ON41508000-320A |
| 8.250 | 9.080 | 0.320 | 8.252 | 446 | 0401ON41508250-320A |
| 8.500 | 9.330 | 0.320 | 8.502 | 446 | 0401ON41508500-320A |
| 9.000 | 9.830 | 0.320 | 9.002 | 447 | 0401ON41509000-320A |
| 9.500 | 10.330 | 0.320 | 9.502 | 448 | 0401ON41509500-320A |
| 10.000 | 10.830 | 0.320 | 10.002 | 449 | 0401ON41510000-320A |
| 10.500 | 11.330 | 0.320 | 10.502 | 450 | 0401ON41510500-320A |
| 11.000 | 11.830 | 0.320 | 11.002 | 451 | 0401ON41511000-320A |
| 11.500 | 12.330 | 0.320 | 11.502 | 452 | 0401ON41511500-320A |
| 12.000 | 12.830 | 0.320 | 12.002 | 453 | 0401ON41512000-320A |
| 12.500 | 13.330 | 0.320 | 12.502 | 454 | 0401ON41512500-320A |
| 13.000 | 13.830 | 0.320 | 13.002 | 455 | 0401ON41513000-320A |
| 13.500 | 14.330 | 0.320 | 13.502 | 456 | 0401ON41513500-320A |
| 14.000 | 14.830 | 0.320 | 14.002 | 457 | 0401ON41514000-320A |
| 14.500 | 15.330 | 0.320 | 14.502 | 458 | 0401ON41514500-320A |
| 15.000 | 15.830 | 0.320 | 15.002 | 459 | 0401ON41515000-320A |
| 15.500 | 16.330 | 0.320 | 15.502 | 460 | 0401ON41515500-320A |
| 16.000 | 16.830 | 0.320 | 16.002 | 461 | 0401ON41516000-320A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.



CR Profile, PTFE Rod Cap Seal to Retrofit O-ring Glands

The Parker CR profile is a cap seal with anti-extrusion, low friction and low wear features. The seal is a bi-directional rod seal for use in pneumatic and low to medium duty applications. Because of its short assembly length, it requires minimal space in the rod housing. The three CR profiles will fit into standard o-ring grooves without modification. Parker's CR profiles will retrofit non-Parker seals of similar design.

- CR0 fits a standard o-ring groove
- CR1 fits an o-ring groove designed for one back-up ring
- CR2 fits an o-ring groove designed for two back-up rings

The CR profile may be ordered without the energizer by omitting the energizer code. See part number nomenclature.




CR Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------|--------------------------------------|-----------------------|------------------------|
| Cap | | | |
| 0401 40% bronze filled PTFE | -200°F to 575°F (-129°C to 302°C) | 5000 psi (344 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | |
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For pneumatic applications, compound 0102 is recommended. For applications that may require an alternate material, please see Section 3 for alternate PTFE (Table 3-4) and energizer (Table 3-5) materials.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

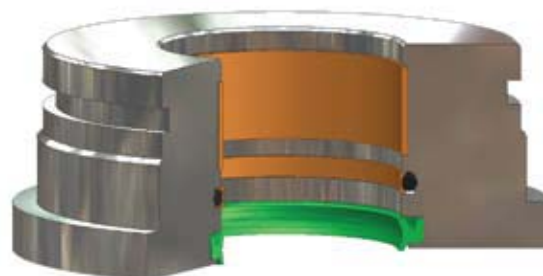

CR installed in Rod Gland

Technical Data (Continued)


Options

Notched side walls: Notches can be added to the side walls of the PTFE cap. This can help to optimize the seal's response to fluid pressure. Notched side walls help ensure that fluid pressure fills the cavity between the side face of the seal and the side face of the seal gland. Consult your local Parker Seal representative for the availability and cost to add side notches to the CR profile.


N = Notched walls 

Part Number Nomenclature — CR Profile

Table 5-24. CR Profile — Inch

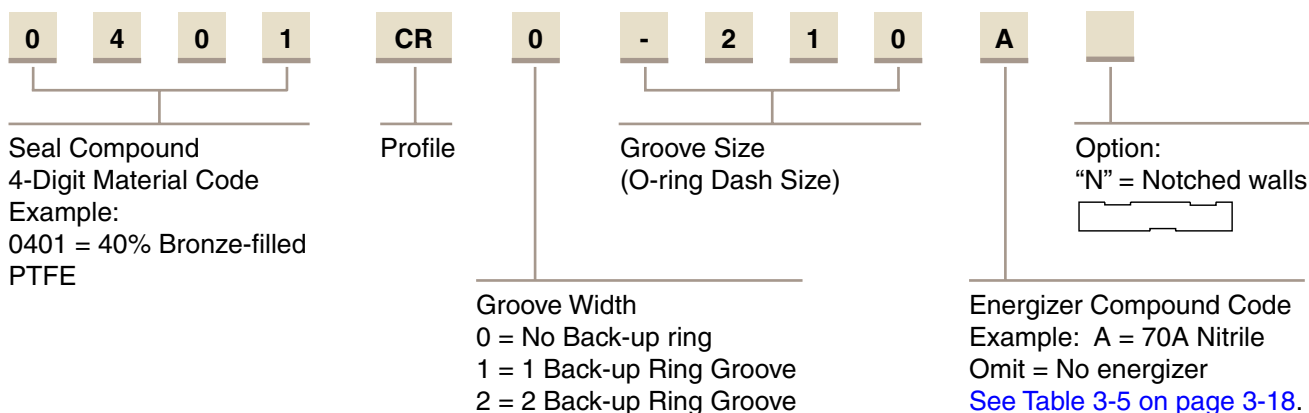

Gland Dimensions — CR Profile

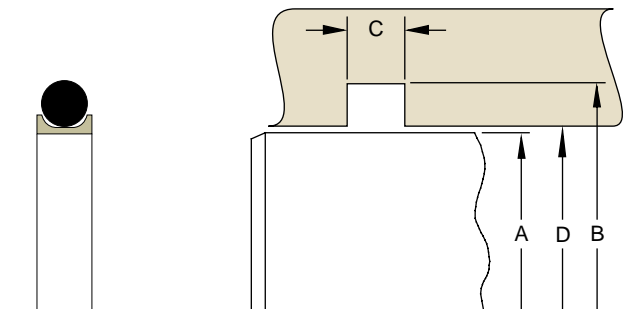

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-25. CR Profile — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------|-------------------|----------------------|----------------------|----------------------|--------------------|--------------------|--|
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.001/-0.000 | | |
| 0.125 | 0.235 | 0.093 | 0.138 | 0.205 | 0.126 | 006 | 0401CR X-006A |
| 0.156 | 0.266 | 0.093 | 0.138 | 0.205 | 0.157 | 007 | 0401CR X-007A |
| 0.187 | 0.297 | 0.093 | 0.138 | 0.205 | 0.188 | 008 | 0401CR X-008A |
| 0.219 | 0.329 | 0.093 | 0.138 | 0.205 | 0.220 | 009 | 0401CR X-009A |
| 0.250 | 0.360 | 0.093 | 0.138 | 0.205 | 0.251 | 010 | 0401CR X-010A |
| 0.312 | 0.422 | 0.093 | 0.138 | 0.205 | 0.313 | 011 | 0401CR X-011A |
| 0.375 | 0.485 | 0.093 | 0.138 | 0.205 | 0.376 | 012 | 0401CR X-012A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).

Table 5-25. CR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------------|--|
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.001/-0.000 | | |
| 0.437 | 0.547 | 0.093 | 0.138 | 0.205 | 0.438 | 013 | 0401CR X-013A |
| 0.500 | 0.610 | 0.093 | 0.138 | 0.205 | 0.501 | 014 | 0401CR X-014A |
| 0.562 | 0.672 | 0.093 | 0.138 | 0.205 | 0.563 | 015 | 0401CR X-015A |
| 0.625 | 0.735 | 0.093 | 0.138 | 0.205 | 0.626 | 016 | 0401CR X-016A |
| 0.687 | 0.797 | 0.093 | 0.138 | 0.205 | 0.688 | 017 | 0401CR X-017A |
| 0.750 | 0.860 | 0.093 | 0.138 | 0.205 | 0.751 | 018 | 0401CR X-018A |
| 0.812 | 0.922 | 0.093 | 0.138 | 0.205 | 0.813 | 019 | 0401CR X-019A |
| 0.875 | 0.985 | 0.093 | 0.138 | 0.205 | 0.876 | 020 | 0401CR X-020A |
| 0.937 | 1.047 | 0.093 | 0.138 | 0.205 | 0.938 | 021 | 0401CR X-021A |
| 1.000 | 1.110 | 0.093 | 0.138 | 0.205 | 1.001 | 022 | 0401CR X-022A |
| 1.062 | 1.172 | 0.093 | 0.138 | 0.205 | 1.063 | 023 | 0401CR X-023A |
| 1.125 | 1.235 | 0.093 | 0.138 | 0.205 | 1.126 | 024 | 0401CR X-024A |
| 1.187 | 1.297 | 0.093 | 0.138 | 0.205 | 1.188 | 025 | 0401CR X-025A |
| 1.250 | 1.360 | 0.093 | 0.138 | 0.205 | 1.251 | 026 | 0401CR X-026A |
| 1.312 | 1.422 | 0.093 | 0.138 | 0.205 | 1.313 | 027 | 0401CR X-027A |
| 1.375 | 1.485 | 0.093 | 0.138 | 0.205 | 1.376 | 028 | 0401CR X-028A |
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.002/-0.000 | | |
| 0.125 | 0.301 | 0.140 | 0.171 | 0.238 | 0.126 | 104 | 0401CR X-104A |
| 0.156 | 0.332 | 0.140 | 0.171 | 0.238 | 0.157 | 105 | 0401CR X-105A |
| 0.187 | 0.363 | 0.140 | 0.171 | 0.238 | 0.188 | 106 | 0401CR X-106A |
| 0.218 | 0.394 | 0.140 | 0.171 | 0.238 | 0.219 | 107 | 0401CR X-107A |
| 0.250 | 0.426 | 0.140 | 0.171 | 0.238 | 0.251 | 108 | 0401CR X-108A |
| 0.312 | 0.488 | 0.140 | 0.171 | 0.238 | 0.313 | 109 | 0401CR X-109A |
| 0.375 | 0.551 | 0.140 | 0.171 | 0.238 | 0.376 | 110 | 0401CR X-110A |
| 0.437 | 0.613 | 0.140 | 0.171 | 0.238 | 0.438 | 111 | 0401CR X-111A |
| 0.500 | 0.676 | 0.140 | 0.171 | 0.238 | 0.501 | 112 | 0401CR X-112A |
| 0.562 | 0.738 | 0.140 | 0.171 | 0.238 | 0.563 | 113 | 0401CR X-113A |
| 0.625 | 0.801 | 0.140 | 0.171 | 0.238 | 0.626 | 114 | 0401CR X-114A |
| 0.687 | 0.863 | 0.140 | 0.171 | 0.238 | 0.688 | 115 | 0401CR X-115A |
| 0.750 | 0.926 | 0.140 | 0.171 | 0.238 | 0.751 | 116 | 0401CR X-116A |
| 0.812 | 0.988 | 0.140 | 0.171 | 0.238 | 0.813 | 117 | 0401CR X-117A |
| 0.875 | 1.051 | 0.140 | 0.171 | 0.238 | 0.876 | 118 | 0401CR X-118A |
| 0.937 | 1.113 | 0.140 | 0.171 | 0.238 | 0.938 | 119 | 0401CR X-119A |
| 1.000 | 1.176 | 0.140 | 0.171 | 0.238 | 1.001 | 120 | 0401CR X-120A |
| 1.062 | 1.238 | 0.140 | 0.171 | 0.238 | 1.063 | 121 | 0401CR X-121A |
| 1.125 | 1.301 | 0.140 | 0.171 | 0.238 | 1.126 | 122 | 0401CR X-122A |
| 1.187 | 1.363 | 0.140 | 0.171 | 0.238 | 1.188 | 123 | 0401CR X-123A |
| 1.250 | 1.426 | 0.140 | 0.171 | 0.238 | 1.251 | 124 | 0401CR X-124A |
| 1.312 | 1.488 | 0.140 | 0.171 | 0.238 | 1.313 | 125 | 0401CR X-125A |
| 1.375 | 1.551 | 0.140 | 0.171 | 0.238 | 1.376 | 126 | 0401CR X-126A |
| 1.437 | 1.613 | 0.140 | 0.171 | 0.238 | 1.439 | 127 | 0401CR X-127A |
| 1.500 | 1.676 | 0.140 | 0.171 | 0.238 | 1.502 | 128 | 0401CR X-128A |
| 1.562 | 1.738 | 0.140 | 0.171 | 0.238 | 1.564 | 129 | 0401CR X-129A |
| 1.625 | 1.801 | 0.140 | 0.171 | 0.238 | 1.627 | 130 | 0401CR X-130A |
| 1.687 | 1.863 | 0.140 | 0.171 | 0.238 | 1.689 | 131 | 0401CR X-131A |
| 1.750 | 1.926 | 0.140 | 0.171 | 0.238 | 1.752 | 132 | 0401CR X-132A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

Table 5-25. CR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|-------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------|--|
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .003/- .000 | | |
| 1.812 | 1.988 | 0.140 | 0.171 | 0.238 | 1.814 | 133 | 0401CR X-133A |
| 1.875 | 2.051 | 0.140 | 0.171 | 0.238 | 1.877 | 134 | 0401CR X-134A |
| 1.937 | 2.113 | 0.140 | 0.171 | 0.238 | 1.939 | 135 | 0401CR X-135A |
| 2.000 | 2.176 | 0.140 | 0.171 | 0.238 | 2.002 | 136 | 0401CR X-136A |
| 2.062 | 2.238 | 0.140 | 0.171 | 0.238 | 2.064 | 137 | 0401CR X-137A |
| 2.125 | 2.301 | 0.140 | 0.171 | 0.238 | 2.127 | 138 | 0401CR X-138A |
| 2.187 | 2.363 | 0.140 | 0.171 | 0.238 | 2.189 | 139 | 0401CR X-139A |
| 2.250 | 2.426 | 0.140 | 0.171 | 0.238 | 2.252 | 140 | 0401CR X-140A |
| 2.312 | 2.488 | 0.140 | 0.171 | 0.238 | 2.314 | 141 | 0401CR X-141A |
| 2.375 | 2.551 | 0.140 | 0.171 | 0.238 | 2.377 | 142 | 0401CR X-142A |
| 2.437 | 2.613 | 0.140 | 0.171 | 0.238 | 2.439 | 143 | 0401CR X-143A |
| 2.500 | 2.676 | 0.140 | 0.171 | 0.238 | 2.502 | 144 | 0401CR X-144A |
| 2.562 | 2.738 | 0.140 | 0.171 | 0.238 | 2.564 | 145 | 0401CR X-145A |
| 2.625 | 2.801 | 0.140 | 0.171 | 0.238 | 2.627 | 146 | 0401CR X-146A |
| 2.687 | 2.863 | 0.140 | 0.171 | 0.238 | 2.689 | 147 | 0401CR X-147A |
| 2.750 | 2.926 | 0.140 | 0.171 | 0.238 | 2.752 | 148 | 0401CR X-148A |
| 2.812 | 2.988 | 0.140 | 0.171 | 0.238 | 2.814 | 149 | 0401CR X-149A |
| 2.875 | 3.051 | 0.140 | 0.171 | 0.238 | 2.877 | 150 | 0401CR X-150A |
| 3.000 | 3.176 | 0.140 | 0.171 | 0.238 | 3.002 | 151 | 0401CR X-151A |
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .002/- .000 | | |
| 0.187 | 0.429 | 0.187 | 0.208 | 0.275 | 0.188 | 201 | 0401CR X-201A |
| 0.250 | 0.492 | 0.187 | 0.208 | 0.275 | 0.251 | 202 | 0401CR X-202A |
| 0.312 | 0.554 | 0.187 | 0.208 | 0.275 | 0.313 | 203 | 0401CR X-203A |
| 0.375 | 0.617 | 0.187 | 0.208 | 0.275 | 0.376 | 204 | 0401CR X-204A |
| 0.437 | 0.679 | 0.187 | 0.208 | 0.275 | 0.438 | 205 | 0401CR X-205A |
| 0.500 | 0.742 | 0.187 | 0.208 | 0.275 | 0.501 | 206 | 0401CR X-206A |
| 0.562 | 0.804 | 0.187 | 0.208 | 0.275 | 0.563 | 207 | 0401CR X-207A |
| 0.625 | 0.867 | 0.187 | 0.208 | 0.275 | 0.626 | 208 | 0401CR X-208A |
| 0.687 | 0.929 | 0.187 | 0.208 | 0.275 | 0.688 | 209 | 0401CR X-209A |
| 0.750 | 0.992 | 0.187 | 0.208 | 0.275 | 0.751 | 210 | 0401CR X-210A |
| 0.812 | 1.054 | 0.187 | 0.208 | 0.275 | 0.813 | 211 | 0401CR X-211A |
| 0.875 | 1.117 | 0.187 | 0.208 | 0.275 | 0.876 | 212 | 0401CR X-212A |
| 0.937 | 1.179 | 0.187 | 0.208 | 0.275 | 0.938 | 213 | 0401CR X-213A |
| 1.000 | 1.242 | 0.187 | 0.208 | 0.275 | 1.001 | 214 | 0401CR X-214A |
| 1.062 | 1.304 | 0.187 | 0.208 | 0.275 | 1.063 | 215 | 0401CR X-215A |
| 1.125 | 1.367 | 0.187 | 0.208 | 0.275 | 1.126 | 216 | 0401CR X-216A |
| 1.187 | 1.429 | 0.187 | 0.208 | 0.275 | 1.188 | 217 | 0401CR X-217A |
| 1.250 | 1.492 | 0.187 | 0.208 | 0.275 | 1.251 | 218 | 0401CR X-218A |
| 1.312 | 1.554 | 0.187 | 0.208 | 0.275 | 1.313 | 219 | 0401CR X-219A |
| 1.375 | 1.617 | 0.187 | 0.208 | 0.275 | 1.376 | 220 | 0401CR X-220A |
| 1.437 | 1.679 | 0.187 | 0.208 | 0.275 | 1.438 | 221 | 0401CR X-221A |
| 1.500 | 1.742 | 0.187 | 0.208 | 0.275 | 1.501 | 222 | 0401CR X-222A |
| 1.625 | 1.867 | 0.187 | 0.208 | 0.275 | 1.627 | 223 | 0401CR X-223A |
| 1.750 | 1.992 | 0.187 | 0.208 | 0.275 | 1.752 | 224 | 0401CR X-224A |
| 1.875 | 2.117 | 0.187 | 0.208 | 0.275 | 1.877 | 225 | 0401CR X-225A |
| 2.000 | 2.242 | 0.187 | 0.208 | 0.275 | 2.002 | 226 | 0401CR X-226A |
| 2.125 | 2.367 | 0.187 | 0.208 | 0.275 | 2.127 | 227 | 0401CR X-227A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 5-25. CR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|-------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------|--|
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.002/-0.000 | | |
| 2.250 | 2.492 | 0.187 | 0.208 | 0.275 | 2.252 | 228 | 0401CR X-228A |
| 2.375 | 2.617 | 0.187 | 0.208 | 0.275 | 2.377 | 229 | 0401CR X-229A |
| 2.500 | 2.742 | 0.187 | 0.208 | 0.275 | 2.502 | 230 | 0401CR X-230A |
| 2.625 | 2.867 | 0.187 | 0.208 | 0.275 | 2.627 | 231 | 0401CR X-231A |
| 2.750 | 2.992 | 0.187 | 0.208 | 0.275 | 2.752 | 232 | 0401CR X-232A |
| 2.875 | 3.117 | 0.187 | 0.208 | 0.275 | 2.877 | 233 | 0401CR X-233A |
| 3.000 | 3.242 | 0.187 | 0.208 | 0.275 | 3.002 | 234 | 0401CR X-234A |
| 3.125 | 3.367 | 0.187 | 0.208 | 0.275 | 3.127 | 235 | 0401CR X-235A |
| 3.250 | 3.492 | 0.187 | 0.208 | 0.275 | 3.252 | 236 | 0401CR X-236A |
| 3.375 | 3.617 | 0.187 | 0.208 | 0.275 | 3.377 | 237 | 0401CR X-237A |
| 3.500 | 3.742 | 0.187 | 0.208 | 0.275 | 3.502 | 238 | 0401CR X-238A |
| 3.625 | 3.867 | 0.187 | 0.208 | 0.275 | 3.627 | 239 | 0401CR X-239A |
| 3.750 | 3.992 | 0.187 | 0.208 | 0.275 | 3.752 | 240 | 0401CR X-240A |
| 3.875 | 4.117 | 0.187 | 0.208 | 0.275 | 3.877 | 241 | 0401CR X-241A |
| 4.000 | 4.242 | 0.187 | 0.208 | 0.275 | 4.002 | 242 | 0401CR X-242A |
| 4.125 | 4.367 | 0.187 | 0.208 | 0.275 | 4.127 | 243 | 0401CR X-243A |
| 4.250 | 4.492 | 0.187 | 0.208 | 0.275 | 4.252 | 244 | 0401CR X-244A |
| 4.375 | 4.617 | 0.187 | 0.208 | 0.275 | 4.377 | 245 | 0401CR X-245A |
| 4.500 | 4.742 | 0.187 | 0.208 | 0.275 | 4.503 | 246 | 0401CR X-246A |
| 4.625 | 4.867 | 0.187 | 0.208 | 0.275 | 4.628 | 247 | 0401CR X-247A |
| 4.750 | 4.992 | 0.187 | 0.208 | 0.275 | 4.753 | 248 | 0401CR X-248A |
| 4.875 | 5.117 | 0.187 | 0.208 | 0.275 | 4.878 | 249 | 0401CR X-249A |
| 5.000 | 5.242 | 0.187 | 0.208 | 0.275 | 5.003 | 250 | 0401CR X-250A |
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.002/-0.000 | | |
| 0.437 | 0.807 | 0.281 | 0.311 | 0.410 | 0.439 | 309 | 0401CR X-309A |
| 0.500 | 0.870 | 0.281 | 0.311 | 0.410 | 0.502 | 310 | 0401CR X-310A |
| 0.562 | 0.932 | 0.281 | 0.311 | 0.410 | 0.564 | 311 | 0401CR X-311A |
| 0.625 | 0.995 | 0.281 | 0.311 | 0.410 | 0.627 | 312 | 0401CR X-312A |
| 0.687 | 1.057 | 0.281 | 0.311 | 0.410 | 0.689 | 313 | 0401CR X-313A |
| 0.750 | 1.120 | 0.281 | 0.311 | 0.410 | 0.752 | 314 | 0401CR X-314A |
| 0.812 | 1.182 | 0.281 | 0.311 | 0.410 | 0.814 | 315 | 0401CR X-315A |
| 0.875 | 1.245 | 0.281 | 0.311 | 0.410 | 0.877 | 316 | 0401CR X-316A |
| 0.937 | 1.307 | 0.281 | 0.311 | 0.410 | 0.939 | 317 | 0401CR X-317A |
| 1.000 | 1.370 | 0.281 | 0.311 | 0.410 | 1.002 | 318 | 0401CR X-318A |
| 1.062 | 1.432 | 0.281 | 0.311 | 0.410 | 1.064 | 319 | 0401CR X-319A |
| 1.125 | 1.495 | 0.281 | 0.311 | 0.410 | 1.127 | 320 | 0401CR X-320A |
| 1.187 | 1.557 | 0.281 | 0.311 | 0.410 | 1.189 | 321 | 0401CR X-321A |
| 1.250 | 1.620 | 0.281 | 0.311 | 0.410 | 1.252 | 322 | 0401CR X-322A |
| 1.312 | 1.682 | 0.281 | 0.311 | 0.410 | 1.314 | 323 | 0401CR X-323A |
| 1.375 | 1.745 | 0.281 | 0.311 | 0.410 | 1.377 | 324 | 0401CR X-324A |
| 1.500 | 1.870 | 0.281 | 0.311 | 0.410 | 1.502 | 325 | 0401CR X-325A |
| 1.625 | 1.995 | 0.281 | 0.311 | 0.410 | 1.627 | 326 | 0401CR X-326A |
| 1.750 | 2.120 | 0.281 | 0.311 | 0.410 | 1.752 | 327 | 0401CR X-327A |
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.002/-0.000 | | |
| 1.875 | 2.245 | 0.281 | 0.311 | 0.410 | 1.878 | 328 | 0401CR X-328A |
| 2.000 | 2.370 | 0.281 | 0.311 | 0.410 | 2.003 | 329 | 0401CR X-329A |
| 2.125 | 2.495 | 0.281 | 0.311 | 0.410 | 2.128 | 330 | 0401CR X-330A |
| 2.250 | 2.620 | 0.281 | 0.311 | 0.410 | 2.253 | 331 | 0401CR X-331A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

09/01/07



Table 5-25. CR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|-------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------|--|
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .002/- .000 | | |
| 2.375 | 2.745 | 0.281 | 0.311 | 0.410 | 2.378 | 332 | 0401CR X-332A |
| 2.500 | 2.870 | 0.281 | 0.311 | 0.410 | 2.503 | 333 | 0401CR X-333A |
| 2.625 | 2.995 | 0.281 | 0.311 | 0.410 | 2.628 | 334 | 0401CR X-334A |
| 2.750 | 3.120 | 0.281 | 0.311 | 0.410 | 2.753 | 335 | 0401CR X-335A |
| 2.875 | 3.245 | 0.281 | 0.311 | 0.410 | 2.878 | 336 | 0401CR X-336A |
| 3.000 | 3.370 | 0.281 | 0.311 | 0.410 | 3.003 | 337 | 0401CR X-337A |
| 3.125 | 3.495 | 0.281 | 0.311 | 0.410 | 3.128 | 338 | 0401CR X-338A |
| 3.250 | 3.620 | 0.281 | 0.311 | 0.410 | 3.253 | 339 | 0401CR X-339A |
| 3.375 | 3.745 | 0.281 | 0.311 | 0.410 | 3.378 | 340 | 0401CR X-340A |
| 3.500 | 3.870 | 0.281 | 0.311 | 0.410 | 3.503 | 341 | 0401CR X-341A |
| 3.625 | 3.995 | 0.281 | 0.311 | 0.410 | 3.628 | 342 | 0401CR X-342A |
| 3.750 | 4.120 | 0.281 | 0.311 | 0.410 | 3.753 | 343 | 0401CR X-343A |
| 3.875 | 4.245 | 0.281 | 0.311 | 0.410 | 3.878 | 344 | 0401CR X-344A |
| 4.000 | 4.370 | 0.281 | 0.311 | 0.410 | 4.003 | 345 | 0401CR X-345A |
| 4.125 | 4.495 | 0.281 | 0.311 | 0.410 | 4.128 | 346 | 0401CR X-346A |
| 4.250 | 4.620 | 0.281 | 0.311 | 0.410 | 4.253 | 347 | 0401CR X-347A |
| 4.375 | 4.745 | 0.281 | 0.311 | 0.410 | 4.378 | 348 | 0401CR X-348A |
| 4.500 | 4.870 | 0.281 | 0.311 | 0.410 | 4.503 | 349 | 0401CR X-349A |
| 4.625 | 4.995 | 0.281 | 0.311 | 0.410 | 4.628 | 350 | 0401CR X-350A |
| 4.750 | 5.120 | 0.281 | 0.311 | 0.410 | 4.753 | 351 | 0401CR X-351A |
| 4.875 | 5.245 | 0.281 | 0.311 | 0.410 | 4.878 | 352 | 0401CR X-352A |
| 5.000 | 5.370 | 0.281 | 0.311 | 0.410 | 5.003 | 353 | 0401CR X-353A |
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .003/- .000 | | |
| 4.500 | 4.974 | 0.375 | 0.408 | 0.538 | 4.504 | 425 | 0401CR X-425A |
| 4.625 | 5.099 | 0.375 | 0.408 | 0.538 | 4.629 | 426 | 0401CR X-426A |
| 4.750 | 5.224 | 0.375 | 0.408 | 0.538 | 4.754 | 427 | 0401CR X-427A |
| 4.875 | 5.349 | 0.375 | 0.408 | 0.538 | 4.879 | 428 | 0401CR X-428A |
| 5.000 | 5.474 | 0.375 | 0.408 | 0.538 | 5.004 | 429 | 0401CR X-429A |
| 5.125 | 5.599 | 0.375 | 0.408 | 0.538 | 5.129 | 430 | 0401CR X-430A |
| 5.250 | 5.724 | 0.375 | 0.408 | 0.538 | 5.254 | 431 | 0401CR X-431A |
| 5.375 | 5.849 | 0.375 | 0.408 | 0.538 | 5.379 | 432 | 0401CR X-432A |
| 5.500 | 5.974 | 0.375 | 0.408 | 0.538 | 5.504 | 433 | 0401CR X-433A |
| 5.625 | 6.099 | 0.375 | 0.408 | 0.538 | 5.629 | 434 | 0401CR X-434A |
| 5.750 | 6.224 | 0.375 | 0.408 | 0.538 | 5.754 | 435 | 0401CR X-435A |
| 5.875 | 6.349 | 0.375 | 0.408 | 0.538 | 5.879 | 436 | 0401CR X-436A |
| 6.000 | 6.474 | 0.375 | 0.408 | 0.538 | 6.004 | 437 | 0401CR X-437A |
| 6.250 | 6.724 | 0.375 | 0.408 | 0.538 | 6.254 | 438 | 0401CR X-438A |
| 6.500 | 6.974 | 0.375 | 0.408 | 0.538 | 6.504 | 439 | 0401CR X-439A |
| 6.750 | 7.224 | 0.375 | 0.408 | 0.538 | 6.754 | 440 | 0401CR X-440A |
| 7.000 | 7.474 | 0.375 | 0.408 | 0.538 | 7.004 | 441 | 0401CR X-441A |
| 7.250 | 7.724 | 0.375 | 0.408 | 0.538 | 7.254 | 442 | 0401CR X-442A |
| 7.500 | 7.974 | 0.375 | 0.408 | 0.538 | 7.504 | 443 | 0401CR X-443A |
| 7.750 | 8.224 | 0.375 | 0.408 | 0.538 | 7.754 | 444 | 0401CR X-444A |
| 8.000 | 8.474 | 0.375 | 0.408 | 0.538 | 8.004 | 445 | 0401CR X-445A |
| 8.500 | 8.974 | 0.375 | 0.408 | 0.538 | 8.504 | 446 | 0401CR X-446A |
| 9.000 | 9.474 | 0.375 | 0.408 | 0.538 | 9.004 | 447 | 0401CR X-447A |
| 9.500 | 9.974 | 0.375 | 0.408 | 0.538 | 9.504 | 448 | 0401CR X-448A |
| 10.000 | 10.474 | 0.375 | 0.408 | 0.538 | 10.004 | 449 | 0401CR X-449A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

09/01/07



CR Profile

Table 5-25. CR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width (CR0) | C Groove Width (CR1) | C Groove Width (CR2) | D Throat Diameter* | O-ring Dash Number | CR Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|-------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------|--|
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.004/-0.000 | | |
| 10.500 | 10.974 | 0.375 | 0.408 | 0.538 | 10.504 | 450 | 0401CR X-450A |
| 11.000 | 11.474 | 0.375 | 0.408 | 0.538 | 11.004 | 451 | 0401CR X-451A |
| 11.500 | 11.974 | 0.375 | 0.408 | 0.538 | 11.504 | 452 | 0401CR X-452A |
| 12.000 | 12.474 | 0.375 | 0.408 | 0.538 | 12.004 | 453 | 0401CR X-453A |
| 12.500 | 12.974 | 0.375 | 0.408 | 0.538 | 12.504 | 454 | 0401CR X-454A |
| 13.000 | 13.474 | 0.375 | 0.408 | 0.538 | 13.004 | 455 | 0401CR X-455A |
| 13.500 | 13.974 | 0.375 | 0.408 | 0.538 | 13.504 | 456 | 0401CR X-456A |
| 14.000 | 14.474 | 0.375 | 0.408 | 0.538 | 14.004 | 457 | 0401CR X-457A |
| 14.500 | 14.974 | 0.375 | 0.408 | 0.538 | 14.504 | 458 | 0401CR X-458A |
| 15.000 | 15.474 | 0.375 | 0.408 | 0.538 | 15.004 | 459 | 0401CR X-459A |
| 15.500 | 15.974 | 0.375 | 0.408 | 0.538 | 15.504 | 460 | 0401CR X-460A |
| 16.000 | 16.474 | 0.375 | 0.408 | 0.538 | 16.004 | 461 | 0401CR X-461A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

5

Rod Seal OC Profile

Catalog EPS 5370/USA



OC Profile, Compact PTFE Rod Cap Seal

The Parker OC profile is a bi-directional rod seal for use in pneumatic and low to medium duty hydraulic systems. The OC profile is a two piece design utilizing a rectangular PTFE cap and standard size Parker o-ring. The OC profile is an excellent choice for applications requiring a compact design. The unique properties of the modified PTFE provide added wear resistance for improved cycle life. Parker's OC profile will retrofit non-Parker seals of similar design.

The OC profile may be ordered without the energizer by omitting the energizer code. See part number nomenclature.

Technical Data


| Standard Materials* | | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|---------------|--------------------------------------|------------------------|------------------------|
| Cap | | | | |
| 0102 | Modified PTFE | -320°F to 450°F (-195°C to 282°C) | 1,500 psi (103 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | | |
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |


***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE (Table 3-4) and energizer (Table 3-5) materials.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

Options

Notched side walls: Notches can be added to the side walls of the PTFE cap. This can help to optimize the seal's response to fluid pressure. Notched side walls help ensure that fluid pressure fills the cavity between the side face of the seal and the side face of the seal gland. Consult your local Parker Seal representative for the availability and cost to add side notches to the OC profile.

N= Notched walls 

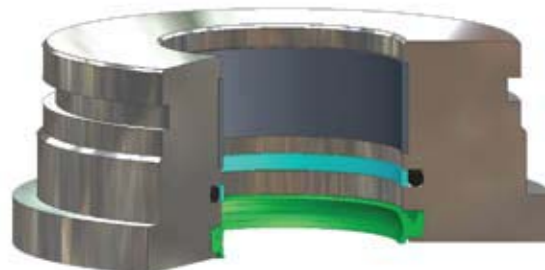


OC installed in Rod Gland

09/01/07

OC Profile


Part Number Nomenclature — OC Profile

Table 5-26. OC Profile — Inch

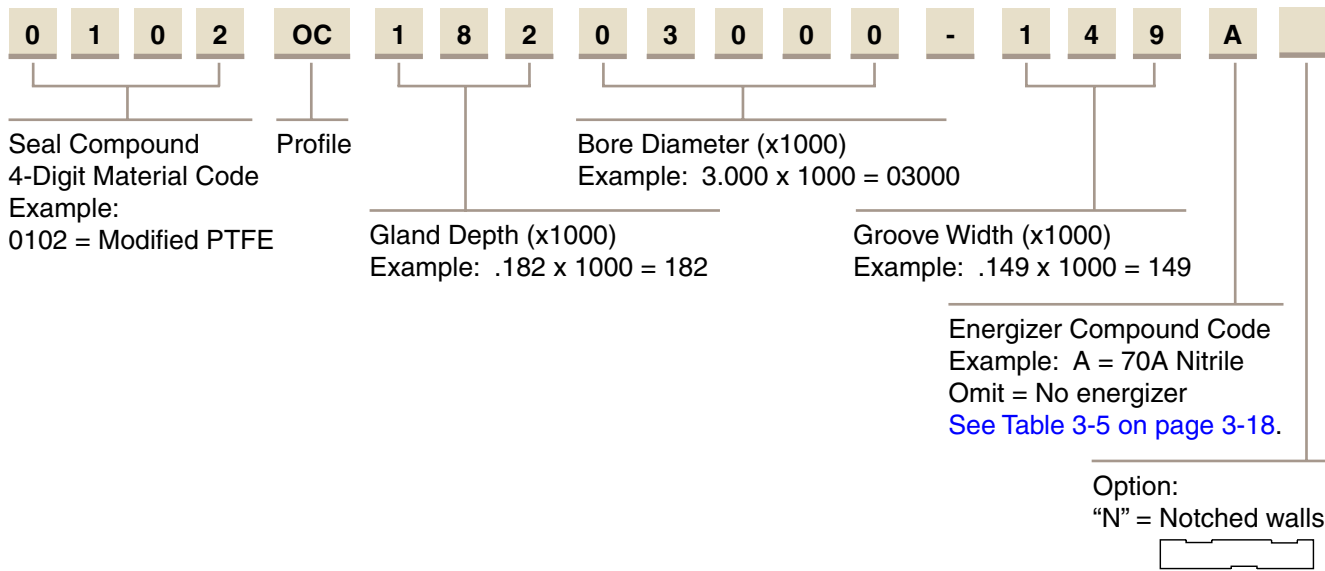

5

Gland Dimensions — OC Profile

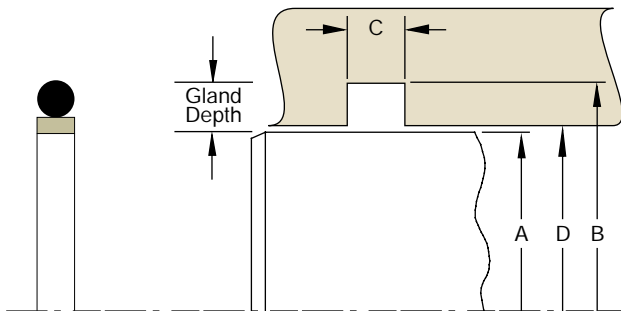

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-27. OC Profile — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------|-------------------|----------------|--------------------|--------------------|---------------------|
| + .000/- .001 | + .001/- .000 | + .005/- .000 | + .002/- .000 | | |
| 0.125 | 0.268 | 0.079 | 0.126 | 007 | 0102OC07200125-079A |
| 0.156 | 0.299 | 0.079 | 0.157 | 008 | 0102OC07200156-079A |
| 0.187 | 0.331 | 0.079 | 0.188 | 009 | 0102OC07200187-079A |
| 0.219 | 0.362 | 0.079 | 0.220 | 010 | 0102OC07200219-079A |
| 0.250 | 0.424 | 0.079 | 0.251 | 011 | 0102OC08700250-079A |
| 0.312 | 0.487 | 0.079 | 0.313 | 012 | 0102OC08700312-079A |
| 0.375 | 0.547 | 0.079 | 0.376 | 013 | 0102OC08700375-079A |
| + .000/- .002 | + .002/- .000 | + .005/- .000 | + .002/- .000 | | |
| 0.437 | 0.610 | 0.079 | 0.438 | 014 | 0102OC08700437-079A |
| 0.500 | 0.672 | 0.079 | 0.501 | 015 | 0102OC08700500-079A |
| 0.562 | 0.735 | 0.079 | 0.563 | 016 | 0102OC08700562-079A |
| 0.625 | 0.797 | 0.079 | 0.626 | 017 | 0102OC08700675-079A |
| 0.687 | 0.860 | 0.079 | 0.688 | 018 | 0102OC08700687-079A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).

Table 5-27. OC Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.000/-0.002 | +.002/-0.000 | +.005/-0.000 | +.002/-0.000 | | |
| 0.750 | 0.922 | 0.079 | 0.751 | 019 | 0102OC08700750-079A |
| 0.812 | 0.985 | 0.079 | 0.813 | 020 | 0102OC08700812-079A |
| 0.875 | 1.047 | 0.079 | 0.876 | 021 | 0102OC08700875-079A |
| 0.937 | 1.110 | 0.079 | 0.938 | 022 | 0102OC08700937-079A |
| 1.000 | 1.172 | 0.079 | 1.001 | 023 | 0102OC08701000-079A |
| 1.062 | 1.235 | 0.079 | 1.063 | 024 | 0102OC08701062-079A |
| 1.125 | 1.298 | 0.079 | 1.126 | 025 | 0102OC08701125-079A |
| 1.188 | 1.360 | 0.079 | 1.189 | 026 | 0102OC08701188-079A |
| 1.250 | 1.422 | 0.079 | 1.251 | 027 | 0102OC08701250-079A |
| 1.312 | 1.485 | 0.079 | 1.313 | 028 | 0102OC08701312-079A |
| +.000/-0.003 | +.003/-0.000 | +.005/-0.000 | +.002/-0.000 | | |
| 0.375 | 0.611 | 0.112 | 0.376 | 111 | 0102OC11800375-112A |
| 0.437 | 0.674 | 0.112 | 0.438 | 112 | 0102OC11800437-112A |
| 0.500 | 0.736 | 0.112 | 0.501 | 113 | 0102OC11800500-112A |
| 0.562 | 0.799 | 0.112 | 0.563 | 114 | 0102OC11800562-112A |
| 0.625 | 0.862 | 0.112 | 0.626 | 115 | 0102OC11800625-112A |
| 0.687 | 0.924 | 0.112 | 0.688 | 116 | 0102OC11800687-112A |
| 0.750 | 0.986 | 0.112 | 0.751 | 117 | 0102OC11800750-112A |
| 0.812 | 1.049 | 0.112 | 0.813 | 118 | 0102OC11800812-112A |
| 0.875 | 1.111 | 0.112 | 0.876 | 119 | 0102OC11800875-112A |
| 0.937 | 1.174 | 0.112 | 0.938 | 120 | 0102OC11800937-112A |
| 1.000 | 1.236 | 0.112 | 1.001 | 121 | 0102OC11801000-112A |
| 1.062 | 1.299 | 0.112 | 1.063 | 122 | 0102OC11801062-112A |
| 1.125 | 1.362 | 0.112 | 1.126 | 123 | 0102OC11801125-112A |
| 1.187 | 1.424 | 0.112 | 1.188 | 124 | 0102OC11801187-112A |
| 1.250 | 1.486 | 0.112 | 1.251 | 125 | 0102OC11801250-112A |
| 1.312 | 1.549 | 0.112 | 1.313 | 126 | 0102OC11801312-112A |
| 1.375 | 1.611 | 0.112 | 1.376 | 127 | 0102OC11801375-112A |
| 1.437 | 1.674 | 0.112 | 1.438 | 128 | 0102OC11801437-112A |
| 1.500 | 1.736 | 0.112 | 1.501 | 129 | 0102OC11801500-112A |
| 1.562 | 1.799 | 0.112 | 1.563 | 130 | 0102OC11801562-112A |
| 1.625 | 1.862 | 0.112 | 1.626 | 131 | 0102OC11801625-112A |
| 1.687 | 1.924 | 0.112 | 1.688 | 132 | 0102OC11801687-112A |
| 1.750 | 1.986 | 0.112 | 1.751 | 133 | 0102OC11801750-112A |
| 1.812 | 2.049 | 0.112 | 1.813 | 134 | 0102OC11801812-112A |
| 1.875 | 2.111 | 0.112 | 1.876 | 135 | 0102OC11801875-112A |
| 1.937 | 2.174 | 0.112 | 1.938 | 136 | 0102OC11801937-112A |
| 2.000 | 2.236 | 0.112 | 2.001 | 137 | 0102OC11802000-112A |
| 2.062 | 2.299 | 0.112 | 2.063 | 138 | 0102OC11802062-112A |
| 2.125 | 2.632 | 0.112 | 2.126 | 139 | 0102OC11802125-112A |
| 2.187 | 2.424 | 0.112 | 2.188 | 140 | 0102OC11802187-112A |
| 2.250 | 2.486 | 0.112 | 2.251 | 141 | 0102OC11802250-112A |
| 2.312 | 2.549 | 0.112 | 2.313 | 142 | 0102OC11802312-112A |
| 2.375 | 2.611 | 0.112 | 2.376 | 143 | 0102OC11802375-112A |
| 2.437 | 2.674 | 0.112 | 2.438 | 144 | 0102OC11802437-112A |
| 2.500 | 2.736 | 0.112 | 2.501 | 145 | 0102OC11802500-112A |
| 2.562 | 2.799 | 0.112 | 2.563 | 146 | 0102OC11802562-112A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

Table 5-27. OC Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .000/- .003 | + .003/- .000 | + .005/- .000 | + .002/- .000 | | |
| 2.625 | 2.862 | 0.112 | 2.626 | 147 | 0102OC11802625-112A |
| 2.687 | 2.924 | 0.112 | 2.688 | 148 | 0102OC11802687-112A |
| 2.750 | 2.986 | 0.112 | 2.751 | 149 | 0102OC11802750-112A |
| + .000/- .004 | + .004/- .000 | + .005/- .000 | + .002/- .000 | | |
| 0.750 | 1.050 | 0.149 | 0.751 | 211 | 0102OC15000750-149A |
| 0.812 | 1.113 | 0.149 | 0.813 | 212 | 0102OC15000812-149A |
| 0.875 | 1.175 | 0.149 | 0.876 | 213 | 0102OC15000875-149A |
| 0.937 | 1.238 | 0.149 | 0.938 | 214 | 0102OC15000937-149A |
| 1.000 | 1.300 | 0.149 | 1.001 | 215 | 0102OC15001000-149A |
| 1.062 | 1.363 | 0.149 | 1.063 | 216 | 0102OC15001062-149A |
| 1.125 | 1.426 | 0.149 | 1.126 | 217 | 0102OC15001125-149A |
| 1.187 | 1.488 | 0.149 | 1.188 | 218 | 0102OC15001187-149A |
| 1.250 | 1.550 | 0.149 | 1.251 | 219 | 0102OC15001250-149A |
| 1.312 | 1.613 | 0.149 | 1.313 | 220 | 0102OC15001312-149A |
| 1.375 | 1.675 | 0.149 | 1.376 | 221 | 0102OC15001375-149A |
| 1.437 | 1.738 | 0.149 | 1.438 | 222 | 0102OC15001437-149A |
| 1.500 | 1.863 | 0.149 | 1.501 | 223 | 0102OC18201500-149A |
| 1.625 | 1.988 | 0.149 | 1.626 | 224 | 0102OC18201625-149A |
| 1.750 | 2.113 | 0.149 | 1.751 | 225 | 0102OC18201750-149A |
| 1.875 | 2.238 | 0.149 | 1.876 | 226 | 0102OC18201875-149A |
| 2.000 | 2.363 | 0.149 | 2.001 | 227 | 0102OC18202000-149A |
| 2.125 | 2.488 | 0.149 | 2.126 | 228 | 0102OC18202125-149A |
| 2.250 | 2.613 | 0.149 | 2.251 | 229 | 0102OC18202250-149A |
| 2.375 | 2.738 | 0.149 | 2.376 | 230 | 0102OC18202375-149A |
| 2.500 | 2.863 | 0.149 | 2.501 | 231 | 0102OC18202500-149A |
| 2.625 | 2.988 | 0.149 | 2.626 | 232 | 0102OC18202625-149A |
| 2.750 | 3.113 | 0.149 | 2.751 | 233 | 0102OC18202750-149A |
| 2.875 | 3.238 | 0.149 | 2.876 | 234 | 0102OC18202875-149A |
| 3.000 | 3.363 | 0.149 | 3.001 | 235 | 0102OC18203000-149A |
| 3.125 | 3.488 | 0.149 | 3.126 | 236 | 0102OC18203125-149A |
| 3.250 | 3.613 | 0.149 | 3.251 | 237 | 0102OC18203250-149A |
| 3.375 | 3.738 | 0.149 | 3.376 | 238 | 0102OC18203375-149A |
| 3.500 | 3.863 | 0.149 | 3.501 | 239 | 0102OC18203500-149A |
| 3.625 | 3.988 | 0.149 | 3.626 | 240 | 0102OC18203625-149A |
| 3.750 | 4.113 | 0.149 | 3.751 | 241 | 0102OC18203750-149A |
| 3.875 | 4.238 | 0.149 | 3.876 | 242 | 0102OC18203875-149A |
| 4.000 | 4.363 | 0.149 | 4.001 | 243 | 0102OC18204000-149A |
| 4.125 | 4.488 | 0.149 | 4.126 | 244 | 0102OC18204125-149A |
| 4.250 | 4.613 | 0.149 | 4.251 | 245 | 0102OC18204250-149A |
| 4.375 | 4.738 | 0.149 | 4.376 | 246 | 0102OC18204375-149A |
| 4.500 | 4.863 | 0.149 | 4.501 | 247 | 0102OC18204500-149A |
| 4.625 | 4.988 | 0.149 | 4.626 | 248 | 0102OC18204625-149A |
| + .000/- .005 | + .005/- .000 | + .005/- .000 | + .003/- .000 | | |
| 1.500 | 1.991 | 0.221 | 1.501 | 326 | 0102OC24601500-221A |
| 1.625 | 2.116 | 0.221 | 1.626 | 327 | 0102OC24601625-221A |
| 1.750 | 2.241 | 0.221 | 1.751 | 328 | 0102OC24601750-221A |
| 1.875 | 2.366 | 0.221 | 1.876 | 329 | 0102OC24601875-221A |
| 2.000 | 2.491 | 0.221 | 2.001 | 330 | 0102OC24602000-221A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

Table 5-27. OC Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.000/--.005 | +.005/--.000 | +.005/--.000 | +.003/--.000 | | |
| 2.125 | 2.616 | 0.221 | 2.126 | 331 | 0102OC24602125-221A |
| 2.250 | 2.741 | 0.221 | 2.251 | 332 | 0102OC24602250-221A |
| 2.375 | 2.866 | 0.221 | 2.376 | 333 | 0102OC24602375-221A |
| 2.500 | 2.991 | 0.221 | 2.501 | 334 | 0102OC24602500-221A |
| 2.625 | 3.116 | 0.221 | 2.626 | 335 | 0102OC24602625-221A |
| 2.750 | 3.241 | 0.221 | 2.751 | 336 | 0102OC24602750-221A |
| 2.875 | 3.366 | 0.221 | 2.876 | 337 | 0102OC24602875-221A |
| 3.000 | 3.491 | 0.221 | 3.001 | 338 | 0102OC24603000-221A |
| 3.125 | 3.616 | 0.221 | 3.126 | 339 | 0102OC24603125-221A |
| 3.250 | 3.741 | 0.221 | 3.251 | 340 | 0102OC24603250-221A |
| 3.375 | 3.866 | 0.221 | 3.376 | 341 | 0102OC24603375-221A |
| 3.500 | 3.991 | 0.221 | 3.501 | 342 | 0102OC24603500-221A |
| 3.625 | 4.116 | 0.221 | 3.626 | 343 | 0102OC24603625-221A |
| 3.750 | 4.241 | 0.221 | 3.751 | 344 | 0102OC24603750-221A |
| 3.875 | 4.366 | 0.221 | 3.876 | 345 | 0102OC24603875-221A |
| 4.000 | 4.491 | 0.221 | 4.001 | 346 | 0102OC24604000-221A |
| 4.125 | 4.616 | 0.221 | 4.126 | 347 | 0102OC24604125-221A |
| 4.250 | 4.741 | 0.221 | 4.251 | 348 | 0102OC24604250-221A |
| 4.375 | 4.866 | 0.221 | 4.376 | 349 | 0102OC24604375-221A |
| +.000/--.006 | +.006/--.000 | +.005/--.000 | +.004/--.000 | | |
| 4.500 | 5.093 | 0.297 | 4.502 | 426 | 0102OC29704500-297A |
| 4.625 | 5.218 | 0.297 | 4.627 | 427 | 0102OC29704625-297A |
| 4.750 | 5.343 | 0.297 | 4.752 | 428 | 0102OC29704750-297A |
| 4.875 | 5.468 | 0.297 | 4.877 | 429 | 0102OC29704875-297A |
| 5.000 | 5.593 | 0.297 | 5.002 | 430 | 0102OC29705000-297A |
| 5.125 | 5.718 | 0.297 | 5.127 | 431 | 0102OC29705125-297A |
| 5.250 | 5.843 | 0.297 | 5.252 | 432 | 0102OC29705250-297A |
| 5.375 | 5.968 | 0.297 | 5.377 | 433 | 0102OC29705375-297A |
| 5.500 | 6.093 | 0.297 | 5.502 | 434 | 0102OC29705500-297A |
| 5.625 | 6.218 | 0.297 | 5.627 | 435 | 0102OC29705625-297A |
| 5.750 | 6.343 | 0.297 | 5.752 | 436 | 0102OC29705750-297A |
| 5.875 | 6.468 | 0.297 | 5.877 | 437 | 0102OC29705875-297A |
| 6.000 | 6.718 | 0.297 | 6.002 | 438 | 0102OC35906000-297A |
| 6.250 | 6.968 | 0.297 | 6.252 | 439 | 0102OC35906250-297A |
| 6.500 | 7.218 | 0.297 | 6.502 | 440 | 0102OC35906500-297A |
| 6.750 | 7.468 | 0.297 | 6.752 | 441 | 0102OC35906750-297A |
| 7.000 | 7.718 | 0.297 | 7.002 | 442 | 0102OC35907000-297A |
| 7.250 | 7.968 | 0.297 | 7.252 | 443 | 0102OC35907250-297A |
| 7.500 | 8.218 | 0.297 | 7.502 | 444 | 0102OC35907500-297A |
| 7.750 | 8.468 | 0.297 | 7.752 | 445 | 0102OC35907750-297A |
| +.000/--.006 | +.006/--.000 | +.005/--.000 | +.005/--.000 | | |
| 8.000 | 8.968 | 0.297 | 8.002 | 446 | 0102OC48408000-297A |
| 8.500 | 9.468 | 0.297 | 8.502 | 447 | 0102OC48408500-297A |
| 9.000 | 9.968 | 0.297 | 9.002 | 448 | 0102OC48409000-297A |
| 9.500 | 10.468 | 0.297 | 9.502 | 449 | 0102OC48409500-297A |
| 10.000 | 10.968 | 0.297 | 10.002 | 450 | 0102OC48410000-297A |
| 10.500 | 11.468 | 0.297 | 10.502 | 451 | 0102OC48410500-297A |
| 11.000 | 11.968 | 0.297 | 11.002 | 452 | 0102OC48411000-297A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

09/01/07



OC Profile**Table 5-27. OC Gland Dimensions — Inch (Continued)**

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|----------------------------|
| + .000/- .006 | + .006/- .000 | + .005/- .000 | + .005/- .000 | | |
| 11.500 | 12.468 | 0.297 | 11.502 | 453 | 0102OC48411500-297A |
| 12.000 | 12.968 | 0.297 | 12.002 | 454 | 0102OC48412000-297A |
| 12.500 | 13.468 | 0.297 | 12.502 | 455 | 0102OC48412500-297A |
| 13.000 | 13.968 | 0.297 | 13.002 | 456 | 0102OC48413000-297A |
| 13.500 | 14.468 | 0.297 | 13.502 | 457 | 0102OC48413500-297A |
| 14.000 | 14.968 | 0.297 | 14.002 | 458 | 0102OC48414000-297A |
| 14.500 | 15.468 | 0.297 | 14.502 | 459 | 0102OC48414500-297A |
| 15.000 | 15.968 | 0.297 | 15.002 | 460 | 0102OC48415000-297A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Rod Seal BR Profile

Catalog EPS 5370/USA

BR Profile, Premium Buffer Seal

The BR profile is a compact rod seal designed to act as a buffer seal for the primary rod seal. As a buffer seal, the BR profile provides the majority of the rod sealing performance while allowing fluid to by pass onto and energize the primary rod seal. Fluid located between the BR profile and the rod seal will relieve back into the cylinder by flowing past the BR profile's flexible static side lip and slotted pedestals. This relieving or check valve function allows the BR profile and primary rod seal to work as a sealing system without the danger of developing a pressure trap. As a sealing system, the BR profile and primary rod seal provide optimal performance in the most difficult applications.



Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



**BR Cross-Section
with Back-up**



**BR Cross-Section
without Back-up**

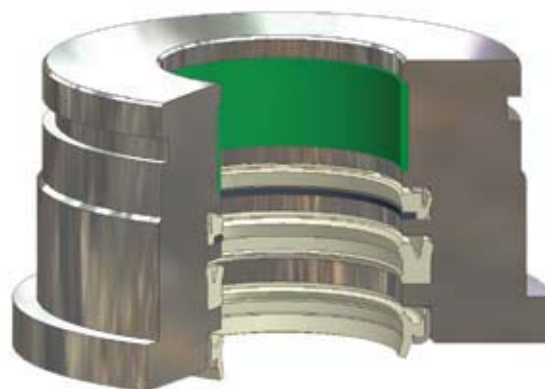

BR Installed in Rod Gland


5

02/15/08

BR Profile

Part Number Nomenclature — BR Profile

Table 5-28. BR Profile — Inch

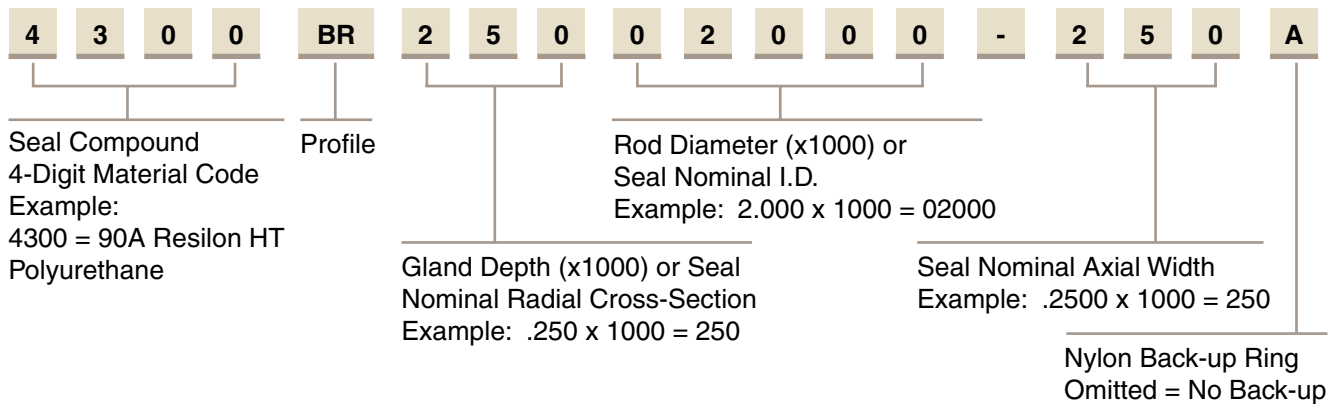

Gland Dimensions — BR Profile

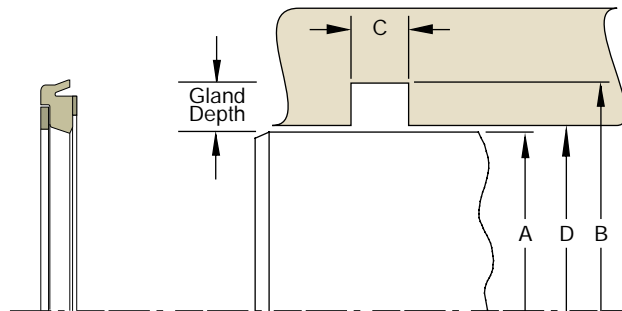


Table 5-29. Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.010/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 5-30. BR Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Part Number | |
|----------------|-------------------|----------------|--------------------|-------------|-----------------|
| 1.000 | 1.374 | 0.205 | 1.001 | 4300 | BR18701000-187A |
| 1.125 | 1.499 | 0.205 | 1.126 | 4300 | BR18701125-187A |
| 1.250 | 1.624 | 0.205 | 1.251 | 4300 | BR18701250-187A |
| 1.250 | 1.812 | 0.135 | 1.251 | 4300 | BR28101250-135 |
| 1.375 | 1.749 | 0.205 | 1.376 | 4300 | BR18701375-187A |
| 1.375 | 1.937 | 0.135 | 1.376 | 4300 | BR28101375-135 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9. For custom groove calculations, see Appendix C.

Table 5-30. BR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | Part Number | |
|----------------------|-------------------------|----------------------|--------------------------|-------------|-----------------|
| 1.500 | 2.000 | 0.275 | 1.501 | 4300 | BR25001500-250A |
| 1.500 | 2.062 | 0.135 | 1.501 | 4300 | BR28101500-135 |
| 1.750 | 2.250 | 0.275 | 1.751 | 4300 | BR25001750-250A |
| 1.750 | 2.312 | 0.135 | 1.751 | 4300 | BR28101750-135 |
| 2.000 | 2.500 | 0.275 | 2.001 | 4300 | BR25002000-250A |
| 2.000 | 2.562 | 0.135 | 2.001 | 4300 | BR28102000-135 |
| 2.250 | 2.926 | 0.252 | 2.251 | 4300 | BR33802250-229A |
| 2.500 | 3.000 | 0.275 | 2.501 | 4300 | BR25002500-250A |
| 2.500 | 3.174 | 0.252 | 2.502 | 4300 | BR33702500-229A |
| 2.750 | 3.397 | 0.252 | 2.752 | 4300 | BR32402750-229A |
| 3.000 | 3.500 | 0.275 | 3.001 | 4300 | BR25003000-250A |
| 3.500 | 4.000 | 0.275 | 3.501 | 4300 | BR25003500-250A |
| 3.500 | 4.166 | 0.252 | 3.502 | 4300 | BR33303500-229A |
| 3.750 | 4.250 | 0.275 | 3.751 | 4300 | BR25003750-250A |
| 4.000 | 4.624 | 0.343 | 4.002 | 4300 | BR31204000-312A |
| 4.000 | 4.666 | 0.252 | 4.002 | 4300 | BR33304000-229A |
| 4.250 | 4.750 | 0.275 | 4.251 | 4300 | BR25004250-250A |
| 4.250 | 4.866 | 0.275 | 4.252 | 4300 | BR30804250-250A |
| 4.500 | 5.124 | 0.343 | 4.502 | 4300 | BR31204500-312A |
| 4.750 | 5.500 | 0.412 | 4.752 | 4300 | BR37504750-375A |
| 5.000 | 5.750 | 0.412 | 5.002 | 4300 | BR37505000-375A |
| 5.000 | 5.830 | 0.358 | 5.002 | 4300 | BR41505000-325A |
| 5.500 | 6.250 | 0.412 | 5.502 | 4300 | BR37505500-375A |
| 5.750 | 6.250 | 0.275 | 5.751 | 4300 | BR25005750-250A |
| 9.000 | 10.000 | 0.550 | 9.002 | 4300 | BR50009000-500A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.



OD Cross-Section

OD Profile, PTFE Buffer Seal

The Parker OD profile is a rod seal that can be used as a buffer seal in conjunction with a primary rod seal or in tandem with itself to form a sealing system for higher performance. The OD profile is a uni-directional seal, with a unique design that allows trapped fluid pressure back into the cylinder. When the rod extends from the cylinder the OD profile is riding on a sealing point, creating a high compression point to limit leakage. As the rod goes through its return stroke this seal rocks forward, creating a larger sealing surface on the rod. The compression force is spread out over a larger area allowing trapped fluid to pass under the seal and return to the system. This pressure relief feature allows the OD profile to be used in tandem or multiple seal arrangements. The OD features low friction, long life, and versatility.

The OD profile may be ordered without the energizer by omitting the energizer code. See part number nomenclature.

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------|--------------------------------------|-----------------------|------------------------|
| Cap | | | |
| 0401 40% bronze-filled PTFE | -200°F to 575°F (-129°C to 302°C) | 5000 psi (344 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | |
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

*Alternate Materials: For applications that may require an alternate material, please see Section 3 for alternate PTFE (Table 3-4) and energizer (Table 3-5) materials.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

Options


Metric: To configure metric part numbering, see Table 5-34 on page 5-52.

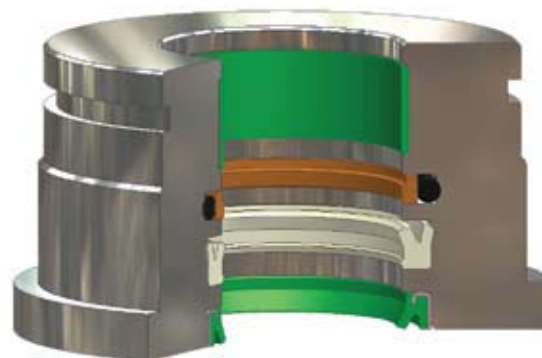


OD installed in Rod Gland

Part Number Nomenclature — OD Profile

Table 5-31. OD Profile — Inch

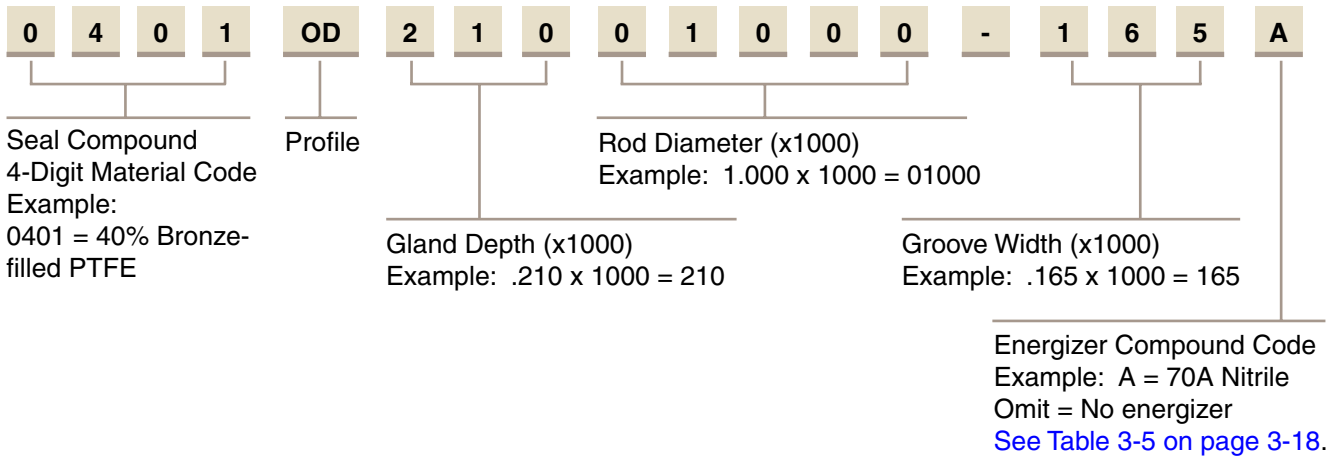

Gland Dimensions — OD Profile

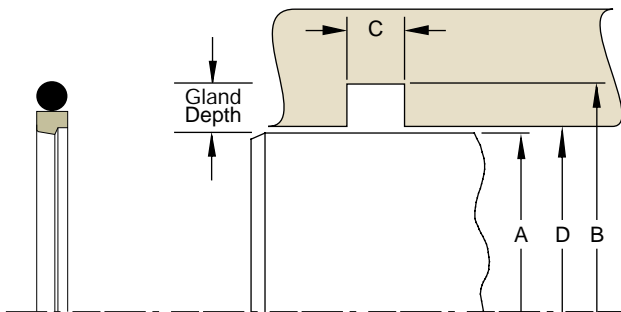

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-32. OD Profile — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.000 / -.001 | +.001/-.000 | +.008/-.000 | +.002/-.000 | | |
| 0.313 | 0.599 | 0.126 | 0.314 | 111 | 0401OD14300313-126A |
| 0.375 | 0.661 | 0.126 | 0.376 | 112 | 0401OD14300375-126A |
| +.000 / -.002 | +.002/-.000 | +.008/-.000 | +.002/-.000 | | |
| 0.438 | 0.724 | 0.126 | 0.439 | 113 | 0401OD14300438-126A |
| 0.500 | 0.786 | 0.126 | 0.501 | 114 | 0401OD14300500-126A |
| 0.563 | 0.849 | 0.126 | 0.564 | 115 | 0401OD14300563-126A |
| 0.625 | 0.911 | 0.126 | 0.626 | 116 | 0401OD14300625-126A |
| 0.688 | 0.974 | 0.126 | 0.689 | 117 | 0401OD14300688-126A |
| +.000 / -.002 | +.002/-.000 | +.008/-.000 | +.002/-.000 | | |
| 0.750 | 1.170 | 0.165 | 0.751 | 213 | 0401OD21000750-165A |
| 0.813 | 1.233 | 0.165 | 0.814 | 214 | 0401OD21000813-165A |
| 0.875 | 1.295 | 0.165 | 0.876 | 215 | 0401OD21000875-165A |
| 0.938 | 1.358 | 0.165 | 0.939 | 216 | 0401OD21000938-165A |
| 1.000 | 1.420 | 0.165 | 1.001 | 217 | 0401OD21001000-165A |
| 1.063 | 1.483 | 0.165 | 1.064 | 218 | 0401OD21001063-165A |
| 1.125 | 1.545 | 0.165 | 1.126 | 219 | 0401OD21001125-165A |
| 1.188 | 1.608 | 0.165 | 1.189 | 220 | 0401OD21001188-165A |
| 1.250 | 1.670 | 0.165 | 1.251 | 221 | 0401OD21001250-165A |
| 1.313 | 1.733 | 0.165 | 1.314 | 222 | 0401OD21001313-165A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).



OD Profile

Table 5-32. OD Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.000 / -.002 | +.002/-.000 | +.008/-.000 | +.002/-.000 | | |
| 1.375 | 1.795 | 0.165 | 1.376 | 222 | 0401OD21001375-165A |
| 1.438 | 1.858 | 0.165 | 1.439 | 223 | 0401OD21001438-165A |
| +.000 / -.002 | +.002/-.000 | +.008/-.000 | +.003/-.000 | | |
| 1.500 | 2.094 | 0.248 | 1.501 | 327 | 0401OD29701500-248A |
| 1.563 | 2.157 | 0.248 | 1.564 | 327 | 0401OD29701563-248A |
| 1.625 | 2.219 | 0.248 | 1.626 | 328 | 0401OD29701625-248A |
| 1.688 | 2.282 | 0.248 | 1.689 | 328 | 0401OD29701688-248A |
| 1.750 | 2.344 | 0.248 | 1.751 | 329 | 0401OD29701750-248A |
| 1.813 | 2.407 | 0.248 | 1.814 | 329 | 0401OD29701813-248A |
| 1.875 | 2.469 | 0.248 | 1.876 | 330 | 0401OD29701875-248A |
| 1.938 | 2.532 | 0.248 | 1.939 | 330 | 0401OD29701938-248A |
| +.000 / -.003 | +.003/-.000 | +.008/-.000 | +.003/-.000 | | |
| 2.000 | 2.594 | 0.248 | 2.001 | 331 | 0401OD29702000-248A |
| 2.125 | 2.719 | 0.248 | 2.126 | 332 | 0401OD29702125-248A |
| 2.250 | 2.844 | 0.248 | 2.251 | 333 | 0401OD29702250-248A |
| 2.375 | 2.969 | 0.248 | 2.376 | 334 | 0401OD29702375-248A |
| 2.500 | 3.094 | 0.248 | 2.501 | 335 | 0401OD29702500-248A |
| 2.625 | 3.219 | 0.248 | 2.626 | 336 | 0401OD29702625-248A |
| 2.750 | 3.344 | 0.248 | 2.751 | 337 | 0401OD29702750-248A |
| 2.875 | 3.469 | 0.248 | 2.876 | 338 | 0401OD29702875-248A |
| 3.000 | 3.594 | 0.248 | 3.001 | 339 | 0401OD29703000-248A |
| 3.125 | 3.719 | 0.248 | 3.126 | 340 | 0401OD29703125-248A |
| 3.250 | 3.844 | 0.248 | 3.251 | 341 | 0401OD29703250-248A |
| 3.375 | 3.969 | 0.248 | 3.376 | 342 | 0401OD29703375-248A |
| 3.500 | 4.094 | 0.248 | 3.501 | 343 | 0401OD29703500-248A |
| 3.625 | 4.219 | 0.248 | 3.626 | 344 | 0401OD29703625-248A |
| 3.750 | 4.344 | 0.248 | 3.751 | 345 | 0401OD29703750-248A |
| 3.875 | 4.469 | 0.248 | 3.876 | 346 | 0401OD29703875-248A |
| 4.000 | 4.594 | 0.248 | 4.001 | 347 | 0401OD29704000-248A |
| 4.125 | 4.719 | 0.248 | 4.126 | 348 | 0401OD29704125-248A |
| 4.250 | 4.844 | 0.248 | 4.251 | 349 | 0401OD29704250-248A |
| 4.375 | 4.969 | 0.248 | 4.376 | 350 | 0401OD29704375-248A |
| 4.500 | 5.094 | 0.248 | 4.501 | 351 | 0401OD29704500-248A |
| 4.625 | 5.219 | 0.248 | 4.626 | 352 | 0401OD29704625-248A |
| +.000 / -.004 | +.004/-.000 | +.008/-.000 | +.003/-.000 | | |
| 4.750 | 5.344 | 0.248 | 4.752 | 353 | 0401OD29704750-248A |
| 4.875 | 5.469 | 0.248 | 4.877 | 354 | 0401OD29704875-248A |
| 5.000 | 5.594 | 0.248 | 5.002 | 355 | 0401OD29705000-248A |
| 5.125 | 5.719 | 0.248 | 5.127 | 356 | 0401OD29705125-248A |
| 5.250 | 5.844 | 0.248 | 5.252 | 357 | 0401OD29705250-248A |
| 5.375 | 5.969 | 0.248 | 5.377 | 358 | 0401OD29705375-248A |
| 5.500 | 6.094 | 0.248 | 5.502 | 359 | 0401OD29705500-248A |
| 5.625 | 6.219 | 0.248 | 5.627 | 360 | 0401OD29705625-248A |
| 5.750 | 6.344 | 0.248 | 5.752 | 361 | 0401OD29705750-248A |
| 6.000 | 6.594 | 0.248 | 6.002 | 362 | 0401OD29706000-248A |
| 6.250 | 6.844 | 0.248 | 6.252 | 363 | 0401OD29706250-248A |
| 6.500 | 7.094 | 0.248 | 6.502 | 364 | 0401OD29706500-248A |
| 6.750 | 7.344 | 0.248 | 6.752 | 365 | 0401OD29706750-248A |
| 7.000 | 7.594 | 0.248 | 7.002 | 366 | 0401OD29707000-248A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.



Table 5-32. OD Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|------------------------|-------------------------|------------------------|--------------------------|--------------------------|---------------------|
| + .000 / - .005 | + .005 / - .000 | + .008 / - .000 | + .003 / - .000 | | |
| 7.250 | 7.844 | 0.248 | 7.252 | 367 | 0401OD29707250-248A |
| 7.500 | 8.094 | 0.248 | 7.502 | 368 | 0401OD29707500-248A |
| 7.750 | 8.344 | 0.248 | 7.752 | 369 | 0401OD29707750-248A |
| + .000 / - .005 | + .005 / - .000 | + .008 / - .000 | + .004 / - .000 | | |
| 8.000 | 8.806 | 0.319 | 8.003 | 445 | 0401OD40308000-319A |
| 8.250 | 9.056 | 0.319 | 8.253 | 446 | 0401OD40308250-319A |
| 8.500 | 9.306 | 0.319 | 8.503 | 446 | 0401OD40308500-319A |
| 8.750 | 9.556 | 0.319 | 8.753 | 447 | 0401OD40308750-319A |
| 9.000 | 9.806 | 0.319 | 9.003 | 447 | 0401OD40309000-319A |
| 9.250 | 10.056 | 0.319 | 9.253 | 448 | 0401OD40309250-319A |
| 9.500 | 10.306 | 0.319 | 9.503 | 448 | 0401OD40309500-319A |
| 9.750 | 10.556 | 0.319 | 9.753 | 449 | 0401OD40309750-319A |
| + .000 / - .005 | + .005 / - .000 | + .008 / - .000 | + .005 / - .000 | | |
| 10.000 | 10.944 | 0.319 | 10.003 | 450 | 0401OD47210000-319A |
| 10.500 | 11.444 | 0.319 | 10.503 | 451 | 0401OD47210500-319A |
| 11.000 | 11.944 | 0.319 | 11.003 | 452 | 0401OD47211000-319A |
| 11.500 | 12.444 | 0.319 | 11.503 | 453 | 0401OD47211500-319A |
| 12.000 | 12.944 | 0.319 | 12.003 | 454 | 0401OD47212000-319A |
| + .000 / - .006 | + .006 / - .000 | + .008 / - .000 | + .005 / - .000 | | |
| 12.500 | 13.444 | 0.319 | 12.503 | 454 | 0401OD47212500-319A |
| 13.000 | 13.944 | 0.319 | 13.003 | 455 | 0401OD47213000-319A |
| 13.500 | 14.444 | 0.319 | 13.503 | 456 | 0401OD47213500-319A |
| 14.000 | 14.944 | 0.319 | 14.003 | 457 | 0401OD47214000-319A |
| 14.500 | 15.444 | 0.319 | 14.503 | 458 | 0401OD47214500-319A |
| 15.000 | 15.944 | 0.319 | 15.003 | 459 | 0401OD47215000-319A |
| 15.500 | 16.444 | 0.319 | 15.503 | 460 | 0401OD47215500-319A |
| 16.000 | 16.944 | 0.319 | 16.003 | 461 | 0401OD47216000-319A |
| 16.500 | 17.444 | 0.319 | 16.503 | 462 | 0401OD47216500-319A |
| 17.000 | 17.944 | 0.319 | 17.003 | 463 | 0401OD47217000-319A |
| 17.500 | 18.444 | 0.319 | 17.503 | 464 | 0401OD47217500-319A |
| 18.000 | 18.944 | 0.319 | 18.003 | 465 | 0401OD47218000-319A |
| 18.500 | 19.444 | 0.319 | 18.503 | 466 | 0401OD47218500-319A |
| 19.000 | 19.944 | 0.319 | 19.003 | 467 | 0401OD47219000-319A |
| 19.500 | 20.444 | 0.319 | 19.503 | 468 | 0401OD47219500-319A |
| + .000 / - .007 | + .007 / - .000 | + .008 / - .000 | + .001 / - .000 | | |
| 20.000 | 20.944 | 0.319 | 20.003 | 469 | 0401OD47220000-319A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.


For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.


OD Profile

Part Number Nomenclature — OD Profile

Table 5-33. OD Profile — Metric

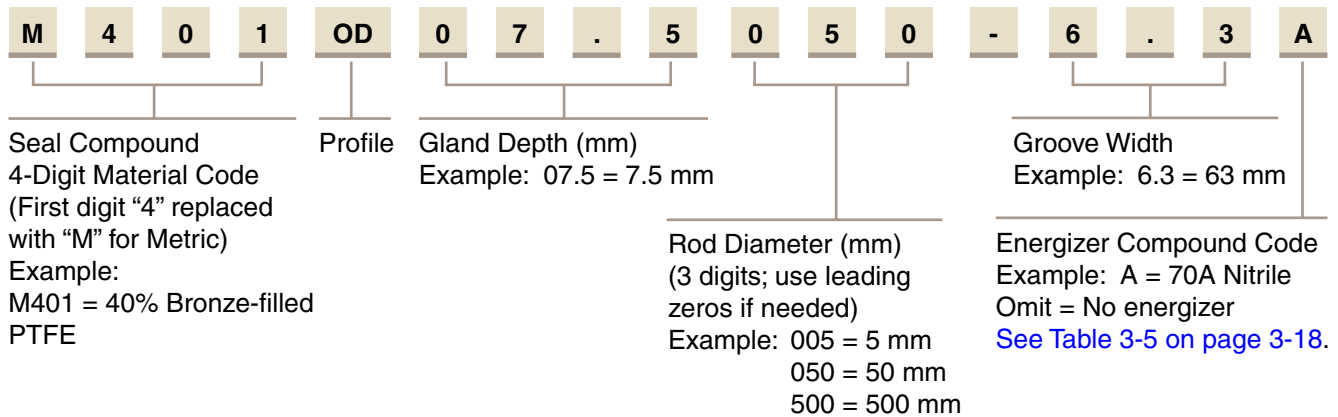

Gland Dimensions — OD Profile

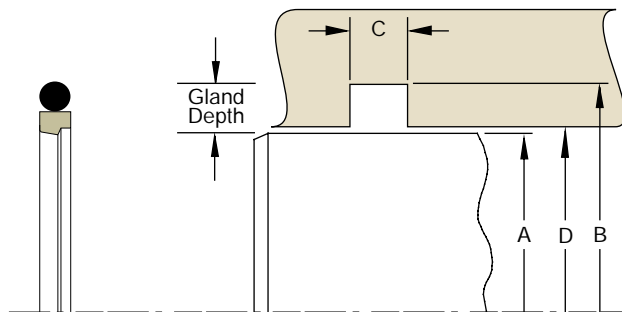

Please refer to Engineering [Section 2](#), [Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-34. OD Profile — Metric

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|---|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| f7 | H9 | + .20/- .00 | H8 | | |
| For ISO tolerances refer to Appendix F. | | | | | |
| 8.0 | 15.2 | 3.2 | 8.0 | 111 | M401OD03.6008-3.2A |
| 10.0 | 17.2 | 3.2 | 10.0 | 112 | M401OD03.6010-3.2A |
| 12.0 | 19.2 | 3.2 | 12.0 | 113 | M401OD03.6012-3.2A |
| 14.0 | 21.2 | 3.2 | 14.0 | 114 | M401OD03.6014-3.2A |
| 15.0 | 22.2 | 3.2 | 15.0 | 115 | M401OD03.6015-3.2A |
| 16.0 | 23.2 | 3.2 | 16.0 | 116 | M401OD03.6016-3.2A |
| 18.0 | 25.2 | 3.2 | 18.0 | 117 | M401OD03.6018-3.2A |
| 20.0 | 30.6 | 4.2 | 20.0 | 213 | M401OD05.3020-4.2A |
| 22.0 | 32.6 | 4.2 | 22.0 | 215 | M401OD05.3022-4.2A |
| 25.0 | 35.6 | 4.2 | 25.0 | 217 | M401OD05.3025-4.2A |
| 28.0 | 38.6 | 4.2 | 28.0 | 219 | M401OD05.3028-4.2A |
| 30.0 | 40.6 | 4.2 | 30.0 | 220 | M401OD05.3030-4.2A |
| 32.0 | 42.6 | 4.2 | 32.0 | 221 | M401OD05.3032-4.2A |
| 35.0 | 45.6 | 4.2 | 35.0 | 222 | M401OD05.3035-4.2A |
| 36.0 | 46.6 | 4.2 | 36.0 | 223 | M401OD05.3036-4.2A |
| 40.0 | 55.0 | 6.3 | 40.0 | 327 | M401OD07.5040-6.3A |
| 42.0 | 57.0 | 6.3 | 42.0 | 328 | M401OD07.5042-6.3A |
| 45.0 | 60.0 | 6.3 | 45.0 | 329 | M401OD07.5045-6.3A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).

Table 5-34. OD Gland Dimensions — Metric (continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|---|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| f7 | H9 | + .20/- .00 | H8 | | |
| For ISO tolerances refer to Appendix F. | | | | | |
| 48.0 | 63.0 | 6.3 | 48.0 | 330 | M401OD07.5048-6.3A |
| 50.0 | 65.0 | 6.3 | 50.0 | 331 | M401OD07.5050-6.3A |
| 52.0 | 67.0 | 6.3 | 52.0 | 331 | M401OD07.5052-6.3A |
| 55.0 | 70.0 | 6.3 | 55.0 | 332 | M401OD07.5055-6.3A |
| 56.0 | 71.0 | 6.3 | 56.0 | 333 | M401OD07.5056-6.3A |
| 60.0 | 75.0 | 6.3 | 60.0 | 334 | M401OD07.5060-6.3A |
| 63.0 | 78.0 | 6.3 | 63.0 | 335 | M401OD07.5063-6.3A |
| 65.0 | 80.0 | 6.3 | 65.0 | 335 | M401OD07.5065-6.3A |
| 70.0 | 85.0 | 6.3 | 70.0 | 337 | M401OD07.5070-6.3A |
| 75.0 | 90.0 | 6.3 | 75.0 | 339 | M401OD07.5075-6.3A |
| 80.0 | 95.0 | 6.3 | 80.0 | 340 | M401OD07.5080-6.3A |
| 85.0 | 100.0 | 6.3 | 85.0 | 342 | M401OD07.5085-6.3A |
| 90.0 | 105.0 | 6.3 | 90.0 | 343 | M401OD07.5090-6.3A |
| 95.0 | 110.0 | 6.3 | 95.0 | 345 | M401OD07.5095-6.3A |
| 100.0 | 115.0 | 6.3 | 100.0 | 347 | M401OD07.5100-6.3A |
| 105.0 | 120.0 | 6.3 | 105.0 | 348 | M401OD07.5105-6.3A |
| 110.0 | 125.0 | 6.3 | 110.0 | 350 | M401OD07.5110-6.3A |
| 115.0 | 130.0 | 6.3 | 115.0 | 351 | M401OD07.5115-6.3A |
| 120.0 | 135.0 | 6.3 | 120.0 | 353 | M401OD07.5120-6.3A |
| 125.0 | 140.0 | 6.3 | 125.0 | 354 | M401OD07.5125-6.3A |
| 130.0 | 145.0 | 6.3 | 130.0 | 356 | M401OD07.5130-6.3A |
| 135.0 | 150.0 | 6.3 | 135.0 | 358 | M401OD07.5135-6.3A |
| 140.0 | 155.0 | 6.3 | 140.0 | 359 | M401OD07.5140-6.3A |
| 150.0 | 165.0 | 6.3 | 150.0 | 362 | M401OD07.5150-6.3A |
| 160.0 | 175.0 | 6.3 | 160.0 | 363 | M401OD07.5160-6.3A |
| 170.0 | 185.0 | 6.3 | 170.0 | 365 | M401OD07.5170-6.3A |
| 180.0 | 195.0 | 6.3 | 180.0 | 366 | M401OD07.5180-6.3A |
| 190.0 | 205.0 | 6.3 | 190.0 | 368 | M401OD07.5190-6.3A |
| 200.0 | 220.6 | 8.1 | 200.0 | 446 | M401OD10.3200-8.1A |
| 210.0 | 230.6 | 8.1 | 210.0 | 446 | M401OD10.3210-8.1A |
| 220.0 | 240.6 | 8.1 | 220.0 | 447 | M401OD10.3220-8.1A |
| 230.0 | 250.6 | 8.1 | 230.0 | 448 | M401OD10.3230-8.1A |
| 240.0 | 260.6 | 8.1 | 240.0 | 449 | M401OD10.3240-8.1A |
| 250.0 | 270.6 | 8.1 | 250.0 | 450 | M401OD10.3250-8.1A |
| 260.0 | 280.6 | 8.1 | 260.0 | 450 | M401OD10.3260-8.1A |
| 270.0 | 294.2 | 8.1 | 270.0 | 452 | M401OD12.1270-8.1A |
| 280.0 | 304.2 | 8.1 | 280.0 | 453 | M401OD12.1280-8.1A |
| 290.0 | 314.2 | 8.1 | 290.0 | 454 | M401OD12.1290-8.1A |
| 300.0 | 324.2 | 8.1 | 300.0 | 455 | M401OD12.1300-8.1A |
| 320.0 | 344.2 | 8.1 | 320.0 | 458 | M401OD12.1320-8.1A |
| 350.0 | 374.2 | 8.1 | 350.0 | 458 | M401OD12.1350-8.1A |
| 360.0 | 384.2 | 8.1 | 360.0 | 462 | M401OD12.1360-8.1A |
| 400.0 | 424.2 | 8.1 | 400.0 | 367 | M401OD12.1400-8.1A |
| 420.0 | 444.2 | 8.1 | 420.0 | 463 | M401OD12.1420-8.1A |
| 450.0 | 474.2 | 8.1 | 450.0 | 466 | M401OD12.1450-8.1A |
| 460.0 | 484.2 | 8.1 | 460.0 | 468 | M401OD12.1460-8.1A |
| 480.0 | 504.2 | 8.1 | 480.0 | 469 | M401OD12.1480-8.1A |
| 500.0 | 524.2 | 8.1 | 500.0 | 469 | M401OD12.1500-8.1A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07



Rod Seal V6 Profile

Catalog EPS 5370/USA

V6 Profile, Cushion Seal

The V6 profile provides a check valve type action for use in cushioning pneumatic cylinders. The V6 profile seals against the cushioning piston or spud, allowing pneumatic pressure to build and cushion the cylinder's end stroke. Through a series of slots and pedestals the intake flow is then able to easily blow past the cushion seal to fill the cylinder. The installation of the cushion seal is very simple as it manually snaps into the groove recess. The V6 profile is available in proprietary Parker compounds formulated for low friction, extrusion resistance, and high temperature. The V6 profile can be used in a wide variety of NFPA cylinders and will provide excellent performance and long life.




5

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|---------------------|---------------------|
| P4622A90 | -65°F to 225°F (-54°C to 107°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| N4180A80 | -40°F to 250°F (-40°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| N4181A80 | -40°F to 250°F (-40°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



V6 Cross-Section

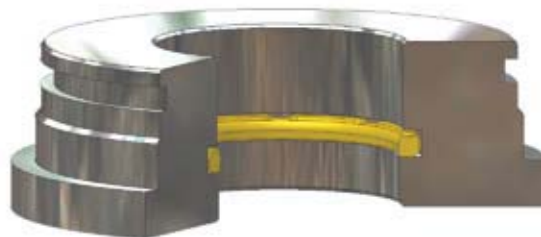


V6 Installed in Rod Gland


09/01/07

Part Number Nomenclature — V6 Profile

Table 5-35. V6 Profile — Inch

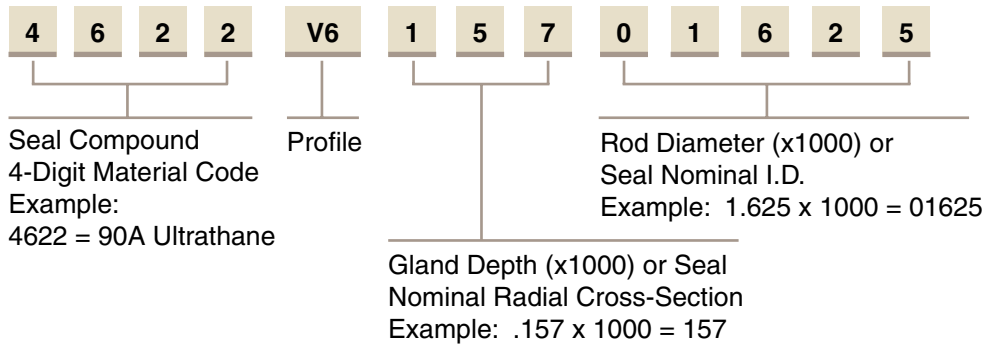

Gland Dimensions — V6 Profile

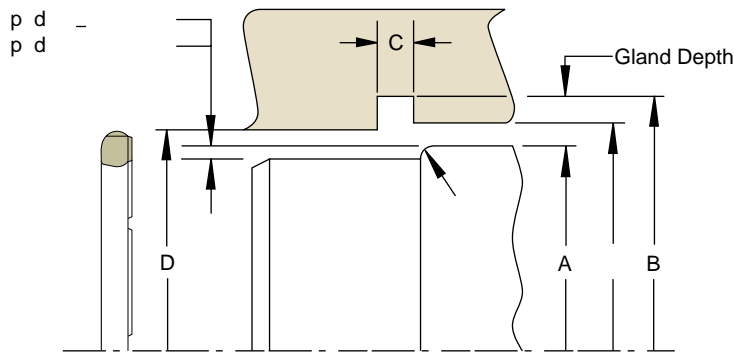

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.



Table 5-36. V6 Gland Dimensions — Inch


| Nominal Spud Diameter | A Spud Diameter | B Groove Diameter | C Groove Width | D Throat Diameter | E Throat Diameter | F Spud End Radius | Compound Codes (X = Standard Offering) | | | Part Number | |
|-----------------------|-----------------|-------------------|----------------|-------------------|-------------------|-------------------|--|------|------|---------------|------------|
| | | | | | | | 4622 | 4180 | 4208 | Compound Code | |
| 3/8 | 0.368/0.370 | 0.685/0.689 | 0.181/0.197 | 0.390/0.393 | 0.449/0.453 | 0.118 | X | X | X | XXXX | V615700375 |
| 5/8 | 0.617/0.620 | 0.935/0.940 | 0.181/0.197 | 0.640/0.644 | 0.699/0.703 | 0.118 | X | X | X | XXXX | V615700625 |
| 3/4 | 0.742/0.745 | 1.060/1.065 | 0.181/0.197 | 0.765/0.769 | 0.824/0.828 | 0.118 | X | X | X | XXXX | V615700750 |
| 7/8 | 0.877/0.880 | 1.195/1.201 | 0.181/0.197 | 0.900/0.905 | 0.959/0.964 | 0.118 | X | X | X | XXXX | V615700875 |
| 1-3/16 | 1.179/1.184 | 1.578/1.585 | 0.228/0.244 | 1.208/1.215 | 1.263/1.270 | 0.157 | X | | | XXXX | V619701187 |
| 1-1/4 | 1.249/1.253 | 1.568/1.574 | 0.181/0.197 | 1.273/1.279 | 1.332/1.338 | 0.118 | X | X | X | XXXX | V615701250 |
| 1-5/8 | 1.620/1.624 | 1.939/1.945 | 0.181/0.197 | 1.644/1.650 | 1.703/1.709 | 0.118 | X | X | X | XXXX | V615701625 |
| 1-5/8 | 1.616/1.622 | 2.016/2.023 | 0.228/0.244 | 1.646/1.653 | 1.701/1.709 | 0.157 | X | | X | XXXX | V619701625 |
| 2 | 1.992/1.997 | 2.391/2.398 | 0.228/0.244 | 2.021/2.028 | 2.076/2.083 | 0.157 | X | X | X | XXXX | V619702000 |
| 2-1/4 | 2.242/2.247 | 2.562/2.569 | 0.181/0.197 | 2.267/2.274 | 2.326/2.333 | 0.118 | X | | X | XXXX | V615702250 |
| 2-3/4 | 2.735/2.740 | 3.291/3.300 | 0.323/0.339 | 2.764/2.771 | 2.858/2.865 | 0.197 | X | | X | XXXX | V627602750 |
| 4-1/4 | 4.219/4.225 | 4.776/4.786 | 0.323/0.339 | 4.249/4.258 | 4.343/4.352 | 0.197 | X | | | XXXX | V627604250 |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

V6 Profile


Part Number Nomenclature — V6 Profile

Table 5-37. V6 Profile — Metric

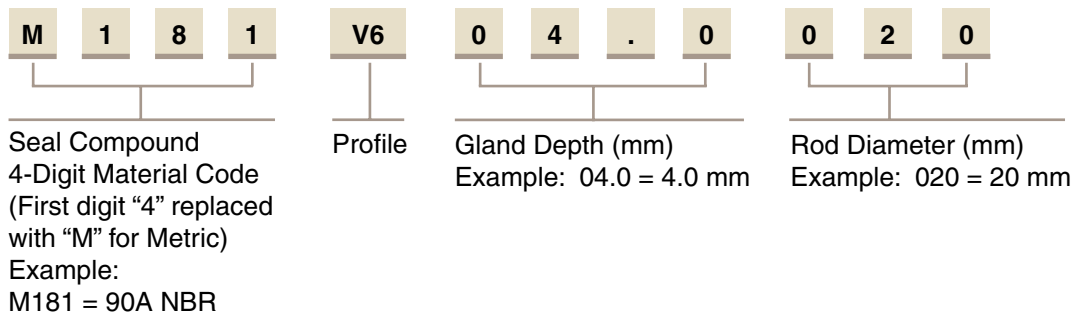

Gland Dimensions — V6 Profile

1.5mm for Spud $\varnothing \leq 20\text{mm}$
 2.0mm for Spud $\varnothing > 20\text{mm}$

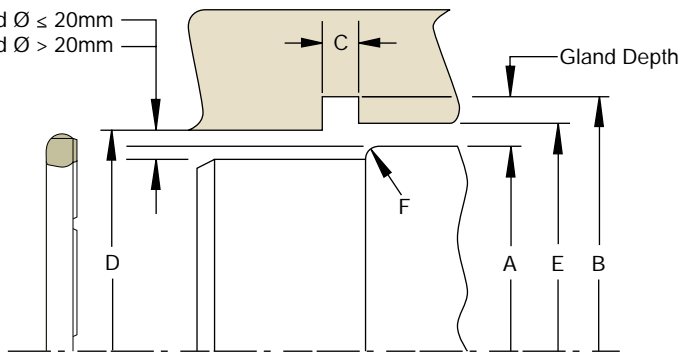

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 5-38. V6 Gland Dimensions — Metric

| Nominal Spud Diameter | A Spud Diameter | B Groove Diameter | C Groove Width | D Throat Diameter | E Throat Diameter | F Spud End Radius | Compound Codes (X = Standard Offering) | | Part Number | |
|---|-----------------|-------------------|----------------|-------------------|-------------------|-------------------|--|------|---------------|-----------|
| | | | | | | | M181 | M208 | Compound Code | |
| | h10 | H11 | +0.20/-0.00 | H11 | H11 | | | | | |
| For ISO tolerances refer to Appendix F. | | | | | | | | | | |
| 10.0 | 10.0 | 18.0 | 4,8 | 10.5 | 12.0 | 3.0 | X | X | XXXX | V604.0010 |
| 14.0 | 14.0 | 22.0 | 4,8 | 14.5 | 16.0 | 3.0 | X | X | XXXX | V604.0014 |
| 16.0 | 16.0 | 24.0 | 4,8 | 16.5 | 18.0 | 3.0 | X | | XXXX | V604.0016 |
| 20.0 | 20.0 | 28.0 | 4,8 | 20.5 | 22.0 | 3.0 | X | X | XXXX | V604.0020 |
| 22.0 | 22.0 | 30.0 | 4,8 | 22.5 | 24.0 | 3.0 | X | | XXXX | V604.0022 |
| 30.0 | 30.0 | 40.0 | 6.0 | 30.6 | 32.0 | 4.0 | X | X | XXXX | V605.0030 |
| 32.0 | 32.0 | 42.0 | 6.0 | 32.6 | 34.0 | 4.0 | X | X | XXXX | V605.0032 |
| 38.0 | 38.0 | 48.0 | 6.0 | 38.6 | 40.0 | 4.0 | X | X | XXXX | V605.0038 |
| 50.0 | 50.0 | 60.0 | 6.0 | 50.6 | 52.0 | 4.0 | X | X | XXXX | V605.0050 |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Rod Seal OR Profile

Catalog EPS 5370/USA



OR Profile, Rotary PTFE Cap Seal

The Parker OR profile is a bi-directional rod seal for use in pneumatic and low to medium duty rotary or oscillating applications. The OR profile is a two piece design comprised of a standard size o-ring energizing a wear resistant PTFE cap. The OR profile offers long wear and low friction without stick-slip. This PTFE outer diameter is designed with a special interference with the o-ring to eliminate spinning between the o-ring and seal. Special grooves are designed into the PTFE inner diameter to provide lubrication and create a labyrinth effect for reduced leakage. The seal is commonly used in swivel joints, hose reels, and machine applications. Parker's OR profile will retrofit non-Parker seals of similar design.

The OR profile may be ordered without the energizer by omitting the energizer code. See part number nomenclature.

5

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|--|--------------------------------------|-----------------------|---------------------------|
| Cap | | | |
| 0205 15% fiberglass-, 5% MoS ₂ -filled PTFE | -200°F to 575°F (-129°C to 302°C) | 3000 psi (206 bar) | < 3.3 ft/s (1.0 m/sec) |

Energizer


| | | |
|---|-------------|------------------------------------|
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) |
|---|-------------|------------------------------------|

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE (Table 3-4) and energizer (Table 3-5) materials.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

Minimum rotary shaft hardness = 60 Rc.

Note: Small size cross sections feature single outer diameter grooves. Cross sections 305 and greater feature dual grooves.



OR Cross-Section



OR installed on Rotary Shaft Gland


09/01/07

OR Profile

Part Number Nomenclature — OR Profile


Table 5-39. OR Profile — Inch

| | | | | | | | | | | | | | | | | | |
|--|---|---|---|---------|---|---|---|--|---|---|---|---|--|---|---|---|---|
| 0 | 2 | 0 | 5 | OR | 1 | 4 | 7 | 0 | 2 | 0 | 0 | 0 | - | 1 | 2 | 6 | A |
| Seal Compound 4-Digit Material Code Example: 0205 = 15% Fiberglass-, 5% MoS ₂ -filled PTFE | | | | Profile | Gland Depth (x1000) Example: .147 x 1000 = 147 | | | Bore Diameter (x1000) Example: 2.000 x 1000 = 02000 | | | | | Groove Width (x1000) Example: .126 x 1000 = 126 | | | | Energizer Compound Code Example: A = 70A Nitrile Omit = No energizer See Table 3-5 on page 3-18. |

Option:
N = Notched walls


5

Gland Dimensions — OR Profile

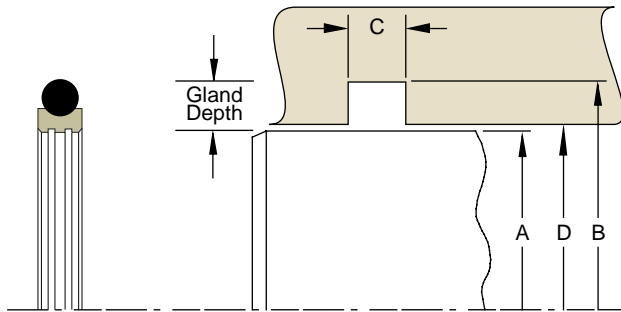

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-40. OR Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|---------------------|---------------------|---------------------|---------------------|--------------------|----------------------------|
| +.000/- .001 | +.001/- .000 | +.008/- .000 | +.002/- .000 | | |
| 0.313 | 0.506 | 0.087 | 0.314 | 012 | 0205OR09700313-087A |
| 0.375 | 0.568 | 0.087 | 0.376 | 013 | 0205OR09700375-087A |
| +.000/- .002 | +.002/- .000 | +.008/- .000 | +.002/- .000 | | |
| 0.438 | 0.631 | 0.087 | 0.439 | 014 | 0205OR09700438-087A |
| 0.500 | 0.693 | 0.087 | 0.501 | 015 | 0205OR09700500-087A |
| 0.563 | 0.756 | 0.087 | 0.564 | 016 | 0205OR09700563-087A |
| 0.625 | 0.818 | 0.087 | 0.626 | 017 | 0205OR09700625-087A |
| 0.688 | 0.881 | 0.087 | 0.689 | 018 | 0205OR09700688-087A |
| 0.750 | 0.943 | 0.087 | 0.751 | 019 | 0205OR09700750-087A |
| 0.813 | 1.006 | 0.087 | 0.814 | 020 | 0205OR09700813-087A |
| 0.875 | 1.068 | 0.087 | 0.876 | 021 | 0205OR09700875-087A |
| 0.938 | 1.131 | 0.087 | 0.939 | 022 | 0205OR09700938-087A |
| 1.000 | 1.193 | 0.087 | 1.001 | 023 | 0205OR09701000-087A |
| 1.125 | 1.318 | 0.087 | 1.126 | 025 | 0205OR09701125-087A |
| 1.250 | 1.443 | 0.087 | 1.251 | 027 | 0205OR09701250-087A |
| 1.375 | 1.568 | 0.087 | 1.376 | 028 | 0205OR09701375-087A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).

Table 5-40. OR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| + .000/- .002 | + .003/- .000 | + .008/- .000 | + .002/- .000 | | |
| 1.500 | 1.795 | 0.126 | 1.501 | 130 | 0205OR14801500-126A |
| 1.625 | 1.920 | 0.126 | 1.626 | 132 | 0205OR14801625-126A |
| 1.750 | 2.045 | 0.126 | 1.751 | 134 | 0205OR14801750-126A |
| 1.875 | 2.170 | 0.126 | 1.876 | 135 | 0205OR14801875-126A |
| + .000/- .003 | + .003/- .000 | + .008/- .000 | + .002/- .000 | | |
| 2.000 | 2.295 | 0.126 | 2.001 | 137 | 0205OR14802000-126A |
| 2.125 | 2.420 | 0.126 | 2.126 | 139 | 0205OR14802125-126A |
| 2.250 | 2.545 | 0.126 | 2.251 | 141 | 0205OR14802250-126A |
| 2.375 | 2.670 | 0.126 | 2.376 | 143 | 0205OR14802375-126A |
| 2.500 | 2.795 | 0.126 | 2.501 | 145 | 0205OR14802500-126A |
| 2.625 | 2.920 | 0.126 | 2.626 | 147 | 0205OR14802625-126A |
| 2.750 | 3.045 | 0.126 | 2.751 | 149 | 0205OR14802750-126A |
| 2.875 | 3.170 | 0.126 | 2.876 | 150 | 0205OR14802875-126A |
| + .000/- .003 | + .003/- .000 | + .008/- .000 | + .003/- .000 | | |
| 3.000 | 3.433 | 0.165 | 3.001 | 235 | 0205OR21703000-165A |
| 3.125 | 3.558 | 0.165 | 3.126 | 236 | 0205OR21703125-165A |
| 3.250 | 3.683 | 0.165 | 3.251 | 237 | 0205OR21703250-165A |
| 3.375 | 3.808 | 0.165 | 3.376 | 238 | 0205OR21703375-165A |
| 3.500 | 3.933 | 0.165 | 3.501 | 239 | 0205OR21703500-165A |
| 3.625 | 4.058 | 0.165 | 3.626 | 240 | 0205OR21703625-165A |
| 3.750 | 4.183 | 0.165 | 3.751 | 241 | 0205OR21703750-165A |
| 3.875 | 4.308 | 0.165 | 3.876 | 242 | 0205OR21703875-165A |
| 4.000 | 4.433 | 0.165 | 4.001 | 243 | 0205OR21704000-165A |
| 4.125 | 4.558 | 0.165 | 4.126 | 244 | 0205OR21704125-165A |
| 4.250 | 4.683 | 0.165 | 4.251 | 245 | 0205OR21704250-165A |
| + .000/- .003 | + .004/- .000 | + .008/- .000 | + .003/- .000 | | |
| 4.375 | 4.808 | 0.165 | 4.376 | 246 | 0205OR21704375-165A |
| 4.500 | 4.933 | 0.165 | 4.501 | 247 | 0205OR21704500-165A |
| 4.625 | 5.058 | 0.165 | 4.626 | 248 | 0205OR21704625-165A |
| + .000/- .004 | + .004/- .000 | + .008/- .000 | + .003/- .000 | | |
| 4.750 | 5.183 | 0.165 | 4.751 | 249 | 0205OR21704750-165A |
| 4.875 | 5.308 | 0.165 | 4.876 | 250 | 0205OR21704875-165A |
| 5.000 | 5.433 | 0.165 | 5.001 | 251 | 0205OR21705000-165A |
| 5.125 | 5.558 | 0.165 | 5.126 | 252 | 0205OR21705125-165A |
| 5.250 | 5.683 | 0.165 | 5.251 | 253 | 0205OR21705250-165A |
| 5.375 | 5.808 | 0.165 | 5.376 | 254 | 0205OR21705375-165A |
| 5.500 | 5.933 | 0.165 | 5.501 | 255 | 0205OR21705500-165A |
| 5.625 | 6.058 | 0.165 | 5.626 | 256 | 0205OR21705625-165A |
| 5.750 | 6.183 | 0.165 | 5.751 | 257 | 0205OR21705750-165A |
| 5.875 | 6.308 | 0.165 | 5.876 | 258 | 0205OR21705875-165A |
| + .000/- .004 | + .004/- .000 | + .008/- .000 | + .004/- .000 | | |
| 6.000 | 6.610 | 0.248 | 6.002 | 362 | 0205OR30506000-248A |
| 6.250 | 6.860 | 0.248 | 6.252 | 363 | 0205OR30506250-248A |
| 6.500 | 7.110 | 0.248 | 6.502 | 364 | 0205OR30506500-248A |
| 6.750 | 7.360 | 0.248 | 6.752 | 365 | 0205OR30506750-248A |
| 7.000 | 7.610 | 0.248 | 7.002 | 365 | 0205OR30507000-248A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
For custom groove calculations, see Appendix C.

OR Profile

Table 5-40. OR Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .000/- .005 | + .005/- .000 | + .008/- .000 | + .004/- .000 | | |
| 7.250 | 7.860 | 0.248 | 7.252 | 366 | 0205OR30507250-248A |
| 7.500 | 8.110 | 0.248 | 7.502 | 367 | 0205OR30507500-248A |
| 7.750 | 8.360 | 0.248 | 7.752 | 368 | 0205OR30507750-248A |
| 8.000 | 8.610 | 0.248 | 8.002 | 369 | 0205OR30508000-248A |
| 8.250 | 8.860 | 0.248 | 8.252 | 370 | 0205OR30508250-248A |
| 8.500 | 9.110 | 0.248 | 8.502 | 371 | 0205OR30508500-248A |
| 8.750 | 9.360 | 0.248 | 8.752 | 372 | 0205OR30508750-248A |
| 9.000 | 9.610 | 0.248 | 9.002 | 373 | 0205OR30509000-248A |
| 9.250 | 9.860 | 0.248 | 9.252 | 374 | 0205OR30509250-248A |
| 9.500 | 10.110 | 0.248 | 9.502 | 375 | 0205OR30509500-248A |
| 9.750 | 10.360 | 0.248 | 9.752 | 376 | 0205OR30509750-248A |
| 10.000 | 10.610 | 0.248 | 10.002 | 377 | 0205OR30510000-248A |
| 10.500 | 11.110 | 0.248 | 10.502 | 378 | 0205OR30510500-248A |
| 11.000 | 11.610 | 0.248 | 11.002 | 379 | 0205OR30511000-248A |
| 11.500 | 12.110 | 0.248 | 11.502 | 380 | 0205OR30511500-248A |
| + .000/- .006 | + .006/- .000 | + .008/- .000 | + .005/- .000 | | |
| 12.000 | 12.827 | 0.319 | 12.002 | 453 | 0205OR41412000-319A |
| 12.500 | 13.327 | 0.319 | 12.502 | 454 | 0205OR41412500-319A |
| 13.000 | 13.827 | 0.319 | 13.002 | 455 | 0205OR41413000-319A |
| 13.500 | 14.327 | 0.319 | 13.502 | 456 | 0205OR41413500-319A |
| 14.000 | 14.827 | 0.319 | 14.002 | 457 | 0205OR41414000-319A |
| 14.500 | 15.327 | 0.319 | 14.502 | 458 | 0205OR41414500-319A |
| 15.000 | 15.827 | 0.319 | 15.002 | 459 | 0205OR41415000-319A |
| 15.500 | 16.327 | 0.319 | 15.502 | 460 | 0205OR41415500-319A |
| 16.000 | 16.827 | 0.319 | 16.002 | 461 | 0205OR41416000-319A |
| 16.500 | 17.327 | 0.319 | 16.502 | 462 | 0205OR41416500-319A |
| 17.000 | 17.827 | 0.319 | 17.002 | 463 | 0205OR41417000-319A |
| 17.500 | 18.327 | 0.319 | 17.502 | 464 | 0205OR41417500-319A |
| 18.000 | 18.827 | 0.319 | 18.002 | 465 | 0205OR41418000-319A |
| 18.500 | 19.327 | 0.319 | 18.502 | 466 | 0205OR41418500-319A |
| 19.000 | 19.827 | 0.319 | 19.002 | 467 | 0205OR41419000-319A |
| 19.500 | 20.327 | 0.319 | 19.502 | 468 | 0205OR41419500-319A |
| + .000/- .007 | + .007/- .000 | + .008/- .000 | + .005/- .000 | | |
| 20.000 | 20.827 | 0.319 | 20.002 | 469 | 0205OR41420000-319A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.


For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.




Part Number Nomenclature — OR Profile

Table 5-41. OR Profile — Metric

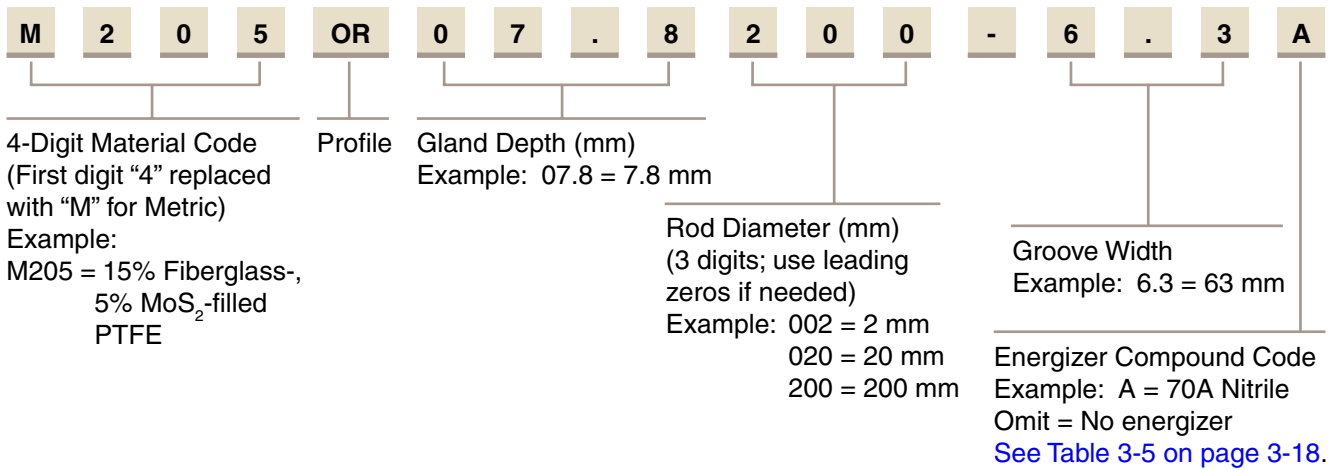

Gland Dimensions — OR Profile

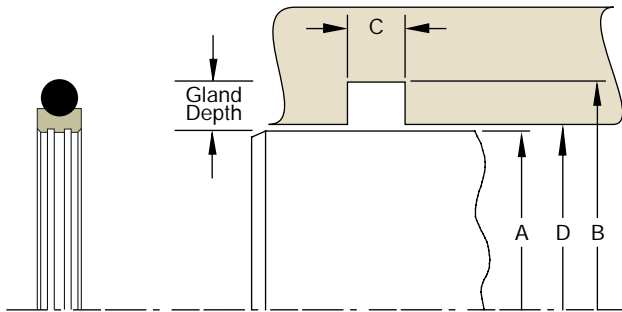

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 5-42. OR Gland Dimensions — Metric

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|---|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| f7 | H9 | + .20/- .00 | H8 | | |
| For ISO tolerances refer to Appendix F. | | | | | |
| 6.0 | 10.9 | 2.2 | 6.0 | 011 | M205OR02.5006-2.2A |
| 8.0 | 12.9 | 2.2 | 8.0 | 012 | M205OR02.5008-2.2A |
| 10.0 | 14.9 | 2.2 | 10.0 | 013 | M205OR02.5010-2.2A |
| 12.0 | 16.9 | 2.2 | 12.0 | 014 | M205OR02.5012-2.2A |
| 14.0 | 18.9 | 2.2 | 14.0 | 016 | M205OR02.5014-2.2A |
| 15.0 | 19.9 | 2.2 | 15.0 | 016 | M205OR02.5015-2.2A |
| 16.0 | 20.9 | 2.2 | 16.0 | 017 | M205OR02.5016-2.2A |
| 18.0 | 22.9 | 2.2 | 18.0 | 018 | M205OR02.5018-2.2A |
| 20.0 | 27.5 | 3.2 | 20.0 | 118 | M205OR03.8020-3.2A |
| 22.0 | 29.5 | 3.2 | 22.0 | 119 | M205OR03.8022-3.2A |
| 25.0 | 32.5 | 3.2 | 25.0 | 121 | M205OR03.8025-3.2A |
| 28.0 | 35.5 | 3.2 | 28.0 | 123 | M205OR03.8028-3.2A |
| 30.0 | 37.5 | 3.2 | 30.0 | 124 | M205OR03.8030-3.2A |
| 32.0 | 39.5 | 3.2 | 32.0 | 126 | M205OR03.8032-3.2A |
| 35.0 | 42.5 | 3.2 | 35.0 | 127 | M205OR03.8035-3.2A |
| 36.0 | 43.5 | 3.2 | 36.0 | 128 | M205OR03.8036-3.2A |
| 40.0 | 51.0 | 4.2 | 40.0 | 224 | M205OR05.5040-4.2A |
| 42.0 | 53.0 | 4.2 | 42.0 | 224 | M205OR05.5042-4.2A |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
For custom groove calculations, [see Appendix C](#).



Table 5-42. OR Gland Dimensions — Metric (continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter* | O-ring Dash Number | Part Number |
|---|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| f7 | H9 | + .20/- .00 | H8 | | |
| For ISO tolerances refer to Appendix F. | | | | | |
| 45.0 | 56.0 | 4.2 | 45.0 | 225 | M205OR05.5045-4.2A |
| 48.0 | 59.0 | 4.2 | 48.0 | 226 | M205OR05.5048-4.2A |
| 50.0 | 61.0 | 4.2 | 50.0 | 227 | M205OR05.5050-4.2A |
| 52.0 | 63.0 | 4.2 | 52.0 | 227 | M205OR05.5052-4.2A |
| 55.0 | 66.0 | 4.2 | 55.0 | 228 | M205OR05.5055-4.2A |
| 56.0 | 67.0 | 4.2 | 56.0 | 229 | M205OR05.5056-4.2A |
| 60.0 | 71.0 | 4.2 | 60.0 | 230 | M205OR05.5060-4.2A |
| 63.0 | 74.0 | 4.2 | 63.0 | 231 | M205OR05.5063-4.2A |
| 65.0 | 76.0 | 4.2 | 65.0 | 232 | M205OR05.5065-4.2A |
| 70.0 | 81.0 | 4.2 | 70.0 | 233 | M205OR05.5070-4.2A |
| 75.0 | 86.0 | 4.2 | 75.0 | 234 | M205OR05.5075-4.2A |
| 80.0 | 91.0 | 4.2 | 80.0 | 236 | M205OR05.5080-4.2A |
| 85.0 | 96.0 | 4.2 | 85.0 | 237 | M205OR05.5085-4.2A |
| 90.0 | 101.0 | 4.2 | 90.0 | 239 | M205OR05.5090-4.2A |
| 95.0 | 106.0 | 4.2 | 95.0 | 241 | M205OR05.5095-4.2A |
| 100.0 | 111.0 | 4.2 | 100.0 | 243 | M205OR05.5100-4.2A |
| 105.0 | 116.0 | 4.2 | 105.0 | 242 | M205OR05.5105-4.2A |
| 110.0 | 121.0 | 4.2 | 110.0 | 246 | M205OR05.5110-4.2A |
| 115.0 | 126.0 | 4.2 | 115.0 | 247 | M205OR05.5115-4.2A |
| 120.0 | 131.0 | 4.2 | 120.0 | 248 | M205OR05.5120-4.2A |
| 125.0 | 136.0 | 4.2 | 125.0 | 250 | M205OR05.5125-4.2A |
| 130.0 | 141.0 | 4.2 | 130.0 | 251 | M205OR05.5130-4.2A |
| 135.0 | 146.0 | 4.2 | 135.0 | 253 | M205OR05.5135-4.2A |
| 140.0 | 151.0 | 4.2 | 140.0 | 255 | M205OR05.5140-4.2A |
| 150.0 | 161.0 | 4.2 | 150.0 | 257 | M205OR05.5150-4.2A |
| 160.0 | 171.0 | 4.2 | 160.0 | 259 | M205OR05.5160-4.2A |
| 170.0 | 181.0 | 4.2 | 170.0 | 261 | M205OR05.5170-4.2A |
| 180.0 | 191.0 | 4.2 | 180.0 | 263 | M205OR05.5180-4.2A |
| 190.0 | 201.0 | 4.2 | 190.0 | 264 | M205OR05.5190-4.2A |
| 200.0 | 215.5 | 6.3 | 200.0 | 369 | M205OR07.8200-6.3A |
| 210.0 | 225.5 | 6.3 | 210.0 | 370 | M205OR07.8210-6.3A |
| 220.0 | 235.5 | 6.3 | 220.0 | 372 | M205OR07.8220-6.3A |
| 230.0 | 245.5 | 6.3 | 230.0 | 374 | M205OR07.8230-6.3A |
| 240.0 | 255.5 | 6.3 | 240.0 | 375 | M205OR07.8240-6.3A |
| 250.0 | 265.5 | 6.3 | 250.0 | 377 | M205OR07.8250-6.3A |
| 280.0 | 301.0 | 8.1 | 280.0 | 451 | M205OR10.5280-8.1A |
| 300.0 | 321.0 | 8.1 | 300.0 | 453 | M205OR10.5300-8.1A |
| 320.0 | 341.0 | 8.1 | 320.0 | 454 | M205OR10.5320-8.1A |
| 350.0 | 371.0 | 8.1 | 350.0 | 456 | M205OR10.5350-8.1A |
| 360.0 | 381.0 | 8.1 | 360.0 | 457 | M205OR10.5360-8.1A |
| 400.0 | 421.0 | 8.1 | 400.0 | 460 | M205OR10.5400-8.1A |
| 420.0 | 441.0 | 8.1 | 420.0 | 462 | M205OR10.5420-8.1A |
| 450.0 | 471.0 | 8.1 | 450.0 | 465 | M205OR10.5450-8.1A |
| 480.0 | 501.0 | 8.1 | 480.0 | 467 | M205OR10.5480-8.1A |
| 500.0 | 521.0 | 8.1 | 500.0 | 469 | M205OR10.5500-8.1A |
| 600.0 | 621.0 | 8.1 | 600.0 | 472 | M205OR10.5600-8.1A |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seals for Rod or Piston Applications

Catalog EPS 5370/USA

Contents

| | |
|------------------------|-----------------------------------|
| Product Offering | 6-2 |
| Decision Tree | 5-3 and 5-4, 7-3 and 7-4 |
| PolyPak Sealing..... | 6-3 |
| Profiles | |
| Standard PolyPak | 6-6 |
| Deep PolyPak..... | 6-8 |
| Type B PolyPak..... | 6-10 |
| SL | 6-39 |
| US | 6-42 |
| 8400 and 8500 | 6-49 |
| AN6226 | 6-55 |
| Spiral Vee | 6-59 |

Symmetrical Profiles






















Parker symmetrical profiles are designed to fit the center of the gland. They are categorized as symmetrical profiles because the shape of the outside diameter sealing lip matches the shape of the inside diameter sealing lip. This symmetrical design, with its centered fit in the gland, allows the profile to function either as a rod or piston seal. Parker's wide range of profile options, proprietary compounds, and sizes establish Parker as a leader in the industry, providing quality solutions for pneumatic and hydraulic applications.

Symmetrical Seal Product Offering (For Rod or Piston Applications)

Catalog EPS 5370/USA

Profiles

Table 6-1: Product Profiles

| Series | Description | Application (Duty) | | | | Page | Series | Description | Application (Duty) | | | | Page |
|--------|---|---|---|---|-----------|------|--------|--|--|---|---|-----------|------|
| | | Light | Medium | Heavy | Pneumatic | | | | Light | Medium | Heavy | Pneumatic | |
| SPP | Square Cross-Section O-ring Energized Lip Seal |  |  |  | | 6-6 | 8400 | Light Load U-cup with Beveled Lips |  |  | | | 6-49 |
| DPP | O-ring Loaded Lip Seal with Scraper Lip Design |  |  |  | | 6-8 | 8500 | Light Load U-cup with Scraper Lips |  |  | | | 6-49 |
| BPP | O-ring Energized Lip Seal with Beveled Lip Design |  |  |  | | 6-10 | AN6226 | Symmetrical U-cup per Army Navy (AN) Specification |  | | | | 6-55 |
| SL | Dual Compound Dual Lip Seal |  |  |  | | 6-39 | Spiral | Cut to Size Chevron Packing | |  |  | | 6-59 |
| US | Symmetrical U-cup Seal |  |  | | | 6-42 | | | | | | | |

Symmetrical Seal Decision Tree

The Symmetrical product offerings are a part of the Decision Trees in the Rod and Piston sections (Sections 5 and 7). These Decision Trees are found on the following pages:

[Rod Decision Tree, Hydraulic](#) page 5-3

[Piston Decision Tree, Hydraulic](#) page 7-3

[Rod Decision Tree, Pneumatic](#) page 5-4

[Piston Decision Tree, Pneumatic](#) page 7-4

09/01/07





PolyPak Sealing

Parker's PolyPak seal is a patented precision molded multi-purpose seal. The Parker PolyPak combines an o-ring type synthetic rubber o-spring with a conventional lip-type seal to produce a unique sealing device capable of sealing both vacuum, high and low pressure.

Conventional lip seals, such as the standard u-cups are prone to leakage under low pressure because little or no lip loading is inherent in the basic seal design. The Parker PolyPak however, is a squeeze type seal and provides high sealability at low pressure. As system pressure increases, additional force is applied to the PolyPak's seal interface and as pressure continues to increase, lip loading is automatically increased to compensate for this higher pressure and thus maintain a positive, leak-free seal from hard vacuum to over 60,000 psi with proper design and auxiliary devices.

In addition to providing superior sealing in vacuum, low and high pressure applications, the PolyPak seal offers a number of distinct advantages over conventional symmetrical or non-symmetrical u-cup seals including:

- The PolyPak's o-spring stabilizes the seal under extreme pressures, preventing seal lip distortion and rolling or twisting in the gland.
- At low or high temperature extremes, the o-spring maintains lip loading on both I.D. and O.D. of the seal interface.
- The PolyPak seal can be stretched or squeezed to accommodate oversize cylinder bores and undersize rods. As long as the seal cross-section is correct in relation to the radial groove dimensions, the PolyPak will compensate and maintain proper lip loading.
- The range of materials available to the user of the PolyPak seal insures the proper combination for abrasion, extrusion, temperature resistance and fluid compatibility which produces high sealability and long life.

PolyPak seals are available in three styles:

1. Standard PolyPak (SPP Profile)
2. Deep PolyPak (DPP Profile)
3. Type B PolyPak (BPP Profile)

Rod Sealing with PolyPak Seals

As a general rule, rod seals are more critical in nature than their companion piston seals. With increasing OEM requirements for “dry rod” capability, both to conserve system fluid and avoid leakage, the design and selection of the rod seal can be more challenging than its piston counterpart.

Parker recommends the use of the Type B PolyPak (BPP Profile) for rod seal applications due to its design features, including:

- Excellent film-breaking capability of the beveled lip design
- The higher level of lip loading provided by the Type B offers maximum sealability
- The long body of the design provides maximum stability

Piston Sealing with PolyPak Seals

Piston seals can be classified in two categories: single-acting and double-acting. The single acting seal is only required to seal in a single direction as system pressure is seen on only one end of the piston (return of the piston in a single-acting system is accomplished either by gravity or spring loading). The double-acting cylinder requires that the piston be sealed in both directions of stroke as system fluid is applied to one side or the other to achieve movement.

Please see the individual PolyPak profile pages for explanation and differentiation on selecting PolyPak profiles for piston applications.

PolyPak Material Combinations

PolyPak seals can be configured in numerous o-spring energizer and shell combinations. Table 6-2 represents “standard” combinations. Care should be taken to insure that both the PolyPak shell and its companion o-spring energizer are compatible with the system temperature, pressure, and fluid requirements.

Table 6-2. Standard Shell and O-spring Energizer Combinations for PolyPak Seals

| PolyPak Shell | O-spring Energizer |
|------------------------|----------------------|
| Molythane | 70A Nitrile |
| PolyMyte | 70A Nitrile, 75A FKM |
| Nitroxile | 70A Nitrile |
| Ethylene Propylene | 80A EPR |
| Fluorocarbon | 75A FKM |
| All Plastic and Rubber | Metal O-spring |

Parker's “smart” part numbering provides for varying standard and custom PolyPak shell and o-spring energizer material combinations. Please refer to the part number nomenclature tables and Technical Data in the PolyPak profile pages for PolyPak shell material options. See Table 6-3 for standard and custom o-spring energizer option details.

Positively-Actuated Back-ups Option

PolyPak seals can be designed with positively-actuated back-ups by designating that option in the part number. See page 10-21 for an explanation of the features of positively-actuated back-ups.

Table 6-3. PolyPak O-spring Energizers

| Standard O-spring Energizer | | |
|-----------------------------|--|--|
| O-spring Energizer Code | Type of PolyPak | Description |
| – (dash) | Urethane (4615, 4622) | 70A NBR o-spring energizer |
| | Rubber | Indicates that the o-spring material family is to match the rubber PolyPak shell material family. Example: XNBR 4263 PolyPak shell: code (“–”) indicates NBR o-ring EPR 4207 PolyPak shell: code (“–”) indicates EPR o-ring FKM 4208 PolyPak shell: code (“–”) indicates FKM o-ring FKM 4266 PolyPak shell: code (“–”) indicates FKM o-ring |
| | PolyMyte (4651) | must be replaced by a custom o-spring energizer code |
| Custom O-spring Energizers | | |
| O-spring Energizer Code | Energizer Description | |
| C | Continuous o-ring | |
| E | General EPR o-ring | |
| J | General HNBR o-ring | |
| L | Canted coil, spring-loaded with oval spring cavity | |
| N | General nitrile o-ring | |
| R | Low swell nitrile o-ring | |
| S | Spring energizer with o-ring groove | |
| U | Geothermal EPR o-ring | |
| V | Fluorocarbon o-ring | |
| W | Nuclear grade EPR o-ring | |
| X | Premium grade low-temperature o-ring | |
| Y | Low temperature nitrile o-ring | |



Symmetrical Seal

SPP Profile, Standard PolyPak

Catalog EPS 5370/USA

SPP Profile, Standard PolyPak, Square Cross-Section O-ring Energized Lip Seal



Parker's Standard PolyPak is a squeeze seal with a symmetrical profile for use in either rod or piston applications. The standard Molythane shell provides high wear resistance and the o-ring energizer functions as a spring to maintain sealing contact under low pressure. The Standard PolyPak utilizes a scraper lip design formed by a precision trimming process. The scraper edge wipes both fluid film and contamination away from the seal. A wide selection of sizes and alternate compounds allow this profile to match up with many hydraulic applications. The Standard PolyPak is an economical choice as a stand alone rod or piston seal. With less squeeze force than the Deep or Type B profiles, the Standard PolyPak can be installed back to back, in separate glands, for bi-directional sealing. To protect against pressure trapping, it is recommended that the o-ring be removed from the Standard PolyPak facing the lower pressure side of the application.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|-----------------------|-------------------------|
| Shell | | | |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5000 psi (345 bar) | < 1.6 ft/s (0.5 m/s) |
| P4622A90 | -65°F to 225°F (-54°C to 107°C) | 5000 psi (345 bar) | < 1.6 ft/s (0.5 m/s) |
| Z4651D60 | -65°F to 275°F (-54°C to 135°C) | 7000 psi (482 bar) | < 1.6 ft/s (0.5 m/s) |
| N4263A90 | -20°F to 275°F (-29°C to 135°C) | 2000 psi (138 bar) | < 1.6 ft/s (0.5 m/s) |
| E4207A90 | -65°F to 300°F (-54°C to 149°C) | 2000 psi (138 bar) | < 1.6 ft/s (0.5 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 2250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |
| V4266A95 | -5°F to 400°F (-21°C to 204°C) | 2250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |



Standard PolyPak Cross-Section

Energizer

For Seals With...

4615 or 4622 PolyPak shell
4651 PolyPak shell
Rubber PolyPak shell


Standard Energizer Material*

Standard energizer is a nitrile o-ring
O-spring energizer code must be identified
Standard energizer is an o-ring from the same rubber material family as the shell


***Alternate Materials:** For custom energizer materials, see [Table 6-3](#). For applications that may require an alternate shell material, please see [Section 3](#) or contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see [Table 2-4, page 2-5](#)).

09/01/07

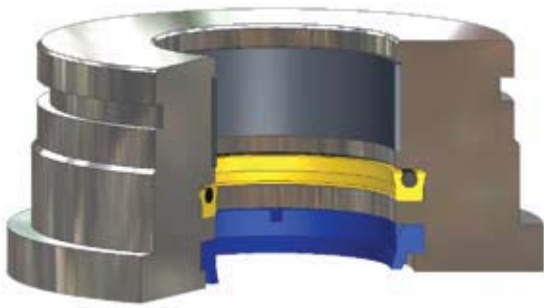


*Standard PolyPak installed
in Rod Gland*

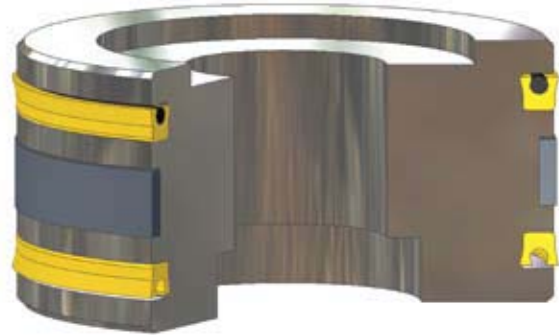

*Standard PolyPak installed
in Piston Gland*

Part Number Nomenclature — Standard PolyPak Profile

Table 6-4. Standard PolyPak Profile — Inch

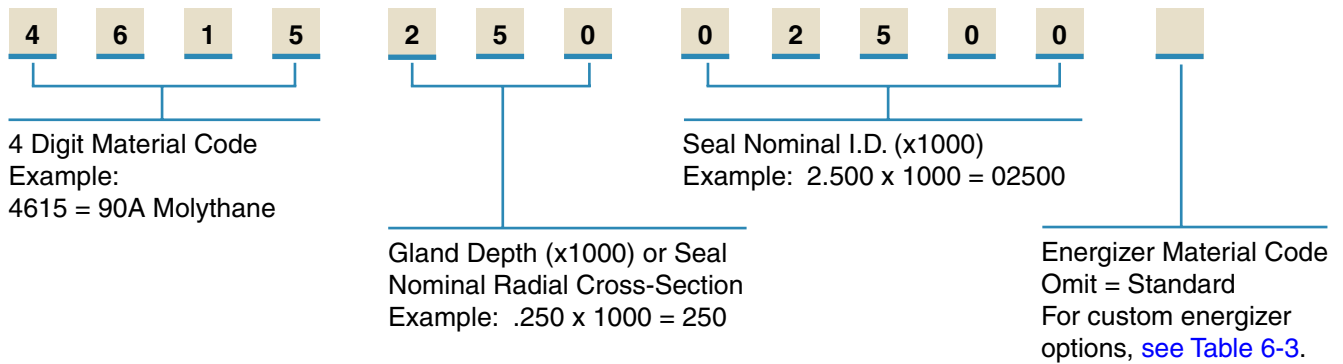

Gland Dimensions — Standard PolyPak Profile

Standard PolyPak gland dimensions are provided on in [Table 6-8, page 6-12](#).

Symmetrical Seal DPP Profile, Deep PolyPak

Catalog EPS 5370/USA


DPP Profile, Deep PolyPak, O-ring Loaded Lip Seal with Scraper Lip Design



Parker's Deep PolyPak is a squeeze seal with a symmetrical profile for use in either rod or piston applications. Its rectangular shape ensures stability in the gland. The standard Molythane shell provides high wear resistance and the o-ring energizer functions as a spring to maintain sealing contact under low pressure or vacuum applications. The Deep PolyPak scraper lip design cuts fluid film and moves contamination away from the seal. The sharp edge of the lip is formed by a precision knife trimming process. A wide selection of sizes and alternate compounds allow this profile to match up with many hydraulic applications. The Deep PolyPak is an economical choice as a stand alone rod or piston seal. Deep PolyPak seals should not be installed back to back in bi-directional piston applications as a pressure trap between the seals may occur.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|------------------------|-------------------------|
| Shell | | | |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4622A90 | -65°F to 225°F (-54°C to 107°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| Z4651D60 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) | < 1.6 ft/s (0.5 m/s) |
| N4263A90 | -20°F to 275°F (-29°C to 135°C) | 2,000 psi (137 bar) | < 1.6 ft/s (0.5 m/s) |
| E4207A90 | -65°F to 300°F (-54°C to 149°C) | 2,000 psi (137 bar) | < 1.6 ft/s (0.5 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 2250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |
| V4266A95 | -5°F to 400°F (-21°C to 204°C) | 2,250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |



Deep PolyPak Cross-Section

Energizer

For Seals With...

4615 or 4622 PolyPak shell
4651 PolyPak shell
Rubber PolyPak shell


Standard Energizer Material*

Standard energizer is a nitrile o-ring
O-spring energizer code must be identified
Standard energizer is an o-ring from the same rubber material family as the shell

*Alternate Materials: For custom energizer materials, see Table 6-3. For applications that may require an alternate shell material, please see Section 3 or contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

09/01/07

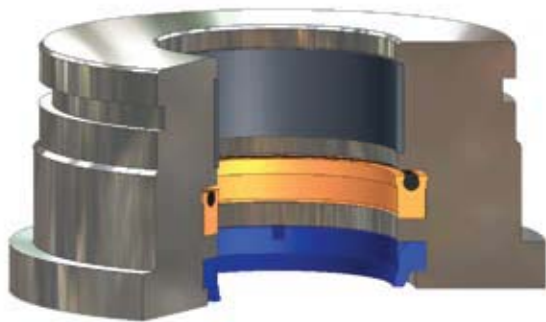


Deep PolyPak installed in Rod Gland



Deep PolyPak installed in Piston Gland

Part Number Nomenclature — Deep PolyPak Profile

Table 6-5. Deep PolyPak Profile — Inch

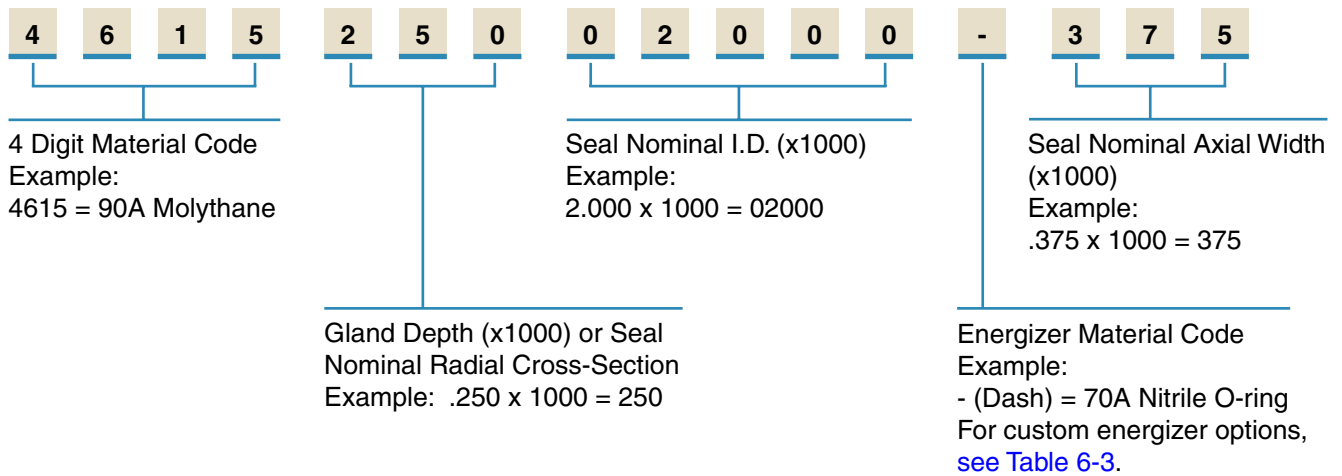

Gland Dimensions — Deep PolyPak Profile

Deep PolyPak gland dimensions are provided in [Table 6-8, page 6-12.](#)

Symmetrical Seal BPP Profile, Type B PolyPak

Catalog EPS 5370/USA

BPP Profile, Type B PolyPak O-ring Energized Lip Seal with Beveled Lip Design




Parker's Type B PolyPak is a squeeze seal with a symmetrical profile for use in either rod or piston applications. The rectangular shape of its cross section ensures stability in the gland. The standard Molythane shell provides high wear resistance and the o-ring energizer functions as a spring to maintain sealing contact under low pressure or vacuum applications. The beveled lip design of the Type B PolyPak is excellent for cutting fluid film. The sharp beveled lip is formed by a precision knife trimming process. A wide selection of sizes and alternate compounds allow this profile to match up with many hydraulic applications. The Type B PolyPak is an economical choice as a stand-alone seal or can be used in tandem with a buffer seal. In piston applications, this seal will function as a unidirectional seal. Instead, for bi-directional piston sealing, incorporate a PIP ring (see page 7-15). Type B PolyPaks should not be installed back to back, in bi-directional pressure applications, as a pressure trap between the seals may occur.


6

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|------------------------|-------------------------|
| Shell | | | |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4622A90 | -65°F to 225°F (-54°C to 107°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| Z4651D60 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) | < 1.6 ft/s (0.5 m/s) |
| N4263A90 | -20°F to 275°F (-29°C to 135°C) | 7,000 psi (482 bar) | < 1.6 ft/s (0.5 m/s) |
| E4207A90 | -65°F to 300°F (-54°C to 149°C) | 2,000 psi (137 bar) | < 1.6 ft/s (0.5 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 2250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |
| V4266A95 | -5°F to 400°F (-21°C to 204°C) | 2,250 psi (155 bar) | < 1.6 ft/s (0.5 m/s) |



Type B PolyPak
Cross-Section



Type B PolyPak
with Back-up
Cross-Section

Energizer

For Seals With...

4615 or 4622 PolyPak shell
4651 PolyPak shell
Rubber PolyPak shell


Standard Energizer Material*

Standard energizer is a nitrile o-ring
O-spring energizer code must be identified
Standard energizer is an o-ring from the same rubber material family as the shell

***Alternate Materials:** For custom energizer materials, see Table 6-3. For applications that may require an alternate shell material, please see Section 3 or contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

09/01/07

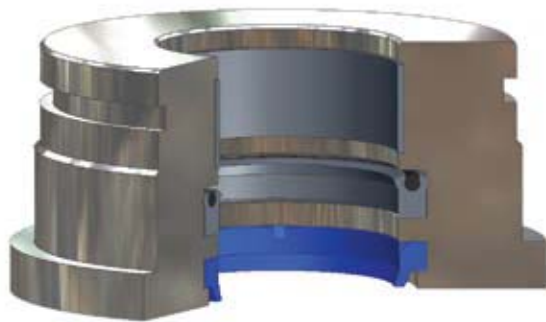


Type B PolyPak installed in Rod Gland



Type B PolyPak installed in Piston Gland

Part Number Nomenclature — Type B PolyPak Profile


Table 6-6. Type B PolyPak Profile — Inch

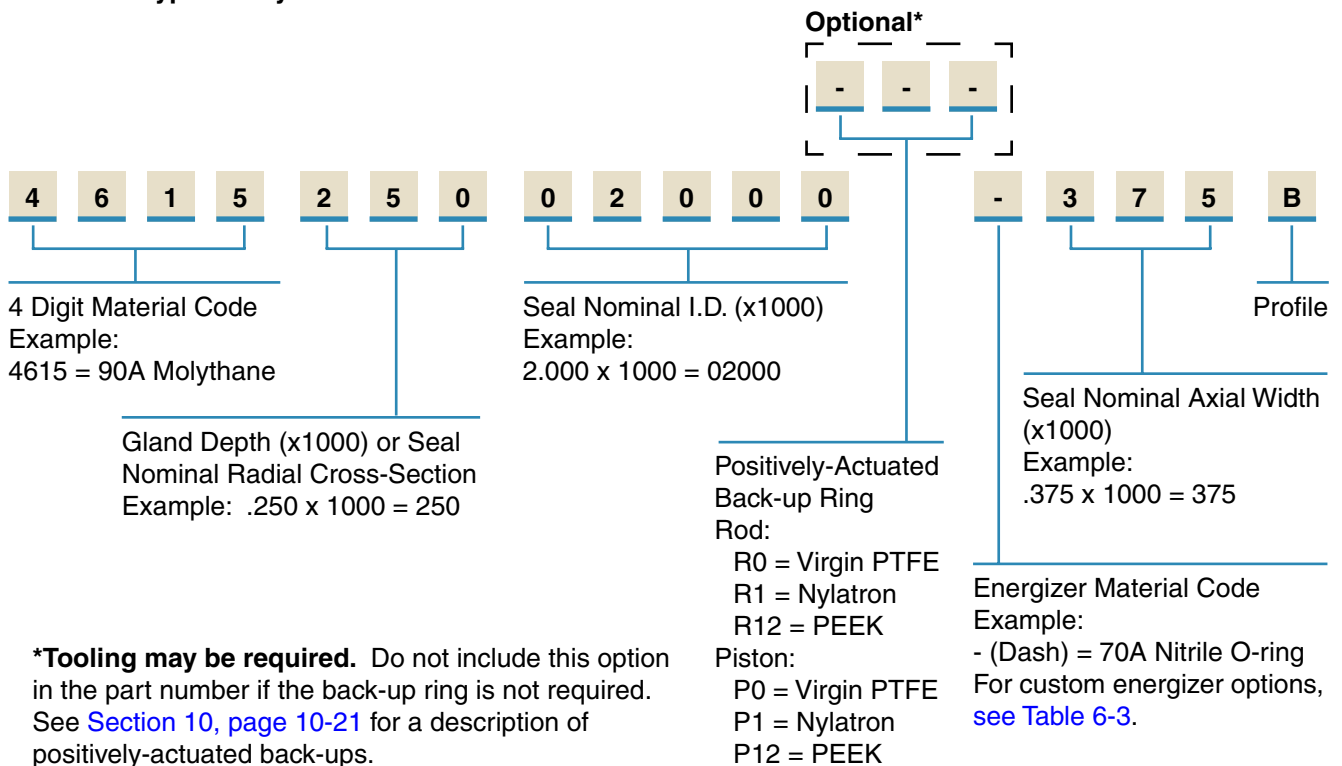

***Tooling may be required.** Do not include this option in the part number if the back-up ring is not required. See [Section 10, page 10-21](#) for a description of positively-actuated back-ups.

Gland Dimensions — Type B PolyPak Profile

Type B PolyPak gland dimensions are provided in [Table 6-8, page 6-12](#).



Standard, Deep and Type B PolyPak Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — Standard, Deep and Type B PolyPak Profiles

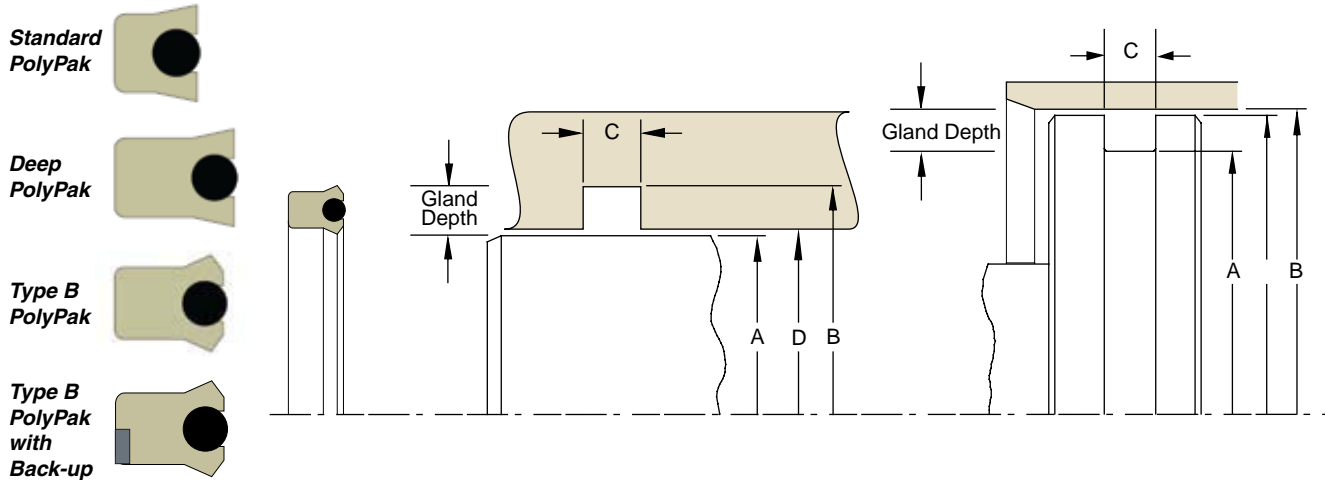


Table 6-7A. Rod Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.00/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Table 6-7B. Piston Gland Dimension Tolerances

| Nominal Gland Depth | B Bore Diameter | A Groove Diameter | C Groove Width | E Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | +0.000/-0.005 | |
| 1 | +0.009/-0.000 | +0.000/-0.012 | +0.000/-0.005 | |

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|-------------------------|------------------------|-------------------------|--------------------|---------------------|---|---------|--------|---------|--------|---------------|----------------|--|--|-----|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | | Plastic | Rubber | Plastic | Rubber | | | | | | |
| 0.062 | 0.312 | 0.138 | 0.275 | 0.063 | 0.311 | X | | | | | | XXXX | 12500062 | - | 250 | B |
| 0.093 | 0.343 | 0.138 | 0.275 | 0.094 | 0.342 | X | X | | | | | XXXX | 12500093 | - | 250 | B |
| 0.125 | 0.375 | 0.138 | 0.275 | 0.126 | 0.374 | X | X | | X | X | | XXXX | 12500125 | - | 250 | B |
| 0.140 | 0.390 | 0.138 | 0.275 | 0.141 | 0.389 | X | | | | | | XXXX | 12500140 | - | 250 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

02/15/08



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter (Bore) Groove Diameter | B (Rod) Groove Diameter Bore Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|---|---|------------------------|-------------------------|-----------------------|----------------------------|--|--------|---------------|----------------|--|--|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | | | | | |
| 0.187 | 0.437 | 0.138 | 0.275 | 0.188 | 0.436 | X | X | | | X | X | XXXX | 12500187 | - | 250 | B |
| 0.187 | 0.562 | 0.206 | 0.343 | 0.188 | 0.561 | X | X | | | | | XXXX | 18700187 | - | 312 | B |
| 0.187 | 0.750 | 0.309 | 0.550 | 0.188 | 0.749 | X | | | | | | XXXX | 28100187 | - | 500 | B |
| 0.218 | 0.468 | 0.138 | 0.275 | 0.219 | 0.467 | | | | | X | | XXXX | 12500218 | - | 250 | B |
| 0.250 | 0.500 | 0.138 | 0.275 | 0.251 | 0.499 | X | X | X | | X | X | XXXX | 12500250 | - | 250 | B |
| 0.250 | 0.625 | 0.206 | 0.343 | 0.251 | 0.624 | X | X | X | | X | | XXXX | 18700250 | - | 312 | B |
| 0.250 | 0.750 | 0.275 | 0.413 | 0.251 | 0.749 | X | | | | X | | XXXX | 25000250 | - | 375 | B |
| 0.250 | 0.875 | 0.343 | 0.550 | 0.252 | 0.873 | X | | | | | | XXXX | 31200250 | - | 500 | B |
| 0.312 | 0.562 | 0.138 | 0.275 | 0.313 | 0.561 | X | X | X | | X | X | XXXX | 12500312 | - | 250 | B |
| 0.312 | 0.687 | 0.206 | 0.343 | 0.313 | 0.686 | X | | | | X | | XXXX | 18700312 | - | 312 | B |
| 0.312 | 0.750 | 0.240 | 0.413 | 0.313 | 0.749 | X | | | | | | XXXX | 21800312 | - | 375 | B |
| 0.312 | 0.812 | 0.275 | 0.413 | 0.313 | 0.811 | X | | | | | X | XXXX | 25000312 | - | 375 | B |
| 0.359 | 0.609 | 0.138 | 0.275 | 0.360 | 0.608 | X | | | | | | XXXX | 12500359 | - | 250 | B |
| 0.375 | 0.625 | 0.138 | 0.206 | 0.376 | 0.624 | X | X | | | X | | XXXX | 12500375 | - | 187 | B |
| 0.375 | 0.625 | 0.138 | 0.275 | 0.376 | 0.624 | | | | | X | X | XXXX | 12500375 | - | 250 | B |
| 0.375 | 0.750 | 0.206 | 0.293 | 0.376 | 0.749 | X | X | | | X | | XXXX | 18700375 | - | 266 | B |
| 0.375 | 0.750 | 0.206 | 0.343 | 0.376 | 0.749 | | | X | X | X | | XXXX | 18700375 | - | 312 | B |
| 0.375 | 0.875 | 0.275 | 0.413 | 0.376 | 0.874 | X | X | X | | | X | XXXX | 25000375 | - | 375 | B |
| 0.375 | 1.000 | 0.343 | 0.550 | 0.377 | 0.998 | X | | | | | | XXXX | 31200375 | - | 500 | B |
| 0.437 | 0.687 | 0.138 | 0.275 | 0.438 | 0.686 | X | X | X | | X | | XXXX | 12500437 | - | 250 | B |
| 0.437 | 0.750 | 0.172 | 0.275 | 0.438 | 0.749 | X | | | | | | XXXX | 15600437 | - | 250 | B |
| 0.437 | 0.812 | 0.206 | 0.343 | 0.438 | 0.811 | X | X | X | | X | | XXXX | 18700437 | - | 312 | B |
| 0.437 | 0.875 | 0.240 | 0.413 | 0.438 | 0.874 | X | | | | | | XXXX | 21800437 | - | 375 | B |
| 0.437 | 0.937 | 0.275 | 0.413 | 0.438 | 0.936 | X | X | X | | X | | XXXX | 25000437 | - | 375 | B |
| 0.437 | 1.062 | 0.343 | 0.550 | 0.439 | 1.060 | X | | | | | | XXXX | 31200437 | - | 500 | B |
| 0.500 | 0.750 | 0.138 | 0.138 | 0.501 | 0.749 | X | X | | | X | X | XXXX | 12500500 | - | 125 | B |
| 0.500 | 0.750 | 0.138 | 0.275 | 0.501 | 0.749 | | | X | X | X | X | XXXX | 12500500 | - | 250 | B |
| 0.500 | 0.875 | 0.206 | 0.343 | 0.501 | 0.874 | X | X | | | X | X | XXXX | 18700500 | - | 312 | B |
| 0.500 | 1.000 | 0.275 | 0.413 | 0.501 | 0.999 | X | | X | | X | | XXXX | 25000500 | - | 375 | B |
| 0.500 | 1.125 | 0.343 | 0.550 | 0.502 | 1.123 | X | X | | | | | XXXX | 31200500 | - | 500 | B |
| 0.500 | 1.250 | 0.413 | 0.688 | 0.502 | 1.248 | X | | | | | | XXXX | 37500500 | - | 625 | B |
| 0.531 | 0.781 | 0.138 | 0.275 | 0.532 | 0.780 | X | | | | | | XXXX | 12500531 | - | 250 | B |
| 0.562 | 0.812 | 0.138 | 0.138 | 0.563 | 0.811 | X | X | | | X | | XXXX | 12500562 | - | 125 | B |
| 0.562 | 0.812 | 0.138 | 0.275 | 0.563 | 0.811 | | | | | X | X | XXXX | 12500562 | - | 250 | B |
| 0.562 | 0.936 | 0.206 | 0.343 | 0.563 | 0.935 | X | | | | X | X | XXXX | 18700562 | - | 312 | B |
| 0.562 | 1.000 | 0.240 | 0.413 | 0.563 | 0.999 | X | | | | | | XXXX | 21800562 | - | 375 | B |
| 0.562 | 1.062 | 0.275 | 0.413 | 0.563 | 1.061 | X | | | | X | | XXXX | 25000562 | - | 375 | B |
| 0.625 | 0.875 | 0.138 | 0.138 | 0.626 | 0.874 | | X | | | X | X | XXXX | 12500625 | - | 125 | B |
| 0.625 | 0.875 | 0.138 | 0.206 | 0.626 | 0.874 | X | | X | | X | | XXXX | 12500625 | - | 187 | B |
| 0.625 | 0.875 | 0.138 | 0.227 | 0.626 | 0.874 | | | | | | X | XXXX | 12500625 | - | 206 | B |
| 0.625 | 0.875 | 0.138 | 0.275 | 0.626 | 0.874 | | | X | X | X | X | XXXX | 12500625 | - | 250 | B |
| 0.625 | 1.000 | 0.206 | 0.343 | 0.626 | 0.999 | X | X | X | X | X | X | XXXX | 18700625 | - | 312 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| | | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 0.625 | 1.125 | 0.275 | 0.413 | 0.626 | 1.124 | X | X | X | X | X | X | XXXX | 25000625 | - | 375 | B |
| 0.625 | 1.250 | 0.343 | 0.550 | 0.627 | 1.248 | X | | | | | | XXXX | 31200625 | - | 500 | B |
| 0.625 | 1.375 | 0.413 | 0.688 | 0.627 | 1.373 | X | | | | | | XXXX | 37500625 | - | 625 | B |
| 0.656 | 1.031 | 0.206 | 0.343 | 0.657 | 1.030 | X | | | | | | XXXX | 18700656 | - | 312 | B |
| 0.687 | 0.937 | 0.138 | 0.275 | 0.688 | 0.936 | X | X | X | | X | X | XXXX | 12500687 | - | 250 | B |
| 0.687 | 1.061 | 0.206 | 0.206 | 0.688 | 1.060 | X | X | | | | X | XXXX | 18700687 | - | 187 | B |
| 0.687 | 1.061 | 0.206 | 0.343 | 0.688 | 1.060 | | | | | X | | XXXX | 18700687 | - | 312 | B |
| 0.687 | 1.187 | 0.275 | 0.413 | 0.688 | 1.186 | X | | | | X | | XXXX | 25000687 | - | 375 | B |
| 0.687 | 1.250 | 0.309 | 0.550 | 0.688 | 1.249 | X | | | | | | XXXX | 28100687 | - | 500 | B |
| 0.687 | 1.312 | 0.343 | 0.550 | 0.689 | 1.310 | X | | | | | | XXXX | 31200687 | - | 500 | B |
| 0.750 | 1.000 | 0.138 | 0.138 | 0.751 | 0.999 | X | X | | | X | | XXXX | 12500750 | - | 125 | B |
| 0.750 | 1.000 | 0.138 | 0.206 | 0.751 | 0.999 | | | | | X | | XXXX | 12500750 | - | 187 | B |
| 0.750 | 1.000 | 0.138 | 0.275 | 0.751 | 0.999 | | | X | X | X | X | XXXX | 12500750 | - | 250 | B |
| 0.750 | 1.062 | 0.172 | 0.275 | 0.751 | 1.061 | X | | | | | | XXXX | 15600750 | - | 250 | B |
| 0.750 | 1.125 | 0.206 | 0.275 | 0.751 | 1.124 | | | X | X | | | XXXX | 18700750 | - | 250 | B |
| 0.750 | 1.125 | 0.206 | 0.343 | 0.751 | 1.124 | X | X | X | | X | X | XXXX | 18700750 | - | 312 | B |
| 0.750 | 1.188 | 0.240 | 0.413 | 0.751 | 1.187 | X | | | | | | XXXX | 21800750 | - | 375 | B |
| 0.750 | 1.250 | 0.275 | 0.413 | 0.751 | 1.249 | X | X | X | X | X | X | XXXX | 25000750 | - | 375 | B |
| 0.750 | 1.375 | 0.343 | 0.550 | 0.752 | 1.373 | X | X | X | | X | | XXXX | 31200750 | - | 500 | B |
| 0.750 | 1.500 | 0.413 | 0.688 | 0.752 | 1.498 | X | | X | | | | XXXX | 37500750 | - | 625 | B |
| 0.800 | 1.050 | 0.138 | 0.275 | 0.801 | 1.049 | | | | | X | | XXXX | 12500800 | - | 250 | B |
| 0.812 | 1.062 | 0.138 | 0.138 | 0.813 | 1.061 | X | X | | | X | | XXXX | 12500812 | - | 125 | B |
| 0.812 | 1.062 | 0.138 | 0.275 | 0.813 | 1.061 | | | | | X | | XXXX | 12500812 | - | 250 | B |
| 0.812 | 1.186 | 0.206 | 0.343 | 0.813 | 1.185 | X | X | X | | X | X | XXXX | 18700812 | - | 312 | B |
| 0.812 | 1.312 | 0.275 | 0.413 | 0.813 | 1.311 | X | | | | | | XXXX | 25000812 | - | 375 | B |
| 0.812 | 1.436 | 0.343 | 0.550 | 0.814 | 1.434 | X | | | | X | | XXXX | 31200812 | - | 500 | B |
| 0.875 | 1.125 | 0.138 | 0.138 | 0.876 | 1.124 | X | X | | | X | X | XXXX | 12500875 | - | 125 | B |
| 0.875 | 1.125 | 0.138 | 0.206 | 0.876 | 1.124 | | | X | | X | | XXXX | 12500875 | - | 187 | B |
| 0.875 | 1.125 | 0.138 | 0.275 | 0.876 | 1.124 | | | X | X | X | X | XXXX | 12500875 | - | 250 | B |
| 0.875 | 1.250 | 0.206 | 0.275 | 0.876 | 1.249 | | | | X | | | XXXX | 18700875 | - | 250 | B |
| 0.875 | 1.250 | 0.206 | 0.343 | 0.876 | 1.249 | X | X | X | X | X | | XXXX | 18700875 | - | 312 | B |
| 0.875 | 1.250 | 0.206 | 0.413 | 0.876 | 1.249 | | | X | | | | XXXX | 18700875 | - | 375 | B |
| 0.875 | 1.375 | 0.275 | 0.413 | 0.876 | 1.374 | X | X | | | X | X | XXXX | 25000875 | - | 375 | B |
| 0.875 | 1.500 | 0.343 | 0.550 | 0.877 | 1.498 | X | | | | | | XXXX | 31200875 | - | 500 | B |
| 0.875 | 1.625 | 0.413 | 0.688 | 0.877 | 1.623 | X | | | | | | XXXX | 37500875 | - | 625 | B |
| 0.906 | 1.156 | 0.138 | 0.275 | 0.907 | 1.155 | X | | | | | | XXXX | 12500906 | - | 250 | B |
| 0.937 | 1.187 | 0.138 | 0.275 | 0.938 | 1.186 | X | X | | | X | | XXXX | 12500937 | - | 250 | B |
| 0.937 | 1.250 | 0.172 | 0.275 | 0.938 | 1.249 | X | X | | | | | XXXX | 15600937 | - | 250 | B |
| 0.937 | 1.312 | 0.206 | 0.343 | 0.938 | 1.311 | X | X | | | X | X | XXXX | 18700937 | - | 312 | B |
| 0.937 | 1.375 | 0.240 | 0.413 | 0.938 | 1.374 | X | | | | | | XXXX | 21800937 | - | 375 | B |
| 0.937 | 1.437 | 0.275 | 0.413 | 0.938 | 1.436 | X | | | | | | XXXX | 25000937 | - | 375 | B |
| 0.937 | 1.687 | 0.413 | 0.688 | 0.939 | 1.685 | X | | | | | | XXXX | 37500937 | - | 625 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|--------|---|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | | | |
| 1.000 | 1.250 | 0.138 | 0.138 | 1.001 | 1.249 | X | X | | | X | | XXXX | 12501000 | - | 125 | B |
| 1.000 | 1.250 | 0.138 | 0.172 | 1.001 | 1.249 | | | | | X | | XXXX | 12501000 | - | 156 | B |
| 1.000 | 1.250 | 0.138 | 0.189 | 1.001 | 1.249 | | | X | | | | XXXX | 12501000 | - | 172 | B |
| 1.000 | 1.250 | 0.138 | 0.206 | 1.001 | 1.249 | | | | | X | | XXXX | 12501000 | - | 187 | B |
| 1.000 | 1.250 | 0.138 | 0.275 | 1.001 | 1.249 | | | X | X | X | X | XXXX | 12501000 | - | 250 | B |
| 1.000 | 1.312 | 0.172 | 0.172 | 1.001 | 1.311 | X | X | | | X | | XXXX | 15601000 | - | 156 | B |
| 1.000 | 1.312 | 0.172 | 0.257 | 1.001 | 1.311 | | | | | X | | XXXX | 15601000 | - | 234 | B |
| 1.000 | 1.375 | 0.206 | 0.275 | 1.001 | 1.374 | | | X | X | | | XXXX | 18701000 | - | 250 | B |
| 1.000 | 1.375 | 0.206 | 0.343 | 1.001 | 1.374 | X | X | X | X | X | X | XXXX | 18701000 | - | 312 | B |
| 1.000 | 1.500 | 0.275 | 0.275 | 1.001 | 1.499 | X | X | | | X | | XXXX | 25001000 | - | 250 | B |
| 1.000 | 1.500 | 0.275 | 0.413 | 1.001 | 1.499 | | | X | X | X | X | XXXX | 25001000 | - | 375 | B |
| 1.000 | 1.625 | 0.343 | 0.550 | 1.002 | 1.623 | X | X | X | | X | | XXXX | 31201000 | - | 500 | B |
| 1.000 | 1.750 | 0.413 | 0.688 | 1.002 | 1.748 | X | X | X | | | | XXXX | 37501000 | - | 625 | B |
| 1.000 | 1.875 | 0.481 | 0.688 | 1.002 | 1.873 | X | | | | | | XXXX | 43701000 | - | 625 | B |
| 1.000 | 2.000 | 0.550 | 0.825 | 1.002 | 1.998 | X | | | | | | XXXX | 50001000 | - | 750 | B |
| 1.000 | 2.000 | 0.550 | 0.825 | 1.002 | 1.998 | | | X | | | | XXXX | 50001000 | - | 750 | B |
| 1.062 | 1.312 | 0.138 | 0.187 | 1.063 | 1.311 | X | X | | | X | | XXXX | 12501062 | - | 170 | B |
| 1.062 | 1.312 | 0.138 | 0.275 | 1.063 | 1.311 | | | | | X | | XXXX | 12501062 | - | 250 | B |
| 1.062 | 1.375 | 0.172 | 0.275 | 1.063 | 1.374 | X | | | | | | XXXX | 15601062 | - | 250 | B |
| 1.062 | 1.436 | 0.206 | 0.343 | 1.063 | 1.435 | X | X | X | X | X | | XXXX | 18701062 | - | 312 | B |
| 1.062 | 1.562 | 0.275 | 0.413 | 1.063 | 1.561 | X | | | | | | XXXX | 25001062 | - | 375 | B |
| 1.062 | 1.687 | 0.343 | 0.550 | 1.064 | 1.685 | X | | | | | | XXXX | 31201062 | - | 500 | B |
| 1.093 | 1.593 | 0.275 | 0.413 | 1.094 | 1.592 | X | | | | | | XXXX | 25001093 | - | 375 | B |
| 1.125 | 1.375 | 0.138 | 0.129 | 1.126 | 1.374 | X | X | | | X | | XXXX | 12501125 | - | 117 | B |
| 1.125 | 1.375 | 0.138 | 0.195 | 1.126 | 1.374 | | | | | X | | XXXX | 12501125 | - | 177 | B |
| 1.125 | 1.375 | 0.138 | 0.275 | 1.126 | 1.374 | | | X | | X | X | XXXX | 12501125 | - | 250 | B |
| 1.125 | 1.500 | 0.206 | 0.206 | 1.126 | 1.499 | X | X | | | X | | XXXX | 18701125 | - | 187 | B |
| 1.125 | 1.500 | 0.206 | 0.343 | 1.126 | 1.499 | | | X | X | X | X | XXXX | 18701125 | - | 312 | B |
| 1.125 | 1.625 | 0.275 | 0.413 | 1.126 | 1.624 | X | X | X | X | X | X | XXXX | 25001125 | - | 375 | B |
| 1.125 | 1.750 | 0.343 | 0.550 | 1.127 | 1.748 | X | X | X | | X | | XXXX | 31201125 | - | 500 | B |
| 1.125 | 1.875 | 0.413 | 0.688 | 1.127 | 1.873 | X | X | | | | | XXXX | 37501125 | - | 625 | B |
| 1.125 | 2.000 | 0.481 | 0.550 | 1.127 | 1.998 | | | | | X | | XXXX | 43701125 | - | 500 | B |
| 1.125 | 2.000 | 0.481 | 0.688 | 1.127 | 1.998 | X | | | | | | XXXX | 43701250 | - | 625 | B |
| 1.187 | 1.437 | 0.138 | 0.196 | 1.188 | 1.436 | X | X | | | X | | XXXX | 12501187 | - | 178 | B |
| 1.187 | 1.437 | 0.138 | 0.206 | 1.188 | 1.436 | | | X | | | | XXXX | 12501187 | - | 187 | B |
| 1.187 | 1.437 | 0.138 | 0.275 | 1.188 | 1.436 | | | | | X | X | XXXX | 12501187 | - | 250 | B |
| 1.187 | 1.500 | 0.172 | 0.275 | 1.188 | 1.499 | X | X | | | | | XXXX | 15601187 | - | 250 | B |
| 1.187 | 1.562 | 0.206 | 0.343 | 1.188 | 1.561 | X | X | | | X | | XXXX | 18701187 | - | 312 | B |
| 1.187 | 1.687 | 0.275 | 0.413 | 1.188 | 1.686 | X | | | | | X | XXXX | 25001187 | - | 375 | B |
| 1.187 | 1.812 | 0.343 | 0.550 | 1.189 | 1.810 | X | | X | | | | XXXX | 31201187 | - | 500 | B |
| 1.187 | 2.000 | 0.447 | 0.688 | 1.189 | 1.998 | X | | | | | | XXXX | 40601187 | - | 625 | B |
| 1.250 | 1.500 | 0.138 | 0.206 | 1.251 | 1.499 | X | X | X | | X | X | XXXX | 12501250 | - | 187 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| | | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 1.250 | 1.500 | 0.138 | 0.275 | 1.251 | 1.499 | | | | X | X | X | XXXX | 12501250 | - | 250 | B |
| 1.250 | 1.563 | 0.172 | 0.275 | 1.251 | 1.562 | X | X | | | | | XXXX | 15601250 | - | 250 | B |
| 1.250 | 1.625 | 0.206 | 0.275 | 1.251 | 1.624 | X | X | | | X | | XXXX | 18701250 | - | 250 | B |
| 1.250 | 1.625 | 0.206 | 0.343 | 1.251 | 1.624 | | | X | X | X | X | XXXX | 18701250 | - | 312 | B |
| 1.250 | 1.625 | 0.206 | 0.413 | 1.251 | 1.624 | | | | | X | | XXXX | 18701250 | - | 375 | B |
| 1.250 | 1.750 | 0.275 | 0.275 | 1.251 | 1.749 | X | X | | | X | | XXXX | 25001250 | - | 250 | B |
| 1.250 | 1.750 | 0.275 | 0.413 | 1.251 | 1.749 | | | X | X | X | X | XXXX | 25001250 | - | 375 | B |
| 1.250 | 1.875 | 0.343 | 0.550 | 1.252 | 1.873 | X | | X | | X | X | XXXX | 31201250 | - | 500 | B |
| 1.250 | 2.000 | 0.413 | 0.688 | 1.252 | 1.998 | X | X | X | | X | | XXXX | 37501250 | - | 625 | B |
| 1.250 | 2.063 | 0.447 | 0.688 | 1.252 | 2.061 | X | | | | | | XXXX | 40601250 | - | 625 | B |
| 1.250 | 2.250 | 0.550 | 0.825 | 1.252 | 2.248 | X | | | | | | XXXX | 50001250 | - | 750 | B |
| 1.250 | 2.500 | 0.688 | 0.963 | 1.253 | 2.497 | X | | | | | | XXXX | 62501750 | - | 875 | B |
| 1.312 | 1.562 | 0.138 | 0.206 | 1.313 | 1.561 | X | X | | | | X | XXXX | 12501312 | - | 187 | B |
| 1.312 | 1.625 | 0.172 | 0.275 | 1.313 | 1.624 | X | | | | | | XXXX | 15601312 | - | 250 | B |
| 1.312 | 1.686 | 0.206 | 0.206 | 1.313 | 1.685 | X | X | | | | X | XXXX | 18701312 | - | 187 | B |
| 1.312 | 1.686 | 0.206 | 0.343 | 1.313 | 1.685 | | | | | | X | XXXX | 18701312 | - | 312 | B |
| 1.312 | 1.812 | 0.275 | 0.413 | 1.313 | 1.811 | X | X | X | | X | | XXXX | 25001312 | - | 375 | B |
| 1.312 | 1.937 | 0.343 | 0.550 | 1.314 | 1.935 | X | | | | | | XXXX | 31201312 | - | 500 | B |
| 1.312 | 2.000 | 0.377 | 0.688 | 1.314 | 1.998 | X | | | | | | XXXX | 34301312 | - | 625 | B |
| 1.312 | 2.062 | 0.413 | 0.481 | 1.314 | 2.060 | X | | X | | | | XXXX | 37501312 | - | 437 | B |
| 1.312 | 2.312 | 0.550 | 0.825 | 1.314 | 2.310 | X | | | | | | XXXX | 50001312 | - | 750 | B |
| 1.375 | 1.625 | 0.138 | 0.138 | 1.376 | 1.624 | X | X | | | | X | XXXX | 12501375 | - | 125 | B |
| 1.375 | 1.625 | 0.138 | 0.196 | 1.376 | 1.624 | | | | | | X | XXXX | 12501375 | - | 178 | B |
| 1.375 | 1.625 | 0.138 | 0.275 | 1.376 | 1.624 | | | X | X | X | X | XXXX | 12501375 | - | 250 | B |
| 1.375 | 1.687 | 0.172 | 0.172 | 1.376 | 1.686 | X | X | | | X | | XXXX | 15601375 | - | 156 | B |
| 1.375 | 1.750 | 0.206 | 0.343 | 1.376 | 1.749 | X | X | X | X | X | X | XXXX | 18701375 | - | 312 | B |
| 1.375 | 1.750 | 0.206 | 0.413 | 1.376 | 1.749 | | | | | X | | XXXX | 18701375 | - | 375 | B |
| 1.375 | 1.875 | 0.275 | 0.413 | 1.376 | 1.874 | X | X | X | X | X | X | XXXX | 25001375 | - | 375 | B |
| 1.375 | 2.000 | 0.343 | 0.550 | 1.377 | 1.998 | X | X | X | X | X | X | XXXX | 31201375 | - | 500 | B |
| 1.375 | 2.125 | 0.413 | 0.688 | 1.377 | 2.123 | X | X | | | | X | XXXX | 37501375 | - | 625 | B |
| 1.375 | 2.250 | 0.481 | 0.688 | 1.377 | 2.248 | X | | | | | | XXXX | 43701375 | - | 625 | B |
| 1.375 | 2.375 | 0.550 | 0.825 | 1.377 | 2.373 | X | | | | | | XXXX | 50001375 | - | 750 | B |
| 1.437 | 1.687 | 0.138 | 0.275 | 1.438 | 1.686 | X | X | X | X | X | | XXXX | 12501437 | - | 250 | B |
| 1.437 | 1.812 | 0.206 | 0.343 | 1.438 | 1.811 | X | X | X | | X | X | XXXX | 18701437 | - | 312 | B |
| 1.437 | 1.937 | 0.275 | 0.413 | 1.438 | 1.936 | | X | | | | | XXXX | 25001437 | - | 375 | B |
| 1.437 | 2.061 | 0.343 | 0.550 | 1.439 | 2.059 | | | | | X | | XXXX | 31201437 | - | 500 | B |
| 1.437 | 2.187 | 0.413 | 0.688 | 1.439 | 2.185 | X | | | | | | XXXX | 37501437 | - | 625 | B |
| 1.437 | 2.312 | 0.481 | 0.688 | 1.439 | 2.310 | X | | | | | | XXXX | 43701437 | - | 625 | B |
| 1.500 | 1.750 | 0.138 | 0.138 | 1.501 | 1.749 | X | X | | | X | | XXXX | 12501500 | - | 125 | B |
| 1.500 | 1.750 | 0.138 | 0.206 | 1.501 | 1.749 | | | | | X | | XXXX | 12501500 | - | 187 | B |
| 1.500 | 1.750 | 0.138 | 0.275 | 1.501 | 1.749 | | | X | | X | X | XXXX | 12501500 | - | 250 | B |
| 1.500 | 1.750 | 0.138 | 0.343 | 1.501 | 1.749 | | | X | | | | XXXX | 12501500 | - | 312 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 1.500 | 1.812 | 0.172 | 0.343 | 1.501 | 1.811 | X | | | | X | | XXXX | 15601500 | - | 312 | B |
| 1.500 | 1.875 | 0.206 | 0.206 | 1.501 | 1.874 | X | X | | | X | | XXXX | 18701500 | - | 187 | B |
| 1.500 | 1.875 | 0.206 | 0.275 | 1.501 | 1.874 | | | X | | X | X | XXXX | 18701500 | - | 250 | B |
| 1.500 | 1.875 | 0.206 | 0.309 | 1.501 | 1.874 | | | X | | | | XXXX | 18701500 | - | 281 | B |
| 1.500 | 1.875 | 0.206 | 0.343 | 1.501 | 1.874 | | | | | X | | XXXX | 18701500 | - | 312 | B |
| 1.500 | 1.875 | 0.206 | 0.413 | 1.501 | 1.874 | | | X | X | X | X | XXXX | 18701500 | - | 375 | B |
| 1.500 | 2.000 | 0.275 | 0.275 | 1.501 | 1.999 | X | X | | | X | | XXXX | 25001500 | - | 250 | B |
| 1.500 | 2.000 | 0.275 | 0.413 | 1.501 | 1.999 | | | X | X | X | X | XXXX | 25001500 | - | 375 | B |
| 1.500 | 2.125 | 0.343 | 0.550 | 1.502 | 2.123 | X | X | X | | X | X | XXXX | 31201500 | - | 500 | B |
| 1.500 | 2.250 | 0.413 | 0.688 | 1.502 | 2.248 | X | X | | | X | X | XXXX | 37501500 | - | 625 | B |
| 1.500 | 2.375 | 0.481 | 0.688 | 1.502 | 2.373 | X | | | | | | XXXX | 43701500 | - | 625 | B |
| 1.500 | 2.500 | 0.550 | 0.825 | 1.502 | 2.498 | X | X | | | X | | XXXX | 50001500 | - | 750 | B |
| 1.562 | 1.812 | 0.138 | 0.275 | 1.563 | 1.811 | X | | | | | | XXXX | 12501562 | - | 250 | B |
| 1.562 | 1.937 | 0.206 | 0.275 | 1.563 | 1.936 | X | X | X | | | X | XXXX | 18701562 | - | 250 | B |
| 1.562 | 2.312 | 0.413 | 0.688 | 1.564 | 2.310 | X | | | | | | XXXX | 37501562 | - | 625 | B |
| 1.625 | 1.875 | 0.138 | 0.275 | 1.626 | 1.874 | X | | | | | | XXXX | 12501625 | - | 250 | B |
| 1.625 | 1.875 | 0.138 | 0.275 | 1.626 | 1.874 | | | X | | | | XXXX | 12501625 | - | 250 | B |
| 1.625 | 2.000 | 0.206 | 0.206 | 1.626 | 1.999 | X | X | | | X | | XXXX | 18701625 | - | 187 | B |
| 1.625 | 2.000 | 0.206 | 0.275 | 1.626 | 1.999 | | | X | | | | XXXX | 18701625 | - | 250 | B |
| 1.625 | 2.000 | 0.206 | 0.293 | 1.626 | 1.999 | | | | | X | | XXXX | 18701625 | - | 266 | B |
| 1.625 | 2.000 | 0.206 | 0.343 | 1.626 | 1.999 | | | X | | X | | XXXX | 18701625 | - | 312 | B |
| 1.625 | 2.000 | 0.206 | 0.413 | 1.626 | 1.999 | | | X | X | X | X | XXXX | 18701625 | - | 375 | B |
| 1.625 | 2.125 | 0.275 | 0.413 | 1.626 | 2.124 | X | X | | | X | X | XXXX | 25001625 | - | 375 | B |
| 1.625 | 2.250 | 0.343 | 0.550 | 1.627 | 2.248 | X | X | | | X | | XXXX | 31201625 | - | 500 | B |
| 1.625 | 2.375 | 0.413 | 0.413 | 1.627 | 2.373 | X | X | | | X | | XXXX | 37501625 | - | 375 | B |
| 1.625 | 2.375 | 0.413 | 0.688 | 1.627 | 2.373 | | | | | X | | XXXX | 37501625 | - | 625 | B |
| 1.687 | 1.937 | 0.138 | 0.275 | 1.688 | 1.936 | X | | | | | | XXXX | 12501687 | - | 250 | B |
| 1.687 | 2.062 | 0.206 | 0.413 | 1.688 | 2.061 | | | X | | | | XXXX | 18701687 | - | 375 | B |
| 1.687 | 2.312 | 0.343 | 0.550 | 1.689 | 2.310 | X | | | | X | | XXXX | 31201687 | - | 500 | B |
| 1.750 | 2.000 | 0.138 | 0.138 | 1.751 | 1.999 | X | X | | | X | | XXXX | 12501750 | - | 125 | B |
| 1.750 | 2.000 | 0.138 | 0.275 | 1.751 | 1.999 | | | X | | | | XXXX | 12501750 | - | 250 | B |
| 1.750 | 2.125 | 0.206 | 0.206 | 1.751 | 2.124 | X | X | | | | X | XXXX | 18701750 | - | 187 | B |
| 1.750 | 2.125 | 0.206 | 0.253 | 1.751 | 2.124 | | | X | | X | | XXXX | 18701750 | - | 230 | B |
| 1.750 | 2.125 | 0.206 | 0.275 | 1.751 | 2.124 | | | | | X | | XXXX | 18701750 | - | 250 | B |
| 1.750 | 2.125 | 0.206 | 0.293 | 1.751 | 2.124 | | | | | X | X | XXXX | 18701750 | - | 266 | B |
| 1.750 | 2.125 | 0.206 | 0.343 | 1.751 | 2.124 | | | | | X | X | XXXX | 18701750 | - | 312 | B |
| 1.750 | 2.125 | 0.206 | 0.413 | 1.751 | 2.124 | | | X | X | X | X | XXXX | 18701750 | - | 375 | B |
| 1.750 | 2.188 | 0.240 | 0.413 | 1.751 | 2.187 | X | | | | | | XXXX | 21801750 | - | 375 | B |
| 1.750 | 2.250 | 0.275 | 0.275 | 1.751 | 2.249 | X | X | | | X | | XXXX | 25001750 | - | 250 | B |
| 1.750 | 2.250 | 0.275 | 0.413 | 1.751 | 2.249 | | | X | X | X | X | XXXX | 25001750 | - | 375 | B |
| 1.750 | 2.375 | 0.343 | 0.550 | 1.752 | 2.373 | X | X | X | X | X | X | XXXX | 31201750 | - | 500 | B |
| 1.750 | 2.500 | 0.413 | 0.688 | 1.752 | 2.498 | X | X | | | X | X | XXXX | 37501750 | - | 625 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 1.750 | 2.563 | 0.447 | 0.688 | 1.752 | 2.561 | X | | | | | | XXXX | 40601750 | - | 625 | B |
| 1.750 | 2.625 | 0.481 | 0.688 | 1.752 | 2.623 | X | | | | | | XXXX | 43701750 | - | 625 | B |
| 1.750 | 2.750 | 0.550 | 0.825 | 1.752 | 2.748 | | | X | | | | XXXX | 50001750 | - | 750 | B |
| 1.750 | 3.000 | 0.688 | 0.963 | 1.753 | 2.997 | X | | | | | | XXXX | 62501812 | - | 875 | B |
| 1.812 | 2.187 | 0.206 | 0.343 | 1.813 | 2.186 | X | | | | | | XXXX | 18701812 | - | 312 | B |
| 1.812 | 2.500 | 0.377 | 0.688 | 1.814 | 2.498 | X | | | | | | XXXX | 34301812 | - | 625 | B |
| 1.875 | 2.125 | 0.138 | 0.138 | 1.876 | 2.124 | X | X | | | | X | XXXX | 12501875 | - | 125 | B |
| 1.875 | 2.125 | 0.138 | 0.275 | 1.876 | 2.124 | | | | | | X | XXXX | 12501875 | - | 250 | B |
| 1.875 | 2.250 | 0.206 | 0.275 | 1.876 | 2.249 | | | | X | | | XXXX | 18701875 | - | 250 | B |
| 1.875 | 2.250 | 0.206 | 0.308 | 1.876 | 2.249 | | | | X | | | XXXX | 18701875 | - | 280 | B |
| 1.875 | 2.250 | 0.206 | 0.413 | 1.876 | 2.249 | X | X | X | X | X | X | XXXX | 18701875 | - | 375 | B |
| 1.875 | 2.375 | 0.275 | 0.413 | 1.876 | 2.374 | X | X | | | | X | XXXX | 25001875 | - | 375 | B |
| 1.875 | 2.500 | 0.343 | 0.550 | 1.877 | 2.498 | X | X | X | | | X | XXXX | 31201875 | - | 500 | B |
| 1.875 | 2.625 | 0.413 | 0.688 | 1.877 | 2.623 | X | X | X | | | | XXXX | 37501875 | - | 625 | B |
| 1.875 | 2.750 | 0.481 | 0.688 | 1.877 | 2.748 | X | | | | | | XXXX | 43701875 | - | 625 | B |
| 1.875 | 2.875 | 0.550 | 0.825 | 1.877 | 2.873 | X | | | | | | XXXX | 50001875 | - | 750 | B |
| 1.875 | 3.000 | 0.618 | 0.963 | 1.877 | 2.998 | | | X | | | | XXXX | 56201875 | - | 875 | B |
| 1.875 | 3.125 | 0.688 | 1.100 | 1.878 | 3.122 | | | X | | | | XXXX | 62501875 | - | 1000 | B |
| 1.937 | 2.312 | 0.206 | 0.309 | 1.938 | 2.311 | X | X | | | | X | XXXX | 18701937 | - | 281 | B |
| 1.937 | 2.312 | 0.206 | 0.413 | 1.938 | 2.311 | | | X | | | | XXXX | 18701937 | - | 375 | B |
| 1.937 | 2.437 | 0.275 | 0.413 | 1.938 | 2.436 | | | | | | X | XXXX | 25001937 | - | 375 | B |
| 1.937 | 2.562 | 0.343 | 0.550 | 1.939 | 2.560 | X | | | | | | XXXX | 31201937 | - | 500 | B |
| 2.000 | 2.250 | 0.138 | 0.206 | 2.001 | 2.249 | X | X | | X | X | | XXXX | 12502000 | - | 187 | B |
| 2.000 | 2.250 | 0.138 | 0.275 | 2.001 | 2.249 | | | X | | | | XXXX | 12502000 | - | 250 | B |
| 2.000 | 2.375 | 0.206 | 0.206 | 2.001 | 2.374 | X | X | | | | X | XXXX | 18702000 | - | 187 | B |
| 2.000 | 2.375 | 0.206 | 0.253 | 2.001 | 2.374 | | | | | | X | XXXX | 18702000 | - | 230 | B |
| 2.000 | 2.375 | 0.206 | 0.289 | 2.001 | 2.374 | | | | | | X | XXXX | 18702000 | - | 263 | B |
| 2.000 | 2.375 | 0.206 | 0.343 | 2.001 | 2.374 | | | | | | X | XXXX | 18702000 | - | 312 | B |
| 2.000 | 2.375 | 0.206 | 0.413 | 2.001 | 2.374 | | | X | X | X | X | XXXX | 18702000 | - | 375 | B |
| 2.000 | 2.438 | 0.240 | 0.413 | 2.001 | 2.437 | | | X | | | | XXXX | 21802000 | - | 375 | B |
| 2.000 | 2.500 | 0.275 | 0.275 | 2.001 | 2.499 | X | X | | | | X | XXXX | 25002000 | - | 250 | B |
| 2.000 | 2.500 | 0.275 | 0.413 | 2.001 | 2.499 | | | X | X | X | X | XXXX | 25002000 | - | 375 | B |
| 2.000 | 2.625 | 0.343 | 0.550 | 2.002 | 2.623 | | | X | X | X | X | XXXX | 31202000 | - | 500 | B |
| 2.000 | 2.750 | 0.413 | 0.550 | 2.002 | 2.748 | | | X | | | | XXXX | 37502000 | - | 500 | B |
| 2.000 | 2.750 | 0.413 | 0.688 | 2.002 | 2.748 | X | X | X | | | X | XXXX | 37502000 | - | 625 | B |
| 2.000 | 2.875 | 0.481 | 0.688 | 2.002 | 2.873 | X | | | | | | XXXX | 43702000 | - | 625 | B |
| 2.000 | 3.000 | 0.550 | 0.825 | 2.002 | 2.998 | X | X | | | | X | XXXX | 50002000 | - | 750 | B |
| 2.000 | 3.250 | 0.688 | 1.100 | 2.003 | 3.247 | X | | | | | | XXXX | 62502000 | - | 1000 | B |
| 2.062 | 2.375 | 0.172 | 0.275 | 2.063 | 2.374 | X | | | | | | XXXX | 15602062 | - | 250 | B |
| 2.062 | 2.437 | 0.206 | 0.413 | 2.063 | 2.436 | X | | | | | | XXXX | 18702062 | - | 375 | B |
| 2.062 | 2.500 | 0.240 | 0.413 | 2.063 | 2.499 | X | | | | | | XXXX | 21802062 | - | 375 | B |
| 2.062 | 2.812 | 0.413 | 0.688 | 2.064 | 2.810 | X | | | | | | XXXX | 37502062 | - | 625 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 2.125 | 2.375 | 0.138 | 0.275 | 2.126 | 2.374 | X | | | | X | | XXXX | 12502125 | - | 250 | B |
| 2.125 | 2.500 | 0.206 | 0.206 | 2.126 | 2.499 | X | X | | | X | | XXXX | 18702125 | - | 187 | B |
| 2.125 | 2.500 | 0.206 | 0.275 | 2.126 | 2.499 | | | X | | X | | XXXX | 18702125 | - | 250 | B |
| 2.125 | 2.500 | 0.206 | 0.413 | 2.126 | 2.499 | | | | X | X | X | XXXX | 18702125 | - | 375 | B |
| 2.125 | 2.625 | 0.275 | 0.275 | 2.126 | 2.624 | X | X | | | X | | XXXX | 25002125 | - | 250 | B |
| 2.125 | 2.625 | 0.275 | 0.413 | 2.126 | 2.624 | | | X | X | X | X | XXXX | 25002125 | - | 375 | B |
| 2.125 | 2.750 | 0.343 | 0.550 | 2.127 | 2.748 | X | X | X | X | X | X | XXXX | 31202125 | - | 500 | B |
| 2.125 | 2.875 | 0.413 | 0.688 | 2.127 | 2.873 | X | X | X | X | | | XXXX | 37502125 | - | 625 | B |
| 2.125 | 3.000 | 0.481 | 0.688 | 2.127 | 2.998 | X | | | | | | XXXX | 43702125 | - | 625 | B |
| 2.125 | 3.125 | 0.550 | 0.825 | 2.127 | 3.123 | X | | | | | | XXXX | 50002125 | - | 750 | B |
| 2.187 | 2.562 | 0.206 | 0.413 | 2.188 | 2.561 | | | X | X | | | XXXX | 18702187 | - | 375 | B |
| 2.250 | 2.500 | 0.138 | 0.206 | 2.251 | 2.499 | X | | | X | | | XXXX | 12502250 | - | 187 | B |
| 2.250 | 2.625 | 0.206 | 0.343 | 2.251 | 2.624 | | | | X | | | XXXX | 18702250 | - | 312 | B |
| 2.250 | 2.625 | 0.206 | 0.413 | 2.251 | 2.624 | X | X | X | X | X | X | XXXX | 18702250 | - | 375 | B |
| 2.250 | 2.750 | 0.275 | 0.413 | 2.251 | 2.749 | X | X | X | X | X | X | XXXX | 25002250 | - | 375 | B |
| 2.250 | 2.812 | 0.309 | 0.413 | 2.251 | 2.811 | | | | | X | | XXXX | 28102250 | - | 375 | B |
| 2.250 | 2.875 | 0.343 | 0.550 | 2.252 | 2.873 | X | X | | | X | X | XXXX | 31202250 | - | 500 | B |
| 2.250 | 3.000 | 0.413 | 0.688 | 2.252 | 2.998 | X | X | X | | X | | XXXX | 37502250 | - | 625 | B |
| 2.250 | 3.125 | 0.481 | 0.413 | 2.252 | 3.123 | | | X | | | | XXXX | 43702250 | - | 375 | B |
| 2.250 | 3.125 | 0.481 | 0.688 | 2.252 | 3.123 | | | | | X | | XXXX | 43702250 | - | 625 | B |
| 2.250 | 3.250 | 0.550 | 0.825 | 2.252 | 3.248 | X | | | | | | XXXX | 50002250 | - | 750 | B |
| 2.312 | 2.875 | 0.309 | 0.550 | 2.313 | 2.874 | X | | | | | | XXXX | 28102312 | - | 500 | B |
| 2.312 | 2.937 | 0.343 | 0.550 | 2.314 | 2.935 | X | | | | | | XXXX | 31202312 | - | 500 | B |
| 2.312 | 3.000 | 0.377 | 0.688 | 2.314 | 2.998 | X | | | | | | XXXX | 34302312 | - | 625 | B |
| 2.375 | 2.625 | 0.138 | 0.275 | 2.376 | 2.624 | X | X | X | | | | XXXX | 12502375 | - | 250 | B |
| 2.375 | 2.750 | 0.206 | 0.275 | 2.376 | 2.749 | | | | X | | | XXXX | 18702375 | - | 250 | B |
| 2.375 | 2.750 | 0.206 | 0.293 | 2.376 | 2.749 | X | X | | | X | | XXXX | 18702375 | - | 266 | B |
| 2.375 | 2.750 | 0.206 | 0.343 | 2.376 | 2.749 | | | | X | | | XXXX | 18702375 | - | 312 | B |
| 2.375 | 2.750 | 0.206 | 0.413 | 2.376 | 2.749 | | | X | | X | X | XXXX | 18702375 | - | 375 | B |
| 2.375 | 2.875 | 0.275 | 0.275 | 2.376 | 2.874 | X | X | | | X | | XXXX | 25002375 | - | 250 | B |
| 2.375 | 2.875 | 0.275 | 0.413 | 2.376 | 2.874 | | | | X | X | X | XXXX | 25002375 | - | 375 | B |
| 2.375 | 3.000 | 0.343 | 0.550 | 2.377 | 2.998 | X | X | X | X | X | | XXXX | 31202375 | - | 500 | B |
| 2.375 | 3.125 | 0.413 | 0.688 | 2.377 | 3.123 | X | X | | | X | X | XXXX | 37502375 | - | 625 | B |
| 2.375 | 3.375 | 0.550 | 0.825 | 2.377 | 3.373 | X | | | | | | XXXX | 50002375 | - | 750 | B |
| 2.437 | 3.187 | 0.413 | 0.688 | 2.439 | 3.185 | X | | | | | | XXXX | 37502437 | - | 625 | B |
| 2.500 | 2.750 | 0.138 | 0.275 | 2.501 | 2.749 | X | | X | X | X | | XXXX | 12502500 | - | 250 | B |
| 2.500 | 2.875 | 0.206 | 0.275 | 2.501 | 2.874 | X | X | | X | X | X | XXXX | 18702500 | - | 250 | B |
| 2.500 | 2.875 | 0.206 | 0.413 | 2.501 | 2.874 | | | X | X | X | X | XXXX | 18702500 | - | 375 | B |
| 2.500 | 2.937 | 0.240 | 0.240 | 2.501 | 2.936 | X | X | | | | X | XXXX | 21802500 | - | 218 | B |
| 2.500 | 2.937 | 0.240 | 0.320 | 2.501 | 2.936 | | | | | | X | XXXX | 21802500 | - | 291 | B |
| 2.500 | 2.937 | 0.240 | 0.413 | 2.501 | 2.936 | | | | | | X | XXXX | 21802500 | - | 375 | B |
| 2.500 | 3.000 | 0.275 | 0.275 | 2.501 | 2.999 | X | X | | | X | | XXXX | 25002500 | - | 250 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|-----------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Bore) Groove Diameter | (Rod) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 2.500 | 3.000 | 0.275 | 0.413 | 2.501 | 2.999 | | | X | X | X | X | XXXX | 25002500 | - | 375 | B |
| 2.500 | 3.125 | 0.343 | 0.550 | 2.502 | 3.123 | X | X | X | | X | X | XXXX | 31202500 | - | 500 | B |
| 2.500 | 3.188 | 0.377 | 0.688 | 2.502 | 3.186 | X | | | | | | XXXX | 34302500 | - | 625 | B |
| 2.500 | 3.250 | 0.413 | 0.688 | 2.502 | 3.248 | X | X | X | X | X | X | XXXX | 37502500 | - | 625 | B |
| 2.500 | 3.375 | 0.481 | 0.688 | 2.502 | 3.373 | X | | | | X | | XXXX | 43702500 | - | 625 | B |
| 2.500 | 3.500 | 0.550 | 0.825 | 2.502 | 3.498 | X | X | X | | X | | XXXX | 50002500 | - | 750 | B |
| 2.500 | 3.750 | 0.688 | 1.100 | 2.503 | 3.747 | X | | | | | | XXXX | 62502500 | - | 1000 | B |
| 2.562 | 3.000 | 0.240 | 0.413 | 2.563 | 2.999 | X | X | | | | | XXXX | 21802562 | - | 375 | B |
| 2.562 | 3.062 | 0.275 | 0.413 | 2.563 | 3.061 | | | | | X | | XXXX | 25002562 | - | 375 | B |
| 2.562 | 3.125 | 0.309 | 0.550 | 2.563 | 3.124 | X | | | | | | XXXX | 28102562 | - | 500 | B |
| 2.562 | 3.187 | 0.343 | 0.550 | 2.564 | 3.185 | X | | | | | | XXXX | 31202562 | - | 500 | B |
| 2.625 | 2.875 | 0.138 | 0.275 | 2.626 | 2.874 | X | | | | | | XXXX | 12502625 | - | 250 | B |
| 2.625 | 3.000 | 0.206 | 0.309 | 2.626 | 2.999 | X | X | | | X | | XXXX | 18702625 | - | 281 | B |
| 2.625 | 3.000 | 0.206 | 0.275 | 2.626 | 2.999 | | | | X | | | XXXX | 18702625 | - | 250 | B |
| 2.625 | 3.000 | 0.206 | 0.343 | 2.626 | 2.999 | | | | | | X | XXXX | 18702625 | - | 312 | B |
| 2.625 | 3.000 | 0.206 | 0.413 | 2.626 | 2.999 | | | X | X | X | | XXXX | 18702625 | - | 375 | B |
| 2.625 | 3.125 | 0.275 | 0.413 | 2.626 | 3.124 | X | X | X | X | X | X | XXXX | 25002625 | - | 375 | B |
| 2.625 | 3.250 | 0.343 | 0.550 | 2.627 | 3.248 | X | X | X | X | X | X | XXXX | 31202625 | - | 500 | B |
| 2.625 | 3.375 | 0.413 | 0.688 | 2.627 | 3.373 | X | X | | X | X | X | XXXX | 37502625 | - | 625 | B |
| 2.687 | 3.375 | 0.377 | 0.688 | 2.689 | 3.373 | X | | | | | | XXXX | 34302687 | - | 625 | B |
| 2.687 | 3.437 | 0.413 | 0.688 | 2.689 | 3.435 | X | | | | | | XXXX | 37502687 | - | 625 | B |
| 2.750 | 3.000 | 0.138 | 0.275 | 2.751 | 2.999 | X | X | | | X | | XXXX | 12502750 | - | 250 | B |
| 2.750 | 3.125 | 0.206 | 0.206 | 2.751 | 3.124 | X | X | | | X | | XXXX | 18702750 | - | 187 | B |
| 2.750 | 3.125 | 0.206 | 0.309 | 2.751 | 3.124 | | | | | X | | XXXX | 18702750 | - | 281 | B |
| 2.750 | 3.125 | 0.206 | 0.413 | 2.751 | 3.124 | | | X | X | X | X | XXXX | 18702750 | - | 375 | B |
| 2.750 | 3.250 | 0.275 | 0.413 | 2.751 | 3.249 | X | X | X | X | X | X | XXXX | 25002750 | - | 375 | B |
| 2.750 | 3.375 | 0.343 | 0.550 | 2.752 | 3.373 | X | X | | | X | X | XXXX | 31202750 | - | 500 | B |
| 2.750 | 3.500 | 0.413 | 0.688 | 2.752 | 3.498 | X | X | X | X | X | X | XXXX | 37502750 | - | 625 | B |
| 2.750 | 3.750 | 0.550 | 0.825 | 2.752 | 3.748 | X | | | | | | XXXX | 50002750 | - | 750 | B |
| 2.750 | 4.000 | 0.688 | 1.100 | 2.753 | 3.997 | X | | X | | X | | XXXX | 62502750 | - | 1000 | B |
| 2.812 | 3.250 | 0.240 | 0.413 | 2.813 | 3.249 | X | X | | | | | XXXX | 21802812 | - | 375 | B |
| 2.812 | 4.062 | 0.688 | 1.100 | 2.815 | 4.059 | X | | | | | | XXXX | 62502812 | - | 1000 | B |
| 2.875 | 3.125 | 0.138 | 0.275 | 2.876 | 3.124 | X | | | | | | XXXX | 12502875 | - | 250 | B |
| 2.875 | 3.250 | 0.206 | 0.206 | 2.876 | 3.249 | X | X | | | | X | XXXX | 18702875 | - | 187 | B |
| 2.875 | 3.250 | 0.206 | 0.275 | 2.876 | 3.249 | | | | X | | | XXXX | 18702875 | - | 250 | B |
| 2.875 | 3.250 | 0.206 | 0.309 | 2.876 | 3.249 | | | | | X | | XXXX | 18702875 | - | 281 | B |
| 2.875 | 3.250 | 0.206 | 0.413 | 2.876 | 3.249 | | | | X | X | X | XXXX | 18702875 | - | 375 | B |
| 2.875 | 3.375 | 0.275 | 0.413 | 2.876 | 3.374 | X | X | | X | X | X | XXXX | 25002875 | - | 375 | B |
| 2.875 | 3.500 | 0.343 | 0.550 | 2.877 | 3.498 | X | X | | X | X | X | XXXX | 31202875 | - | 500 | B |
| 2.875 | 3.625 | 0.413 | 0.688 | 2.877 | 3.623 | X | X | | X | X | | XXXX | 37502875 | - | 625 | B |
| 2.875 | 3.750 | 0.481 | 0.688 | 2.877 | 3.748 | X | | | | | | XXXX | 43702875 | - | 625 | B |
| 2.875 | 3.875 | 0.550 | 0.825 | 2.877 | 3.873 | X | | | | | | XXXX | 50002875 | - | 750 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 2.875 | 4.000 | 0.618 | 0.963 | 2.877 | 3.998 | | | X | | | | XXXX | 56202875 | - | 875 | B |
| 2.875 | 4.125 | 0.688 | 1.100 | 2.878 | 4.122 | | | | | X | | XXXX | 62502875 | - | 1000 | B |
| 3.000 | 3.250 | 0.138 | 0.275 | 3.001 | 3.249 | X | | X | | | | XXXX | 12503000 | - | 250 | B |
| 3.000 | 3.375 | 0.206 | 0.275 | 3.001 | 3.374 | X | X | | | X | | XXXX | 18703000 | - | 250 | B |
| 3.000 | 3.375 | 0.206 | 0.413 | 3.001 | 3.374 | | | X | X | X | X | XXXX | 18703000 | - | 375 | B |
| 3.000 | 3.437 | 0.240 | 0.240 | 3.001 | 3.436 | X | X | | | | | XXXX | 21803000 | - | 218 | B |
| 3.000 | 3.437 | 0.240 | 0.320 | 3.001 | 3.436 | | | | | | X | XXXX | 21803000 | - | 291 | B |
| 3.000 | 3.437 | 0.240 | 0.343 | 3.001 | 3.436 | | | | | | X | XXXX | 21803000 | - | 312 | B |
| 3.000 | 3.500 | 0.275 | 0.275 | 3.001 | 3.499 | X | X | | | X | | XXXX | 25003000 | - | 250 | B |
| 3.000 | 3.500 | 0.275 | 0.413 | 3.001 | 3.499 | | | X | X | X | X | XXXX | 25003000 | - | 375 | B |
| 3.000 | 3.625 | 0.343 | 0.550 | 3.002 | 3.623 | X | X | X | X | X | X | XXXX | 31203000 | - | 500 | B |
| 3.000 | 3.750 | 0.413 | 0.550 | 3.002 | 3.748 | X | X | | | X | X | XXXX | 37503000 | - | 500 | B |
| 3.000 | 3.750 | 0.413 | 0.688 | 3.002 | 3.748 | X | | X | X | X | X | XXXX | 37503000 | - | 625 | B |
| 3.000 | 3.875 | 0.481 | 0.756 | 3.002 | 3.873 | X | | X | | | | XXXX | 43703000 | - | 687 | B |
| 3.000 | 4.000 | 0.550 | 0.825 | 3.002 | 3.998 | X | | X | | X | X | XXXX | 50003000 | - | 750 | B |
| 3.000 | 4.250 | 0.688 | 1.100 | 3.003 | 4.247 | X | | | | | | XXXX | 62503000 | - | 1000 | B |
| 3.062 | 3.500 | 0.240 | 0.413 | 3.063 | 3.499 | X | | | | | | XXXX | 21803062 | - | 375 | B |
| 3.125 | 3.500 | 0.206 | 0.206 | 3.126 | 3.499 | X | X | | | X | | XXXX | 18703125 | - | 187 | B |
| 3.125 | 3.500 | 0.206 | 0.343 | 3.126 | 3.499 | | | | | X | | XXXX | 18703125 | - | 312 | B |
| 3.125 | 3.500 | 0.206 | 0.413 | 3.126 | 3.499 | | | X | X | X | X | XXXX | 18703125 | - | 375 | B |
| 3.125 | 3.625 | 0.275 | 0.413 | 3.126 | 3.624 | X | X | X | | X | X | XXXX | 25003125 | - | 375 | B |
| 3.125 | 3.750 | 0.343 | 0.413 | 3.127 | 3.748 | X | X | | | | X | XXXX | 31203125 | - | 375 | B |
| 3.125 | 3.750 | 0.343 | 0.550 | 3.127 | 3.748 | | | | X | | X | XXXX | 31203125 | - | 500 | B |
| 3.125 | 3.875 | 0.413 | 0.688 | 3.127 | 3.873 | X | | | | X | | XXXX | 37503125 | - | 625 | B |
| 3.125 | 4.000 | 0.481 | 0.688 | 3.127 | 3.998 | X | | | | | | XXXX | 43703125 | - | 625 | B |
| 3.250 | 3.500 | 0.138 | 0.275 | 3.251 | 3.499 | X | | | | | | XXXX | 12503250 | - | 250 | B |
| 3.250 | 3.625 | 0.206 | 0.275 | 3.251 | 3.624 | | | | X | | | XXXX | 18703250 | - | 250 | B |
| 3.250 | 3.625 | 0.206 | 0.413 | 3.251 | 3.624 | X | X | X | | X | X | XXXX | 18703250 | - | 375 | B |
| 3.250 | 3.750 | 0.275 | 0.275 | 3.251 | 3.749 | X | X | | | X | | XXXX | 25003250 | - | 250 | B |
| 3.250 | 3.750 | 0.275 | 0.413 | 3.251 | 3.749 | | | X | X | X | X | XXXX | 25003250 | - | 375 | B |
| 3.250 | 3.875 | 0.343 | 0.550 | 3.252 | 3.873 | X | X | X | X | X | X | XXXX | 31203250 | - | 500 | B |
| 3.250 | 4.000 | 0.413 | 0.550 | 3.252 | 3.998 | X | X | | | | X | XXXX | 37503250 | - | 500 | B |
| 3.250 | 4.000 | 0.413 | 0.688 | 3.252 | 3.998 | | | X | X | X | X | XXXX | 37503250 | - | 625 | B |
| 3.250 | 4.125 | 0.481 | 0.688 | 3.252 | 4.123 | X | | | | | | XXXX | 43703250 | - | 625 | B |
| 3.250 | 4.250 | 0.550 | 0.825 | 3.252 | 4.248 | X | | | | X | | XXXX | 50003250 | - | 750 | B |
| 3.250 | 4.500 | 0.688 | 1.100 | 3.253 | 4.497 | X | | | | X | | XXXX | 62503250 | - | 1000 | B |
| 3.375 | 3.750 | 0.206 | 0.206 | 3.376 | 3.749 | X | | | | X | | XXXX | 18703375 | - | 187 | B |
| 3.375 | 3.750 | 0.206 | 0.275 | 3.376 | 3.749 | | X | | | X | | XXXX | 18703375 | - | 250 | B |
| 3.375 | 3.750 | 0.206 | 0.413 | 3.376 | 3.749 | | | X | | X | X | XXXX | 18703375 | - | 375 | B |
| 3.375 | 3.875 | 0.275 | 0.413 | 3.376 | 3.874 | X | X | X | X | X | X | XXXX | 25003375 | - | 375 | B |
| 3.375 | 4.000 | 0.343 | 0.343 | 3.377 | 3.998 | X | X | | | X | | XXXX | 31203375 | - | 312 | B |
| 3.375 | 4.000 | 0.343 | 0.550 | 3.377 | 3.998 | | | X | X | X | X | XXXX | 31203375 | - | 500 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 3.375 | 4.125 | 0.413 | 0.688 | 3.377 | 4.123 | X | | | | X | | XXXX | 37503375 | - | 625 | B |
| 3.375 | 4.375 | 0.550 | 0.688 | 3.377 | 4.373 | | | | | X | | XXXX | 50003375 | - | 625 | B |
| 3.375 | 4.625 | 0.688 | 1.100 | 3.378 | 4.622 | X | | | | | | XXXX | 62503375 | - | 1000 | B |
| 3.437 | 3.875 | 0.240 | 0.413 | 3.438 | 3.874 | X | | | | | | XXXX | 21803437 | - | 375 | B |
| 3.500 | 3.750 | 0.138 | 0.275 | 3.501 | 3.749 | X | | | | | | XXXX | 12503500 | - | 250 | B |
| 3.500 | 3.875 | 0.206 | 0.293 | 3.501 | 3.874 | X | X | | | X | | XXXX | 18703500 | - | 266 | B |
| 3.500 | 3.875 | 0.206 | 0.309 | 3.501 | 3.874 | | | | | X | | XXXX | 18703500 | - | 281 | B |
| 3.500 | 3.875 | 0.206 | 0.413 | 3.501 | 3.874 | | | X | X | X | X | XXXX | 18703500 | - | 375 | B |
| 3.500 | 4.000 | 0.275 | 0.275 | 3.501 | 3.999 | X | X | | | | X | XXXX | 25003500 | - | 250 | B |
| 3.500 | 4.000 | 0.275 | 0.362 | 3.501 | 3.999 | | | | | | X | XXXX | 25003500 | - | 329 | B |
| 3.500 | 4.000 | 0.275 | 0.413 | 3.501 | 3.999 | | | X | X | X | X | XXXX | 25003500 | - | 375 | B |
| 3.500 | 4.125 | 0.343 | 0.550 | 3.502 | 4.123 | X | X | X | | X | X | XXXX | 31203500 | - | 500 | B |
| 3.500 | 4.250 | 0.413 | 0.688 | 3.502 | 4.248 | X | X | X | X | X | X | XXXX | 37503500 | - | 625 | B |
| 3.500 | 4.500 | 0.550 | 0.825 | 3.502 | 4.498 | X | X | X | | X | X | XXXX | 50003500 | - | 750 | B |
| 3.500 | 4.750 | 0.688 | 1.100 | 3.503 | 4.747 | X | | | | | | XXXX | 62503500 | - | 1000 | B |
| 3.500 | 5.000 | 0.825 | 1.375 | 3.503 | 4.997 | X | | | | | | XXXX | 75003500 | - | 1250 | B |
| 3.625 | 3.875 | 0.138 | 0.206 | 3.626 | 3.874 | | | | | X | | XXXX | 12503625 | - | 187 | B |
| 3.625 | 4.000 | 0.206 | 0.413 | 3.626 | 3.999 | X | X | X | | X | X | XXXX | 18703625 | - | 375 | B |
| 3.625 | 4.125 | 0.275 | 0.413 | 3.626 | 4.124 | X | X | X | X | X | | XXXX | 25003625 | - | 375 | B |
| 3.625 | 4.250 | 0.343 | 0.550 | 3.627 | 4.248 | X | X | | X | X | X | XXXX | 31203625 | - | 500 | B |
| 3.625 | 4.375 | 0.413 | 0.688 | 3.627 | 4.373 | X | | | | X | X | XXXX | 37503625 | - | 625 | B |
| 3.625 | 4.500 | 0.481 | 0.688 | 3.627 | 4.498 | X | | | | | | XXXX | 43703625 | - | 625 | B |
| 3.625 | 4.625 | 0.550 | 0.825 | 3.627 | 4.623 | | | X | | | | XXXX | 50003625 | - | 750 | B |
| 3.687 | 4.250 | 0.309 | 0.413 | 3.688 | 4.249 | | | X | | | | XXXX | 28103687 | - | 375 | B |
| 3.750 | 4.125 | 0.206 | 0.275 | 3.751 | 4.124 | | | | X | | | XXXX | 18703750 | - | 250 | B |
| 3.750 | 4.125 | 0.206 | 0.413 | 3.751 | 4.124 | X | X | X | | X | X | XXXX | 18703750 | - | 375 | B |
| 3.750 | 4.250 | 0.275 | 0.413 | 3.751 | 4.249 | X | X | X | X | X | X | XXXX | 25003750 | - | 375 | B |
| 3.750 | 4.250 | 0.275 | 0.618 | 3.751 | 4.249 | | | | | X | | XXXX | 25003750 | - | 562 | B |
| 3.750 | 4.375 | 0.343 | 0.413 | 3.752 | 4.373 | X | X | | | X | | XXXX | 31203750 | - | 375 | B |
| 3.750 | 4.375 | 0.343 | 0.550 | 3.752 | 4.373 | | | | | X | X | XXXX | 31203750 | - | 500 | B |
| 3.750 | 4.375 | 0.343 | 0.688 | 3.752 | 4.373 | | | | | X | | XXXX | 31203750 | - | 625 | B |
| 3.750 | 4.500 | 0.413 | 0.550 | 3.752 | 4.498 | | | | X | | | XXXX | 37503750 | - | 500 | B |
| 3.750 | 4.500 | 0.413 | 0.688 | 3.752 | 4.498 | X | X | X | X | X | X | XXXX | 37503750 | - | 625 | B |
| 3.750 | 4.750 | 0.550 | 0.759 | 3.752 | 4.748 | X | X | X | | X | | XXXX | 50003750 | - | 690 | B |
| 3.750 | 5.000 | 0.688 | 1.100 | 3.753 | 4.997 | X | X | | | X | | XXXX | 62503750 | - | 1000 | B |
| 3.875 | 4.250 | 0.206 | 0.413 | 3.876 | 4.249 | X | X | | | X | | XXXX | 18703875 | - | 375 | B |
| 3.875 | 4.375 | 0.275 | 0.413 | 3.876 | 4.374 | X | X | X | | | X | XXXX | 25003875 | - | 375 | B |
| 3.875 | 4.500 | 0.343 | 0.550 | 3.877 | 4.498 | X | X | X | | X | X | XXXX | 31203875 | - | 500 | B |
| 3.875 | 4.625 | 0.413 | 0.688 | 3.877 | 4.623 | X | X | | | X | X | XXXX | 37503875 | - | 625 | B |
| 3.875 | 4.750 | 0.481 | 0.825 | 3.877 | 4.748 | | | | | X | | XXXX | 43703875 | - | 750 | B |
| 3.875 | 4.875 | 0.550 | 0.825 | 3.877 | 4.873 | | | | | X | X | XXXX | 50003875 | - | 750 | B |
| 3.937 | 4.500 | 0.309 | 0.550 | 3.938 | 4.499 | | | | | X | | XXXX | 28103937 | - | 500 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.


**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 4.000 | 4.250 | 0.138 | 0.275 | 4.001 | 4.249 | X | | | | | | XXXX | 12504000 | - | 250 | B |
| 4.000 | 4.375 | 0.206 | 0.206 | 4.001 | 4.374 | X | X | | | X | | XXXX | 18704000 | - | 187 | B |
| 4.000 | 4.375 | 0.206 | 0.413 | 4.001 | 4.374 | | | X | | X | X | XXXX | 18704000 | - | 375 | B |
| 4.000 | 4.500 | 0.275 | 0.275 | 4.001 | 4.499 | X | X | | | | X | XXXX | 25004000 | - | 250 | B |
| 4.000 | 4.500 | 0.275 | 0.413 | 4.001 | 4.499 | | | X | X | X | X | XXXX | 25004000 | - | 375 | B |
| 4.000 | 4.500 | 0.275 | 0.618 | 4.001 | 4.499 | | | X | X | X | X | XXXX | 25004000 | - | 562 | B |
| 4.000 | 4.625 | 0.343 | 0.550 | 4.002 | 4.623 | | | X | | | | XXXX | 31204000 | - | 500 | B |
| 4.000 | 4.625 | 0.343 | 0.618 | 4.002 | 4.623 | X | X | X | | X | X | XXXX | 31204000 | - | 562 | B |
| 4.000 | 4.750 | 0.413 | 0.550 | 4.002 | 4.748 | X | X | | | | X | XXXX | 37504000 | - | 500 | B |
| 4.000 | 4.750 | 0.413 | 0.688 | 4.002 | 4.748 | | | X | X | X | X | XXXX | 37504000 | - | 625 | B |
| 4.000 | 4.875 | 0.481 | 0.688 | 4.002 | 4.873 | X | X | X | | X | | XXXX | 43704000 | - | 625 | B |
| 4.000 | 4.875 | 0.481 | 0.825 | 4.002 | 4.873 | | | | | | X | XXXX | 43704000 | - | 750 | B |
| 4.000 | 5.000 | 0.550 | 0.825 | 4.002 | 4.998 | X | X | X | | X | X | XXXX | 50004000 | - | 750 | B |
| 4.000 | 5.250 | 0.688 | 1.100 | 4.003 | 5.247 | X | | | | | | XXXX | 62504000 | - | 1000 | B |
| 4.000 | 5.500 | 0.825 | 1.375 | 4.003 | 5.497 | X | | | | | | XXXX | 75004000 | - | 1250 | B |
| 4.062 | 4.562 | 0.275 | 0.413 | 4.063 | 4.561 | | | | | X | | XXXX | 25004062 | - | 375 | B |
| 4.125 | 4.500 | 0.206 | 0.413 | 4.126 | 4.499 | X | X | X | X | X | X | XXXX | 18704125 | - | 375 | B |
| 4.125 | 4.625 | 0.275 | 0.618 | 4.126 | 4.624 | X | X | | | X | X | XXXX | 25004125 | - | 562 | B |
| 4.125 | 4.750 | 0.343 | 0.618 | 4.127 | 4.748 | X | | X | X | X | | XXXX | 31204125 | - | 562 | B |
| 4.125 | 4.875 | 0.413 | 0.688 | 4.127 | 4.873 | X | | | | X | X | XXXX | 37504125 | - | 625 | B |
| 4.125 | 5.125 | 0.550 | 0.825 | 4.127 | 5.123 | X | | | | X | | XXXX | 50004125 | - | 750 | B |
| 4.125 | 5.250 | 0.618 | 0.963 | 4.127 | 5.248 | X | | | | | | XXXX | 56204125 | - | 875 | B |
| 4.250 | 4.500 | 0.138 | 0.275 | 4.251 | 4.499 | X | | | | | | XXXX | 12504250 | - | 250 | B |
| 4.250 | 4.625 | 0.206 | 0.275 | 4.251 | 4.624 | | | | X | | | XXXX | 18704250 | - | 250 | B |
| 4.250 | 4.625 | 0.206 | 0.309 | 4.251 | 4.624 | X | X | | | X | | XXXX | 18704250 | - | 281 | B |
| 4.250 | 4.625 | 0.206 | 0.413 | 4.251 | 4.624 | | | X | X | X | | XXXX | 18704250 | - | 375 | B |
| 4.250 | 4.750 | 0.275 | 0.413 | 4.251 | 4.749 | X | X | | X | X | X | XXXX | 25004250 | - | 375 | B |
| 4.250 | 4.750 | 0.275 | 0.618 | 4.251 | 4.749 | | | X | X | X | X | XXXX | 25004250 | - | 562 | B |
| 4.250 | 4.875 | 0.343 | 0.618 | 4.252 | 4.873 | X | X | X | | X | X | XXXX | 31204250 | - | 562 | B |
| 4.250 | 5.000 | 0.413 | 0.413 | 4.252 | 4.998 | X | X | | | X | | XXXX | 37504250 | - | 375 | B |
| 4.250 | 5.000 | 0.413 | 0.550 | 4.252 | 4.998 | | | X | X | | | XXXX | 37504250 | - | 500 | B |
| 4.250 | 5.000 | 0.413 | 0.688 | 4.252 | 4.998 | | | X | X | X | X | XXXX | 37504250 | - | 625 | B |
| 4.250 | 5.250 | 0.550 | 0.825 | 4.252 | 5.248 | X | | | | X | | XXXX | 50004250 | - | 750 | B |
| 4.250 | 5.500 | 0.688 | 1.100 | 4.253 | 5.497 | X | | | | X | | XXXX | 62504250 | - | 1000 | B |
| 4.250 | 5.750 | 0.825 | 1.375 | 4.253 | 5.747 | X | | | | | | XXXX | 75004250 | - | 1250 | B |
| 4.312 | 5.312 | 0.550 | 0.825 | 4.314 | 5.310 | X | | | | | | XXXX | 50004312 | - | 750 | B |
| 4.375 | 4.625 | 0.138 | 0.275 | 4.376 | 4.624 | X | | | | | | XXXX | 12504375 | - | 250 | B |
| 4.375 | 4.750 | 0.206 | 0.413 | 4.376 | 4.749 | X | | X | | X | | XXXX | 18704375 | - | 375 | B |
| 4.375 | 4.875 | 0.275 | 0.618 | 4.376 | 4.874 | X | X | X | X | | X | XXXX | 25004375 | - | 562 | B |
| 4.375 | 5.000 | 0.343 | 0.343 | 4.377 | 4.998 | X | X | | | X | | XXXX | 31204375 | - | 312 | B |
| 4.375 | 5.000 | 0.343 | 0.550 | 4.377 | 4.998 | | | X | X | | | XXXX | 31204375 | - | 500 | B |
| 4.375 | 5.000 | 0.343 | 0.618 | 4.377 | 4.998 | | | X | | X | | XXXX | 31204375 | - | 562 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 4.375 | 5.125 | 0.413 | 0.688 | 4.377 | 5.123 | X | X | X | | X | X | XXXX | 37504375 | - | 625 | B |
| 4.375 | 5.375 | 0.550 | 0.688 | 4.377 | 5.373 | X | | | | X | | XXXX | 50004375 | - | 625 | B |
| 4.375 | 5.375 | 0.550 | 0.825 | 4.377 | 5.373 | | | X | | X | | XXXX | 50004375 | - | 750 | B |
| 4.397 | 5.147 | 0.413 | 0.688 | 4.399 | 5.145 | | | | | X | | XXXX | 37504397 | - | 625 | B |
| 4.416 | 4.916 | 0.275 | 0.618 | 4.417 | 4.915 | | | | | X | | XXXX | 25004416 | - | 562 | B |
| 4.437 | 4.937 | 0.275 | 0.413 | 4.438 | 4.936 | | | | | X | | XXXX | 25004437 | - | 375 | B |
| 4.437 | 5.000 | 0.309 | 0.550 | 4.438 | 4.999 | X | | | | | | XXXX | 28104437 | - | 500 | B |
| 4.500 | 4.750 | 0.138 | 0.206 | 4.501 | 4.749 | X | | | | X | | XXXX | 12504500 | - | 187 | B |
| 4.500 | 4.875 | 0.206 | 0.206 | 4.501 | 4.874 | X | | | | X | | XXXX | 18704500 | - | 187 | B |
| 4.500 | 4.875 | 0.206 | 0.413 | 4.501 | 4.874 | | | X | | X | X | XXXX | 18704500 | - | 375 | B |
| 4.500 | 5.000 | 0.275 | 0.275 | 4.501 | 4.999 | X | X | | | X | X | XXXX | 25004500 | - | 250 | B |
| 4.500 | 5.000 | 0.275 | 0.413 | 4.501 | 4.999 | | | | X | X | X | XXXX | 25004500 | - | 375 | B |
| 4.500 | 5.000 | 0.275 | 0.550 | 4.501 | 4.999 | | | | | X | X | XXXX | 25004500 | - | 500 | B |
| 4.500 | 5.000 | 0.275 | 0.618 | 4.501 | 4.999 | | | X | X | X | X | XXXX | 25004500 | - | 562 | B |
| 4.500 | 5.125 | 0.343 | 0.618 | 4.502 | 5.123 | X | X | | | X | | XXXX | 31204500 | - | 562 | B |
| 4.500 | 5.125 | 0.343 | 0.688 | 4.502 | 5.123 | | | | X | X | | XXXX | 31204500 | - | 625 | B |
| 4.500 | 5.250 | 0.413 | 0.688 | 4.502 | 5.248 | X | X | X | X | X | X | XXXX | 37504500 | - | 625 | B |
| 4.500 | 5.375 | 0.481 | 0.825 | 4.502 | 5.373 | X | | | | X | X | XXXX | 43704500 | - | 750 | B |
| 4.500 | 5.500 | 0.550 | 0.825 | 4.502 | 5.498 | X | X | X | | X | X | XXXX | 50004500 | - | 750 | B |
| 4.500 | 5.750 | 0.688 | 1.100 | 4.503 | 5.747 | X | | | | | | XXXX | 62504500 | - | 1000 | B |
| 4.500 | 6.000 | 0.825 | 1.375 | 4.503 | 5.997 | X | | | | | | XXXX | 75004500 | - | 1250 | B |
| 4.625 | 5.000 | 0.206 | 0.413 | 4.626 | 4.999 | X | | X | | | | XXXX | 18704625 | - | 375 | B |
| 4.625 | 5.125 | 0.275 | 0.618 | 4.626 | 5.124 | X | X | | | X | X | XXXX | 25004625 | - | 562 | B |
| 4.625 | 5.250 | 0.343 | 0.688 | 4.627 | 5.248 | | | X | X | X | | XXXX | 31204625 | - | 625 | B |
| 4.625 | 5.375 | 0.413 | 0.688 | 4.627 | 5.373 | X | | | | X | X | XXXX | 37504625 | - | 625 | B |
| 4.625 | 5.875 | 0.688 | 1.100 | 4.628 | 5.872 | X | | | | | | XXXX | 62504625 | - | 1000 | B |
| 4.687 | 5.250 | 0.309 | 0.688 | 4.688 | 5.249 | | | | | X | | XXXX | 28104687 | - | 625 | B |
| 4.750 | 5.000 | 0.138 | 0.275 | 4.751 | 4.999 | X | | | | | | XXXX | 12504750 | - | 250 | B |
| 4.750 | 5.125 | 0.206 | 0.413 | 4.751 | 5.124 | X | | | | | | XXXX | 18704750 | - | 375 | B |
| 4.750 | 5.250 | 0.275 | 0.413 | 4.751 | 5.249 | X | X | | | X | | XXXX | 25004750 | - | 375 | B |
| 4.750 | 5.250 | 0.275 | 0.618 | 4.751 | 5.249 | | | X | X | X | X | XXXX | 25004750 | - | 562 | B |
| 4.750 | 5.375 | 0.343 | 0.688 | 4.752 | 5.373 | X | | | X | X | | XXXX | 31204750 | - | 625 | B |
| 4.750 | 5.500 | 0.413 | 0.550 | 4.752 | 5.498 | | | X | | | | XXXX | 37504750 | - | 500 | B |
| 4.750 | 5.500 | 0.413 | 0.688 | 4.752 | 5.498 | X | X | X | X | X | X | XXXX | 37504750 | - | 625 | B |
| 4.750 | 5.625 | 0.481 | 0.688 | 4.752 | 5.623 | | | X | X | | | XXXX | 43704750 | - | 625 | B |
| 4.750 | 5.625 | 0.481 | 0.825 | 4.752 | 5.623 | X | X | | | X | | XXXX | 43704750 | - | 750 | B |
| 4.750 | 5.750 | 0.550 | 0.756 | 4.752 | 5.748 | | | X | | | | XXXX | 50004750 | - | 687 | B |
| 4.750 | 5.750 | 0.550 | 0.825 | 4.752 | 5.748 | X | | | | X | | XXXX | 50004750 | - | 750 | B |
| 4.750 | 6.000 | 0.688 | 1.100 | 4.753 | 5.997 | X | | X | | | | XXXX | 62504750 | - | 1000 | B |
| 4.750 | 6.250 | 0.825 | 1.375 | 4.753 | 6.247 | | | X | | | | XXXX | 75004750 | - | 1250 | B |
| 4.875 | 5.250 | 0.206 | 0.413 | 4.876 | 5.249 | X | | | | | | XXXX | 18704875 | - | 375 | B |
| 4.875 | 5.250 | 0.206 | 0.618 | 4.876 | 5.249 | | | X | | | | XXXX | 18704875 | - | 562 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 4.875 | 5.375 | 0.275 | 0.413 | 4.876 | 5.374 | X | X | | | X | X | XXXX | 25004875 | - | 375 | B |
| 4.875 | 5.375 | 0.275 | 0.618 | 4.876 | 5.374 | | | X | X | X | X | XXXX | 25004875 | - | 562 | B |
| 4.875 | 5.500 | 0.343 | 0.343 | 4.877 | 5.498 | X | | | | | X | XXXX | 31204875 | - | 312 | B |
| 4.875 | 5.500 | 0.343 | 0.688 | 4.877 | 5.498 | | | | | | X | XXXX | 31204875 | - | 625 | B |
| 4.875 | 5.625 | 0.413 | 0.688 | 4.877 | 5.623 | X | | | | X | X | XXXX | 37504875 | - | 625 | B |
| 4.875 | 5.750 | 0.481 | 0.618 | 4.877 | 5.748 | | | | | X | | XXXX | 43704875 | - | 562 | B |
| 4.875 | 5.875 | 0.550 | 0.618 | 4.877 | 5.873 | | | X | | | | XXXX | 50004875 | - | 562 | B |
| 4.937 | 5.500 | 0.309 | 0.377 | 4.938 | 5.499 | | | | | X | | XXXX | 28104937 | - | 343 | B |
| 4.937 | 5.500 | 0.309 | 0.550 | 4.938 | 5.499 | | | | | X | | XXXX | 28104937 | - | 500 | B |
| 5.000 | 5.250 | 0.138 | 0.275 | 5.001 | 5.249 | X | | | | | | XXXX | 12505000 | - | 250 | B |
| 5.000 | 5.375 | 0.206 | 0.309 | 5.001 | 5.374 | | | | | X | | XXXX | 18705000 | - | 281 | B |
| 5.000 | 5.375 | 0.206 | 0.413 | 5.001 | 5.374 | | | X | | | X | XXXX | 18705000 | - | 375 | B |
| 5.000 | 5.500 | 0.275 | 0.413 | 5.001 | 5.499 | X | X | X | X | X | X | XXXX | 25005000 | - | 375 | B |
| 5.000 | 5.500 | 0.275 | 0.618 | 5.001 | 5.499 | | | X | X | X | X | XXXX | 25005000 | - | 562 | B |
| 5.000 | 5.562 | 0.309 | 0.381 | 5.001 | 5.561 | X | X | | | | X | XXXX | 28105000 | - | 346 | B |
| 5.000 | 5.625 | 0.343 | 0.688 | 5.002 | 5.623 | X | X | | | X | X | XXXX | 31205000 | - | 625 | B |
| 5.000 | 5.750 | 0.413 | 0.413 | 5.002 | 5.748 | X | X | | | | X | XXXX | 37505000 | - | 375 | B |
| 5.000 | 5.750 | 0.413 | 0.550 | 5.002 | 5.748 | | | | | X | | XXXX | 37505000 | - | 500 | B |
| 5.000 | 5.750 | 0.413 | 0.688 | 5.002 | 5.748 | X | | X | X | X | X | XXXX | 37505000 | - | 625 | B |
| 5.000 | 5.875 | 0.481 | 0.825 | 5.002 | 5.873 | | | | | X | X | XXXX | 43705000 | - | 750 | B |
| 5.000 | 6.000 | 0.550 | 0.825 | 5.002 | 5.998 | X | X | | X | X | X | XXXX | 50005000 | - | 750 | B |
| 5.000 | 6.250 | 0.688 | 1.100 | 5.003 | 6.247 | X | | | | X | | XXXX | 62505000 | - | 1000 | B |
| 5.000 | 6.500 | 0.825 | 1.375 | 5.003 | 6.497 | X | | | | | | XXXX | 75005000 | - | 1250 | B |
| 5.000 | 7.000 | 1.100 | 1.650 | 5.004 | 6.996 | | | X | | | | XXXX | 100005000 | - | 1500 | B |
| 5.125 | 5.625 | 0.275 | 0.618 | 5.126 | 5.624 | X | X | | X | | | XXXX | 25005125 | - | 562 | B |
| 5.125 | 5.750 | 0.343 | 0.688 | 5.127 | 5.748 | X | X | X | | X | | XXXX | 31205125 | - | 625 | B |
| 5.125 | 5.875 | 0.413 | 0.688 | 5.127 | 5.873 | X | | | | X | | XXXX | 37505125 | - | 625 | B |
| 5.125 | 6.000 | 0.481 | 0.550 | 5.127 | 5.998 | X | | X | | | | XXXX | 43705125 | - | 500 | B |
| 5.125 | 6.125 | 0.550 | 0.825 | 5.127 | 6.123 | X | | X | | | | XXXX | 50005125 | - | 750 | B |
| 5.250 | 5.625 | 0.206 | 0.413 | 5.251 | 5.624 | X | | | | | | XXXX | 18705250 | - | 375 | B |
| 5.250 | 5.750 | 0.275 | 0.413 | 5.251 | 5.749 | X | X | X | | X | | XXXX | 25005250 | - | 375 | B |
| 5.250 | 5.750 | 0.275 | 0.618 | 5.251 | 5.749 | | | X | X | X | | XXXX | 25005250 | - | 562 | B |
| 5.250 | 5.875 | 0.343 | 0.550 | 5.252 | 5.873 | X | X | | | | X | XXXX | 31205250 | - | 500 | B |
| 5.250 | 5.875 | 0.343 | 0.688 | 5.252 | 5.873 | | | | | X | | XXXX | 31205250 | - | 625 | B |
| 5.250 | 6.000 | 0.413 | 0.413 | 5.252 | 5.998 | X | X | | | X | | XXXX | 37505250 | - | 375 | B |
| 5.250 | 6.000 | 0.413 | 0.550 | 5.252 | 5.998 | | | X | | X | | XXXX | 37505250 | - | 500 | B |
| 5.250 | 6.000 | 0.413 | 0.688 | 5.252 | 5.998 | | | X | X | X | X | XXXX | 37505250 | - | 625 | B |
| 5.250 | 6.250 | 0.550 | 0.550 | 5.252 | 6.248 | X | | | | X | | XXXX | 50005250 | - | 500 | B |
| 5.250 | 6.250 | 0.550 | 0.825 | 5.252 | 6.248 | | | | | X | | XXXX | 50005250 | - | 750 | B |
| 5.250 | 6.500 | 0.688 | 1.100 | 5.253 | 6.497 | | | | | X | | XXXX | 62505250 | - | 1000 | B |
| 5.375 | 5.875 | 0.275 | 0.413 | 5.376 | 5.874 | X | X | | | X | X | XXXX | 25005375 | - | 375 | B |
| 5.375 | 5.875 | 0.275 | 0.618 | 5.376 | 5.874 | | | | | X | | XXXX | 25005375 | - | 562 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 5.375 | 6.000 | 0.343 | 0.688 | 5.377 | 5.998 | X | X | X | | | X | XXXX | 31205375 | - | 625 | B |
| 5.375 | 6.125 | 0.413 | 0.688 | 5.377 | 6.123 | X | | | | X | X | XXXX | 37505375 | - | 625 | B |
| 5.375 | 6.375 | 0.550 | 0.825 | 5.377 | 6.373 | X | | X | | | | XXXX | 50005375 | - | 750 | B |
| 5.437 | 6.000 | 0.309 | 0.550 | 5.438 | 5.999 | X | X | | | | | XXXX | 28105437 | - | 500 | B |
| 5.437 | 6.437 | 0.550 | 0.825 | 5.439 | 6.435 | X | | | | | | XXXX | 50005437 | - | 750 | B |
| 5.500 | 5.875 | 0.206 | 0.413 | 5.501 | 5.874 | | | | | X | | XXXX | 18705500 | - | 375 | B |
| 5.500 | 6.000 | 0.275 | 0.413 | 5.501 | 5.999 | X | X | X | X | X | X | XXXX | 25005500 | - | 375 | B |
| 5.500 | 6.000 | 0.275 | 0.618 | 5.501 | 5.999 | | | X | | X | X | XXXX | 25005500 | - | 562 | B |
| 5.500 | 6.125 | 0.343 | 0.343 | 5.502 | 6.123 | X | X | | | | X | XXXX | 31205500 | - | 312 | B |
| 5.500 | 6.125 | 0.343 | 0.413 | 5.502 | 6.123 | | | | | | X | XXXX | 31205500 | - | 374 | B |
| 5.500 | 6.125 | 0.343 | 0.550 | 5.502 | 6.123 | | | | | | X | XXXX | 31205500 | - | 500 | B |
| 5.500 | 6.125 | 0.343 | 0.688 | 5.502 | 6.123 | | | X | | X | | XXXX | 31205500 | - | 625 | B |
| 5.500 | 6.250 | 0.413 | 0.688 | 5.502 | 6.248 | X | X | X | X | X | X | XXXX | 37505500 | - | 625 | B |
| 5.500 | 6.375 | 0.481 | 0.825 | 5.502 | 6.373 | X | | | | | | XXXX | 43705500 | - | 750 | B |
| 5.500 | 6.500 | 0.550 | 0.825 | 5.502 | 6.498 | X | X | X | X | X | X | XXXX | 50005500 | - | 750 | B |
| 5.500 | 6.625 | 0.618 | 0.963 | 5.502 | 6.623 | X | | | | | | XXXX | 56205500 | - | 875 | B |
| 5.500 | 6.750 | 0.688 | 1.100 | 5.503 | 6.747 | X | | X | | X | | XXXX | 62505500 | - | 1000 | B |
| 5.500 | 7.000 | 0.825 | 1.375 | 5.503 | 6.997 | X | | | | | | XXXX | 75005500 | - | 1250 | B |
| 5.625 | 6.125 | 0.275 | 0.618 | 5.626 | 6.124 | X | X | | | X | X | XXXX | 25005625 | - | 562 | B |
| 5.625 | 6.250 | 0.343 | 0.688 | 5.627 | 6.248 | | | | X | X | | XXXX | 31205625 | - | 625 | B |
| 5.625 | 6.375 | 0.413 | 0.688 | 5.627 | 6.373 | X | X | X | | X | X | XXXX | 37505625 | - | 625 | B |
| 5.687 | 6.062 | 0.206 | 0.413 | 5.688 | 6.061 | X | | | | | | XXXX | 18705687 | - | 375 | B |
| 5.750 | 6.000 | 0.138 | 0.275 | 5.751 | 5.999 | X | | | | | | XXXX | 12505750 | - | 250 | B |
| 5.750 | 6.250 | 0.275 | 0.413 | 5.751 | 6.249 | X | X | | | | X | XXXX | 25005750 | - | 375 | B |
| 5.750 | 6.250 | 0.275 | 0.618 | 5.751 | 6.249 | | | X | X | X | X | XXXX | 25005750 | - | 562 | B |
| 5.750 | 6.375 | 0.343 | 0.688 | 5.752 | 6.373 | | | | | X | | XXXX | 31205750 | - | 625 | B |
| 5.750 | 6.500 | 0.413 | 0.550 | 5.752 | 6.498 | | | X | | | | XXXX | 37505750 | - | 500 | B |
| 5.750 | 6.500 | 0.413 | 0.688 | 5.752 | 6.498 | X | | X | | X | X | XXXX | 37505750 | - | 625 | B |
| 5.750 | 6.750 | 0.550 | 0.825 | 5.752 | 6.748 | X | | | | X | X | XXXX | 50005750 | - | 750 | B |
| 5.750 | 7.000 | 0.688 | 1.100 | 5.753 | 6.997 | X | X | | | | | XXXX | 62505750 | - | 1000 | B |
| 5.812 | 6.312 | 0.275 | 0.413 | 5.813 | 6.311 | | | | X | | | XXXX | 25005812 | - | 375 | B |
| 5.875 | 6.250 | 0.206 | 0.413 | 5.876 | 6.249 | X | | | | | | XXXX | 18705875 | - | 375 | B |
| 5.875 | 6.375 | 0.275 | 0.413 | 5.876 | 6.374 | X | | | | | X | XXXX | 25005875 | - | 375 | B |
| 5.875 | 6.375 | 0.275 | 0.618 | 5.876 | 6.374 | | | X | | | | XXXX | 25005875 | - | 562 | B |
| 5.875 | 6.500 | 0.343 | 0.343 | 5.877 | 6.498 | X | | | | | X | XXXX | 31205875 | - | 312 | B |
| 5.875 | 6.500 | 0.343 | 0.688 | 5.877 | 6.498 | | | | | | X | XXXX | 31205875 | - | 625 | B |
| 5.875 | 6.625 | 0.413 | 0.688 | 5.877 | 6.623 | X | X | | | X | | XXXX | 37505875 | - | 625 | B |
| 5.937 | 6.500 | 0.309 | 0.550 | 5.938 | 6.499 | | | | | X | | XXXX | 28105937 | - | 500 | B |
| 6.000 | 6.375 | 0.206 | 0.413 | 6.001 | 6.374 | X | | X | | | | XXXX | 18706000 | - | 375 | B |
| 6.000 | 6.500 | 0.275 | 0.413 | 6.001 | 6.499 | X | X | | | X | X | XXXX | 25006000 | - | 375 | B |
| 6.000 | 6.500 | 0.275 | 0.481 | 6.001 | 6.499 | | | | | X | | XXXX | 25006000 | - | 437 | B |
| 6.000 | 6.500 | 0.275 | 0.618 | 6.001 | 6.499 | | | X | X | X | X | XXXX | 25006000 | - | 562 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 6.000 | 6.625 | 0.343 | 0.688 | 6.002 | 6.623 | X | | | | X | | XXXX | 31206000 | - | 625 | B |
| 6.000 | 6.750 | 0.413 | 0.550 | 6.002 | 6.748 | X | X | | | X | | XXXX | 37506000 | - | 500 | B |
| 6.000 | 6.750 | 0.413 | 0.688 | 6.002 | 6.748 | | | X | X | X | X | XXXX | 37506000 | - | 625 | B |
| 6.000 | 7.000 | 0.550 | 0.825 | 6.002 | 6.998 | | X | X | X | X | X | XXXX | 50006000 | - | 750 | B |
| 6.000 | 7.250 | 0.688 | 1.100 | 6.003 | 7.247 | X | | | | | X | XXXX | 62506000 | - | 1000 | B |
| 6.000 | 7.500 | 0.825 | 1.375 | 6.003 | 7.497 | X | | | | | | XXXX | 75006000 | - | 1250 | B |
| 6.000 | 8.000 | 1.100 | 1.650 | 6.004 | 7.996 | X | | | | | | XXXX | 100006000 | - | 1500 | B |
| 6.125 | 6.625 | 0.275 | 0.413 | 6.126 | 6.624 | X | | | | | | XXXX | 25006125 | - | 375 | B |
| 6.125 | 6.750 | 0.343 | 0.688 | 6.127 | 6.748 | X | | | | | X | XXXX | 31206125 | - | 625 | B |
| 6.250 | 6.750 | 0.275 | 0.413 | 6.251 | 6.749 | X | X | | | | X | XXXX | 25006250 | - | 375 | B |
| 6.250 | 6.750 | 0.275 | 0.618 | 6.251 | 6.749 | | | X | | X | X | XXXX | 25006250 | - | 562 | B |
| 6.250 | 7.000 | 0.413 | 0.550 | 6.252 | 6.998 | X | X | X | | X | | XXXX | 37506250 | - | 500 | B |
| 6.250 | 7.000 | 0.413 | 0.688 | 6.252 | 6.998 | | | X | X | X | X | XXXX | 37506250 | - | 625 | B |
| 6.250 | 7.250 | 0.550 | 0.825 | 6.252 | 7.248 | X | X | | | | X | XXXX | 50006250 | - | 750 | B |
| 6.250 | 7.500 | 0.688 | 1.100 | 6.253 | 7.497 | X | | | | | | XXXX | 62506250 | - | 1000 | B |
| 6.250 | 7.750 | 0.825 | 1.375 | 6.253 | 7.747 | | | X | | | | XXXX | 75006250 | - | 1250 | B |
| 6.312 | 6.687 | 0.206 | 0.413 | 6.313 | 6.686 | X | | | | | | XXXX | 18706312 | - | 375 | B |
| 6.375 | 7.000 | 0.343 | 0.688 | 6.377 | 6.998 | X | X | X | | X | X | XXXX | 31206375 | - | 625 | B |
| 6.375 | 7.375 | 0.550 | 0.825 | 6.377 | 7.373 | X | | | | | | XXXX | 50006375 | - | 750 | B |
| 6.437 | 7.000 | 0.309 | 0.550 | 6.438 | 6.999 | X | X | | | | | XXXX | 28106437 | - | 500 | B |
| 6.500 | 7.000 | 0.275 | 0.413 | 6.501 | 6.999 | X | X | X | X | X | | XXXX | 25006500 | - | 375 | B |
| 6.500 | 7.000 | 0.275 | 0.618 | 6.501 | 6.999 | | | X | X | X | X | XXXX | 25006500 | - | 562 | B |
| 6.500 | 7.125 | 0.343 | 0.688 | 6.502 | 7.123 | X | | | | X | | XXXX | 31206500 | - | 625 | B |
| 6.500 | 7.250 | 0.413 | 0.413 | 6.502 | 7.248 | X | X | | | | X | XXXX | 37506500 | - | 375 | B |
| 6.500 | 7.250 | 0.413 | 0.550 | 6.502 | 7.248 | | | X | | X | | XXXX | 37506500 | - | 500 | B |
| 6.500 | 7.250 | 0.413 | 0.688 | 6.502 | 7.248 | | | X | | X | X | XXXX | 37506500 | - | 625 | B |
| 6.500 | 7.500 | 0.550 | 0.825 | 6.502 | 7.498 | X | | X | X | X | | XXXX | 50006500 | - | 750 | B |
| 6.500 | 7.750 | 0.688 | 1.100 | 6.503 | 7.747 | X | | X | | | | XXXX | 62506500 | - | 1000 | B |
| 6.500 | 8.000 | 0.825 | 1.375 | 6.503 | 7.997 | X | | X | | | | XXXX | 75006500 | - | 1250 | B |
| 6.625 | 7.125 | 0.275 | 0.413 | 6.626 | 7.124 | | | X | X | | | XXXX | 25006625 | - | 375 | B |
| 6.625 | 7.250 | 0.343 | 0.688 | 6.627 | 7.248 | X | | | | X | | XXXX | 31206625 | - | 625 | B |
| 6.625 | 7.875 | 0.688 | 1.100 | 6.628 | 7.872 | X | | | | | | XXXX | 62506625 | - | 1000 | B |
| 6.750 | 7.250 | 0.275 | 0.413 | 6.751 | 7.249 | X | X | | | X | X | XXXX | 25006750 | - | 375 | B |
| 6.750 | 7.250 | 0.275 | 0.618 | 6.751 | 7.249 | | | X | | X | X | XXXX | 25006750 | - | 562 | B |
| 6.750 | 7.375 | 0.343 | 0.688 | 6.752 | 7.373 | X | | | | X | | XXXX | 31206750 | - | 625 | B |
| 6.750 | 7.500 | 0.413 | 0.413 | 6.752 | 7.498 | X | X | | | X | | XXXX | 37506750 | - | 375 | B |
| 6.750 | 7.500 | 0.413 | 0.550 | 6.752 | 7.498 | | | | | X | | XXXX | 37506750 | - | 500 | B |
| 6.750 | 7.500 | 0.413 | 0.618 | 6.752 | 7.498 | | | X | | | | XXXX | 37506750 | - | 562 | B |
| 6.750 | 7.500 | 0.413 | 0.688 | 6.752 | 7.498 | | | X | | X | X | XXXX | 37506750 | - | 625 | B |
| 6.750 | 7.750 | 0.550 | 0.825 | 6.752 | 7.748 | X | | | X | X | | XXXX | 50006750 | - | 750 | B |
| 6.750 | 7.875 | 0.618 | 0.963 | 6.752 | 7.873 | X | | | | | | XXXX | 56206750 | - | 875 | B |
| 6.750 | 8.000 | 0.688 | 1.100 | 6.753 | 7.997 | X | | X | | X | | XXXX | 62506750 | - | 1000 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|--------|---|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | | | |
| 6.875 | 7.625 | 0.413 | 0.688 | 6.877 | 7.623 | | | | | X | | XXXX | 37506875 | - | 625 | B |
| 6.875 | 8.125 | 0.688 | 1.100 | 6.878 | 8.122 | X | | | | | | XXXX | 62506875 | - | 1000 | B |
| 6.937 | 7.500 | 0.309 | 0.550 | 6.938 | 7.499 | | | | | X | | XXXX | 28106937 | - | 500 | B |
| 7.000 | 7.375 | 0.206 | 0.413 | 7.001 | 7.374 | | | | | X | | XXXX | 18707000 | - | 375 | B |
| 7.000 | 7.500 | 0.275 | 0.413 | 7.001 | 7.499 | X | X | X | | X | X | XXXX | 25007000 | - | 375 | B |
| 7.000 | 7.500 | 0.275 | 0.618 | 7.001 | 7.499 | | | X | X | X | X | XXXX | 25007000 | - | 562 | B |
| 7.000 | 7.625 | 0.343 | 0.688 | 7.002 | 7.623 | X | | | | X | | XXXX | 31207000 | - | 625 | B |
| 7.000 | 7.750 | 0.413 | 0.550 | 7.002 | 7.748 | X | X | | | X | | XXXX | 37507000 | - | 500 | B |
| 7.000 | 7.750 | 0.413 | 0.688 | 7.002 | 7.748 | | | X | | X | X | XXXX | 37507000 | - | 625 | B |
| 7.000 | 8.000 | 0.550 | 0.825 | 7.002 | 7.998 | X | X | X | X | X | X | XXXX | 50007000 | - | 750 | B |
| 7.000 | 8.250 | 0.688 | 1.100 | 7.003 | 8.247 | X | | | | X | | XXXX | 62507000 | - | 1000 | B |
| 7.000 | 8.500 | 0.825 | 1.375 | 7.003 | 8.497 | X | X | X | | | | XXXX | 75007000 | - | 1250 | B |
| 7.000 | 9.000 | 1.100 | 1.650 | 7.004 | 8.996 | X | | | | | | XXXX | 100007000 | - | 1500 | B |
| 7.125 | 7.625 | 0.275 | 0.413 | 7.126 | 7.624 | X | | | X | | | XXXX | 25007125 | - | 375 | B |
| 7.187 | 8.000 | 0.447 | 0.688 | 7.189 | 7.998 | X | | | | | | XXXX | 40607187 | - | 625 | B |
| 7.250 | 7.750 | 0.275 | 0.618 | 7.251 | 7.749 | X | X | | | X | X | XXXX | 25007250 | - | 562 | B |
| 7.250 | 7.875 | 0.343 | 0.688 | 7.252 | 7.873 | X | | | | X | | XXXX | 31207250 | - | 625 | B |
| 7.250 | 8.000 | 0.413 | 0.688 | 7.252 | 7.998 | X | X | X | X | X | X | XXXX | 37507250 | - | 625 | B |
| 7.250 | 8.250 | 0.550 | 0.825 | 7.252 | 8.248 | | | | X | X | X | XXXX | 50007250 | - | 750 | B |
| 7.250 | 8.500 | 0.688 | 1.100 | 7.253 | 8.497 | | | | | X | | XXXX | 62507250 | - | 1000 | B |
| 7.375 | 7.750 | 0.206 | 0.413 | 7.376 | 7.749 | | X | | | | | XXXX | 18707375 | - | 375 | B |
| 7.375 | 8.000 | 0.343 | 0.688 | 7.377 | 7.998 | X | X | | | | | XXXX | 31207375 | - | 625 | B |
| 7.375 | 8.125 | 0.413 | 0.550 | 7.377 | 8.123 | | | | | X | | XXXX | 37507375 | - | 500 | B |
| 7.404 | 8.028 | 0.343 | 0.688 | 7.406 | 8.026 | | | | | X | | XXXX | 31207404 | - | 625 | B |
| 7.500 | 7.875 | 0.206 | 0.275 | 7.501 | 7.874 | | | X | | | | XXXX | 18707500 | - | 250 | B |
| 7.500 | 8.000 | 0.275 | 0.618 | 7.501 | 7.999 | X | X | X | X | X | X | XXXX | 25007500 | - | 562 | B |
| 7.500 | 8.125 | 0.343 | 0.688 | 7.502 | 8.123 | X | | X | | | | XXXX | 31207500 | - | 625 | B |
| 7.500 | 8.250 | 0.413 | 0.550 | 7.502 | 8.248 | X | X | X | | X | | XXXX | 37507500 | - | 500 | B |
| 7.500 | 8.250 | 0.413 | 0.688 | 7.502 | 8.248 | X | | X | X | X | X | XXXX | 37507500 | - | 625 | B |
| 7.500 | 8.500 | 0.550 | 0.825 | 7.502 | 8.498 | X | | X | | X | | XXXX | 50007500 | - | 750 | B |
| 7.500 | 8.750 | 0.688 | 1.100 | 7.503 | 8.747 | | | | | X | | XXXX | 62507500 | - | 1000 | B |
| 7.500 | 9.000 | 0.825 | 1.375 | 7.503 | 8.997 | X | | X | | | | XXXX | 75007500 | - | 1250 | B |
| 7.500 | 9.500 | 1.100 | 1.650 | 7.504 | 9.496 | X | | | | | | XXXX | 100007500 | - | 1500 | B |
| 7.625 | 8.250 | 0.343 | 0.550 | 7.627 | 8.248 | | | X | | | | XXXX | 31207625 | - | 500 | B |
| 7.625 | 8.375 | 0.413 | 0.688 | 7.627 | 8.373 | X | | | | | | XXXX | 37507625 | - | 625 | B |
| 7.750 | 8.250 | 0.275 | 0.618 | 7.751 | 8.249 | X | X | X | | X | | XXXX | 25007750 | - | 562 | B |
| 7.750 | 8.375 | 0.343 | 0.688 | 7.752 | 8.373 | X | | | | | | XXXX | 31207750 | - | 625 | B |
| 7.750 | 8.500 | 0.413 | 0.550 | 7.752 | 8.498 | X | X | X | | X | | XXXX | 37507750 | - | 500 | B |
| 7.750 | 8.500 | 0.413 | 0.688 | 7.752 | 8.498 | | | X | X | X | X | XXXX | 37507750 | - | 625 | B |
| 7.750 | 8.750 | 0.550 | 0.825 | 7.752 | 8.748 | X | | | | X | | XXXX | 50007750 | - | 750 | B |
| 7.750 | 9.000 | 0.688 | 1.100 | 7.753 | 8.997 | X | | | | X | | XXXX | 62507750 | - | 1000 | B |
| 7.790 | 8.540 | 0.413 | 0.413 | 7.792 | 8.538 | | | | | X | | XXXX | 37507790 | - | 375 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 7.875 | 8.500 | 0.343 | 0.688 | 7.877 | 8.498 | X | | | | X | | XXXX | 31207875 | - | 625 | B |
| 7.875 | 8.625 | 0.413 | 0.688 | 7.877 | 8.623 | | | | | | X | XXXX | 37507875 | - | 625 | B |
| 7.875 | 8.875 | 0.550 | 0.825 | 7.877 | 8.873 | | | | | X | | XXXX | 50007875 | - | 750 | B |
| 8.000 | 8.500 | 0.275 | 0.618 | 8.001 | 8.499 | X | X | | | X | X | XXXX | 25008000 | - | 562 | B |
| 8.000 | 8.625 | 0.343 | 0.688 | 8.002 | 8.623 | X | X | | | X | | XXXX | 31208000 | - | 625 | B |
| 8.000 | 8.750 | 0.413 | 0.550 | 8.002 | 8.748 | | | X | | | | XXXX | 37508000 | - | 500 | B |
| 8.000 | 8.750 | 0.413 | 0.688 | 8.002 | 8.748 | X | X | X | | X | X | XXXX | 37508000 | - | 625 | B |
| 8.000 | 9.000 | 0.550 | 0.825 | 8.002 | 8.998 | X | | X | X | X | X | XXXX | 50008000 | - | 750 | B |
| 8.000 | 9.250 | 0.688 | 1.100 | 8.003 | 9.247 | X | | X | | | | XXXX | 62508000 | - | 1000 | B |
| 8.000 | 9.500 | 0.825 | 1.238 | 8.003 | 9.497 | X | | | | X | | XXXX | 75008000 | - | 1125 | B |
| 8.000 | 9.500 | 0.825 | 1.375 | 8.003 | 9.497 | | | | | X | | XXXX | 75008000 | - | 1250 | B |
| 8.000 | 10.000 | 1.100 | 1.650 | 8.004 | 9.996 | X | | | | | | XXXX | 100008000 | - | 1500 | B |
| 8.125 | 8.625 | 0.275 | 0.618 | 8.126 | 8.624 | | | | | X | | XXXX | 25008125 | - | 562 | B |
| 8.187 | 9.437 | 0.688 | 1.100 | 8.190 | 9.434 | X | | | | | | XXXX | 62508187 | - | 1000 | B |
| 8.250 | 8.750 | 0.275 | 0.413 | 8.251 | 8.749 | X | X | | | X | | XXXX | 25008250 | - | 375 | B |
| 8.250 | 8.750 | 0.275 | 0.618 | 8.251 | 8.749 | | | | | X | X | XXXX | 25008250 | - | 562 | B |
| 8.250 | 9.000 | 0.413 | 0.688 | 8.252 | 8.998 | X | X | X | X | X | X | XXXX | 37508250 | - | 625 | B |
| 8.250 | 9.250 | 0.550 | 0.825 | 8.252 | 9.248 | X | | X | | X | | XXXX | 50008250 | - | 750 | B |
| 8.250 | 9.500 | 0.688 | 1.100 | 8.253 | 9.497 | X | | | | X | | XXXX | 62508250 | - | 1000 | B |
| 8.250 | 9.750 | 0.825 | 1.375 | 8.253 | 9.747 | X | | | | | | XXXX | 75008250 | - | 1250 | B |
| 8.375 | 9.000 | 0.343 | 0.688 | 8.377 | 8.998 | X | | X | | | | XXXX | 31208375 | - | 625 | B |
| 8.375 | 9.875 | 0.825 | 1.375 | 8.378 | 9.872 | X | | | | | | XXXX | 75008375 | - | 1250 | B |
| 8.500 | 9.000 | 0.275 | 0.618 | 8.501 | 8.999 | X | X | X | | X | X | XXXX | 25008500 | - | 562 | B |
| 8.500 | 9.125 | 0.343 | 0.688 | 8.502 | 9.123 | X | | | | | | XXXX | 31208500 | - | 625 | B |
| 8.500 | 9.250 | 0.413 | 0.688 | 8.502 | 9.248 | X | X | | | X | X | XXXX | 37508500 | - | 625 | B |
| 8.500 | 9.500 | 0.550 | 0.825 | 8.502 | 9.498 | X | X | X | | X | X | XXXX | 50008500 | - | 750 | B |
| 8.500 | 9.750 | 0.688 | 1.100 | 8.503 | 9.747 | X | | | | X | | XXXX | 62508500 | - | 1000 | B |
| 8.500 | 10.000 | 0.825 | 1.238 | 8.503 | 9.997 | X | X | | | X | | XXXX | 75008500 | - | 1125 | B |
| 8.500 | 10.000 | 0.825 | 1.375 | 8.503 | 9.997 | | | X | | | | XXXX | 75008500 | - | 1250 | B |
| 8.500 | 10.250 | 0.963 | 1.513 | 8.504 | 10.246 | X | | | | | | XXXX | 87508500 | - | 1375 | B |
| 8.625 | 9.375 | 0.413 | 0.688 | 8.627 | 9.373 | X | | | | | | XXXX | 37508625 | - | 625 | B |
| 8.625 | 9.875 | 0.688 | 1.100 | 8.628 | 9.872 | X | | | | | | XXXX | 62508625 | - | 1000 | B |
| 8.750 | 9.250 | 0.275 | 0.618 | 8.751 | 9.249 | X | X | X | | | | XXXX | 25008750 | - | 562 | B |
| 8.750 | 9.500 | 0.413 | 0.413 | 8.752 | 9.498 | X | X | | | | X | XXXX | 37508750 | - | 375 | B |
| 8.750 | 9.500 | 0.413 | 0.550 | 8.752 | 9.498 | X | | | | X | | XXXX | 37508750 | - | 500 | B |
| 8.750 | 9.500 | 0.413 | 0.688 | 8.752 | 9.498 | | | X | X | | | XXXX | 37508750 | - | 625 | B |
| 8.750 | 9.500 | 0.413 | 0.825 | 8.752 | 9.498 | | | X | X | X | | XXXX | 37508750 | - | 750 | B |
| 8.750 | 9.750 | 0.550 | 0.825 | 8.752 | 9.748 | X | | X | | X | | XXXX | 50008750 | - | 750 | B |
| 8.750 | 10.000 | 0.688 | 1.100 | 8.753 | 9.997 | X | | X | | | | XXXX | 62508750 | - | 1000 | B |
| 8.795 | 9.545 | 0.413 | 0.413 | 8.797 | 9.543 | | | | | X | | XXXX | 37508795 | - | 375 | B |
| 8.875 | 9.500 | 0.343 | 0.688 | 8.877 | 9.498 | X | | | | | | XXXX | 31208875 | - | 625 | B |
| 8.875 | 9.625 | 0.413 | 0.688 | 8.877 | 9.623 | | | | | X | X | XXXX | 37508875 | - | 625 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 8.937 | 9.500 | 0.309 | 0.550 | 8.938 | 9.499 | | | | | X | | XXXX | 28108937 | - | 500 | B |
| 9.000 | 9.500 | 0.275 | 0.413 | 9.001 | 9.499 | X | X | X | | X | | XXXX | 25009000 | - | 375 | B |
| 9.000 | 9.625 | 0.343 | 0.550 | 9.002 | 9.623 | | | X | | | | XXXX | 31209000 | - | 500 | B |
| 9.000 | 9.750 | 0.413 | 0.688 | 9.002 | 9.748 | X | X | X | | X | X | XXXX | 37509000 | - | 625 | B |
| 9.000 | 10.000 | 0.550 | 0.825 | 9.002 | 9.998 | X | X | X | X | X | X | XXXX | 50009000 | - | 750 | B |
| 9.000 | 10.250 | 0.688 | 1.100 | 9.003 | 10.247 | X | | | | X | | XXXX | 62509000 | - | 1000 | B |
| 9.000 | 10.500 | 0.825 | 1.375 | 9.003 | 10.497 | X | | X | | | | XXXX | 75009000 | - | 1250 | B |
| 9.125 | 9.750 | 0.343 | 0.688 | 9.127 | 9.748 | | | | | X | | XXXX | 31209125 | - | 625 | B |
| 9.250 | 9.750 | 0.275 | 0.618 | 9.251 | 9.749 | X | X | X | | | | XXXX | 25009250 | - | 562 | B |
| 9.250 | 9.875 | 0.343 | 0.688 | 9.252 | 9.873 | | | | | X | | XXXX | 31209250 | - | 625 | B |
| 9.250 | 10.000 | 0.413 | 0.550 | 9.252 | 9.998 | | | X | | | | XXXX | 37509250 | - | 500 | B |
| 9.250 | 10.000 | 0.413 | 0.688 | 9.252 | 9.998 | X | X | X | X | X | | XXXX | 37509250 | - | 625 | B |
| 9.250 | 10.250 | 0.550 | 0.825 | 9.252 | 10.248 | | | | | X | | XXXX | 50009250 | - | 750 | B |
| 9.250 | 10.500 | 0.688 | 1.100 | 9.253 | 10.497 | X | | | | | | XXXX | 62509250 | - | 1000 | B |
| 9.312 | 10.000 | 0.377 | 0.688 | 9.314 | 9.998 | X | X | | | | | XXXX | 34309312 | - | 625 | B |
| 9.375 | 10.000 | 0.343 | 0.688 | 9.377 | 9.998 | | | | | X | | XXXX | 31209375 | - | 625 | B |
| 9.500 | 10.000 | 0.275 | 0.413 | 9.501 | 9.999 | | | X | | | | XXXX | 25009500 | - | 375 | B |
| 9.500 | 10.000 | 0.275 | 0.618 | 9.501 | 9.999 | | X | X | X | X | | XXXX | 25009500 | - | 562 | B |
| 9.500 | 10.125 | 0.343 | 0.688 | 9.502 | 10.123 | X | | | | | | XXXX | 31209500 | - | 625 | B |
| 9.500 | 10.250 | 0.413 | 0.688 | 9.502 | 10.248 | X | | | | X | X | XXXX | 37509500 | - | 625 | B |
| 9.500 | 10.500 | 0.550 | 0.825 | 9.502 | 10.498 | X | X | X | | X | | XXXX | 50009500 | - | 750 | B |
| 9.500 | 11.000 | 0.825 | 1.375 | 9.503 | 10.997 | X | | | | | | XXXX | 75009500 | - | 1250 | B |
| 9.500 | 11.500 | 1.100 | 1.650 | 9.504 | 11.496 | X | | | | | | XXXX | 100009500 | - | 1500 | B |
| 9.625 | 10.250 | 0.343 | 0.688 | 9.627 | 10.248 | X | | | | X | | XXXX | 31209625 | - | 625 | B |
| 9.625 | 10.375 | 0.413 | 0.688 | 9.627 | 10.373 | | | X | | | X | XXXX | 37509625 | - | 625 | B |
| 9.625 | 11.500 | 1.031 | 1.650 | 9.629 | 11.496 | | | X | | | | XXXX | 93709625 | - | 1500 | B |
| 9.750 | 10.250 | 0.275 | 0.413 | 9.751 | 10.249 | X | X | | | X | | XXXX | 25009750 | - | 375 | B |
| 9.750 | 10.250 | 0.275 | 0.618 | 9.751 | 10.249 | | | | | X | | XXXX | 25009750 | - | 562 | B |
| 9.750 | 10.375 | 0.343 | 0.688 | 9.752 | 10.373 | | | | | X | | XXXX | 31209750 | - | 625 | B |
| 9.750 | 10.500 | 0.413 | 0.688 | 9.752 | 10.498 | X | | X | | | | XXXX | 37509750 | - | 625 | B |
| 9.750 | 10.750 | 0.550 | 0.825 | 9.752 | 10.748 | X | | | | X | | XXXX | 50009750 | - | 750 | B |
| 9.750 | 11.250 | 0.825 | 1.375 | 9.753 | 11.247 | | | | | X | | XXXX | 75009750 | - | 1250 | B |
| 9.750 | 11.500 | 0.963 | 1.513 | 9.754 | 11.496 | X | | | | | | XXXX | 87509750 | - | 1375 | B |
| 9.812 | 11.312 | 0.825 | 1.375 | 9.815 | 11.309 | | | X | | | | XXXX | 75009812 | - | 1250 | B |
| 9.875 | 10.625 | 0.413 | 0.688 | 9.877 | 10.623 | X | | | | | X | XXXX | 37509875 | - | 625 | B |
| 9.875 | 10.875 | 0.550 | 0.825 | 9.877 | 10.873 | | | X | | | | XXXX | 50009875 | - | 750 | B |
| 10.000 | 10.500 | 0.275 | 0.618 | 10.001 | 10.499 | X | X | | | X | X | XXXX | 25010000 | - | 562 | B |
| 10.000 | 10.625 | 0.343 | 0.688 | 10.002 | 10.623 | X | | | | | | XXXX | 31210000 | - | 625 | B |
| 10.000 | 10.750 | 0.413 | 0.688 | 10.002 | 10.748 | X | X | | | X | X | XXXX | 37510000 | - | 625 | B |
| 10.000 | 11.000 | 0.550 | 0.825 | 10.002 | 10.998 | X | X | X | X | X | X | XXXX | 50010000 | - | 750 | B |
| 10.000 | 11.250 | 0.688 | 1.100 | 10.003 | 11.247 | X | | X | | | | XXXX | 62510000 | - | 1000 | B |
| 10.000 | 11.500 | 0.825 | 1.375 | 10.003 | 11.497 | X | | | | X | | XXXX | 75010000 | - | 1250 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 10.000 | 12.000 | 1.100 | 1.650 | 10.004 | 11.996 | X | | | | | | XXXX | 100010000 | - | 1500 | B |
| 10.125 | 10.750 | 0.343 | 0.688 | 10.127 | 10.748 | X | | | | | | XXXX | 31210125 | - | 625 | B |
| 10.125 | 10.875 | 0.413 | 0.688 | 10.127 | 10.873 | | | | | | X | XXXX | 37510125 | - | 625 | B |
| 10.187 | 11.000 | 0.447 | 0.550 | 10.189 | 10.998 | | | X | | | | XXXX | 40610187 | - | 500 | B |
| 10.250 | 10.750 | 0.275 | 0.618 | 10.251 | 10.749 | X | X | | | X | X | XXXX | 25010250 | - | 562 | B |
| 10.250 | 11.000 | 0.413 | 0.550 | 10.252 | 10.998 | X | X | | | X | | XXXX | 37510250 | - | 500 | B |
| 10.250 | 11.000 | 0.413 | 0.688 | 10.252 | 10.998 | | | X | | | | XXXX | 37510250 | - | 625 | B |
| 10.250 | 11.000 | 0.413 | 0.825 | 10.252 | 10.998 | | | | | X | | XXXX | 37510250 | - | 750 | B |
| 10.250 | 11.250 | 0.550 | 0.825 | 10.252 | 11.248 | | | | | X | | XXXX | 50010250 | - | 750 | B |
| 10.250 | 11.500 | 0.688 | 1.100 | 10.253 | 11.497 | X | | | | | | XXXX | 62510250 | - | 1000 | B |
| 10.375 | 11.000 | 0.343 | 0.688 | 10.377 | 10.998 | | | | | X | | XXXX | 31210375 | - | 625 | B |
| 10.500 | 11.000 | 0.275 | 0.550 | 10.501 | 10.999 | | | X | | | | XXXX | 25010500 | - | 500 | B |
| 10.500 | 11.000 | 0.275 | 0.618 | 10.501 | 10.999 | X | | | | X | | XXXX | 25010500 | - | 562 | B |
| 10.500 | 11.125 | 0.343 | 0.550 | 10.502 | 11.123 | | | X | | | | XXXX | 31210500 | - | 500 | B |
| 10.500 | 11.250 | 0.413 | 0.413 | 10.502 | 11.248 | X | | | | X | | XXXX | 37510500 | - | 375 | B |
| 10.500 | 11.250 | 0.413 | 0.688 | 10.502 | 11.248 | | | X | | X | | XXXX | 37510500 | - | 625 | B |
| 10.500 | 11.500 | 0.550 | 0.825 | 10.502 | 11.498 | X | | X | | X | | XXXX | 50010500 | - | 750 | B |
| 10.500 | 11.750 | 0.688 | 0.825 | 10.503 | 11.747 | X | | | | X | | XXXX | 62510500 | - | 750 | B |
| 10.500 | 12.000 | 0.825 | 1.100 | 10.503 | 11.997 | X | X | | | X | | XXXX | 75010500 | - | 1000 | B |
| 10.500 | 12.000 | 0.825 | 1.375 | 10.503 | 11.997 | | | X | | | | XXXX | 75010500 | - | 1250 | B |
| 10.500 | 12.000 | 0.825 | 1.375 | 10.503 | 11.997 | X | | | | | | XXXX | 75010750 | - | 1250 | B |
| 10.625 | 11.625 | 0.550 | 0.688 | 10.627 | 11.623 | | | | X | | | XXXX | 50010625 | - | 625 | B |
| 10.625 | 11.625 | 0.550 | 0.825 | 10.627 | 11.623 | | | X | | | | XXXX | 50010625 | - | 750 | B |
| 10.750 | 11.250 | 0.275 | 0.413 | 10.751 | 11.249 | X | X | | | | | XXXX | 25010750 | - | 375 | B |
| 10.750 | 11.500 | 0.413 | 0.688 | 10.752 | 11.498 | X | X | X | | X | | XXXX | 37510750 | - | 625 | B |
| 10.750 | 11.750 | 0.550 | 0.825 | 10.752 | 11.748 | X | | X | | X | | XXXX | 50010750 | - | 750 | B |
| 11.000 | 11.500 | 0.275 | 0.618 | 11.001 | 11.499 | X | | | | X | | XXXX | 25011000 | - | 562 | B |
| 11.000 | 11.750 | 0.413 | 0.688 | 11.002 | 11.748 | X | | | | | | XXXX | 37511000 | - | 625 | B |
| 11.000 | 12.000 | 0.550 | 0.825 | 11.002 | 11.998 | X | X | X | | X | X | XXXX | 50011000 | - | 750 | B |
| 11.000 | 12.250 | 0.688 | 1.100 | 11.003 | 12.247 | X | | X | | X | | XXXX | 62511000 | - | 1000 | B |
| 11.000 | 12.500 | 0.825 | 1.375 | 11.003 | 12.497 | X | | X | | | | XXXX | 75011000 | - | 1250 | B |
| 11.125 | 11.750 | 0.343 | 0.688 | 11.127 | 11.748 | | | | | | X | XXXX | 31211125 | - | 625 | B |
| 11.250 | 11.750 | 0.275 | 0.413 | 11.251 | 11.749 | X | | | | X | | XXXX | 25011250 | - | 375 | B |
| 11.250 | 11.750 | 0.275 | 0.618 | 11.251 | 11.749 | | | | | X | | XXXX | 25011250 | - | 562 | B |
| 11.250 | 12.000 | 0.413 | 0.688 | 11.252 | 11.998 | X | X | X | X | X | | XXXX | 37511250 | - | 625 | B |
| 11.250 | 12.250 | 0.550 | 0.825 | 11.252 | 12.248 | X | | | | X | | XXXX | 50011250 | - | 750 | B |
| 11.250 | 12.500 | 0.688 | 1.100 | 11.253 | 12.497 | | | | | X | | XXXX | 62511250 | - | 1000 | B |
| 11.375 | 12.375 | 0.550 | 0.825 | 11.377 | 12.373 | X | | | | X | | XXXX | 50011375 | - | 750 | B |
| 11.500 | 12.000 | 0.275 | 0.618 | 11.501 | 11.999 | X | X | | | X | | XXXX | 25011500 | - | 562 | B |
| 11.500 | 12.250 | 0.413 | 0.688 | 11.502 | 12.248 | X | | X | | X | X | XXXX | 37511500 | - | 625 | B |
| 11.500 | 12.500 | 0.550 | 0.825 | 11.502 | 12.498 | X | | X | X | X | | XXXX | 50011500 | - | 750 | B |
| 11.500 | 12.750 | 0.688 | 1.100 | 11.503 | 12.747 | | | | | X | | XXXX | 62511500 | - | 1000 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|-----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 11.500 | 13.000 | 0.825 | 1.375 | 11.503 | 12.997 | | | | | X | | XXXX | 75011500 | - | 1250 | B |
| 11.750 | 12.250 | 0.275 | 0.413 | 11.751 | 12.249 | X | | | | | | XXXX | 25011750 | - | 375 | B |
| 11.750 | 12.500 | 0.413 | 0.688 | 11.752 | 12.498 | X | | | | X | | XXXX | 37511750 | - | 625 | B |
| 11.750 | 12.500 | 0.413 | 0.825 | 11.752 | 12.498 | | | | | X | | XXXX | 37511750 | - | 750 | B |
| 11.750 | 12.750 | 0.550 | 0.825 | 11.752 | 12.748 | X | | | | X | | XXXX | 50011750 | - | 750 | B |
| 11.750 | 13.000 | 0.688 | 1.100 | 11.753 | 12.997 | | | | | X | | XXXX | 62511750 | - | 1000 | B |
| 11.875 | 12.875 | 0.550 | 0.825 | 11.877 | 12.873 | | | | | X | | XXXX | 50011875 | - | 750 | B |
| 12.000 | 12.500 | 0.275 | 0.413 | 12.001 | 12.499 | X | | | | | | XXXX | 25012000 | - | 375 | B |
| 12.000 | 12.625 | 0.343 | 0.688 | 12.002 | 12.623 | X | | | | | | XXXX | 31212000 | - | 625 | B |
| 12.000 | 12.750 | 0.413 | 0.688 | 12.002 | 12.748 | X | | | | X | | XXXX | 37512000 | - | 625 | B |
| 12.000 | 13.000 | 0.550 | 0.825 | 12.002 | 12.998 | X | | | | X | | XXXX | 50012000 | - | 750 | B |
| 12.000 | 13.250 | 0.688 | 1.100 | 12.003 | 13.247 | X | | X | | X | | XXXX | 62512000 | - | 1000 | B |
| 12.000 | 13.500 | 0.825 | 1.375 | 12.003 | 13.497 | X | | | | X | | XXXX | 75012000 | - | 1250 | B |
| 12.000 | 14.000 | 1.100 | 1.650 | 12.004 | 13.996 | X | | | | X | | XXXX | 100012000 | - | 1500 | B |
| 12.125 | 13.125 | 0.550 | 0.825 | 12.127 | 13.123 | | | | | X | | XXXX | 50012125 | - | 750 | B |
| 12.250 | 12.875 | 0.343 | 0.688 | 12.252 | 12.873 | | | | | X | | XXXX | 31212250 | - | 625 | B |
| 12.250 | 13.000 | 0.413 | 0.688 | 12.252 | 12.998 | X | | X | | X | X | XXXX | 37512250 | - | 625 | B |
| 12.250 | 13.250 | 0.550 | 0.825 | 12.252 | 13.248 | | | | | X | | XXXX | 50012250 | - | 750 | B |
| 12.250 | 13.500 | 0.688 | 1.100 | 12.253 | 13.497 | X | | | | X | | XXXX | 62512250 | - | 1000 | B |
| 12.250 | 13.875 | 0.893 | 1.238 | 12.253 | 13.872 | | | X | | | | XXXX | 81212250 | - | 1125 | B |
| 12.500 | 13.000 | 0.275 | 0.413 | 12.501 | 12.999 | X | | | | | | XXXX | 25012500 | - | 375 | B |
| 12.500 | 13.125 | 0.343 | 0.688 | 12.502 | 13.123 | | | | | X | | XXXX | 31212500 | - | 625 | B |
| 12.500 | 13.500 | 0.550 | 0.825 | 12.502 | 13.498 | | X | X | | X | X | XXXX | 50012500 | - | 750 | B |
| 12.500 | 13.750 | 0.688 | 1.100 | 12.503 | 13.747 | | | X | | | | XXXX | 62512500 | - | 1000 | B |
| 12.500 | 14.000 | 0.825 | 1.375 | 12.503 | 13.997 | X | X | | | X | | XXXX | 75012500 | - | 1250 | B |
| 12.500 | 14.500 | 1.100 | 1.650 | 12.504 | 14.496 | X | | | | | | XXXX | 100012500 | - | 1500 | B |
| 12.562 | 13.686 | 0.618 | 0.963 | 12.564 | 13.684 | | | | | X | | XXXX | 56212562 | - | 875 | B |
| 12.562 | 13.812 | 0.688 | 0.963 | 12.565 | 13.809 | X | | | | | | XXXX | 62501250 | - | 875 | B |
| 12.750 | 13.250 | 0.275 | 0.618 | 12.751 | 13.249 | X | | | | X | | XXXX | 25012750 | - | 562 | B |
| 12.750 | 13.375 | 0.343 | 0.688 | 12.752 | 13.373 | X | | | | | | XXXX | 31212750 | - | 625 | B |
| 12.750 | 13.500 | 0.413 | 0.688 | 12.752 | 13.498 | X | | | | X | X | XXXX | 37512750 | - | 625 | B |
| 12.750 | 13.750 | 0.550 | 0.825 | 12.752 | 13.748 | X | | | | | | XXXX | 50012750 | - | 750 | B |
| 12.750 | 14.000 | 0.688 | 1.100 | 12.753 | 13.997 | X | | X | X | | | XXXX | 62512750 | - | 1000 | B |
| 13.000 | 13.500 | 0.275 | 0.618 | 13.001 | 13.499 | | X | X | | X | | XXXX | 25013000 | - | 562 | B |
| 13.000 | 13.750 | 0.413 | 0.413 | 13.002 | 13.748 | X | X | | | X | | XXXX | 37513000 | - | 375 | B |
| 13.000 | 13.750 | 0.413 | 0.688 | 13.002 | 13.748 | | | | | X | | XXXX | 37513000 | - | 625 | B |
| 13.000 | 14.000 | 0.550 | 0.825 | 13.002 | 13.998 | X | X | X | X | X | | XXXX | 50013000 | - | 750 | B |
| 13.000 | 14.250 | 0.688 | 1.100 | 13.003 | 14.247 | X | | | | | | XXXX | 62513000 | - | 1000 | B |
| 13.000 | 14.500 | 0.825 | 1.100 | 13.003 | 14.497 | X | | | | X | | XXXX | 75013000 | - | 1000 | B |
| 13.187 | 14.000 | 0.447 | 0.688 | 13.189 | 13.998 | X | | | | | | XXXX | 40613187 | - | 625 | B |
| 13.250 | 14.000 | 0.413 | 0.618 | 13.252 | 13.998 | | | | X | | | XXXX | 37513250 | - | 562 | B |
| 13.250 | 14.000 | 0.413 | 0.688 | 13.252 | 13.998 | X | | | | X | X | XXXX | 37513250 | - | 625 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 13.250 | 14.250 | 0.550 | 0.825 | 13.252 | 14.248 | | | X | | X | | XXXX | 50013250 | - | 750 | B |
| 13.375 | 14.000 | 0.343 | 0.688 | 13.377 | 13.998 | X | | | | | | XXXX | 31213375 | - | 625 | B |
| 13.500 | 14.000 | 0.275 | 0.618 | 13.501 | 13.999 | X | X | | | X | | XXXX | 25013500 | - | 562 | B |
| 13.500 | 14.250 | 0.413 | 0.688 | 13.502 | 14.248 | X | | X | | X | | XXXX | 37513500 | - | 625 | B |
| 13.500 | 14.500 | 0.550 | 0.825 | 13.502 | 14.498 | X | | X | | X | | XXXX | 50013500 | - | 750 | B |
| 13.500 | 14.750 | 0.688 | 0.963 | 13.503 | 14.747 | | | | | X | X | XXXX | 62513500 | - | 875 | B |
| 13.500 | 15.000 | 0.825 | 1.375 | 13.503 | 14.997 | X | | | | | | XXXX | 75013500 | - | 1250 | B |
| 13.750 | 14.500 | 0.413 | 0.688 | 13.752 | 14.498 | X | | | | X | | XXXX | 37513750 | - | 625 | B |
| 13.750 | 15.250 | 0.825 | 1.375 | 13.753 | 15.247 | X | | | | | | XXXX | 75013750 | - | 1250 | B |
| 14.000 | 14.500 | 0.275 | 0.413 | 14.001 | 14.499 | X | | X | | | | XXXX | 25014000 | - | 375 | B |
| 14.000 | 14.750 | 0.413 | 0.688 | 14.002 | 14.748 | X | | | | | | XXXX | 37514000 | - | 625 | B |
| 14.000 | 15.000 | 0.550 | 0.825 | 14.002 | 14.998 | | | X | | X | | XXXX | 50014000 | - | 750 | B |
| 14.000 | 15.250 | 0.688 | 1.100 | 14.003 | 15.247 | | | | | X | | XXXX | 62514000 | - | 1000 | B |
| 14.000 | 15.250 | 0.688 | 1.100 | 14.003 | 15.247 | X | | | | | | XXXX | 62514750 | - | 1000 | B |
| 14.000 | 15.500 | 0.825 | 1.375 | 14.003 | 15.497 | X | X | | | X | | XXXX | 75014000 | - | 1250 | B |
| 14.000 | 15.750 | 0.963 | 1.650 | 14.004 | 15.746 | | | X | | | | XXXX | 87514000 | - | 1500 | B |
| 14.000 | 16.000 | 1.100 | 1.650 | 14.004 | 15.996 | X | | | | X | | XXXX | 100014000 | - | 1500 | B |
| 14.125 | 14.625 | 0.275 | 0.413 | 14.126 | 14.624 | X | | | | | | XXXX | 25014125 | - | 375 | B |
| 14.250 | 14.750 | 0.275 | 0.413 | 14.251 | 14.749 | X | | | | | | XXXX | 25014250 | - | 375 | B |
| 14.250 | 15.000 | 0.413 | 0.688 | 14.252 | 14.998 | | | | | X | | XXXX | 37514250 | - | 625 | B |
| 14.250 | 15.250 | 0.550 | 0.825 | 14.252 | 15.248 | X | | | | | | XXXX | 50014250 | - | 750 | B |
| 14.250 | 15.750 | 0.825 | 1.375 | 14.253 | 15.747 | X | | | | | | XXXX | 75014250 | - | 1250 | B |
| 14.420 | 15.420 | 0.550 | 0.550 | 14.422 | 15.418 | | | | | X | | XXXX | 50014420 | - | 500 | B |
| 14.500 | 15.000 | 0.275 | 0.413 | 14.501 | 14.999 | X | | | | | | XXXX | 25014500 | - | 375 | B |
| 14.500 | 15.000 | 0.275 | 0.413 | 14.501 | 14.999 | | | X | X | | | XXXX | 25014500 | - | 375 | B |
| 14.500 | 15.250 | 0.413 | 0.688 | 14.502 | 15.248 | X | | | | | | XXXX | 37514500 | - | 625 | B |
| 14.500 | 15.500 | 0.550 | 0.825 | 14.502 | 15.498 | X | | | | | | XXXX | 50014500 | - | 750 | B |
| 14.500 | 16.000 | 0.825 | 1.375 | 14.503 | 15.997 | X | | X | | X | | XXXX | 75014500 | - | 1250 | B |
| 14.750 | 15.500 | 0.413 | 0.688 | 14.752 | 15.498 | X | | X | | X | | XXXX | 37514750 | - | 625 | B |
| 14.750 | 15.750 | 0.550 | 0.825 | 14.752 | 15.748 | | | | | X | | XXXX | 50014750 | - | 750 | B |
| 14.750 | 16.000 | 0.688 | 1.100 | 14.753 | 15.997 | X | | | | | | XXXX | 62515000 | - | 1000 | B |
| 14.750 | 16.250 | 0.825 | 1.375 | 14.753 | 16.247 | X | | | | | | XXXX | 75014750 | - | 1250 | B |
| 14.875 | 15.500 | 0.343 | 0.688 | 14.877 | 15.498 | X | | | | | | XXXX | 31214875 | - | 625 | B |
| 15.000 | 15.500 | 0.275 | 0.618 | 15.001 | 15.499 | | X | | | X | | XXXX | 25015000 | - | 562 | B |
| 15.000 | 15.750 | 0.413 | 0.688 | 15.002 | 15.748 | X | | | | | | XXXX | 37515000 | - | 625 | B |
| 15.000 | 16.000 | 0.550 | 0.825 | 15.002 | 15.998 | X | X | X | X | X | | XXXX | 50015000 | - | 750 | B |
| 15.000 | 16.500 | 0.825 | 1.375 | 15.003 | 16.497 | | | X | | | | XXXX | 75015000 | - | 1250 | B |
| 15.000 | 17.000 | 1.100 | 1.650 | 15.004 | 16.996 | | | | | X | | XXXX | 100015000 | - | 1500 | B |
| 15.250 | 16.000 | 0.413 | 0.688 | 15.252 | 15.998 | | | X | X | | | XXXX | 37515250 | - | 625 | B |
| 15.250 | 16.250 | 0.550 | 0.825 | 15.252 | 16.248 | | | | | X | | XXXX | 50015250 | - | 750 | B |
| 15.250 | 16.500 | 0.688 | 1.100 | 15.253 | 16.497 | | | | | X | | XXXX | 62515250 | - | 1000 | B |
| 15.375 | 16.000 | 0.343 | 0.688 | 15.377 | 15.998 | | | X | | | | XXXX | 31215375 | - | 625 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|-----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 15.500 | 16.000 | 0.275 | 0.413 | 15.501 | 15.999 | X | | | | | | XXXX | 25015500 | - | 375 | B |
| 15.500 | 16.250 | 0.413 | 0.688 | 15.502 | 16.248 | X | | | | | | XXXX | 37515500 | - | 625 | B |
| 15.500 | 16.500 | 0.550 | 0.825 | 15.502 | 16.498 | X | | X | X | X | X | XXXX | 50015500 | - | 750 | B |
| 15.500 | 16.750 | 0.688 | 1.100 | 15.503 | 16.747 | | | | | X | X | XXXX | 62515500 | - | 1000 | B |
| 15.625 | 16.250 | 0.343 | 0.688 | 15.627 | 16.248 | | | | | X | | XXXX | 31215625 | - | 625 | B |
| 15.625 | 17.125 | 0.825 | 1.375 | 15.628 | 17.122 | | | | | X | | XXXX | 75015625 | - | 1250 | B |
| 15.750 | 16.250 | 0.275 | 0.618 | 15.751 | 16.249 | | | X | | | | XXXX | 25015750 | - | 562 | B |
| 15.750 | 16.500 | 0.413 | 0.688 | 15.752 | 16.498 | X | | | | | X | XXXX | 37515750 | - | 625 | B |
| 15.750 | 16.750 | 0.550 | 0.825 | 15.752 | 16.748 | X | | | | | | XXXX | 50015750 | - | 750 | B |
| 15.875 | 16.500 | 0.343 | 0.688 | 15.877 | 16.498 | X | | | | | | XXXX | 31215875 | - | 625 | B |
| 16.000 | 16.500 | 0.275 | 0.275 | 16.001 | 16.499 | | | X | | | | XXXX | 25016000 | - | 250 | B |
| 16.000 | 16.500 | 0.275 | 0.413 | 16.001 | 16.499 | | | X | | | | XXXX | 25016000 | - | 375 | B |
| 16.000 | 16.750 | 0.413 | 0.688 | 16.002 | 16.748 | X | | X | | | | XXXX | 37516000 | - | 625 | B |
| 16.000 | 17.000 | 0.550 | 0.825 | 16.002 | 16.998 | X | X | X | X | | | XXXX | 50016000 | - | 750 | B |
| 16.000 | 17.500 | 0.825 | 1.375 | 16.003 | 17.497 | X | X | | | | | XXXX | 75016000 | - | 1250 | B |
| 16.000 | 17.750 | 0.963 | 1.375 | 16.004 | 17.746 | | | X | | | | XXXX | 87516000 | - | 1250 | B |
| 16.000 | 17.750 | 0.963 | 1.513 | 16.004 | 17.746 | | | X | | | | XXXX | 87516000 | - | 1375 | B |
| 16.000 | 18.000 | 1.100 | 1.375 | 16.004 | 17.996 | X | | X | | X | | XXXX | 100016000 | - | 1250 | B |
| 16.250 | 17.000 | 0.413 | 0.688 | 16.252 | 16.998 | X | | | | | | XXXX | 37516250 | - | 625 | B |
| 16.263 | 16.763 | 0.275 | 0.413 | 16.264 | 16.762 | | | | | X | | XXXX | 25016263 | - | 375 | B |
| 16.500 | 17.250 | 0.413 | 0.688 | 16.502 | 17.248 | X | | | | | | XXXX | 37516500 | - | 625 | B |
| 16.500 | 17.500 | 0.550 | 0.825 | 16.502 | 17.498 | | | X | | X | | XXXX | 50016500 | - | 750 | B |
| 16.500 | 18.000 | 0.825 | 0.825 | 16.503 | 17.997 | | | X | | | | XXXX | 75016500 | - | 750 | B |
| 16.500 | 18.000 | 0.825 | 1.375 | 16.503 | 17.997 | | | X | | | | XXXX | 75016500 | - | 1250 | B |
| 16.750 | 17.750 | 0.550 | 0.825 | 16.752 | 17.748 | | | | | X | | XXXX | 50016750 | - | 750 | B |
| 16.750 | 18.000 | 0.688 | 1.100 | 16.753 | 17.997 | X | | | | | | XXXX | 62516750 | - | 1000 | B |
| 17.000 | 18.000 | 0.550 | 0.825 | 17.002 | 17.998 | X | X | X | X | X | | XXXX | 50017000 | - | 750 | B |
| 17.000 | 19.000 | 1.100 | 1.375 | 17.004 | 18.996 | | | X | | | | XXXX | 100017000 | - | 1250 | B |
| 17.250 | 18.000 | 0.413 | 0.688 | 17.252 | 17.998 | X | | | | | | XXXX | 37517250 | - | 625 | B |
| 17.500 | 18.500 | 0.550 | 0.825 | 17.502 | 18.498 | X | | | | X | | XXXX | 50017500 | - | 750 | B |
| 17.500 | 18.750 | 0.688 | 1.100 | 17.503 | 18.747 | | | X | | | | XXXX | 62517500 | - | 1000 | B |
| 17.500 | 19.500 | 1.100 | 1.650 | 17.504 | 19.496 | | | | | X | | XXXX | 100017500 | - | 1500 | B |
| 17.625 | 19.125 | 0.825 | 1.375 | 17.628 | 19.122 | | | | | X | | XXXX | 75017625 | - | 1250 | B |
| 17.750 | 18.500 | 0.413 | 0.550 | 17.752 | 18.498 | | | X | | | | XXXX | 37517750 | - | 500 | B |
| 17.750 | 19.000 | 0.688 | 1.100 | 17.753 | 18.997 | | | | | X | | XXXX | 62517750 | - | 1000 | B |
| 17.875 | 18.500 | 0.343 | 0.550 | 17.877 | 18.498 | | | | | | X | XXXX | 31217875 | - | 500 | B |
| 17.875 | 18.563 | 0.377 | 0.688 | 17.877 | 18.561 | X | | | | | | XXXX | 34301062 | - | 625 | B |
| 18.000 | 19.000 | 0.550 | 0.825 | 18.002 | 18.998 | | | X | | X | | XXXX | 50018000 | - | 750 | B |
| 18.000 | 19.250 | 0.688 | 1.375 | 18.003 | 19.247 | | | X | | | | XXXX | 62518000 | - | 1250 | B |
| 18.000 | 19.500 | 0.825 | 1.375 | 18.003 | 19.497 | X | | X | | | | XXXX | 75018000 | - | 1250 | B |
| 18.000 | 19.750 | 0.963 | 1.375 | 18.004 | 19.746 | | | X | | | | XXXX | 87518000 | - | 1250 | B |
| 18.000 | 20.000 | 1.100 | 1.650 | 18.004 | 19.996 | X | | | | | | XXXX | 100018000 | - | 1500 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 18.187 | 18.937 | 0.413 | 0.688 | 18.189 | 18.935 | X | | | | | | XXXX | 37518187 | - | 625 | B |
| 18.250 | 18.750 | 0.275 | 0.413 | 18.251 | 18.749 | | | | | X | | XXXX | 25018250 | - | 375 | B |
| 18.500 | 19.500 | 0.550 | 0.825 | 18.502 | 19.498 | | | X | | | | XXXX | 50018500 | - | 750 | B |
| 18.500 | 20.500 | 1.100 | 1.650 | 18.504 | 20.496 | X | | | | | | XXXX | 100018500 | - | 1500 | B |
| 18.750 | 20.000 | 0.688 | 1.100 | 18.753 | 19.997 | X | X | | | X | | XXXX | 62518750 | - | 1000 | B |
| 19.000 | 19.500 | 0.275 | 0.413 | 19.001 | 19.499 | X | | | | | | XXXX | 25019000 | - | 375 | B |
| 19.000 | 20.000 | 0.550 | 0.825 | 19.002 | 19.998 | X | X | X | | X | | XXXX | 50019000 | - | 750 | B |
| 19.000 | 20.500 | 0.825 | 1.375 | 19.003 | 20.497 | X | | | | X | | XXXX | 75019000 | - | 1250 | B |
| 19.250 | 20.000 | 0.413 | 0.688 | 19.252 | 19.998 | | | | | X | X | XXXX | 37519250 | - | 625 | B |
| 19.250 | 20.500 | 0.688 | 1.100 | 19.253 | 20.497 | | | | | | | XXXX | 62519250 | - | 1000 | B |
| 19.250 | 21.000 | 0.963 | 1.513 | 19.254 | 20.996 | | | X | | | | XXXX | 87519250 | - | 1375 | B |
| 19.375 | 20.250 | 0.481 | 0.550 | 19.377 | 20.248 | | | | | | X | XXXX | 43719375 | - | 500 | B |
| 19.500 | 20.000 | 0.275 | 0.275 | 19.501 | 19.999 | | | X | | | | XXXX | 25019500 | - | 250 | B |
| 19.500 | 20.000 | 0.275 | 0.343 | 19.501 | 19.999 | | | X | | | | XXXX | 25019500 | - | 312 | B |
| 19.500 | 20.250 | 0.413 | 0.688 | 19.502 | 20.248 | X | | | | | | XXXX | 37519500 | - | 625 | B |
| 19.500 | 20.500 | 0.550 | 0.825 | 19.502 | 20.498 | X | | X | | | | XXXX | 50019500 | - | 750 | B |
| 19.625 | 20.625 | 0.550 | 0.825 | 19.627 | 20.623 | | | | | X | | XXXX | 50019625 | - | 750 | B |
| 19.750 | 21.000 | 0.688 | 1.100 | 19.753 | 20.997 | | | | | X | | XXXX | 62519750 | - | 1000 | B |
| 20.000 | 21.000 | 0.550 | 0.825 | 20.002 | 20.998 | X | | X | | X | | XXXX | 50020000 | - | 750 | B |
| 20.000 | 21.250 | 0.688 | 1.100 | 20.003 | 21.247 | X | | | | | | XXXX | 62520000 | - | 1000 | B |
| 20.000 | 21.500 | 0.825 | 1.100 | 20.003 | 21.497 | | | | | X | | XXXX | 75020000 | - | 1000 | B |
| 20.000 | 21.500 | 0.825 | 1.375 | 20.003 | 21.497 | | | X | | X | | XXXX | 75020000 | - | 1250 | B |
| 20.000 | 21.750 | 0.963 | 1.513 | 20.004 | 21.746 | X | | | | | | XXXX | 87520000 | - | 1375 | B |
| 20.000 | 22.000 | 1.100 | 0.963 | 20.004 | 21.996 | | | X | | | | XXXX | 100020000 | - | 875 | B |
| 20.000 | 22.000 | 1.100 | 1.650 | 20.004 | 21.996 | | | X | | | | XXXX | 100020000 | - | 1500 | B |
| 20.250 | 21.250 | 0.550 | 0.825 | 20.252 | 21.248 | | | | | X | | XXXX | 50020250 | - | 750 | B |
| 20.500 | 21.500 | 0.550 | 0.825 | 20.502 | 21.498 | | | X | | | | XXXX | 50020500 | - | 750 | B |
| 20.500 | 22.000 | 0.825 | 1.100 | 20.503 | 21.997 | X | | | | X | | XXXX | 75020500 | - | 1000 | B |
| 20.750 | 21.500 | 0.413 | 0.550 | 20.752 | 21.498 | | | | | X | | XXXX | 37520750 | - | 500 | B |
| 21.000 | 21.500 | 0.275 | 0.343 | 21.001 | 21.499 | | | X | | | | XXXX | 25021000 | - | 312 | B |
| 21.000 | 22.000 | 0.550 | 0.825 | 21.002 | 21.998 | X | | X | | X | | XXXX | 50021000 | - | 750 | B |
| 21.000 | 22.500 | 0.825 | 1.375 | 21.003 | 22.497 | | | X | | | | XXXX | 75021000 | - | 1250 | B |
| 21.500 | 22.500 | 0.550 | 0.825 | 21.502 | 22.498 | | | X | | | | XXXX | 50021500 | - | 750 | B |
| 21.500 | 23.000 | 0.825 | 1.375 | 21.503 | 22.997 | | | X | | | | XXXX | 75021500 | - | 1250 | B |
| 21.750 | 22.250 | 0.275 | 0.413 | 21.751 | 22.249 | | | | | X | | XXXX | 25021750 | - | 375 | B |
| 21.875 | 22.875 | 0.550 | 0.825 | 21.877 | 22.873 | X | | | | | | XXXX | 50021875 | - | 750 | B |
| 22.000 | 23.000 | 0.550 | 0.825 | 22.002 | 22.998 | | | | | X | | XXXX | 50022000 | - | 750 | B |
| 22.000 | 23.500 | 0.825 | 1.375 | 22.003 | 23.497 | X | | X | | | | XXXX | 75022000 | - | 1250 | B |
| 22.000 | 24.000 | 1.100 | 1.513 | 22.004 | 23.996 | | | X | | | | XXXX | 100022000 | - | 1375 | B |
| 22.062 | 22.562 | 0.275 | 0.413 | 22.063 | 22.561 | | | | | X | | XXXX | 25022062 | - | 375 | B |
| 22.500 | 23.000 | 0.275 | 0.343 | 22.501 | 22.999 | X | | X | | | | XXXX | 25022500 | - | 312 | B |
| 22.500 | 24.000 | 0.825 | 1.375 | 22.503 | 23.997 | | | X | | | | XXXX | 75022500 | - | 1250 | B |



†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A | B | C | | D | E | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------|--------|--|-------------------|-------------|--------|---------|--------|-------------|-----------|---------------|----------------|--|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Throat Diameter* | Piston Diameter** | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only |
| (Rod) Groove Diameter | (Bore) Groove Diameter | | | Plastic | Rubber | | | Plastic | Rubber | Plastic | Rubber | | | | | |
| 23.000 | 23.500 | 0.275 | 0.413 | 23.001 | 23.499 | X | | | | X | | XXXX | 25023000 | - | 375 | B |
| 23.000 | 23.750 | 0.413 | 0.688 | 23.002 | 23.748 | X | | | | | | XXXX | 37523000 | - | 625 | B |
| 23.000 | 24.000 | 0.550 | 0.825 | 23.002 | 23.998 | X | | | | | | XXXX | 50023000 | - | 750 | B |
| 23.250 | 24.000 | 0.413 | 0.688 | 23.252 | 23.998 | | | X | | | | XXXX | 37523250 | - | 625 | B |
| 23.375 | 25.375 | 1.100 | 1.650 | 23.379 | 25.371 | X | | | | | | XXXX | 100023375 | - | 1500 | B |
| 23.500 | 24.000 | 0.275 | 0.413 | 23.501 | 23.999 | X | | | | | | XXXX | 25023500 | - | 375 | B |
| 23.500 | 24.500 | 0.550 | 0.825 | 23.502 | 24.498 | X | | | | | | XXXX | 50023500 | - | 750 | B |
| 23.500 | 25.000 | 0.825 | 1.375 | 23.503 | 24.997 | | | | | X | | XXXX | 75023500 | - | 1250 | B |
| 23.750 | 24.250 | 0.275 | 0.413 | 23.751 | 24.249 | | | | | X | | XXXX | 25023750 | - | 375 | B |
| 24.000 | 24.500 | 0.275 | 0.413 | 24.001 | 24.499 | X | | | | X | | XXXX | 25024000 | - | 375 | B |
| 24.000 | 25.000 | 0.550 | 0.825 | 24.002 | 24.998 | | | | | X | | XXXX | 50024000 | - | 750 | B |
| 24.000 | 25.500 | 0.825 | 1.375 | 24.003 | 25.497 | | | X | | | | XXXX | 75024000 | - | 1250 | B |
| 24.000 | 25.750 | 0.963 | 1.375 | 24.004 | 25.746 | | | X | | | | XXXX | 87524000 | - | 1250 | B |
| 24.000 | 26.000 | 1.100 | 1.650 | 24.004 | 25.996 | | | | | X | | XXXX | 100024000 | - | 1500 | B |
| 24.500 | 25.000 | 0.275 | 0.413 | 24.501 | 24.999 | X | | | | | | XXXX | 25024500 | - | 375 | B |
| 24.500 | 25.500 | 0.550 | 0.825 | 24.502 | 25.498 | | | | | X | | XXXX | 50024500 | - | 750 | B |
| 24.750 | 26.000 | 0.688 | 1.100 | 24.753 | 25.997 | X | | | | | | XXXX | 62524750 | - | 1000 | B |
| 24.875 | 25.875 | 0.550 | 0.825 | 24.877 | 25.873 | | | | | X | | XXXX | 50024875 | - | 750 | B |
| 25.000 | 25.750 | 0.413 | 0.688 | 25.002 | 25.748 | X | | | | X | | XXXX | 37525000 | - | 625 | B |
| 25.000 | 26.000 | 0.550 | 0.825 | 25.002 | 25.998 | X | | | | | | XXXX | 50025000 | - | 750 | B |
| 25.000 | 27.000 | 1.100 | 1.477 | 25.004 | 26.996 | | | X | | | | XXXX | 100025000 | - | 1343 | B |
| 25.250 | 25.750 | 0.275 | 0.413 | 25.251 | 25.749 | | | | | X | | XXXX | 25025250 | - | 375 | B |
| 25.250 | 26.000 | 0.413 | 0.688 | 25.252 | 25.998 | X | | | | | | XXXX | 37525250 | - | 625 | B |
| 25.250 | 26.250 | 0.550 | 0.825 | 25.252 | 26.248 | | | X | | | | XXXX | 50025250 | - | 750 | B |
| 25.500 | 27.000 | 0.825 | 1.375 | 25.503 | 26.997 | X | | | | | | XXXX | 75025500 | - | 1250 | B |
| 26.000 | 26.750 | 0.413 | 0.688 | 26.002 | 26.748 | | | | | | X | XXXX | 37526000 | - | 625 | B |
| 26.000 | 27.000 | 0.550 | 0.825 | 26.002 | 26.998 | X | | | | | | XXXX | 50026000 | - | 750 | B |
| 26.000 | 27.500 | 0.825 | 1.375 | 26.003 | 27.497 | X | | | | | | XXXX | 75026000 | - | 1250 | B |
| 26.125 | 27.125 | 0.550 | 0.825 | 26.127 | 27.123 | | | | | X | | XXXX | 50026125 | - | 750 | B |
| 26.500 | 27.500 | 0.550 | 0.825 | 26.502 | 27.498 | X | | | | | | XXXX | 50026500 | - | 750 | B |
| 26.718 | 27.218 | 0.275 | 0.343 | 26.719 | 27.217 | | | X | | | | XXXX | 25026718 | - | 312 | B |
| 27.000 | 28.000 | 0.550 | 0.825 | 27.002 | 27.998 | | | X | | X | | XXXX | 50027000 | - | 750 | B |
| 27.000 | 29.000 | 1.100 | 1.650 | 27.004 | 28.996 | X | | | | | | XXXX | 100027000 | - | 1500 | B |
| 27.250 | 28.000 | 0.413 | 0.688 | 27.252 | 27.998 | X | | | | | | XXXX | 37527250 | - | 625 | B |
| 27.500 | 28.000 | 0.275 | 0.413 | 27.501 | 27.999 | X | | | | | | XXXX | 25027500 | - | 375 | B |
| 27.500 | 28.500 | 0.550 | 0.825 | 27.502 | 28.498 | | | X | | | | XXXX | 50027500 | - | 750 | B |
| 27.625 | 28.625 | 0.550 | 0.825 | 27.627 | 28.623 | | | | | X | | XXXX | 50027625 | - | 750 | B |
| 28.000 | 29.000 | 0.550 | 0.825 | 28.002 | 28.998 | X | | | | | | XXXX | 50028000 | - | 750 | B |
| 28.000 | 30.000 | 1.100 | 1.650 | 28.004 | 29.996 | X | | | | | | XXXX | 100028000 | - | 1500 | B |
| 28.187 | 29.187 | 0.550 | 0.825 | 28.189 | 29.185 | | | | | X | | XXXX | 50028187 | - | 750 | B |
| 28.500 | 29.500 | 0.550 | 0.825 | 28.502 | 29.498 | X | | | | | | XXXX | 50028500 | - | 750 | B |
| 28.500 | 29.500 | 0.550 | 0.825 | 28.502 | 29.498 | | | X | | | | XXXX | 50028500 | - | 750 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|---|--------|---------|--------|---------|--------|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | |
| 28.750 | 29.500 | 0.413 | 0.688 | 28.752 | 29.498 | | | X | | | | XXXX | 37528750 | - | 625 | B |
| 29.000 | 30.000 | 0.550 | 0.825 | 29.002 | 29.998 | | | X | | X | | XXXX | 50029000 | - | 750 | B |
| 29.000 | 31.000 | 1.100 | 1.650 | 29.004 | 30.996 | | | | | X | | XXXX | 100029000 | - | 1500 | B |
| 29.750 | 30.750 | 0.550 | 0.825 | 29.752 | 30.748 | | | | | X | | XXXX | 50029750 | - | 750 | B |
| 30.000 | 30.750 | 0.413 | 0.688 | 30.002 | 30.748 | | | | | X | | XXXX | 37530000 | - | 625 | B |
| 30.000 | 30.750 | 0.413 | 0.688 | 30.002 | 30.748 | X | | | | | | XXXX | 37531750 | - | 625 | B |
| 30.000 | 31.000 | 0.550 | 0.687 | 30.002 | 30.998 | | | X | | | | XXXX | 50030000 | - | 625 | B |
| 30.000 | 31.250 | 0.688 | 1.100 | 30.003 | 31.247 | | | | | X | | XXXX | 62530000 | - | 1000 | B |
| 30.000 | 32.000 | 1.100 | 1.650 | 30.004 | 31.996 | | | | | X | | XXXX | 100030000 | - | 1500 | B |
| 30.250 | 31.250 | 0.550 | 0.825 | 30.252 | 31.248 | | | X | | | | XXXX | 50030250 | - | 750 | B |
| 30.375 | 31.375 | 0.550 | 0.825 | 30.377 | 31.373 | | | | | X | | XXXX | 50030375 | - | 750 | B |
| 30.750 | 31.750 | 0.550 | 0.825 | 30.752 | 31.748 | | | | | X | | XXXX | 50030750 | - | 750 | B |
| 31.000 | 32.000 | 0.550 | 0.825 | 31.002 | 31.998 | X | | | | | | XXXX | 50031000 | - | 750 | B |
| 31.000 | 33.000 | 1.100 | 1.650 | 31.004 | 32.996 | X | | | | | | XXXX | 100031000 | - | 1500 | B |
| 31.500 | 32.250 | 0.413 | 0.688 | 31.502 | 32.248 | | | X | | | | XXXX | 37531500 | - | 625 | B |
| 31.500 | 32.500 | 0.550 | 0.825 | 31.502 | 32.498 | | | | | X | | XXXX | 50031500 | - | 750 | B |
| 31.750 | 32.500 | 0.413 | 0.688 | 31.752 | 32.498 | X | | | | | | XXXX | 37536250 | - | 625 | B |
| 32.000 | 32.500 | 0.275 | 0.413 | 32.001 | 32.499 | X | | | | | | XXXX | 25032000 | - | 375 | B |
| 32.000 | 33.000 | 0.550 | 0.825 | 32.002 | 32.998 | X | | | | | | XXXX | 50032000 | - | 750 | B |
| 32.000 | 33.500 | 0.825 | 0.963 | 32.003 | 33.497 | | | X | | | | XXXX | 75032000 | - | 875 | B |
| 33.000 | 34.000 | 0.550 | 0.825 | 33.002 | 33.998 | | | X | | X | | XXXX | 50033000 | - | 750 | B |
| 34.000 | 34.750 | 0.413 | 0.688 | 34.002 | 34.748 | | | X | | | | XXXX | 37534000 | - | 625 | B |
| 34.500 | 35.000 | 0.275 | 0.413 | 34.501 | 34.999 | X | | | | | | XXXX | 25034500 | - | 375 | B |
| 34.500 | 35.500 | 0.550 | 0.825 | 34.502 | 35.498 | | | | | X | | XXXX | 50034500 | - | 750 | B |
| 35.000 | 35.750 | 0.413 | 0.688 | 35.002 | 35.748 | | | X | | | | XXXX | 37535000 | - | 625 | B |
| 35.750 | 36.750 | 0.550 | 0.825 | 35.752 | 36.748 | X | | | | | | XXXX | 50035750 | - | 750 | B |
| 36.000 | 36.750 | 0.413 | 0.688 | 36.002 | 36.748 | | | X | | | | XXXX | 37536000 | - | 625 | B |
| 36.000 | 37.000 | 0.550 | 0.825 | 36.002 | 36.998 | X | | | | | | XXXX | 50036000 | - | 750 | B |
| 37.000 | 37.750 | 0.413 | 0.688 | 37.002 | 37.748 | | | X | | | | XXXX | 37537000 | - | 625 | B |
| 37.000 | 38.000 | 0.550 | 0.825 | 37.002 | 37.998 | X | | X | | | | XXXX | 50037000 | - | 750 | B |
| 37.500 | 38.250 | 0.413 | 0.688 | 37.502 | 38.248 | X | | | | | | XXXX | 37537500 | - | 625 | B |
| 38.000 | 39.000 | 0.550 | 0.825 | 38.002 | 38.998 | | | | | X | | XXXX | 50038000 | - | 750 | B |
| 38.250 | 39.250 | 0.550 | 0.825 | 38.252 | 39.248 | | | | | X | | XXXX | 50038250 | - | 750 | B |
| 38.500 | 39.250 | 0.413 | 0.688 | 38.502 | 39.248 | X | | | | | | XXXX | 37538500 | - | 625 | B |
| 38.750 | 39.750 | 0.550 | 0.825 | 38.752 | 39.748 | | | | | X | | XXXX | 50038750 | - | 750 | B |
| 39.135 | 40.135 | 0.550 | 0.825 | 39.137 | 40.133 | X | | | | | | XXXX | 50039135 | - | 750 | B |
| 40.000 | 40.750 | 0.413 | 0.688 | 40.002 | 40.748 | | | X | | | | XXXX | 37540000 | - | 625 | B |
| 41.000 | 42.000 | 0.550 | 0.825 | 41.002 | 41.998 | | | | | X | | XXXX | 50041000 | - | 750 | B |
| 41.485 | 42.485 | 0.550 | 0.825 | 41.487 | 42.483 | X | | | | | | XXXX | 50041485 | - | 750 | B |
| 41.750 | 42.750 | 0.550 | 0.825 | 41.752 | 42.748 | | | | | X | | XXXX | 50041750 | - | 750 | B |
| 42.000 | 43.000 | 0.550 | 0.688 | 42.002 | 42.998 | | | | | X | | XXXX | 50042000 | - | 625 | B |
| 42.000 | 43.000 | 0.550 | 0.825 | 42.002 | 42.998 | | | | | X | | XXXX | 50042000 | - | 750 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Standard, Deep and Type B PolyPak Profile

Table 6-8. Standard, Deep and Type B PolyPak Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C | | D Throat Diameter* | E Piston Diameter** | Compound Codes (X = Standard Offering)† | | | | | | Part Number | | | | |
|------------------------|----------------------------|------------------------|-------------------------|-----------------------|------------------------|--|--------|---------|--------|--------|--|---------------|----------------|--|--|---|
| | | (Std. PP) Groove Width | (Deep & B) Groove Width | | | Standard PP | | Deep PP | | Type B | | Compound Code | Energizer Code | Add to the part number for Type B or Deep only | Add to the part number for Type B only | |
| (Bore) Groove Diameter | Bore Diameter | | | Plastic | Rubber | Plastic | Rubber | Plastic | Rubber | | | | | | | |
| 42.267 | 43.267 | 0.550 | 0.825 | 42.269 | 43.265 | X | | | | | | XXXX | 50042267 | - | 750 | B |
| 43.500 | 44.500 | 0.550 | 0.825 | 43.502 | 44.498 | | | | | X | | XXXX | 50043500 | - | 750 | B |
| 44.125 | 45.125 | 0.550 | 0.825 | 44.127 | 45.123 | | | | | X | | XXXX | 50044125 | - | 750 | B |
| 44.618 | 45.618 | 0.550 | 0.825 | 44.620 | 45.616 | X | | | | | | XXXX | 50044618 | - | 750 | B |
| 46.250 | 47.250 | 0.550 | 0.825 | 46.252 | 47.248 | | | | | X | | XXXX | 50046250 | - | 750 | B |
| 47.500 | 48.500 | 0.550 | 0.825 | 47.502 | 48.498 | | | | | X | | XXXX | 50047500 | - | 750 | B |

†For plastic compounds, see Table 3-1, page 3-11. For rubber compounds, see Table 3-3, page 3-14.

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seal SL Profile

Catalog EPS 5370/USA

SL Profile, Dual Compound Dual Lip Seal



Parker's SL profile is considered a multiple lip seal. The primary sealing lip is provided by the precision knife trimmed rubber element that snaps into the Molythane base. The base of the SL profile provides the secondary lip which is aligned directly below the primary lip to provide extrusion, and wear resistance. The SL Profile combines the sealing benefit of rubber with the wear and strength of Molythane. The beveled rubber lip geometry is excellent for cutting fluid film and the squeeze forces across the lips maintain sealing contact under low pressure or vacuum. The ability of Parker to supply a variety of rubber compounds allows the SL profile to be compatible with a wide range of pressure, temperature and fluids. The SL profile is designed to work as a stand alone rod seal or can be used in tandem with a buffer seal. In piston applications, this seal will function as a unidirectional seal. SL profiles should not be installed back to back in bi-directional pressure applications, as a pressure trap between the seals may occur.

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|------------------------|------------------------------------|------------------------|-------------------------|
| Rubber Element: | | | |
| N4180A80 | -40°F to 250°F (-40°C to 121°C) | 1,250 psi (86 bar) | < 1.6 ft/s (0.5 m/s) |
| Base: | | | |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



SL Cross-Section

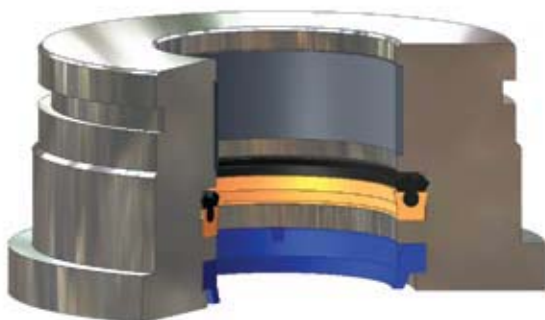

SL installed in Rod Gland

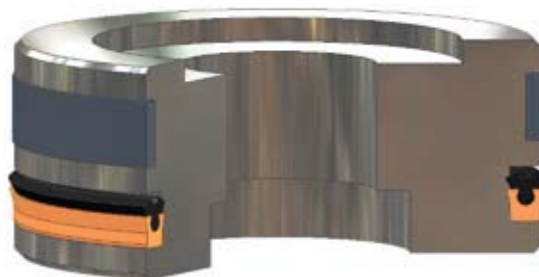


SL installed in Piston Gland

09/01/07

SL Profile

Part Number Nomenclature — SL Profile

Table 6-9. SL Profile — Inch

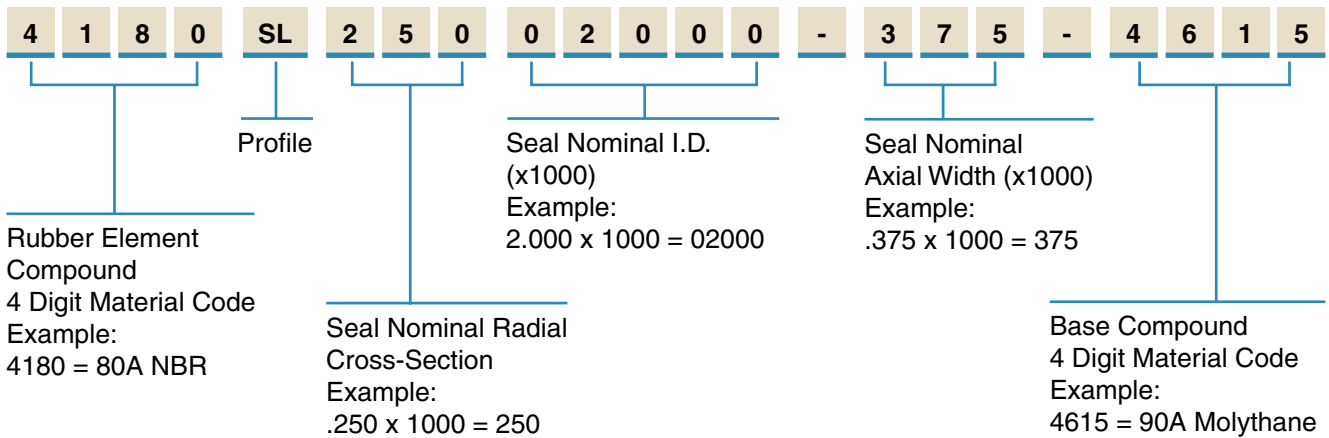

Gland Dimensions — SL Profile

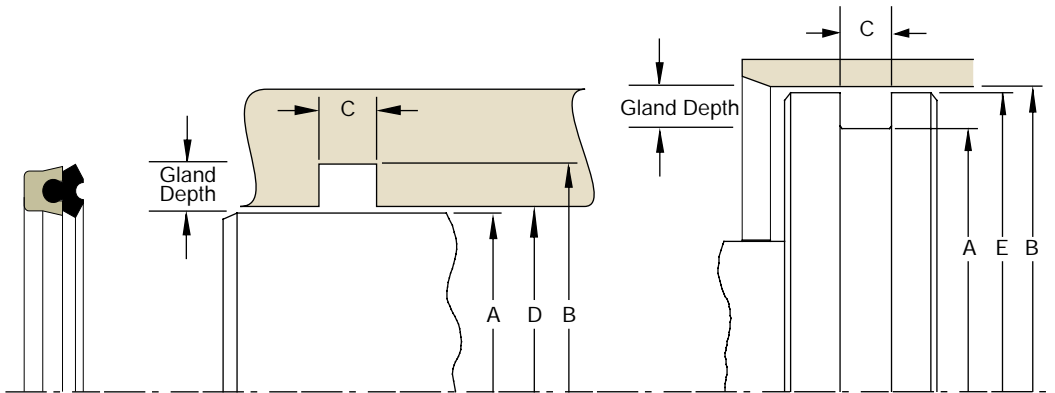


Table 6-10A. Rod Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Table 6-10B. Piston Gland Dimension Tolerances

| Nominal Gland Depth | B Bore Diameter | A Groove Diameter | C Groove Width | E Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | +0.000/-0.005 | |
| 1 | +0.009/-0.000 | +0.000/-0.012 | +0.000/-0.005 | |

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 6-11. SL Gland Dimensions — Inch

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|-------------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 1.125 | 1.500 | 0.343 | 1.126 | 1.499 | 4180SL18701125-312-4615 |
| 1.250 | 1.625 | 0.343 | 1.251 | 1.624 | 4180SL18701250-312-4615 |
| 1.250 | 1.875 | 0.550 | 1.252 | 1.873 | 4180SL31201250-500-4615 |
| 1.500 | 1.875 | 0.412 | 1.501 | 1.874 | 4180SL18701500-375-4615 |
| 1.500 | 2.000 | 0.412 | 1.501 | 1.999 | 4180SL25001500-375-4615 |
| 1.625 | 2.000 | 0.412 | 1.626 | 1.999 | 4180SL18701625-375-4615 |
| 1.750 | 2.125 | 0.412 | 1.751 | 2.124 | 4180SL18701750-375-4615 |
| 1.750 | 2.250 | 0.412 | 1.751 | 2.249 | 4180SL25001750-375-4615 |
| 1.750 | 2.500 | 0.687 | 1.752 | 2.498 | 4180SL37501750-625-4615 |
| 2.000 | 2.375 | 0.412 | 2.001 | 2.374 | 4180SL18702000-375-4615 |
| 2.000 | 2.500 | 0.412 | 2.001 | 2.499 | 4180SL25002000-375-4615 |
| 2.000 | 2.750 | 0.687 | 2.002 | 2.748 | 4180SL37502000-625-4615 |
| 2.500 | 3.000 | 0.412 | 2.501 | 2.999 | 4180SL25002500-375-4615 |
| 2.625 | 3.375 | 0.687 | 2.627 | 3.373 | 4180SL37502625-625-4615 |
| 2.750 | 3.250 | 0.412 | 2.751 | 3.249 | 4180SL25002750-375-4615 |
| 3.000 | 3.500 | 0.412 | 3.001 | 3.499 | 4180SL25003000-375-4615 |
| 3.250 | 3.750 | 0.412 | 3.251 | 3.749 | 4180SL25003250-375-4615 |
| 3.500 | 4.000 | 0.412 | 3.501 | 3.999 | 4180SL25003500-375-4615 |
| 3.500 | 4.250 | 0.687 | 3.502 | 4.248 | 4180SL37503500-625-4615 |
| 4.000 | 4.500 | 0.412 | 4.001 | 4.499 | 4180SL25004000-375-4615 |
| 4.250 | 4.750 | 0.412 | 4.251 | 4.749 | 4180SL25004250-375-4615 |
| 4.500 | 5.000 | 0.412 | 4.501 | 4.999 | 4180SL25004500-375-4615 |
| 4.750 | 5.250 | 0.412 | 4.751 | 5.249 | 4180SL25004750-375-4615 |
| 5.250 | 5.750 | 0.412 | 5.251 | 5.749 | 4180SL25005250-375-4615 |
| 6.500 | 7.500 | 0.825 | 6.502 | 7.498 | 4180SL50006500-750-4615 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seal US Profile

Catalog EPS 5370/USA

US Profile, Symmetrical u-cup Seal



The Parker US profile is a symmetrical, beveled lip u-cup designed for use in hydraulic cylinder applications. The symmetrical shape allows interchangeability between rod and piston applications. A precision knife trimming process is utilized to create the beveled sealing lips. This ensures that the inside and outside diameter sealing edges provide excellent fluid wiping action. The US profile is a single acting seal. Two seals can be installed back to back, in separate grooves, to seal dual acting pistons without pressure trapping fluid between the seals. The US profile is an economical choice, available in Parker's wear and extrusion resistant Molythane compound.

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|-----------------------------------|------------------------|-------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



US Cross-Section

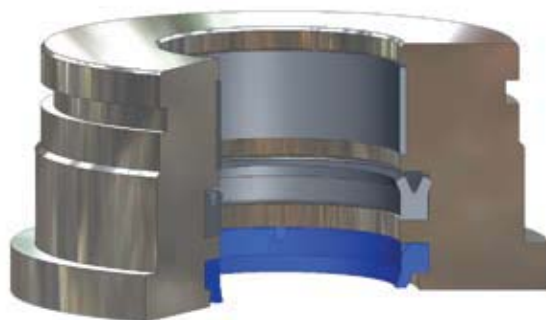

US installed in Rod Gland

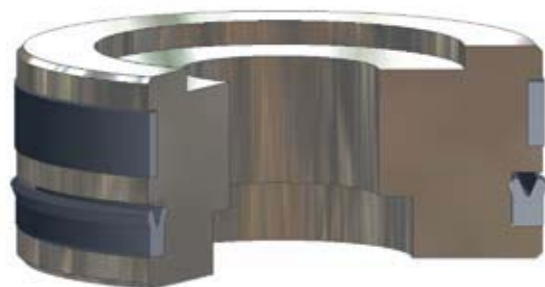


US installed in Piston Gland

09/01/07

Part Number Nomenclature — US Profile

Table 6-12. US Profile — Inch

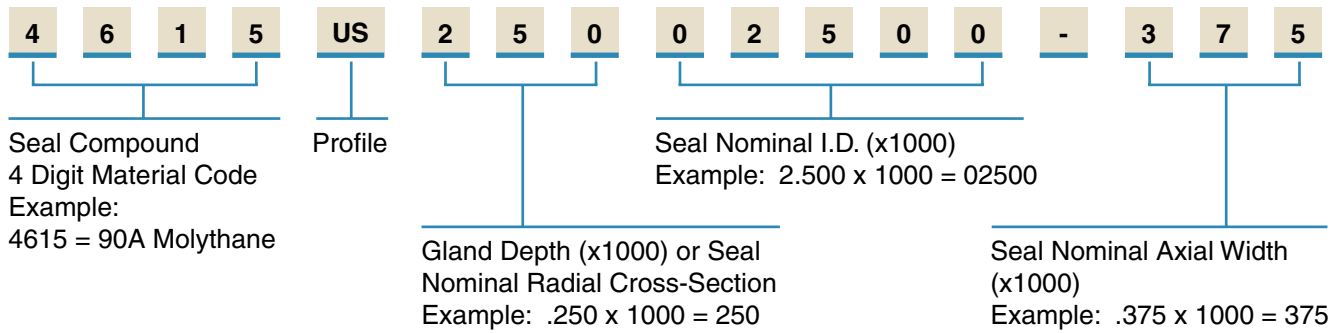

Gland Dimensions — US Profile

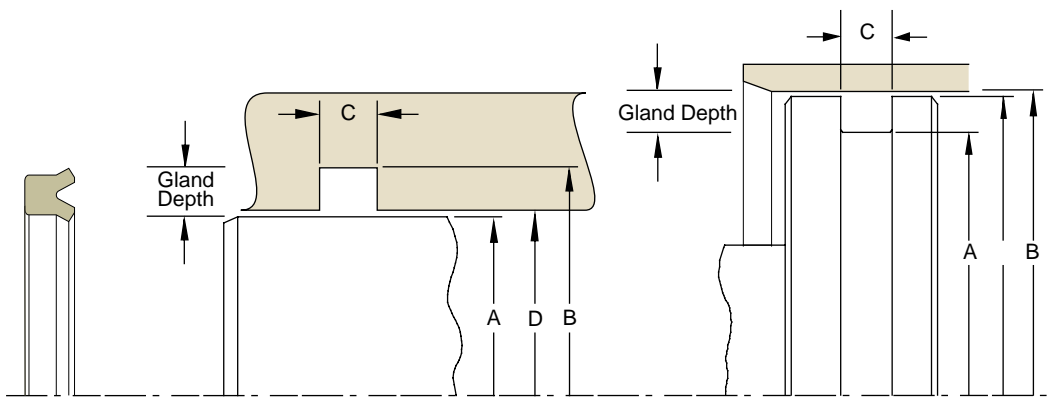


Table 6-13A. Rod Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Table 6-13B. Piston Gland Dimension Tolerances

| Nominal Gland Depth | B Bore Diameter | A Groove Diameter | C Groove Width | E Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | +0.000/-0.005 | |
| 1 | +0.009/-0.000 | +0.000/-0.012 | +0.000/-0.005 | |

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.



Table 6-14. US Gland Dimensions — Inch

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 0.093 | 0.343 | 0.138 | 0.094 | 0.342 | 4615US12500093-125 |
| 0.187 | 0.562 | 0.343 | 0.188 | 0.561 | 4615US18700187-312 |
| 0.250 | 0.500 | 0.275 | 0.251 | 0.499 | 4615US12500250-250 |
| 0.250 | 0.625 | 0.343 | 0.251 | 0.624 | 4615US18700250-312 |
| 0.250 | 0.750 | 0.343 | 0.251 | 0.749 | 4615US25000250-312 |
| 0.312 | 0.562 | 0.138 | 0.313 | 0.561 | 4615US12500312-125 |
| 0.312 | 0.562 | 0.275 | 0.313 | 0.561 | 4615US12500312-250 |
| 0.312 | 0.812 | 0.343 | 0.313 | 0.811 | 4615US25000312-312 |
| 0.312 | 0.812 | 0.413 | 0.313 | 0.811 | 4615US25000312-375 |
| 0.375 | 0.625 | 0.275 | 0.376 | 0.624 | 4615US12500375-250 |
| 0.375 | 0.750 | 0.206 | 0.376 | 0.749 | 4615US18700375-187 |
| 0.375 | 0.750 | 0.343 | 0.376 | 0.749 | 4615US18700375-312 |
| 0.375 | 0.875 | 0.343 | 0.376 | 0.874 | 4615US25000375-312 |
| 0.437 | 0.687 | 0.206 | 0.438 | 0.686 | 4615US12500437-187 |
| 0.500 | 0.750 | 0.138 | 0.501 | 0.749 | 4615US12500500-125 |
| 0.500 | 0.750 | 0.275 | 0.501 | 0.749 | 4615US12500500-250 |
| 0.500 | 0.875 | 0.275 | 0.501 | 0.874 | 4615US18700500-250 |
| 0.500 | 0.875 | 0.343 | 0.501 | 0.874 | 4615US18700500-312 |
| 0.562 | 0.750 | 0.102 | 0.563 | 0.749 | 4615US09300562-093 |
| 0.500 | 1.000 | 0.275 | 0.501 | 0.999 | 4615US25000500-250 |
| 0.562 | 1.062 | 0.275 | 0.563 | 1.061 | 4615US25000562-250 |
| 0.625 | 0.875 | 0.138 | 0.626 | 0.874 | 4615US12500625-125 |
| 0.625 | 0.875 | 0.206 | 0.626 | 0.874 | 4615US12500625-187 |
| 0.625 | 0.875 | 0.275 | 0.626 | 0.874 | 4615US12500625-250 |
| 0.625 | 1.000 | 0.275 | 0.626 | 0.999 | 4615US18700625-250 |
| 0.625 | 1.000 | 0.343 | 0.626 | 0.999 | 4615US18700625-312 |
| 0.625 | 1.125 | 0.413 | 0.626 | 1.124 | 4615US25000625-375 |
| 0.750 | 1.000 | 0.138 | 0.751 | 0.999 | 4615US12500750-125 |
| 0.750 | 1.000 | 0.206 | 0.751 | 0.999 | 4615US12500750-187 |
| 0.750 | 1.125 | 0.343 | 0.751 | 1.124 | 4615US18700750-312 |
| 0.750 | 1.250 | 0.275 | 0.751 | 1.249 | 4615US25000750-250 |
| 0.750 | 1.250 | 0.413 | 0.751 | 1.249 | 4615US25000750-375 |
| 0.812 | 1.062 | 0.275 | 0.813 | 1.061 | 4615US12500812-250 |
| 0.812 | 1.187 | 0.343 | 0.813 | 1.186 | 4615US18700812-312 |
| 0.875 | 1.125 | 0.189 | 0.876 | 1.124 | 4615US12500875-172 |
| 0.875 | 1.125 | 0.275 | 0.876 | 1.124 | 4615US12500875-250 |
| 0.875 | 1.250 | 0.275 | 0.876 | 1.249 | 4615US18700875-250 |
| 0.875 | 1.250 | 0.343 | 0.876 | 1.249 | 4615US18700875-312 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-14. US Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 1.000 | 1.250 | 0.138 | 1.001 | 1.249 | 4615US12501000-125 |
| 1.000 | 1.250 | 0.275 | 1.001 | 1.249 | 4615US12501000-250 |
| 1.000 | 1.375 | 0.206 | 1.001 | 1.374 | 4615US18701000-187 |
| 1.000 | 1.375 | 0.343 | 1.001 | 1.374 | 4615US18701000-312 |
| 1.000 | 1.500 | 0.275 | 1.001 | 1.499 | 4615US25001000-250 |
| 1.000 | 1.500 | 0.413 | 1.001 | 1.499 | 4615US25001000-375 |
| 1.125 | 1.375 | 0.206 | 1.126 | 1.374 | 4615US12501125-187 |
| 1.125 | 1.500 | 0.206 | 1.126 | 1.499 | 4615US18701125-187 |
| 1.125 | 1.500 | 0.275 | 1.126 | 1.499 | 4615US18701125-250 |
| 1.125 | 1.625 | 0.275 | 1.126 | 1.624 | 4615US25001125-250 |
| 1.187 | 1.687 | 0.275 | 1.188 | 1.686 | 4615US25001187-250 |
| 1.250 | 1.500 | 0.138 | 1.251 | 1.499 | 4615US12501250-125 |
| 1.250 | 1.500 | 0.206 | 1.251 | 1.499 | 4615US12501250-187 |
| 1.250 | 1.500 | 0.275 | 1.251 | 1.499 | 4615US12501250-250 |
| 1.250 | 1.625 | 0.413 | 1.251 | 1.624 | 4615US18701250-375 |
| 1.250 | 1.750 | 0.275 | 1.251 | 1.749 | 4615US25001250-250 |
| 1.250 | 1.750 | 0.413 | 1.251 | 1.749 | 4615US25001250-375 |
| 1.250 | 1.875 | 0.413 | 1.252 | 1.873 | 4615US31201250-375 |
| 1.312 | 1.687 | 0.343 | 1.313 | 1.686 | 4615US18701312-312 |
| 1.375 | 1.625 | 0.172 | 1.376 | 1.624 | 4615US12501375-156 |
| 1.375 | 1.625 | 0.206 | 1.376 | 1.624 | 4615US12501375-187 |
| 1.375 | 1.750 | 0.343 | 1.376 | 1.749 | 4615US18701375-312 |
| 1.375 | 1.875 | 0.413 | 1.376 | 1.874 | 4615US25001375-375 |
| 1.375 | 2.000 | 0.343 | 1.377 | 1.998 | 4615US31201375-312 |
| 1.500 | 1.750 | 0.206 | 1.501 | 1.749 | 4615US12501500-187 |
| 1.500 | 1.750 | 0.275 | 1.501 | 1.749 | 4615US12501500-250 |
| 1.500 | 1.875 | 0.206 | 1.501 | 1.874 | 4615US18701500-187 |
| 1.500 | 1.875 | 0.343 | 1.501 | 1.874 | 4615US18701500-312 |
| 1.500 | 1.875 | 0.413 | 1.501 | 1.874 | 4615US18701500-375 |
| 1.500 | 2.000 | 0.343 | 1.501 | 1.999 | 4615US25001500-312 |
| 1.500 | 2.000 | 0.413 | 1.501 | 1.999 | 4615US25001500-375 |
| 1.500 | 2.125 | 0.343 | 1.502 | 2.123 | 4615US31201500-312 |
| 1.625 | 2.000 | 0.206 | 1.626 | 1.999 | 4615US18701625-187 |
| 1.625 | 2.000 | 0.275 | 1.626 | 1.999 | 4615US18701625-250 |
| 1.625 | 2.000 | 0.343 | 1.626 | 1.999 | 4615US18701625-312 |
| 1.625 | 2.000 | 0.413 | 1.626 | 1.999 | 4615US18701625-375 |
| 1.750 | 2.000 | 0.138 | 1.751 | 1.999 | 4615US12501750-125 |
| 1.750 | 2.125 | 0.206 | 1.751 | 2.124 | 4615US18701750-187 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-14. US Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 1.750 | 2.125 | 0.275 | 1.751 | 2.124 | 4615US18701750-250 |
| 1.750 | 2.125 | 0.343 | 1.751 | 2.124 | 4615US18701750-312 |
| 1.750 | 2.125 | 0.413 | 1.751 | 2.124 | 4615US18701750-375 |
| 1.750 | 2.375 | 0.343 | 1.752 | 2.373 | 4615US31201750-312 |
| 1.875 | 2.250 | 0.308 | 1.876 | 2.249 | 4615US18701875-280 |
| 1.875 | 2.500 | 0.343 | 1.877 | 2.498 | 4615US31201875-312 |
| 1.875 | 2.500 | 0.550 | 1.877 | 2.498 | 4615US31201875-500 |
| 2.000 | 2.375 | 0.275 | 2.001 | 2.374 | 4615US18702000-250 |
| 2.000 | 2.375 | 0.343 | 2.001 | 2.374 | 4615US18702000-312 |
| 2.000 | 2.375 | 0.413 | 2.001 | 2.374 | 4615US18702000-375 |
| 2.000 | 2.500 | 0.413 | 2.001 | 2.499 | 4615US25002000-375 |
| 2.000 | 2.625 | 0.413 | 2.002 | 2.623 | 4615US31202000-375 |
| 2.125 | 2.500 | 0.206 | 2.126 | 2.499 | 4615US18702125-187 |
| 2.125 | 2.500 | 0.343 | 2.126 | 2.499 | 4615US18702125-312 |
| 2.250 | 2.625 | 0.343 | 2.251 | 2.624 | 4615US18702250-312 |
| 2.250 | 2.750 | 0.413 | 2.251 | 2.749 | 4615US25002250-375 |
| 2.250 | 2.875 | 0.550 | 2.252 | 2.873 | 4615US31202250-500 |
| 2.250 | 3.000 | 0.688 | 2.252 | 2.998 | 4615US37502250-625 |
| 2.375 | 2.875 | 0.413 | 2.376 | 2.874 | 4615US25002375-375 |
| 2.500 | 2.875 | 0.343 | 2.501 | 2.874 | 4615US18702500-312 |
| 2.500 | 2.875 | 0.413 | 2.501 | 2.874 | 4615US18702500-375 |
| 2.500 | 3.000 | 0.343 | 2.501 | 2.999 | 4615US25002500-312 |
| 2.500 | 3.000 | 0.413 | 2.501 | 2.999 | 4615US25002500-375 |
| 2.500 | 3.125 | 0.413 | 2.502 | 3.123 | 4615US31202500-375 |
| 2.625 | 3.000 | 0.413 | 2.626 | 2.999 | 4615US18702625-375 |
| 2.625 | 3.250 | 0.550 | 2.627 | 3.248 | 4615US31202625-500 |
| 2.750 | 3.250 | 0.275 | 2.751 | 3.249 | 4615US25002750-250 |
| 2.750 | 3.250 | 0.413 | 2.751 | 3.249 | 4615US25002750-375 |
| 2.750 | 3.500 | 0.413 | 2.752 | 3.498 | 4615US37502750-375 |
| 2.750 | 3.500 | 0.688 | 2.752 | 3.498 | 4615US37502750-625 |
| 3.000 | 3.375 | 0.413 | 3.001 | 3.374 | 4615US18703000-375 |
| 3.000 | 3.500 | 0.413 | 3.001 | 3.499 | 4615US25003000-375 |
| 3.125 | 3.500 | 0.413 | 3.126 | 3.499 | 4615US18703125-375 |
| 3.125 | 3.750 | 0.550 | 3.127 | 3.748 | 4615US31203125-500 |
| 3.250 | 3.750 | 0.413 | 3.251 | 3.749 | 4615US25003250-375 |
| 3.250 | 4.000 | 0.413 | 3.252 | 3.998 | 4615US37503250-375 |
| 3.250 | 4.000 | 0.481 | 3.252 | 3.998 | 4615US37503250-437 |
| 3.250 | 4.000 | 0.688 | 3.252 | 3.998 | 4615US37503250-625 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-14. US Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 3.500 | 3.875 | 0.413 | 3.501 | 3.874 | 4615US18703500-375 |
| 3.500 | 4.000 | 0.413 | 3.501 | 3.999 | 4615US25003500-375 |
| 3.625 | 4.000 | 0.206 | 3.626 | 3.999 | 4615US18703625-187 |
| 3.625 | 4.000 | 0.275 | 3.626 | 3.999 | 4615US18703625-250 |
| 3.625 | 4.000 | 0.413 | 3.626 | 3.999 | 4615US18703625-375 |
| 3.750 | 4.250 | 0.413 | 3.751 | 4.249 | 4615US25003750-375 |
| 3.750 | 4.500 | 0.413 | 3.752 | 4.498 | 4615US37503750-375 |
| 3.875 | 4.500 | 0.550 | 3.877 | 4.498 | 4615US31203875-500 |
| 4.000 | 4.375 | 0.413 | 4.001 | 4.374 | 4615US18704000-375 |
| 4.000 | 4.500 | 0.413 | 4.001 | 4.499 | 4615US25004000-375 |
| 4.000 | 4.750 | 0.550 | 4.002 | 4.748 | 4615US37504000-500 |
| 4.000 | 4.750 | 0.688 | 4.002 | 4.748 | 4615US37504000-625 |
| 4.000 | 5.000 | 0.688 | 4.002 | 4.998 | 4615US50004000-625 |
| 4.250 | 4.750 | 0.618 | 4.251 | 4.749 | 4615US25004250-562 |
| 4.250 | 5.000 | 0.413 | 4.252 | 4.998 | 4615US37504250-375 |
| 4.250 | 5.000 | 0.550 | 4.252 | 4.998 | 4615US37504250-500 |
| 4.250 | 5.000 | 0.688 | 4.252 | 4.998 | 4615US37504250-625 |
| 4.250 | 5.500 | 0.825 | 4.253 | 5.497 | 4615US62504250-750 |
| 4.375 | 5.000 | 0.413 | 4.377 | 4.998 | 4615US31204375-375 |
| 4.375 | 5.000 | 0.618 | 4.377 | 4.998 | 4615US31204375-562 |
| 4.500 | 5.000 | 0.413 | 4.501 | 4.999 | 4615US25004500-375 |
| 4.500 | 5.000 | 0.618 | 4.501 | 4.999 | 4615US25004500-562 |
| 4.500 | 5.250 | 0.550 | 4.502 | 5.248 | 4615US37504500-500 |
| 4.750 | 5.000 | 0.206 | 4.751 | 4.999 | 4615US12504750-187 |
| 4.750 | 5.500 | 0.688 | 4.752 | 5.498 | 4615US37504750-625 |
| 5.000 | 5.375 | 0.413 | 5.001 | 5.374 | 4615US18705000-375 |
| 5.000 | 5.500 | 0.413 | 5.001 | 5.499 | 4615US25005000-375 |
| 5.000 | 5.750 | 0.550 | 5.002 | 5.748 | 4615US37505000-500 |
| 5.250 | 6.000 | 0.413 | 5.252 | 5.998 | 4615US37505250-375 |
| 5.250 | 6.500 | 0.825 | 5.253 | 6.497 | 4615US62505250-750 |
| 5.375 | 6.000 | 0.413 | 5.377 | 5.998 | 4615US31205375-375 |
| 5.375 | 6.000 | 0.656 | 5.377 | 5.998 | 4615US31205375-596 |
| 5.375 | 6.000 | 0.688 | 5.377 | 5.998 | 4615US31205375-625 |
| 5.500 | 5.875 | 0.413 | 5.501 | 5.874 | 4615US18705500-375 |
| 5.500 | 6.000 | 0.413 | 5.501 | 5.999 | 4615US25005500-375 |
| 5.750 | 6.250 | 0.618 | 5.751 | 6.249 | 4615US25005750-562 |
| 5.750 | 6.500 | 0.550 | 5.752 | 6.498 | 4615US37505750-500 |
| 6.000 | 6.500 | 0.618 | 6.001 | 6.499 | 4615US25006000-562 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-14. US Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 6.250 | 7.000 | 0.413 | 6.252 | 6.998 | 4615US37506250-375 |
| 6.250 | 7.000 | 0.688 | 6.252 | 6.998 | 4615US37506250-625 |
| 6.500 | 7.000 | 0.618 | 6.501 | 6.999 | 4615US25006500-562 |
| 6.750 | 7.500 | 0.550 | 6.752 | 7.498 | 4615US37506750-500 |
| 7.000 | 8.000 | 0.825 | 7.002 | 7.998 | 4615US50007000-750 |
| 7.250 | 8.000 | 0.688 | 7.252 | 7.998 | 4615US37507250-625 |
| 7.375 | 8.000 | 0.343 | 7.377 | 7.998 | 4615US31207375-312 |
| 7.500 | 8.000 | 0.275 | 7.501 | 7.999 | 4615US25007500-250 |
| 7.500 | 8.000 | 0.618 | 7.501 | 7.999 | 4615US25007500-562 |
| 7.500 | 8.250 | 0.550 | 7.502 | 8.248 | 4615US37507500-500 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seals

8400 and 8500 Profiles

Catalog EPS 5370/USA

8400 Profile, Light Load U-cup with Beveled Lips; 8500 Profile, Light Load U-cup with Scraper Lips



Parker's 8400 and 8500 Series u-cups are symmetrical lip seals for use in either rod or piston sealing applications. The thin, flexible lip design reacts to low pressure and provides an extremely smooth, steady movement with less break away force required because of the inherent low friction. Both the 8400 and 8500 u-cups are produced from the same molds. The 8400 style utilizes a beveled lip, ideal for wiping fluid film, while the 8500 design utilizes a flat, scraper lip that yields additional lip interference and wipes contamination away from the sealing edge. Both u-cup profiles are available in a variety of rubber compounds to cover a wide range of applications. While the 8400 and 8500 u-cups are primarily designed for pneumatic applications, they can also be used in low to medium pressure hydraulic applications. The pressure range of the u-cups may be extended by incorporating an 8700 back-up ring.



8400 Cross-Section




8500 Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|------------------------|-------------------------|
| N4180A80 | -40°F to 250°F (-40°C to 121°C) | 1,250 psi (86 bar) | < 1.6 ft/s (0.5 m/s) |
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | 1,750 psi (120 bar) | < 1.6 ft/s (0.5 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 2,000 psi (137 bar) | < 1.6 ft/s (0.5 m/s) |
| E4259A80 | -65°F to 300°F (-54°C to 149°C) | 1,750 psi (120 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

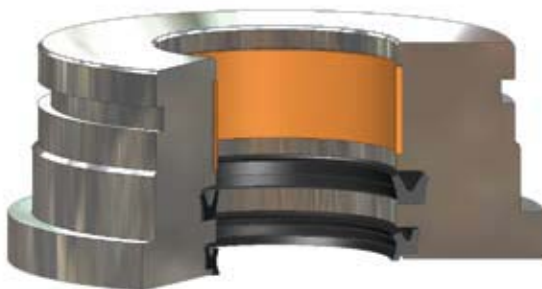

8400 installed in Rod Gland




8400 installed in Piston Gland

09/01/07

8400 and 8500 Profiles


Part Number Nomenclature — 8400 Profile

Table 6-15. 8400 Profile — Inch

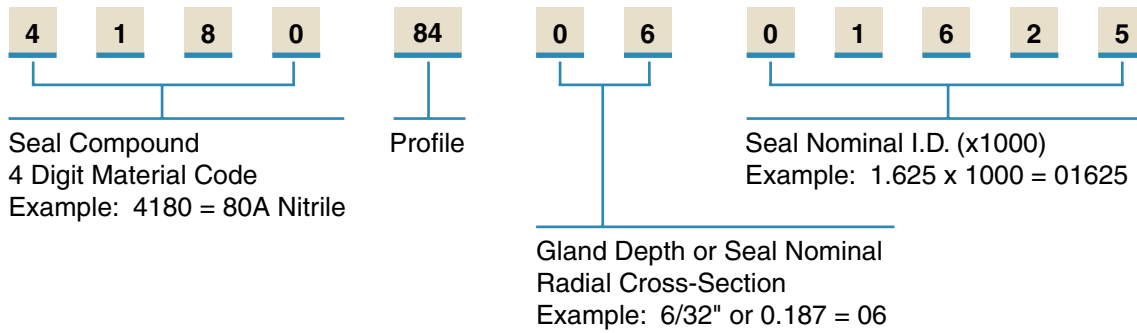

Part Number Nomenclature — 8500 Profile

Table 6-16. 8500 Profile — Inch

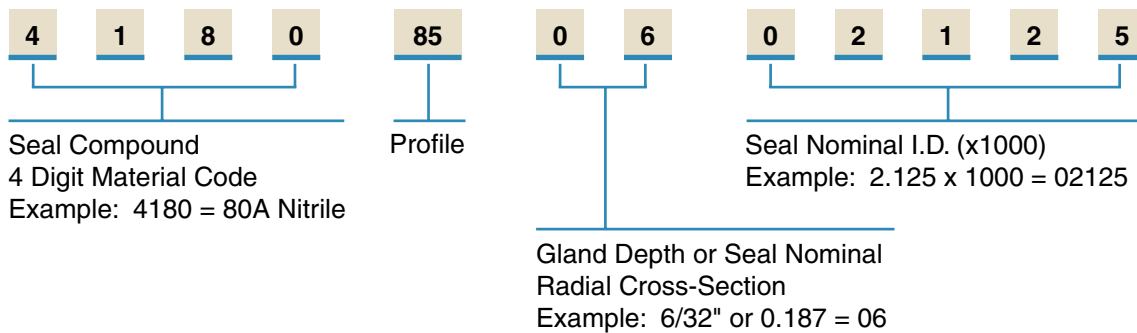

Gland Dimensions — 8400 and 8500 Profiles

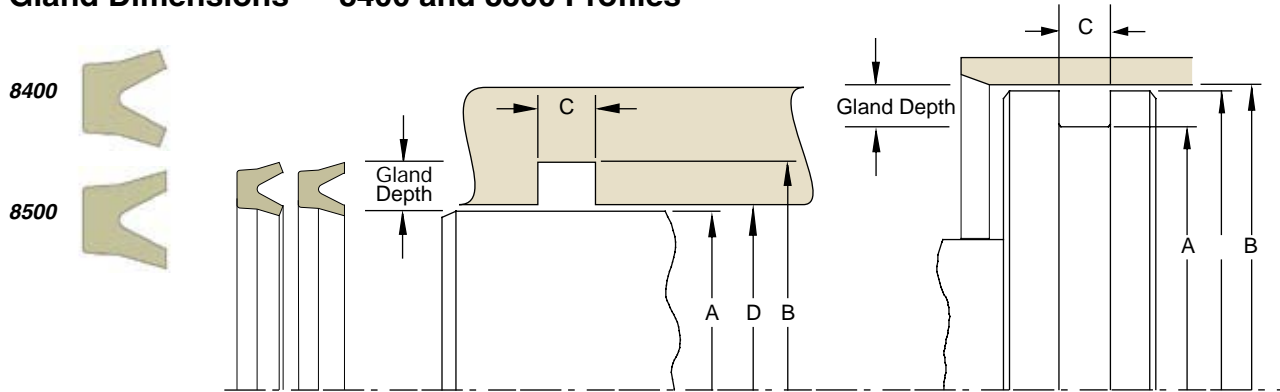


Table 6-17A. Rod Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.000/-0.001 | +0.002/-0.000 | +0.015/-0.000 | +0.002/-0.000 |
| 3/16 | +0.000/-0.002 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.003/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |
| 7/16 | +0.000/-0.003 | +0.006/-0.000 | | +0.004/-0.000 |
| 1/2 | +0.000/-0.003 | +0.007/-0.000 | | +0.005/-0.000 |
| 5/8 | +0.000/-0.003 | +0.009/-0.000 | | +0.006/-0.000 |
| 3/4 | +0.000/-0.004 | +0.011/-0.000 | | +0.007/-0.000 |
| 1 | +0.000/-0.005 | +0.015/-0.000 | | +0.009/-0.000 |

Table 6-17B. Piston Gland Dimension Tolerances

| Nominal Gland Depth | B Bore Diameter | A Groove Diameter | C Groove Width | E Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | +0.000/-0.005 | |
| 1 | +0.009/-0.000 | +0.000/-0.012 | +0.000/-0.005 | |

Please refer to Engineering [Section 2](#), [page 2-8](#) for surface finish and additional hardware considerations.

Table 6-18. 8400 and 8500 Gland Dimensions — Inch

| A | B | C | D | E | Compound Code (X = Standard Offering) | | | | Part Number | | |
|------------------------|-----------------------|---------------------|------------------|--------------------------|---------------------------------------|------|------|------|---------------|-----------------------|---------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | 4180 | 4274 | 4208 | 4259 | Compound Code | Profile Code 84 or 85 | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | | | | | | | |
| 0.125 | 0.250 | 0.093 | 0.126 | 0.249 | X | X | X | X | XXXX | 8x | 0200125 |
| 0.156 | 0.343 | 0.125 | 0.157 | 0.342 | | | X | | XXXX | 8x | 0300156 |
| 0.187 | 0.312 | 0.093 | 0.188 | 0.311 | X | X | X | X | XXXX | 8x | 0200187 |
| 0.187 | 0.375 | 0.125 | 0.188 | 0.374 | X | X | X | X | XXXX | 8x | 0300187 |
| 0.187 | 0.437 | 0.156 | 0.188 | 0.436 | | X | X | X | XXXX | 8x | 0400187 |
| 0.250 | 0.375 | 0.093 | 0.251 | 0.374 | X | X | X | X | XXXX | 8x | 0200250 |
| 0.250 | 0.437 | 0.125 | 0.251 | 0.436 | X | X | X | | XXXX | 8x | 0300250 |
| 0.250 | 0.500 | 0.156 | 0.251 | 0.499 | | X | X | X | XXXX | 8x | 0400250 |
| 0.312 | 0.500 | 0.125 | 0.313 | 0.499 | X | X | X | X | XXXX | 8x | 0300312 |
| 0.312 | 0.562 | 0.156 | 0.313 | 0.561 | X | X | X | X | XXXX | 8x | 0400312 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).
 **If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).
 For custom groove calculations, [see Appendix C](#).

Table 6-18. 8400 and 8500 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E (Bore) Piston Diameter** | Compound Code (X = Standard Offering) | | | | Part Number | | |
|-------------------|----------------------------|-------------------------|-----------------------|-------------------------------|--|------|------|------|---------------|-----------------------|---------|
| | | | | | 4180 | 4274 | 4208 | 4259 | Compound Code | Profile Code 84 or 85 | |
| 0.375 | 0.500 | 0.093 | 0.376 | 0.499 | | | X | | XXXX | 8x | 0200375 |
| 0.375 | 0.625 | 0.156 | 0.376 | 0.624 | | X | X | X | XXXX | 8x | 0400375 |
| 0.437 | 0.687 | 0.156 | 0.438 | 0.686 | X | X | X | X | XXXX | 8x | 0400437 |
| 0.500 | 0.750 | 0.156 | 0.501 | 0.749 | X | X | X | X | XXXX | 8x | 0400500 |
| 0.562 | 0.812 | 0.156 | 0.563 | 0.811 | X | X | X | | XXXX | 8x | 0400562 |
| 0.625 | 0.812 | 0.125 | 0.626 | 0.811 | X | X | | | XXXX | 8x | 0300625 |
| 0.625 | 0.875 | 0.156 | 0.626 | 0.874 | X | X | X | X | XXXX | 8x | 0400625 |
| 0.687 | 0.937 | 0.156 | 0.688 | 0.936 | X | | | | XXXX | 8x | 0400687 |
| 0.687 | 1.000 | 0.188 | 0.688 | 0.999 | X | | | | XXXX | 8x | 0500687 |
| 0.750 | 1.000 | 0.156 | 0.751 | 0.999 | X | X | X | X | XXXX | 8x | 0400750 |
| 0.750 | 1.125 | 0.218 | 0.751 | 1.124 | X | X | | | XXXX | 8x | 0600750 |
| 0.812 | 1.062 | 0.156 | 0.813 | 1.061 | X | X | X | X | XXXX | 8x | 0400812 |
| 0.875 | 1.125 | 0.156 | 0.876 | 1.124 | X | X | X | X | XXXX | 8x | 0400875 |
| 0.875 | 1.250 | 0.218 | 0.876 | 1.249 | X | X | | | XXXX | 8x | 0600875 |
| 0.937 | 1.187 | 0.156 | 0.938 | 1.186 | X | X | X | | XXXX | 8x | 0400937 |
| 0.937 | 1.250 | 0.188 | 0.938 | 1.249 | X | X | X | | XXXX | 8x | 0500937 |
| 1.000 | 1.250 | 0.156 | 1.001 | 1.249 | X | X | X | X | XXXX | 8x | 0401000 |
| 1.000 | 1.312 | 0.188 | 1.001 | 1.311 | X | X | X | X | XXXX | 8x | 0501000 |
| 1.000 | 1.375 | 0.218 | 1.002 | 1.374 | | X | | X | XXXX | 8x | 0601000 |
| 1.000 | 1.500 | 0.281 | 1.001 | 1.499 | X | X | X | X | XXXX | 8x | 0801000 |
| 1.062 | 1.375 | 0.188 | 1.063 | 1.374 | X | X | X | X | XXXX | 8x | 0501062 |
| 1.125 | 1.375 | 0.156 | 1.126 | 1.374 | X | X | X | X | XXXX | 8x | 0401125 |
| 1.125 | 1.437 | 0.188 | 1.126 | 1.436 | X | | | | XXXX | 8x | 0501125 |
| 1.187 | 1.500 | 0.188 | 1.188 | 1.499 | X | X | X | X | XXXX | 8x | 0501187 |
| 1.250 | 1.500 | 0.156 | 1.251 | 1.499 | X | | | | XXXX | 8x | 0401250 |
| 1.250 | 1.562 | 0.188 | 1.251 | 1.561 | X | X | X | X | XXXX | 8x | 0501250 |
| 1.312 | 1.625 | 0.188 | 1.313 | 1.624 | X | X | X | X | XXXX | 8x | 0501312 |
| 1.375 | 1.687 | 0.188 | 1.376 | 1.686 | X | X | X | | XXXX | 8x | 0501375 |
| 1.375 | 1.750 | 0.218 | 1.377 | 1.749 | X | X | X | X | XXXX | 8x | 0601375 |
| 1.437 | 1.750 | 0.188 | 1.438 | 1.749 | X | | | | XXXX | 8x | 0501437 |
| 1.500 | 1.812 | 0.188 | 1.501 | 1.811 | X | X | X | | XXXX | 8x | 0501500 |
| 1.500 | 1.875 | 0.218 | 1.502 | 1.874 | X | | X | X | XXXX | 8x | 0601500 |
| 1.625 | 2.000 | 0.218 | 1.627 | 1.999 | X | X | X | X | XXXX | 8x | 0601625 |
| 1.687 | 2.062 | 0.218 | 1.689 | 2.061 | | | X | | XXXX | 8x | 0601687 |
| 1.750 | 2.000 | 0.156 | 1.751 | 1.999 | X | | X | | XXXX | 8x | 0401750 |
| 1.750 | 2.125 | 0.218 | 1.752 | 2.124 | X | X | X | X | XXXX | 8x | 0601750 |
| 1.875 | 2.250 | 0.218 | 1.877 | 2.249 | X | X | X | X | XXXX | 8x | 0601875 |
| 1.937 | 2.375 | 0.250 | 1.938 | 2.374 | X | | X | | XXXX | 8x | 0701937 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-18. 8400 and 8500 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E (Bore) Piston Diameter** | Compound Code (X = Standard Offering) | | | | Part Number | | |
|------------------------|----------------------------|-------------------------|-----------------------|-------------------------------|--|------|------|------|---------------|-----------------------|---------|
| | | | | | 4180 | 4274 | 4208 | 4259 | Compound Code | Profile Code 84 or 85 | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | | | | | | | | |
| 2.000 | 2.375 | 0.218 | 2.002 | 2.374 | X | X | X | X | XXXX | 8x | 0602000 |
| 2.125 | 2.500 | 0.218 | 2.127 | 2.499 | X | X | X | X | XXXX | 8x | 0602125 |
| 2.250 | 2.625 | 0.218 | 2.252 | 2.624 | X | X | X | | XXXX | 8x | 0602250 |
| 2.250 | 3.000 | 0.406 | 2.252 | 2.998 | X | | | | XXXX | 8x | 1202250 |
| 2.375 | 2.750 | 0.218 | 2.377 | 2.749 | X | X | X | | XXXX | 8x | 0602375 |
| 2.375 | 3.000 | 0.344 | 2.377 | 2.998 | X | X | | | XXXX | 8x | 1002375 |
| 2.437 | 2.937 | 0.281 | 2.438 | 2.936 | | X | | | XXXX | 8x | 0802437 |
| 2.500 | 2.875 | 0.218 | 2.502 | 2.874 | X | X | X | X | XXXX | 8x | 0602500 |
| 2.500 | 2.937 | 0.250 | 2.501 | 2.936 | X | X | X | X | XXXX | 8x | 0702500 |
| 2.500 | 3.000 | 0.281 | 2.501 | 2.999 | X | | | | XXXX | 8x | 0802500 |
| 2.562 | 3.000 | 0.250 | 2.563 | 2.999 | X | X | X | X | XXXX | 8x | 0702562 |
| 2.625 | 3.000 | 0.218 | 2.627 | 2.999 | X | | X | X | XXXX | 8x | 0602625 |
| 2.687 | 3.125 | 0.250 | 2.688 | 3.124 | X | | | | XXXX | 8x | 0702687 |
| 2.750 | 3.125 | 0.218 | 2.752 | 3.124 | X | | X | X | XXXX | 8x | 0602750 |
| 2.750 | 3.187 | 0.250 | 2.751 | 3.186 | X | | | | XXXX | 8x | 0702750 |
| 2.750 | 3.250 | 0.281 | 2.751 | 3.249 | X | | | | XXXX | 8x | 0802750 |
| 2.812 | 3.250 | 0.250 | 2.813 | 3.249 | X | X | X | | XXXX | 8x | 0702812 |
| 2.875 | 3.250 | 0.218 | 2.877 | 3.249 | X | | | | XXXX | 8x | 0602875 |
| 3.000 | 3.375 | 0.218 | 3.002 | 3.374 | X | X | X | X | XXXX | 8x | 0603000 |
| 3.000 | 3.437 | 0.250 | 3.001 | 3.436 | X | X | X | X | XXXX | 8x | 0703000 |
| 3.062 | 3.500 | 0.250 | 3.063 | 3.499 | X | X | X | X | XXXX | 8x | 0703062 |
| 3.375 | 3.875 | 0.281 | 3.376 | 3.874 | X | | | | XXXX | 8x | 0803375 |
| 3.500 | 4.000 | 0.281 | 3.501 | 3.999 | X | X | X | X | XXXX | 8x | 0803500 |
| 3.625 | 4.000 | 0.218 | 3.627 | 3.999 | X | | | | XXXX | 8x | 0603625 |
| 3.750 | 4.250 | 0.281 | 3.751 | 4.249 | X | X | X | | XXXX | 8x | 0803750 |
| 3.875 | 4.375 | 0.281 | 3.876 | 4.374 | | X | | | XXXX | 8x | 0803875 |
| 4.000 | 4.250 | 0.156 | 4.001 | 4.249 | X | | | | XXXX | 8x | 0404000 |
| 4.000 | 4.500 | 0.281 | 4.001 | 4.499 | X | | X | X | XXXX | 8x | 0804000 |
| 4.250 | 4.750 | 0.281 | 4.251 | 4.749 | X | X | X | | XXXX | 8x | 0804250 |
| 4.437 | 5.000 | 0.312 | 4.438 | 4.999 | X | X | X | X | XXXX | 8x | 0904437 |
| 4.500 | 5.000 | 0.281 | 4.501 | 4.999 | X | X | X | X | XXXX | 8x | 0804500 |
| 4.750 | 5.250 | 0.281 | 4.751 | 5.249 | X | | X | | XXXX | 8x | 0804750 |
| 5.000 | 5.562 | 0.312 | 5.001 | 5.561 | X | X | X | | XXXX | 8x | 0905000 |
| 5.125 | 5.750 | 0.344 | 5.127 | 5.748 | X | | | | XXXX | 8x | 1005125 |
| 5.375 | 6.000 | 0.344 | 5.377 | 5.998 | X | X | X | X | XXXX | 8x | 1005375 |
| 5.437 | 6.000 | 0.312 | 5.438 | 5.999 | X | X | X | X | XXXX | 8x | 0905437 |
| 5.500 | 6.125 | 0.344 | 5.502 | 6.123 | X | X | X | X | XXXX | 8x | 1005500 |
| 5.937 | 6.500 | 0.312 | 5.938 | 6.499 | X | X | | | XXXX | 8x | 0905937 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.



Table 6-18. 8400 and 8500 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E (Bore) Piston Diameter** | Compound Code (X = Standard Offering) | | | | Part Number | | |
|-------------------|----------------------------|-------------------------|-----------------------|-------------------------------|--|------|------|------|---------------|-----------------------|---------|
| | | | | | 4180 | 4274 | 4208 | 4259 | Compound Code | Profile Code 84 or 85 | |
| 6.000 | 6.625 | 0.344 | 6.002 | 6.623 | X | X | | | XXXX | 8x | 1006000 |
| 6.375 | 7.000 | 0.344 | 6.377 | 6.998 | X | X | X | | XXXX | 8x | 1006375 |
| 6.437 | 7.000 | 0.312 | 6.438 | 6.999 | X | | | | XXXX | 8x | 0906437 |
| 6.969 | 7.593 | 0.344 | 6.971 | 7.591 | X | | | X | XXXX | 8x | 1006969 |
| 7.000 | 7.625 | 0.344 | 7.002 | 7.623 | X | | X | X | XXXX | 8x | 1007000 |
| 7.375 | 8.000 | 0.344 | 7.377 | 7.998 | X | X | X | X | XXXX | 8x | 1007375 |
| 7.750 | 8.375 | 0.344 | 7.752 | 8.373 | X | | | | XXXX | 8x | 1007750 |
| 8.500 | 9.125 | 0.344 | 8.502 | 9.123 | X | | | X | XXXX | 8x | 1008500 |
| 9.000 | 9.750 | 0.406 | 9.002 | 9.748 | | | X | | XXXX | 8x | 1209000 |
| 9.312 | 10.000 | 0.375 | 9.314 | 9.998 | X | X | X | | XXXX | 8x | 1109312 |
| 11.000 | 11.750 | 0.406 | 11.002 | 11.748 | | | | | XXXX | 8x | 1211000 |
| 11.000 | 12.000 | 0.531 | 11.002 | 11.998 | X | | | | XXXX | 8x | 1611000 |
| 11.250 | 12.000 | 0.406 | 11.252 | 11.998 | X | | X | X | XXXX | 8x | 1211250 |
| 13.000 | 14.000 | 0.531 | 13.002 | 13.998 | X | X | X | X | XXXX | 8x | 1613000 |
| 13.187 | 14.000 | 0.437 | 13.189 | 13.998 | X | X | X | | XXXX | 8x | 1313187 |
| 17.125 | 18.000 | 0.469 | 17.127 | 17.998 | X | | | | XXXX | 8x | 1417125 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seal AN6226 Profile

Catalog EPS 5370/USA

AN6226 Profile, Industrial, Standard, Light Load Rubber U-cups




Parker's AN6226 Style u-cups have a square format where the nominal cross section is equal to the height. Although widely used in the fluid power industry for low friction pneumatics, this profile was originally designed for early aircraft and ordnance service. Many units still use this type u-cup. The AN6226 profile is available in the most popular sizes and is made of a standard 70 Shore A nitrile compound.

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|---------------------|-------------------------|
| N4295A70 | -40°F to 250°F (-40°C to 121°C) | 800 psi (55 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



AN6226 Cross-Section

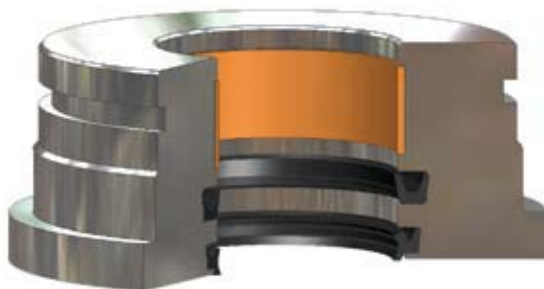

AN6226 installed in Rod Gland




AN6226 installed in Piston Gland

09/01/07

AN6226 Profile

Part Number Nomenclature — AN6226 Profile

Table 6-19. AN6226 Profile — Inch

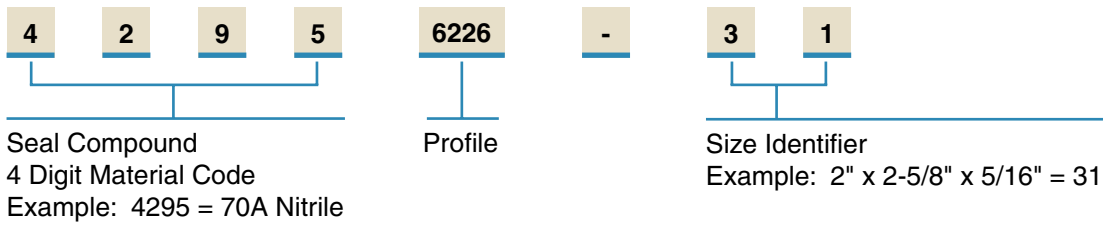

Gland Dimensions — AN6226 Profile

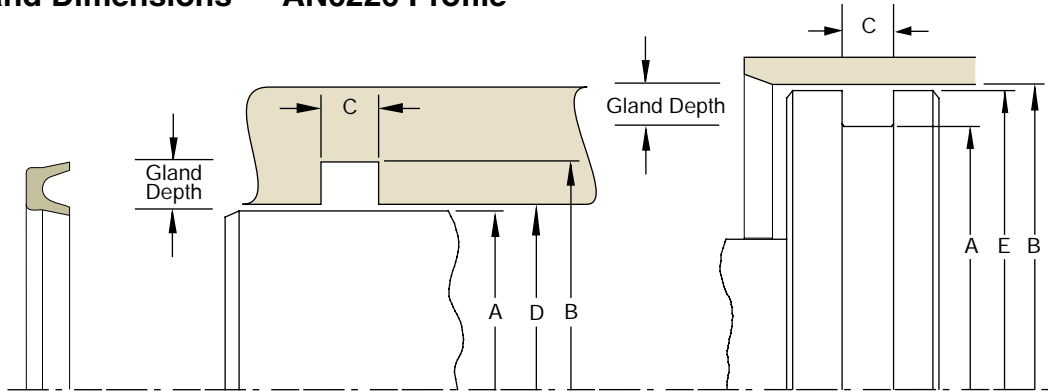


Table 6-20A. Rod Gland Dimension Tolerances

| Nominal Gland Depth | A Rod Diameter | B Groove Diameter | C Groove Width | D Throat Diameter |
|---------------------|----------------|-------------------|----------------|-------------------|
| 1/8 | +0.00/-0.001 | +0.002/-0.000 | +0.010/-0.010 | +0.002/-0.000 |
| 3/16 | +0.000/-0.001 | +0.002/-0.000 | | +0.002/-0.000 |
| 1/4 | +0.000/-0.002 | +0.003/-0.000 | | +0.003/-0.000 |
| 5/16 | +0.000/-0.002 | +0.004/-0.000 | | +0.004/-0.000 |
| 3/8 | +0.000/-0.002 | +0.005/-0.000 | | +0.004/-0.000 |

Table 6-20B. Piston Gland Dimension Tolerances

| Nominal Gland Depth | B Bore Diameter | A Groove Diameter | C Groove Width | E Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.003/-0.000 | +0.000/-0.001 | +0.010/-0.010 | +0.000/-0.001 |
| 3/16 | +0.003/-0.000 | +0.000/-0.002 | | +0.000/-0.001 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.001 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 6-21. AN6226 Gland Dimensions — Inch

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E (Bore) Piston Diameter** | Part Number |
|------------------------|-------------------------|----------------------|--------------------|----------------------------|-------------|
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | | |
| 0.125 | 0.500 | 0.218 | 0.126 | 0.498 | 42956226-01 |
| 0.187 | 0.562 | 0.218 | 0.188 | 0.560 | 42956226-02 |
| 0.250 | 0.625 | 0.218 | 0.251 | 0.623 | 42956226-03 |
| 0.312 | 0.687 | 0.218 | 0.313 | 0.685 | 42956226-04 |
| 0.375 | 0.750 | 0.218 | 0.376 | 0.748 | 42956226-05 |
| 0.437 | 0.812 | 0.218 | 0.438 | 0.810 | 42956226-06 |
| 0.500 | 0.875 | 0.218 | 0.501 | 0.873 | 42956226-07 |
| 0.250 | 0.750 | 0.281 | 0.251 | 0.748 | 42956226-08 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

For custom groove calculations, see Appendix C.

Table 6-21. AN6226 Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|-------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 0.312 | 0.812 | 0.281 | 0.313 | 0.810 | 42956226-09 |
| 0.375 | 0.875 | 0.281 | 0.376 | 0.873 | 42956226-10 |
| 0.437 | 0.937 | 0.281 | 0.438 | 0.935 | 42956226-11 |
| 0.500 | 1.000 | 0.281 | 0.501 | 0.998 | 42956226-12 |
| 0.562 | 1.062 | 0.281 | 0.563 | 1.060 | 42956226-13 |
| 0.625 | 1.125 | 0.281 | 0.626 | 1.123 | 42956226-14 |
| 0.687 | 1.187 | 0.281 | 0.688 | 1.185 | 42956226-15 |
| 0.750 | 1.250 | 0.281 | 0.751 | 1.248 | 42956226-16 |
| 0.812 | 1.312 | 0.281 | 0.813 | 1.310 | 42956226-17 |
| 0.875 | 1.375 | 0.281 | 0.876 | 1.373 | 42956226-18 |
| 0.937 | 1.437 | 0.281 | 0.938 | 1.435 | 42956226-19 |
| 1.000 | 1.500 | 0.281 | 1.001 | 1.498 | 42956226-20 |
| 1.062 | 1.562 | 0.281 | 1.063 | 1.560 | 42956226-21 |
| 1.125 | 1.625 | 0.281 | 1.126 | 1.623 | 42956226-22 |
| 1.187 | 1.687 | 0.281 | 1.188 | 1.685 | 42956226-23 |
| 1.250 | 1.750 | 0.281 | 1.251 | 1.748 | 42956226-24 |
| 1.250 | 1.875 | 0.344 | 1.252 | 1.873 | 42956226-25 |
| 1.375 | 2.000 | 0.344 | 1.377 | 1.998 | 42956226-26 |
| 1.500 | 2.125 | 0.344 | 1.502 | 2.123 | 42956226-27 |
| 1.625 | 2.250 | 0.344 | 1.627 | 2.248 | 42956226-28 |
| 1.750 | 2.375 | 0.344 | 1.752 | 2.373 | 42956226-29 |
| 1.875 | 2.500 | 0.344 | 1.877 | 2.498 | 42956226-30 |
| 2.000 | 2.625 | 0.344 | 2.002 | 2.623 | 42956226-31 |
| 2.125 | 2.750 | 0.344 | 2.127 | 2.748 | 42956226-32 |
| 2.250 | 2.875 | 0.344 | 2.252 | 2.873 | 42956226-33 |
| 2.375 | 3.000 | 0.344 | 2.377 | 2.998 | 42956226-34 |
| 2.500 | 3.125 | 0.344 | 2.502 | 3.123 | 42956226-35 |
| 2.500 | 3.250 | 0.406 | 2.502 | 3.248 | 42956226-36 |
| 2.625 | 3.375 | 0.406 | 2.627 | 3.373 | 42956226-37 |
| 2.750 | 3.500 | 0.406 | 2.752 | 3.498 | 42956226-38 |
| 2.875 | 3.625 | 0.406 | 2.877 | 3.623 | 42956226-39 |
| 3.000 | 3.750 | 0.406 | 3.002 | 3.748 | 42956226-40 |
| 0.125 | 0.375 | 0.156 | 0.126 | 0.373 | 42956226-41 |
| 0.187 | 0.437 | 0.156 | 0.188 | 0.435 | 42956226-42 |
| 0.250 | 0.500 | 0.156 | 0.251 | 0.498 | 42956226-43 |
| 0.312 | 0.562 | 0.156 | 0.313 | 0.560 | 42956226-44 |
| 0.375 | 0.625 | 0.156 | 0.376 | 0.623 | 42956226-45 |
| 0.437 | 0.687 | 0.156 | 0.438 | 0.685 | 42956226-46 |
| 0.500 | 0.750 | 0.156 | 0.501 | 0.748 | 42956226-47 |
| 0.625 | 1.000 | 0.218 | 0.626 | 0.998 | 42956226-48 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

09/01/07



AN6226 Profile

Table 6-21. AN6226 Gland Dimensions — Inch (Continued)

| A | B | C | D | E | Part Number |
|------------------------|-----------------------|---------------------|------------------|--------------------------|--------------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | |
| 0.750 | 1.125 | 0.218 | 0.751 | 1.123 | 42956226-49 |
| 0.875 | 1.250 | 0.218 | 0.876 | 1.248 | 42956226-50 |
| 1.000 | 1.375 | 0.218 | 1.001 | 1.373 | 42956226-51 |
| 1.125 | 1.500 | 0.218 | 1.126 | 1.498 | 42956226-52 |
| 1.250 | 1.625 | 0.218 | 1.251 | 1.623 | 42956226-53 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Symmetrical Seal Spiral Vee Profile

Catalog EPS 5370/USA


Spiral Vee Rings, Cut to Size Chevron Packing



Parker Spiral Vee rings are precision formed rubber and combination rubber/fabric sealing products designed to protect equipment from leakage and costly down time. Parker Spiral Vee rings are designed to work in combination with adapters and shims. Adapters, which typically consist of rubber and plastic rings, are fitted to the top and/or bottom of the Vee ring stack to enhance sealing performance and prohibit extrusion. Rectangular cross-section discs, or “shims,” are used to adjust the height of the Vee ring stack set to pre-existing groove depths. Spiral Vee rings, adapters and shims are engineered for use in rams and plungers, presses, forging hammers and other hydraulic applications. Also included are refuse trucks and telescoping systems that require consistent, cost-effective sealing. These products contribute to the safe and reliable operation of equipment in chemical processing, energy/oilfield and other industries. To ensure compatibility with the many organic (petroleum-based) and synthetic fluids used in hydraulic applications, Parker offers its Spiral Vee ring products, adapters and shims in a wide range of compounds.



Spiral Vee Cross-Section

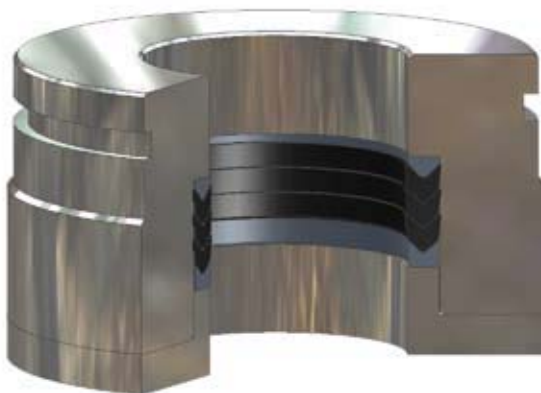

Spiral Vee installed in Rod Gland



Spiral Vee installed in Piston Gland

09/01/07

Technical Data — Materials Matrix*†

Table 6-22. Material Codes


| Vee Set Material Code | Adapters | | Middle Rings | |
|-----------------------|-----------------|------------------------------------|-------------------------------------|------------------------------------|
| | Description | Temperature Rating | Description | Temperature Rating |
| 4050 | Fabric/Neoprene | -45°F to 250°F (-43°C to 121°C) | Fabric/Neoprene | -45°F to 250°F (-43°C to 121°C) |
| 4051 | Fabric/Neoprene | -45°F to 250°F (-43°C to 121°C) | Fabric/Neoprene/ Homogeneous NBR | -45°F to 250°F (-43°C to 121°C) |
| 4052 | Fabric/Neoprene | -45°F to 250°F (-43°C to 121°C) | Nitrile | -30°F to 250°F (-34°C to 121°C) |
| 4053 | Fabric/FKM | -25°F to 450°F (-32°C to 232°C) | Fabric/FKM | -25°F to 450°F (-32°C to 232°C) |
| 4054 | Fabric/FKM | -25°F to 450°F (-32°C to 232°C) | Fabric/FKM/ Homogeneous FKM | -25°F to 450°F (-32°C to 232°C) |
| 4055 | Fabric/FKM | -25°F to 450°F (-32°C to 232°C) | FKM | -25°F to 450°F (-32°C to 232°C) |

***Note:** Independent of Material Codes in [Section 3](#).

†**Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.



Table 6-23. Recommended Number of Middle Rings (Vees) per Set Based on Pressure

| | Pressure | | | |
|-------------------------|-----------------|--------------------|--------------------|--------------------|
| | Up to 1,000 psi | 1,000 to 2,000 psi | 2,000 to 4,000 psi | 4,000 to 6,000 psi |
| Minimum Number of Rings | 3 | 4 | 5 | 6 |

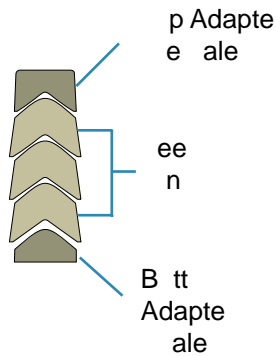

Part Number Nomenclature — Spiral Vee Profile

Table 6-24. Spiral Vee Profile — Inch

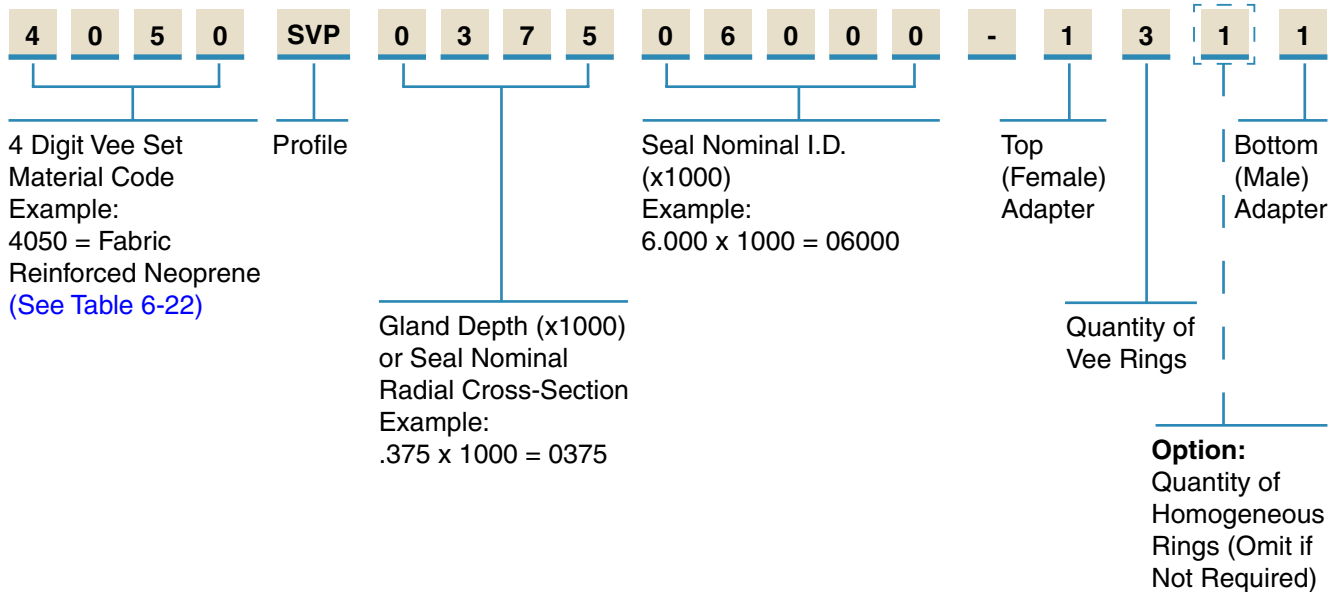

Steps in developing Spiral Vee part number:

- 1) Identify the material combination for the V-Packing Set from the material matrix.
- 2) SVP – Spiral V-Packing line callout.
- 3) Identify the nominal cross-section (0375 = .375").
- 4) Identify the nominal inner diameter (06000 = 6.000").
- 5) Identify the number and type of rings in the set:
 - a) First digit is the number of top adapters (1 or 0).
 - b) Second digit is the number of vees (as shown "3" = 3 vees).
 - c) Number of homogeneous rubber vee rings. Omit if not required.
 - d) Third digit is the number of bottom adapters (1 or 0).

Bulk Length Availability — Spiral Vee Profile


Table 6-25. Spiral Vee Profile — Inch

| Cross Section | Feet/ Spiral | I.D./ Range | Mandrel Sizes Available | | | |
|---------------|--------------|-------------|-------------------------|-----------|-----------|--------|
| | | | I.D. | 6" | 10" | 16" |
| 0.375" | 49' | I.D. | 6" | 10" | 16" | 20" |
| | | Range | 4"-8" | 8.1"-14" | 14.1"-21" | 21.1"+ |
| 0.500" | 46' | I.D. | 6" | 12" | 16" | 20" |
| | | Range | 5"-10" | 10.1"-16" | 16.1"-23" | 23.1"+ |
| 0.625" | 62' | I.D. | 6" | 12" | 18" | 20" |
| | | Range | 6"-11" | 11.1"-17" | 17.1"-22" | 22.1"+ |
| 0.750" | 62' | I.D. | 10" | 12" | 18" | 20" |
| | | Range | 9"-12" | 12.1"-16" | 16.1-23" | 23.1"+ |
| .0875" | 62' | I.D. | | 12" | 16" | 20" |
| | | Range | | 11"-15" | 15.1"-23" | 23.1"+ |
| 1.000" | 62' | I.D. | | | 16" | 20" |
| | | Range | | | 14"-23" | 23.1"+ |

Contact your local Parker Seal representative for price and availability of bulk length Spiral Vee.

Stack Height Calculation — Spiral Vee Profile

Table 6-26. Spiral Vee Dimensions — Inch



| Cross-Section | Stack Height for Each Vee Ring | | Height of Combined Top and Bottom Adapters | |
|---------------|--------------------------------|-----------|--|-----------|
| | Inches | Tolerance | Inches | Tolerance |
| 0.375 | 0.220 | ±0.025 | 0.480 | ±0.030 |
| 0.500 | 0.300 | ±0.025 | 0.530 | ±0.030 |
| 0.625 | 0.370 | ±0.030 | 0.625 | ±0.030 |
| 0.750 | 0.405 | ±0.030 | 0.690 | ±0.030 |
| 0.875 | 0.500 | ±0.030 | 0.740 | ±0.030 |
| 1.000 | 0.540 | ±0.030 | 0.780 | ±0.030 |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

$$\text{Stack Height} = \left([\text{number of middle rings (Vees)}] \times [\text{stack height for each vee ring (see Table 6-26)}] \right) + [\text{height of combined top and bottom adapters (see Table 6-26)}]$$

Example: 1-3-1 Vee Stack with 0.500" cross-section

$$\begin{aligned} \text{Stack Height} &= ([3] \times [.300]) \\ &\quad ([\text{number of middle rings (Vees)}] \times [\text{stack height for each vee ring (see Table 6-26)}]) \\ &+ [.530] \\ &\quad + [\text{height of combined top and bottom adapters (see Table 6-26)}] \\ &= 1.430" \end{aligned}$$

Contents

| | |
|------------------------|------|
| Product Offering | 7-2 |
| Decision Tree | 7-3 |
| Piston Seal Profiles | |
| BP | 7-5 |
| PSP | 7-8 |
| CC | 7-11 |
| OK | 7-13 |
| PIP..... | 7-15 |
| B7 | 7-19 |
| UP | 7-23 |
| E4 | 7-26 |
| BMP..... | 7-29 |
| TP | 7-31 |
| S5 | 7-35 |
| R5 | 7-39 |
| CT | 7-43 |
| CQ..... | 7-48 |
| OE | 7-53 |
| CP | 7-62 |
| OA | 7-68 |
| OQ..... | 7-74 |

Piston Seal Profiles

Parker offers the most comprehensive range of piston seals in the market today. A variety of profiles such as lip seals, cap seals and squeeze seals are manufactured from proprietary rubber, thermoplastic and PTFE compounds to meet the broad demands of the fluid power industry. The highest quality materials and manufacturing processes are utilized to ensure the best performance possible. Parker's piston seal profiles are available for both uni-directional and bi-directional applications. When combined with wear rings, Parker piston seals have proven to provide long life and leak free performance.











































Piston Seal Product Offering

Catalog EPS 5370/USA

Profiles


Table 7-1: Product Profiles

| Series | Description | Application (Duty) | | | | Page | Series | Description | Application (Duty) | | | | Page |
|--------|--|---|---|---|---|------|--------|--|---|---|---|---|------|
| | | Light | Medium | Heavy | Pneumatic | | | | Light | Medium | Heavy | Pneumatic | |
| BP | Premium TPU Cap Seal | |  |  | | 7-5 | TP | Compact Seal with Anti-Extrusion Technology |  |  |  |  | 7-31 |
| PSP | TPU Piston Cap Seal |  |  | | | 7-8 | S5 | Square PTFE Cap Seal |  |  | |  | 7-35 |
| CC | High Pressure, Step Cut Cap Piston Seal | | |  | | 7-11 | R5 | Rectangular PTFE Cap Seal | |  |  |  | 7-39 |
| OK | High Pressure, Step Cut Cap Piston Seal | | |  | | 7-13 | CT | Premium PTFE Cap Seal with Anti-Extrusion Technology | | |  | | 7-43 |
| PIP | Loaded Lip Seal with Pressure Inverting Pedestal | |  |  | | 7-15 | CQ | Premium PTFE Cap Seal with Anti-Drift Technology | |  |  | | 7-48 |
| B7 | U-cup Piston Seal |  |  | | | 7-19 | OE | PTFE Piston Cap Seal |  |  | | | 7-53 |
| UP | Industrial U-cup Piston Seal |  |  | | | 7-23 | CP | PTFE Piston Cap Seal to Retrofit O-ring Gland |  |  | |  | 7-62 |
| E4 | Premium Rounded Lip U-cup Piston Seal |  | | |  | 7-26 | OA | Compact PTFE Piston Cap Seal |  |  | |  | 7-68 |
| BMP | Rounded Lip Seal with Bumper Cushion |  | | |  | 7-29 | OQ | Rotary PTFE Cap Seal |  |  | |  | 7-74 |


09/01/07



Piston Seal Decision Tree

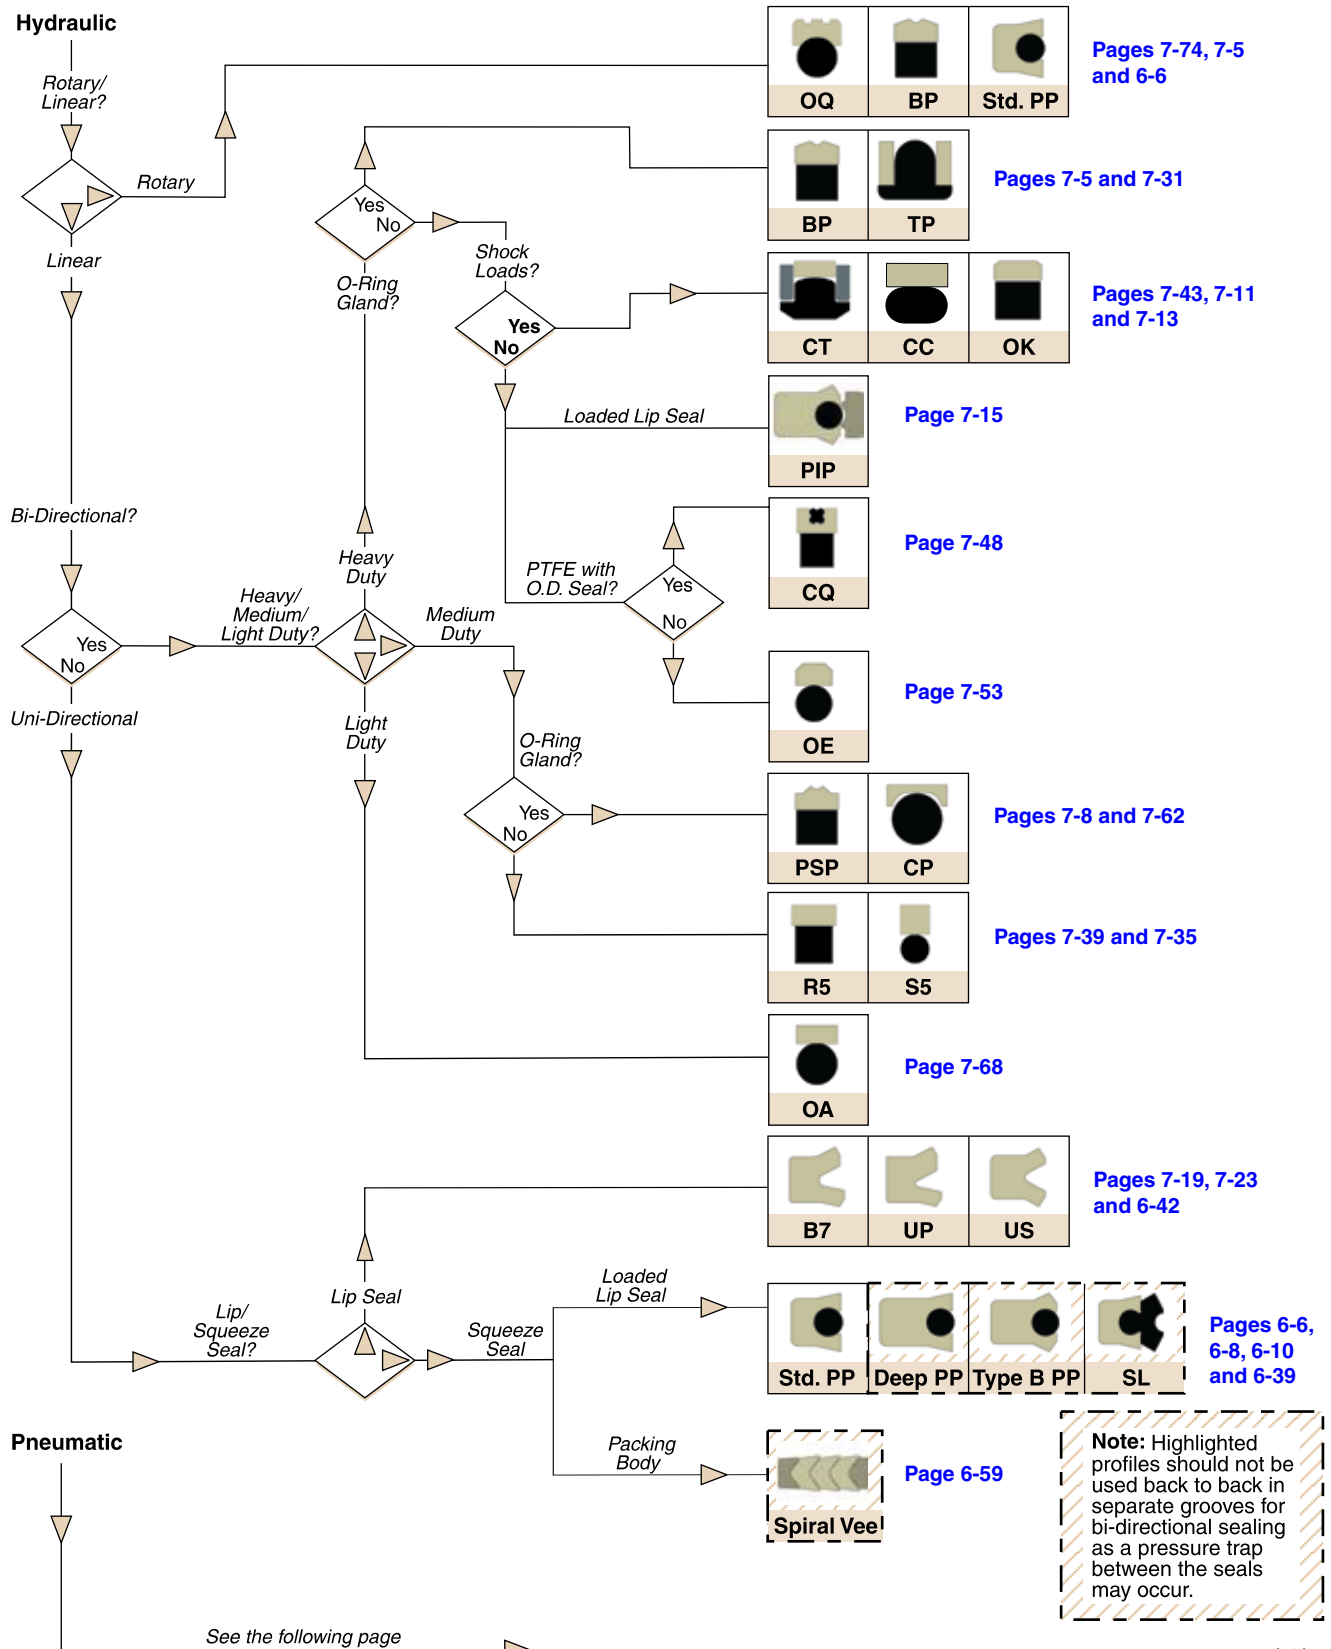

Piston Seal Decision Tree (Continued)

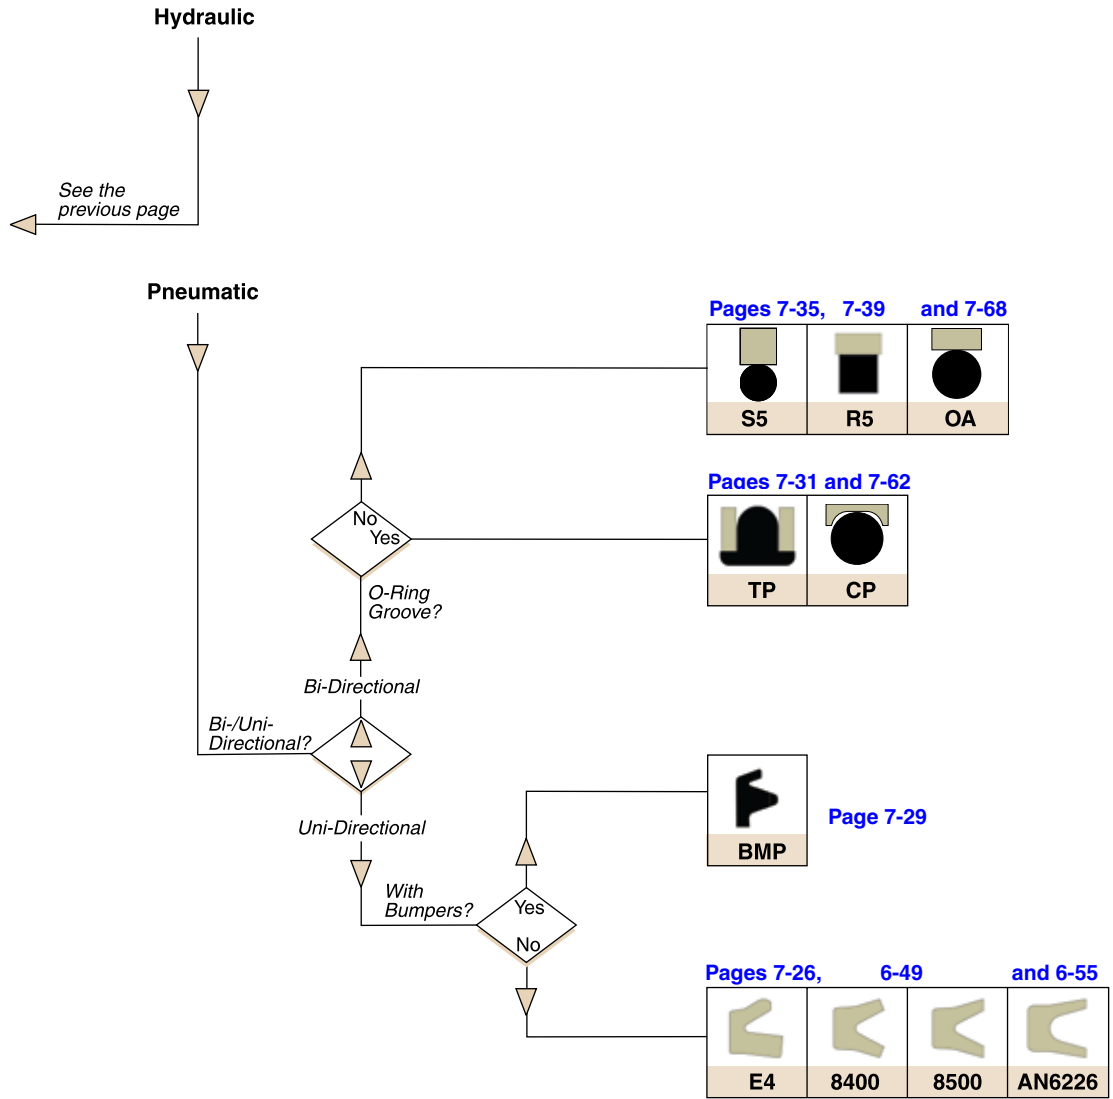

7

Piston Seal BP Profile

Catalog EPS 5370/USA



BP Profile, Premium TPU Cap Seal

Parker's BP profile is a squeeze type, bi-directional piston seal for use in medium to heavy duty hydraulic applications. This seal is primarily designed for linear applications but has been successfully used as a low speed rotary seal. The standard material for this profile is Resilon ER, compound P4304. This is a proprietary Parker polyurethane offering higher wear resistance, extrusion resistance, and extended temperature range. The Resilon ER cap is energized using a resilient nitrile elastomer offering low compression set. The BP seal's geometry provides a fluid reservoir between the two sealing lips which holds system fluid, resulting in reduced breakaway and running friction. The BP is offered in two styles, standard and narrow, with the standard style designed to retrofit o-ring grooves. The BP profile is easy to install and will resist rolling and twisting in long stroke applications.

The BP profile is sold only as an assembly (seal and energizer). [See part number nomenclature.](#)

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------------|------------------------------------|------------------------|---------------------------|
| Cap P4304D60 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) | < 1.6 ft/s (0.5 m/sec) |
| Energizer A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



BP Cross-Section

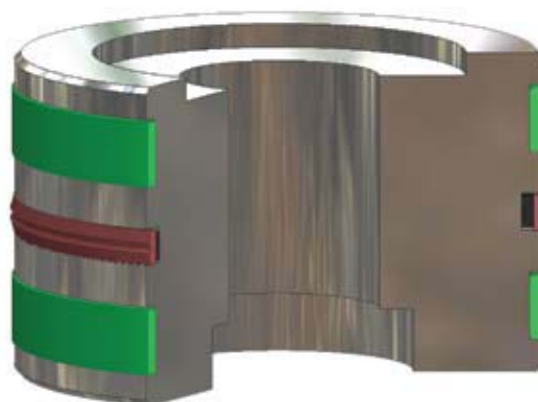

BP installed in Piston Gland


7

09/01/07

BP Profile

Part Number Nomenclature — BP (Standard Style) Profile

Table 7-2. BP (Standard Style) Profile — Inch

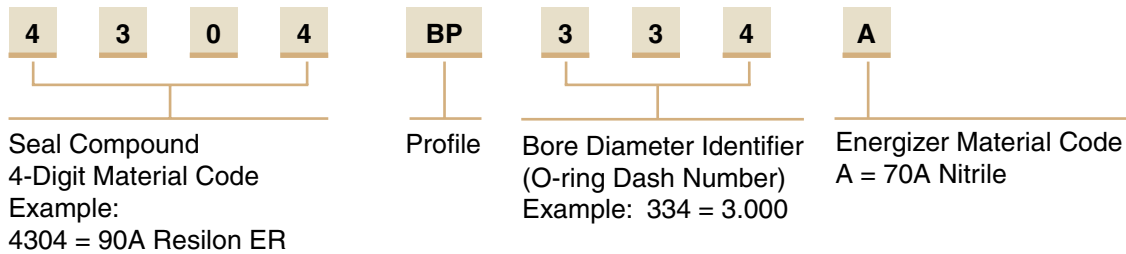

Gland Dimensions — BP Profile

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

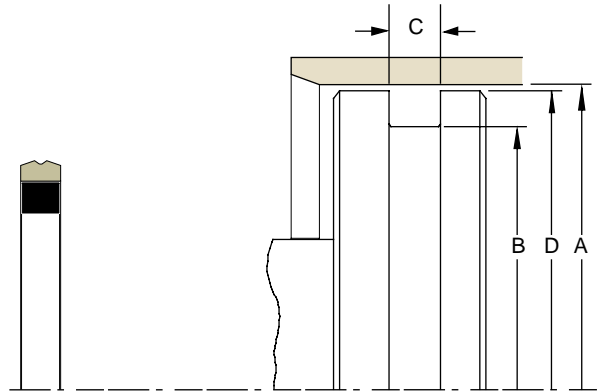


Table 7-3. BP Gland Dimensions (Standard Size)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|-------------------|
| +0.002/ -0.000 | +0.000/ -0.002 | +0.005/ -0.000 | +0.000/ -0.001 | |
| 0.562 | 0.320 | 0.187 | 0.559 | 4304BP203A |
| 0.625 | 0.383 | 0.187 | 0.662 | 4304BP204A |
| 0.687 | 0.445 | 0.187 | 0.684 | 4304BP205A |
| 0.750 | 0.508 | 0.187 | 0.747 | 4304BP206A |
| 0.812 | 0.570 | 0.187 | 0.809 | 4304BP207A |
| 0.875 | 0.633 | 0.187 | 0.872 | 4304BP208A |
| 0.937 | 0.695 | 0.187 | 0.934 | 4304BP209A |
| 1.000 | 0.758 | 0.187 | 0.997 | 4304BP210A |
| 1.062 | 0.820 | 0.187 | 1.059 | 4304BP211A |
| 1.125 | 0.833 | 0.187 | 1.122 | 4304BP212A |
| 1.187 | 0.945 | 0.187 | 1.184 | 4304BP213A |
| 1.250 | 1.008 | 0.187 | 1.247 | 4304BP214A |
| 1.312 | 1.070 | 0.187 | 1.309 | 4304BP215A |
| 1.375 | 1.133 | 0.187 | 1.372 | 4304BP216A |
| 1.437 | 1.195 | 0.187 | 1.434 | 4304BP217A |
| 1.500 | 1.258 | 0.187 | 1.497 | 4304BP218A |
| 1.562 | 1.320 | 0.187 | 1.559 | 4304BP219A |
| 1.625 | 1.383 | 0.187 | 1.622 | 4304BP220A |
| 1.687 | 1.445 | 0.187 | 1.684 | 4304BP221A |
| 1.750 | 1.508 | 0.187 | 1.747 | 4304BP222A |
| 1.875 | 1.505 | 0.281 | 1.872 | 4304BP325A |
| 2.000 | 1.630 | 0.281 | 1.997 | 4304BP326A |
| 2.125 | 1.755 | 0.281 | 2.122 | 4304BP327A |
| 2.250 | 1.880 | 0.281 | 2.247 | 4304BP328A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|-------------------|
| +0.002/ -0.000 | +0.000/ -0.002 | +0.005/ -0.000 | +0.000/ -0.001 | |
| 2.375 | 2.005 | 0.281 | 2.372 | 4304BP329A |
| 2.500 | 2.130 | 0.281 | 2.497 | 4304BP330A |
| 2.625 | 2.255 | 0.281 | 2.622 | 4304BP331A |
| 2.750 | 2.380 | 0.281 | 2.747 | 4304BP332A |
| 2.875 | 2.505 | 0.281 | 2.872 | 4304BP333A |
| 3.000 | 2.630 | 0.281 | 2.997 | 4304BP334A |
| 3.125 | 2.755 | 0.281 | 3.122 | 4304BP335A |
| 3.250 | 2.880 | 0.281 | 3.247 | 4304BP336A |
| 3.375 | 3.005 | 0.281 | 3.372 | 4304BP337A |
| 3.500 | 3.130 | 0.281 | 3.497 | 4304BP338A |
| 3.625 | 3.255 | 0.281 | 3.622 | 4304BP339A |
| 3.750 | 3.380 | 0.281 | 3.747 | 4304BP340A |
| 3.875 | 3.505 | 0.281 | 3.872 | 4304BP341A |
| 4.000 | 3.630 | 0.281 | 3.997 | 4304BP342A |
| 4.125 | 3.755 | 0.281 | 4.122 | 4304BP343A |
| 4.250 | 3.880 | 0.281 | 4.247 | 4304BP344A |
| 4.375 | 4.005 | 0.281 | 4.372 | 4304BP345A |
| 4.500 | 4.130 | 0.281 | 4.497 | 4304BP346A |
| 4.625 | 4.255 | 0.281 | 4.622 | 4304BP347A |
| 4.750 | 4.380 | 0.281 | 4.747 | 4304BP348A |
| 4.875 | 4.505 | 0.281 | 4.872 | 4304BP349A |
| 5.002 | 4.630 | 0.281 | 4.997 | 4304BP350A |
| 5.127 | 4.653 | 0.375 | 5.123 | 4304BP426A |
| 5.252 | 4.778 | 0.375 | 5.248 | 4304BP427A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

09/01/07



Table 7-3. BP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|------------------|-------------------|------------------|--------------------|-------------|
| +0.002/ -.000 | +0.000/ -.002 | +0.005/ -.000 | +0.000/ -.001 | |
| 5.377 | 4.903 | 0.375 | 5.373 | 4304BP428A |
| 5.502 | 5.028 | 0.375 | 5.498 | 4304BP429A |
| 5.627 | 5.153 | 0.375 | 5.623 | 4304BP430A |
| 5.752 | 5.278 | 0.375 | 5.748 | 4304BP431A |
| 5.877 | 5.403 | 0.375 | 5.873 | 4304BP432A |
| 6.002 | 5.528 | 0.375 | 5.998 | 4304BP433A |

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|------------------|-------------------|------------------|--------------------|-------------|
| +0.002/ -.000 | +0.000/ -.002 | +0.005/ -.000 | +0.000/ -.001 | |
| 6.127 | 5.653 | 0.375 | 6.123 | 4304BP434A |
| 6.252 | 5.778 | 0.375 | 6.248 | 4304BP435A |
| 6.502 | 6.028 | 0.375 | 6.498 | 4304BP437A |
| 6.752 | 6.278 | 0.375 | 6.748 | 4304BP438A |
| 7.002 | 6.528 | 0.375 | 6.998 | 4304BP439A |


*If used with wear rings, refer to wear ring piston diameter, see Section 9.

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — BP (Narrow Style) Profile

Table 7-4. BP (Narrow Style) Profile — Inch

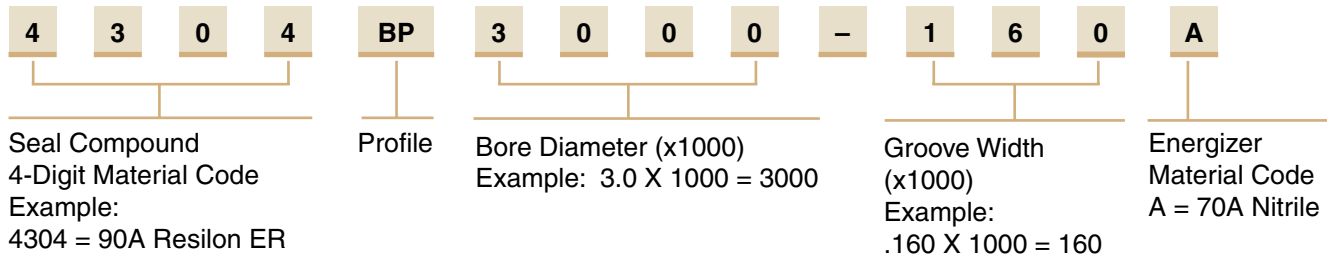

Gland Dimensions — BP Profile

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

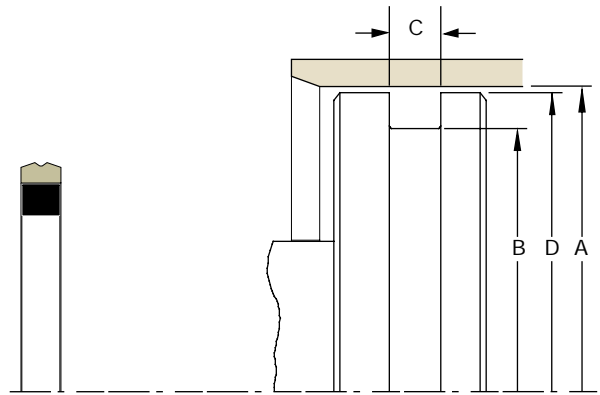


Table 7-5. BP Gland Dimensions (Narrow Size)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|------------------|-------------------|------------------|--------------------|-----------------|
| +0.002/ -.000 | +0.000/ -.002 | +0.002/ -.000 | +0.000/ -.001 | |
| 1.750 | 1.473 | 0.130 | 1.747 | 4304BP1750-130A |
| 2.000 | 1.582 | 0.175 | 1.997 | 4304BP2000-175A |
| 2.250 | 1.973 | 0.130 | 2.247 | 4304BP2250-130A |
| 2.500 | 2.223 | 0.130 | 2.497 | 4304BP2500-130A |
| 2.500 | 2.082 | 0.175 | 2.497 | 4304BP2500-175A |
| 2.750 | 2.348 | 0.160 | 2.747 | 4304BP2750-160A |
| 3.000 | 2.598 | 0.160 | 2.997 | 4304BP3000-160A |

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|------------------|-------------------|------------------|--------------------|-----------------|
| +0.002/ -.000 | +0.000/ -.002 | +0.002/ -.000 | +0.000/ -.001 | |
| 3.250 | 2.848 | 0.160 | 3.247 | 4304BP3250-160A |
| 3.500 | 3.098 | 0.160 | 3.497 | 4304BP3500-160A |
| 3.750 | 3.348 | 0.160 | 3.747 | 4304BP3750-160A |
| 4.000 | 3.598 | 0.160 | 3.997 | 4304BP4000-160A |
| 4.250 | 3.848 | 0.160 | 4.247 | 4304BP4250-160A |
| 4.500 | 4.098 | 0.160 | 4.497 | 4304BP4500-160A |
| 5.000 | 4.598 | 0.160 | 4.997 | 4304BP5000-160A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal PSP Profile

Catalog EPS 5370/USA



PSP Profile, TPU Piston Cap Seal

Parker's PSP seal is a squeeze type, bi-directional piston seal for use in light to medium duty hydraulic applications. Available from proprietary Parker polyurethanes, the PSP offers low friction, abrasion and extrusion resistance. The nitrile elastomer energizer ensures resistance to compression set to increase seal life. The PSP seal's geometry provides a fluid reservoir between the two sealing lips which holds system fluid, resulting in reduced breakaway and running friction. Designed to retrofit grooves for a single o-ring or an o-ring with two back-ups, the PSP profile is easy to install and resist rolling and twisting in long stroke applications.

The PSP profile is sold only as an assembly (seal and energizer). [See part number nomenclature.](#)

Technical Data


| Standard Materials* Cap | Temperature Range | Pressure Range† | Surface Speed |
|----------------------------|------------------------------------|-----------------------|---------------------------|
| P4622A90 | -65°F to 225°F (-54°C to 107°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/sec) |
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/sec) |
| Energizer | | | |
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

*Alternate Materials: For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).



PSP Cross-Section

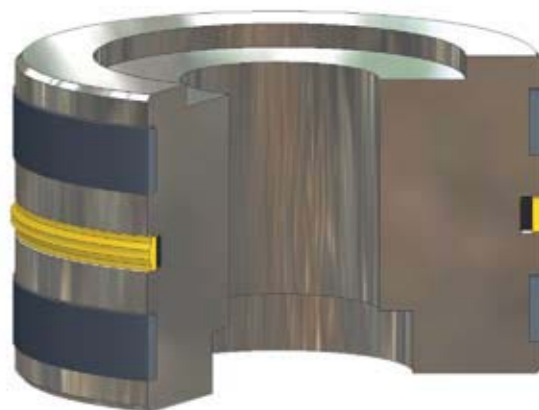


PSP installed in Piston Gland


09/01/07

Part Number Nomenclature — PSP Profile

Table 7-6. PSP Profile — Inch

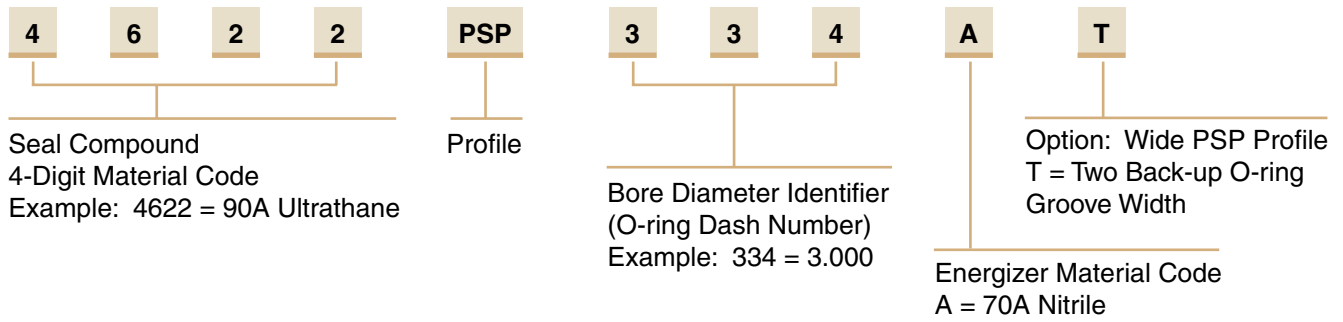

Gland Dimensions — PSP Profile

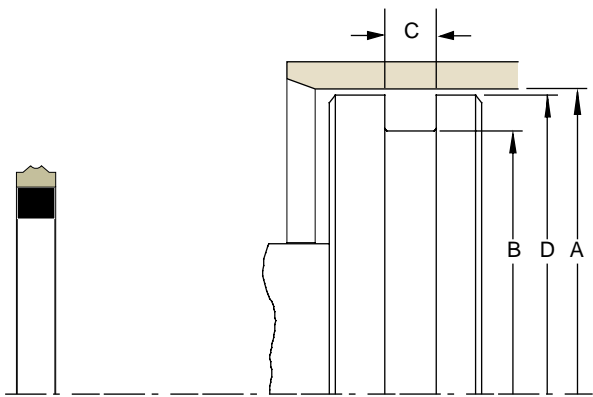

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-7. PSP Gland Dimensions

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound (X = Standard Offering) | | | Part Number | |
|-----------------------|-------------------------|----------------------|--------------------------|----------------------------------|------|----------|------------------|----------|
| | | | | PSP | | Wide PSP | Compound Code | |
| | | | | 4622 | 4300 | 4300 | | |
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.000/-0.001 | | | | | |
| 0.625 | 0.383 | 0.187 | 0.662 | | X | | XXXX | PSP204A |
| 0.750 | 0.508 | 0.187 | 0.747 | | X | | XXXX | PSP206A |
| 1.000 | 0.758 | 0.187 | 0.997 | X | X | | XXXX | PSP210A |
| 1.250 | 1.008 | 0.187 | 1.247 | X | X | | XXXX | PSP214A |
| 1.500 | 1.258 | 0.187 | 1.497 | X | X | | XXXX | PSP218A |
| 1.500 | 1.258 | 0.275 | 1.497 | | | X | XXXX | PSP218AT |
| 1.750 | 1.508 | 0.187 | 1.747 | X | | | XXXX | PSP222A |
| 1.750 | 1.508 | 0.275 | 1.747 | | | X | XXXX | PSP222AT |
| 1.875 | 1.633 | 0.187 | 1.872 | | X | | XXXX | PSP223A |
| 2.125 | 1.833 | 0.187 | 2.122 | | X | | XXXX | PSP225A |
| 2.250 | 2.008 | 0.187 | 2.247 | | X | | XXXX | PSP226A |
| 1.875 | 1.505 | 0.281 | 1.872 | | | | XXXX | PSP325A |
| 2.000 | 1.630 | 0.281 | 1.997 | X | X | | XXXX | PSP326A |
| 2.000 | 1.630 | 0.410 | 1.997 | | | X | XXXX | PSP326AT |
| 2.250 | 1.880 | 0.281 | 2.247 | X | X | | XXXX | PSP328A |
| 2.500 | 2.130 | 0.281 | 2.497 | X | X | | XXXX | PSP330A |
| 2.500 | 2.130 | 0.410 | 2.497 | | | X | XXXX | PSP330AT |
| 2.625 | 2.255 | 0.281 | 2.622 | | X | | XXXX | PSP331A |
| 2.750 | 2.380 | 0.281 | 2.747 | X | X | | XXXX | PSP332A |
| 3.000 | 2.630 | 0.281 | 2.997 | X | X | | XXXX | PSP334A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.



PSP Profile

Table 7-7. PSP Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound (X = Standard Offering) | | | Part Number | |
|-----------------------|-------------------------|----------------------|--------------------------|----------------------------------|------|----------|------------------|----------|
| | | | | PSP | | Wide PSP | Compound Code | |
| | | | | 4622 | 4300 | 4300 | | |
| +.002/-0.000 | +.000/-0.002 | +.005/-0.000 | +.000/-0.001 | | | | | |
| 3.000 | 2.630 | 0.410 | 2.997 | | | X | XXXX | PSP334AT |
| 3.125 | 2.755 | 0.281 | 3.122 | | X | | XXXX | PSP335A |
| 3.250 | 2.880 | 0.281 | 3.247 | X | X | | XXXX | PSP336A |
| 3.500 | 3.130 | 0.281 | 3.497 | X | X | | XXXX | PSP338A |
| 3.500 | 3.130 | 0.410 | 3.497 | | | X | XXXX | PSP338AT |
| 3.625 | 3.255 | 0.281 | 3.622 | X | | | XXXX | PSP339A |
| 4.000 | 3.630 | 0.281 | 3.997 | X | X | | XXXX | PSP342A |
| 4.000 | 3.630 | 0.410 | 3.997 | | | X | XXXX | PSP342AT |
| 4.500 | 4.130 | 0.281 | 4.497 | X | | | XXXX | PSP346A |
| 4.500 | 4.130 | 0.410 | 4.497 | | | X | XXXX | PSP346AT |
| 5.002 | 4.630 | 0.281 | 4.997 | X | | | XXXX | PSP350A |
| 5.002 | 4.528 | 0.538 | 4.997 | | | X | XXXX | PSP425AT |
| 5.502 | 5.028 | 0.375 | 5.498 | X | | | XXXX | PSP429A |
| 5.502 | 5.028 | 0.538 | 5.498 | | | X | XXXX | PSP429AT |
| 6.002 | 5.528 | 0.375 | 5.998 | X | | | XXXX | PSP433A |
| 6.002 | 5.528 | 0.538 | 5.998 | | | X | XXXX | PSP433AT |
| 6.502 | 6.028 | 0.375 | 6.498 | | X | | XXXX | PSP437A |
| 7.002 | 6.528 | 0.538 | 6.998 | | | X | XXXX | PSP439AT |
| 8.002 | 7.528 | 0.375 | 7.998 | | X | | XXXX | PSP443A |
| 12.002 | 11.528 | 0.375 | 11.998 | | X | | XXXX | PSP452A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal CC Profile

Catalog EPS 5370/USA



CC Cross-Section

CC Profile, High Pressure Split Cap Piston Seal

Parker's CC profile, also known as the ChemCast™ seal, is a bi-directional piston seal designed for heavy duty applications. The CC profile design consists of a self-lubricated, glass reinforced, heat-stabilized, thermoplastic O.D. sealing ring that is energized by a flexible, oval shape, energizer. When installed in the bore, the precision step cut ring is aligned and compressed to provide drift free operation that can withstand pressure exceeding 50,000 psi. The hard thermoplastic cap allows the CC profile to work effectively in substandard, rough-surfaced cylinders with much lower tolerances. The CC is an excellent choice for mobile equipment experiencing shock loads. The CC profile can pass over ports, resist cold flow and protect against metal-to-metal contact.

The CC profile is sold only as an assembly (seal and energizer). [See part number nomenclature.](#)


Technical Data

| Standard Materials | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------------|------------------------------------|---------------------------|---------------------------|
| Cap W4650NHH | -65°F to 300°F (-54°C to 149°C) | 50,000 psi (3,447 bar) | < 3.3 ft/s (1.0 m/sec) |
| Energizer A 80A Nitrile | -40°F to 250°F (-40°C to 121°C) | | |

†Pressure Range without wear rings (see Table 2-4, page 2-5).

Part Number Nomenclature — CC Profile

Part numbers are provided in [Table 7-8, page 7-12.](#)

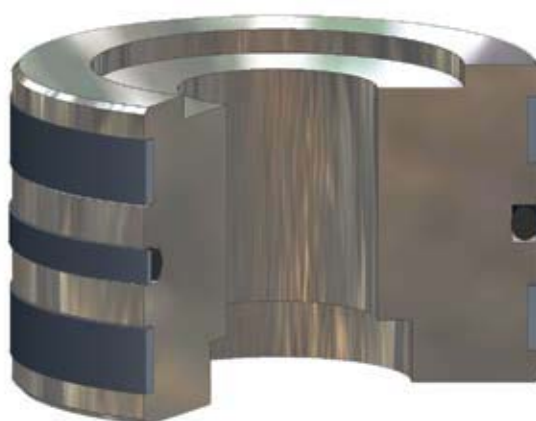


CC installed in Piston Gland

09/01/07



Gland Dimensions — CC Profile — Inch

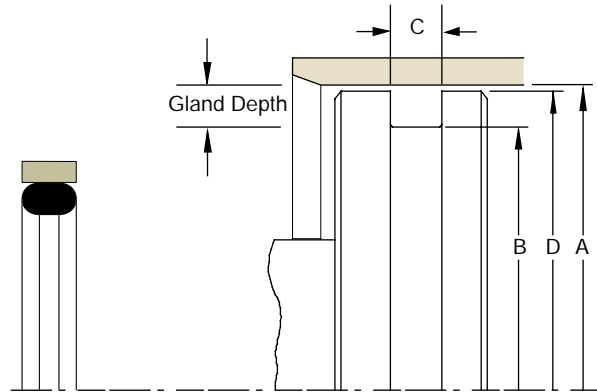

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-8. CC Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Custom Part Number |
|-----------------|-------------------|----------------|--------------------|--------------------|
| +0.005/-0.000 | +0.000/-0.005 | +0.005/-0.000 | +0.000/-0.005 | |
| 1.500 | 1.042 | 0.252 | 1.448 | 090150011 |
| 1.750 | 1.292 | 0.252 | 1.698 | 090175012 |
| 2.000 | 1.462 | 0.282 | 1.935 | 090200011 |
| 2.000 | 1.462 | 0.312 | 1.935 | 090200021 |
| 2.250 | 1.712 | 0.282 | 2.185 | 090225011 |
| 2.500 | 1.962 | 0.282 | 2.435 | 090250011 |
| 2.500 | 1.962 | 0.312 | 2.435 | 090250021 |
| 2.750 | 2.212 | 0.282 | 2.685 | 090275011 |
| 3.000 | 2.442 | 0.282 | 2.920 | 090300011 |
| 3.000 | 2.442 | 0.312 | 2.920 | 090300021 |
| 3.025 | 2.467 | 0.282 | 2.945 | 090302511 |
| 3.250 | 2.692 | 0.282 | 3.170 | 090325011 |
| 3.500 | 2.942 | 0.282 | 3.420 | 090350011 |
| 3.500 | 2.942 | 0.312 | 3.420 | 090350021 |
| 4.000 | 3.442 | 0.312 | 3.920 | 090400021 |
| 4.000 | 3.442 | 0.282 | 3.920 | 090400011 |
| 4.000 | 3.442 | 0.424 | 3.920 | 090400031 |
| 4.250 | 3.692 | 0.282 | 4.170 | 090425011 |
| 4.500 | 3.942 | 0.375 | 4.420 | 090450051 |
| 4.500 | 3.942 | 0.312 | 4.420 | 090450021 |
| 4.525 | 3.967 | 0.282 | 4.445 | 090452251 |
| 5.000 | 4.442 | 0.282 | 4.920 | 090500011 |
| 5.000 | 4.442 | 0.375 | 4.920 | 090500051 |
| 5.025 | 4.467 | 0.282 | 4.945 | 090502511 |
| 5.025 | 4.467 | 0.375 | 4.945 | 090502521 |
| 6.000 | 5.240 | 0.375 | 5.900 | 090600011 |

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Custom Part Number |
|-----------------|-------------------|----------------|--------------------|--------------------|
| +0.005/-0.000 | +0.000/-0.005 | +0.005/-0.000 | +0.000/-0.005 | |
| 6.025 | 5.265 | 0.375 | 5.925 | 090602511 |
| 6.500 | 5.740 | 0.375 | 6.400 | 090650011 |
| 7.000 | 6.240 | 0.375 | 6.900 | 090700011 |
| 7.015 | 6.255 | 0.375 | 6.915 | 090701511 |
| 7.500 | 6.740 | 0.375 | 7.400 | 090750011 |
| 8.000 | 7.240 | 0.375 | 7.900 | 090800011 |
| 8.025 | 7.265 | 0.375 | 7.925 | 090802511 |
| 8.500 | 7.740 | 0.375 | 8.400 | 090850011 |
| 8.500 | 7.740 | 0.375 | 8.400 | 090850021 |
| 9.000 | 8.124 | 0.375 | 8.890 | 090900011 |
| 9.025 | 8.149 | 0.375 | 8.915 | 090902511 |
| 9.500 | 8.624 | 0.375 | 9.390 | 090950011 |
| 10.000 | 9.124 | 0.375 | 9.890 | 091000011 |
| 10.023 | 9.147 | 0.375 | 9.913 | 091002311 |
| 12.000 | 11.124 | 0.375 | 11.890 | 091200011 |
| 12.500 | 11.624 | 0.375 | 12.390 | 091250011 |
| 13.000 | 12.124 | 0.375 | 12.890 | 091300011** |
| 13.500 | 12.624 | 0.375 | 13.390 | 091350011** |
| 14.000 | 13.124 | 0.375 | 13.870 | 091400011** |
| 15.000 | 14.124 | 0.375 | 14.870 | 091500011** |
| 15.500 | 14.624 | 0.375 | 15.370 | 091550011** |
| 17.000 | 16.124 | 0.375 | 16.870 | 091700011** |
| 18.000 | 17.124 | 0.375 | 17.870 | 091800011** |
| 22.000 | 21.124 | 0.375 | 21.870 | 092200011** |
| 26.000 | 25.124 | 0.375 | 25.870 | 092600011** |
| 36.000 | 35.124 | 0.375 | 35.870 | 093600011** |

* If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

* If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

**Segmented ring.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal OK Profile

Catalog EPS 5370/USA



OK Profile, High Pressure Split Cap Piston Seal

The OK profile is a bi-directional piston seal designed for heavy duty hydraulic applications. Its durable, two-piece design installs easily onto a solid piston without the necessity of auxiliary tools. When installed into the bore, the diameter of the OK profile is compressed to close the step cut in the cap to provide excellent, drift free sealing performance. The glass-filled nylon sealing surface handles the toughest applications. It will resist shock loads, wear, contamination, and will resist extrusion or chipping when passing over cylinder ports. The rectangular nitrile energizer ring ensures resistance to compression set to increase seal life.

The OK profile is sold only as an assembly. [See part number nomenclature.](#)


Technical Data

| Standard Materials | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------------|------------------------------------|-----------------------|---------------------------|
| Cap W4650NHH | -65°F to 275°F (-54°C to 135°C) | 7250 psi (500 bar) | < 3.3 ft/s (1.0 m/sec) |
| Energizer A 70A Nitrile | -40°F to 250°F (-40°C to 121°C) | | |

†Pressure Range without wear rings (see Table 2-4, page 2-5).



OK Cross-Section

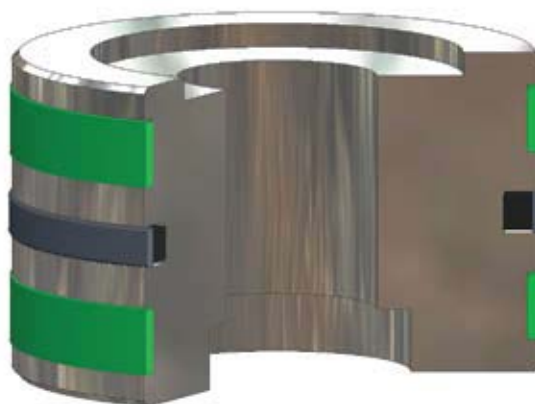

OK installed in Piston Gland


7

09/01/07


OK Profile

Part Number Nomenclature — OK Profile

Table 7-9. OK Profile — Inch

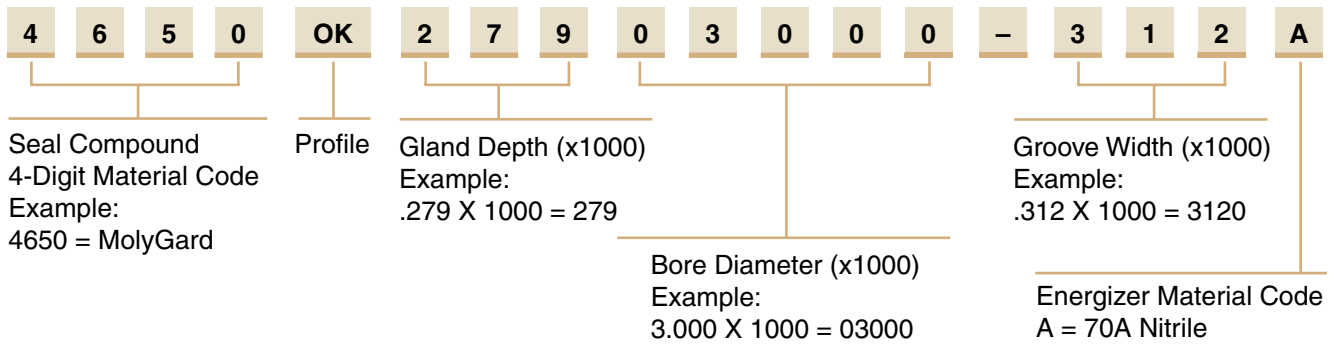

Gland Dimensions — OK Profile

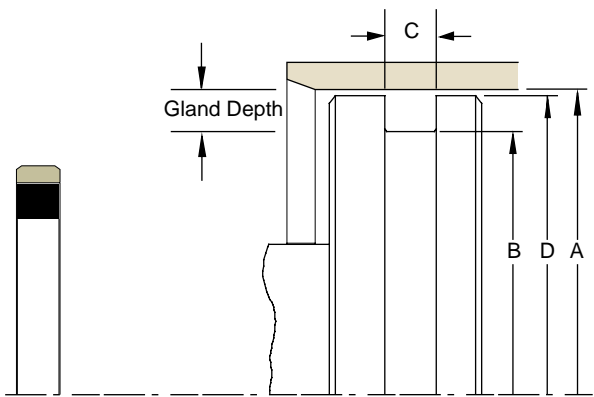

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-10. OK Gland Dimensions — Inch

| A Bore Diameter +.005/-0.000 | B Groove Diameter +.000/-0.005 | C Groove Width +.005/-0.000 | D Piston Diameter* +.000/-0.001 | Part Number |
|---------------------------------------|---|--------------------------------------|--|---------------------|
| 1.500 | 0.962 | 0.282 | 1.435 | 4650OK26901500-282A |
| 2.000 | 1.462 | 0.282 | 1.935 | 4650OK26902000-282A |
| 2.500 | 1.962 | 0.282 | 2.435 | 4650OK26902500-282A |
| 2.500 | 1.962 | 0.312 | 2.435 | 4650OK26902500-312A |
| 2.750 | 2.192 | 0.282 | 2.670 | 4650OK27902750-282A |
| 3.000 | 2.442 | 0.312 | 2.920 | 4650OK27903000-312A |
| 3.250 | 2.692 | 0.312 | 3.170 | 4650OK27903250-312A |
| 3.500 | 2.942 | 0.282 | 3.420 | 4650OK27903500-282A |
| 3.500 | 2.942 | 0.312 | 3.420 | 4650OK27903500-312A |
| 3.750 | 3.192 | 0.282 | 3.670 | 4650OK27903750-282A |
| 4.000 | 3.442 | 0.282 | 3.920 | 4650OK27904000-282A |
| 4.000 | 3.402 | 0.315 | 3.920 | 4650OK29904000-315A |
| 4.500 | 3.942 | 0.282 | 4.420 | 4650OK27904500-282A |
| 5.000 | 4.442 | 0.282 | 4.920 | 4650OK27905000-282A |
| 5.500 | 4.740 | 0.377 | 5.400 | 4650OK38005500-377A |
| 6.000 | 5.240 | 0.377 | 5.900 | 4650OK38006000-377A |
| 7.000 | 6.240 | 0.377 | 6.900 | 4650OK38007000-377A |
| 8.000 | 7.240 | 0.377 | 7.900 | 4650OK38008000-377A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal PIP Profile


Catalog EPS 5370/USA

PIP Profile, Loaded Lip Seal with Pressure Inverting Pedestal



The Parker PIP profile combines a “Pressure Inverting Pedestal” with a Type B PolyPak to provide excellent, bi-directional piston sealing in hydraulic applications. The Pressure Inverting Pedestal conforms to the beveled sealing lips of the Type B PolyPak to provide extrusion resistance when pressure is applied to the heel side of the seal. The PIP profile requires only a single seal groove for installation. This eliminates the use of two PolyPaks on the piston to save space and increase bearing length.

Note: The PIP profile may be purchased as an assembly (Type B PolyPak and PIP ring) or separately as a PIP ring only. If purchasing as an assembly, the standard material is a 4615 Type B PolyPak with 4617 PIP ring. If you desire alternate material combinations, please order the PIP ring and Type B PolyPak separately. Call your Parker Seal representative for details.



PIP Cross-Section

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------------|------------------------------------|---------------------------|-------------------------|
| Type B Polypak | | | |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| PIP Ring | | | |
| P4617D65 | -65°F to 250°F (-54°C to 121°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| Optional Materials | | | |
| PIP Ring | | | |
| Z4652D65 | -65°F to 275°F (-54°C to 135°C) | 10,000 psi** (689 bar) | |
| W4685R119 | -65°F to 500°F (-54°C to 260°C) | 10,000+ psi (689 bar) | |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†Pressure Range without wear rings (see Table 2-4, page 2-5).

****Pressure rating** dependant on entire assembly of PolyPak shell/energizer and PIP ring.

Note: The PIP may be ordered separately. Please contact your local Parker Seal representative.

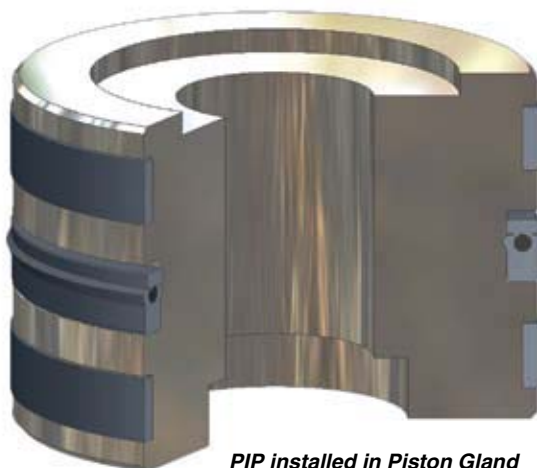

PIP installed in Piston Gland

09/01/07

PIP Profile

Part Number Nomenclature — PIP Assembly Profile

Table 7-11. PIP Assembly Profile — Inch


| | | | | | | | | | | | | | | | | |
|--|---|---|---|---|---|---|--|---|---|---|---|---|---|---|---|---|
| 4 | 6 | 1 | 5 | 2 | 5 | 0 | 0 | 2 | 5 | 0 | 0 | P | 3 | 7 | 5 | B |
| Seal Compound 4-Digit Material Code Example: 4615 = 90A Molythane | | | | Gland Depth (x1000) or Seal Nominal Radial Cross-Section Example: .250 x 1000 = 250 | | | Seal Nominal I.D. (x1000) Example: 2.500 x 1000 = 02500 | | | | | Cap Profile PIP 4617 is standard for assemblies only | Base Profile Type B PolyPak Axial Width | | | |

Part Number Nomenclature — PIP Ring Only Profile

Table 7-12. PIP Ring Only Profile — Inch

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---------|
| 4 | 6 | 1 | 7 | 2 | 5 | 0 | 0 | 2 | 5 | 0 | 0 | PR |
| PIP Ring Compound 4-Digit Material Code Example: 4617 = 90A Molythane 4652 = PolyMyte 4685 = UltraCOMP | | | | Gland Depth (x1000) or Seal Nominal Radial Cross-Section Example: .250 x 1000 = 250 | | | Seal Nominal I.D. (x1000) Example: 2.500 x 1000 = 02500 | | | | | Profile |

Gland Dimensions — PIP Profile

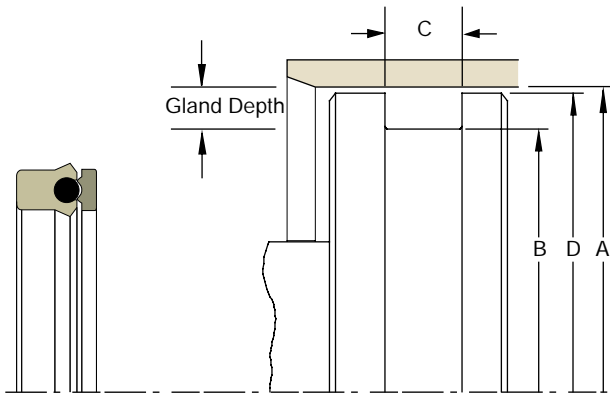

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-13. Gland Dimension Tolerances

| Nominal Gland Depth | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | +0.000/-0.005 | |
| 1 | +0.009/-0.000 | +0.000/-0.012 | +0.000/-0.005 | |

Table 7-14. PIP Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------|-------------------|----------------|--------------------|-------------------|
| 1.250 | 0.875 | 0.453 | 1.249 | 461518700875P312B |
| 1.250 | 1.000 | 0.340 | 1.249 | 461512501000P250B |
| 1.500 | 1.000 | 0.550 | 1.499 | 461525001000P375B |
| 1.500 | 1.125 | 0.453 | 1.498 | 461518701125P312B |
| 1.500 | 1.250 | 0.340 | 1.499 | 461512501250P250B |
| 1.562 | 1.312 | 0.271 | 1.561 | 461512501312P187B |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------|-------------------|----------------|--------------------|-------------------|
| 1.625 | 1.375 | 0.340 | 1.624 | 461512501375P250B |
| 1.687 | 1.437 | 0.340 | 1.686 | 461512501437P250B |
| 1.750 | 1.250 | 0.550 | 1.749 | 461525001250P375B |
| 1.750 | 1.375 | 0.453 | 1.749 | 461518701375P312B |
| 1.750 | 1.500 | 0.340 | 1.749 | 461512501500P250B |
| 2.000 | 1.500 | 0.550 | 1.999 | 461525001500P375B |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-14. PIP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------|-------------------|----------------|--------------------|-------------------|-----------------|-------------------|----------------|--------------------|-------------------|
| 2.000 | 1.625 | 0.453 | 1.999 | 461518701625P312B | 5.000 | 4.500 | 0.550 | 4.999 | 461525004500P375B |
| 2.000 | 1.625 | 0.523 | 1.999 | 461518701625P375B | 5.000 | 4.500 | 0.688 | 4.999 | 461525004500P500B |
| 2.125 | 1.750 | 0.523 | 2.124 | 461518701750P375B | 5.000 | 4.500 | 0.756 | 4.999 | 461525004500P562B |
| 2.250 | 1.750 | 0.550 | 2.249 | 461525001750P375B | 5.125 | 4.500 | 0.853 | 5.123 | 461531204500P625B |
| 2.250 | 1.875 | 0.523 | 2.249 | 461518701875P375B | 5.125 | 4.625 | 0.756 | 5.124 | 461525004625P562B |
| 2.250 | 2.000 | 0.271 | 2.249 | 461512502000P187B | 5.250 | 4.750 | 0.756 | 5.249 | 461525004750P562B |
| 2.375 | 2.000 | 0.523 | 2.374 | 461518702000P375B | 5.375 | 4.875 | 0.756 | 5.374 | 461525004875P562B |
| 2.500 | 1.875 | 0.715 | 2.499 | 461531201875P500B | 5.500 | 4.750 | 0.895 | 5.498 | 461537504750P625B |
| 2.500 | 2.000 | 0.550 | 2.499 | 461525002000P375B | 5.500 | 5.000 | 0.550 | 5.499 | 461525005000P375B |
| 2.500 | 2.125 | 0.523 | 2.499 | 461518702125P375B | 5.500 | 5.000 | 0.756 | 5.499 | 461525005000P562B |
| 2.625 | 2.250 | 0.523 | 2.624 | 461518702250P375B | 5.750 | 5.000 | 0.895 | 5.748 | 461537505000P625B |
| 2.750 | 2.250 | 0.550 | 2.749 | 461525002250P375B | 5.750 | 5.250 | 0.550 | 5.749 | 461525005250P375B |
| 2.750 | 2.375 | 0.403 | 2.749 | 461518702375P266B | 5.750 | 5.250 | 0.756 | 5.749 | 461525005250P562B |
| 2.750 | 2.375 | 0.523 | 2.749 | 461518702375P375B | 6.000 | 5.000 | 1.100 | 5.998 | 461550005000P750B |
| 2.875 | 2.250 | 0.715 | 2.873 | 461531202250P500B | 6.000 | 5.250 | 0.758 | 5.998 | 461537505250P500B |
| 2.875 | 2.500 | 0.523 | 2.874 | 461518702500P375B | 6.000 | 5.250 | 0.895 | 5.998 | 461537505250P625B |
| 3.000 | 2.250 | 0.895 | 2.998 | 461537502250P625B | 6.000 | 5.500 | 0.550 | 5.999 | 461525005500P375B |
| 3.000 | 2.375 | 0.715 | 2.998 | 461531202375P500B | 6.000 | 5.500 | 0.756 | 5.999 | 461525005500P562B |
| 3.000 | 2.500 | 0.413 | 2.999 | 461525002500P250B | 6.125 | 5.500 | 0.853 | 6.123 | 461531205500P625B |
| 3.000 | 2.500 | 0.550 | 2.999 | 461525002500P375B | 6.250 | 5.250 | 0.825 | 6.248 | 461550005250P500B |
| 3.000 | 2.625 | 0.523 | 2.999 | 461518702625P375B | 6.250 | 5.250 | 1.100 | 6.248 | 461550005250P750B |
| 3.125 | 2.750 | 0.523 | 3.124 | 461518702750P375B | 6.250 | 5.500 | 0.895 | 6.248 | 461537505500P625B |
| 3.250 | 2.500 | 0.895 | 3.248 | 461537502500P625B | 6.375 | 5.625 | 0.895 | 6.373 | 461537505625P625B |
| 3.250 | 2.625 | 0.715 | 3.248 | 461531202625P500B | 6.500 | 5.750 | 0.895 | 6.498 | 461537505750P625B |
| 3.250 | 2.750 | 0.550 | 3.249 | 461525002750P375B | 6.500 | 6.000 | 0.550 | 6.499 | 461525006000P375B |
| 3.250 | 2.875 | 0.523 | 3.249 | 461518702875P375B | 6.500 | 6.000 | 0.618 | 6.499 | 461525006000P437B |
| 3.375 | 2.875 | 0.550 | 3.374 | 461525002875P375B | 6.500 | 6.000 | 0.756 | 6.499 | 461525006000P562B |
| 3.375 | 3.000 | 0.523 | 3.374 | 461518703000P375B | 6.750 | 6.250 | 0.756 | 6.749 | 461525006250P562B |
| 3.500 | 3.000 | 0.550 | 3.499 | 461525003000P375B | 7.000 | 6.250 | 0.895 | 6.998 | 461537506250P625B |
| 3.500 | 3.125 | 0.523 | 3.499 | 461518703125P375B | 7.000 | 6.500 | 0.550 | 6.999 | 461525006500P375B |
| 3.625 | 3.125 | 0.550 | 3.624 | 461525003125P375B | 7.000 | 6.500 | 0.756 | 6.999 | 461525006500P562B |
| 3.750 | 3.250 | 0.550 | 3.749 | 461525003250P375B | 7.250 | 6.500 | 0.895 | 7.248 | 461537506500P625B |
| 3.875 | 3.375 | 0.550 | 3.874 | 461525003375P375B | 7.250 | 6.750 | 0.756 | 7.249 | 461525006750P562B |
| 4.000 | 3.250 | 0.895 | 3.998 | 461537503250P625B | 7.500 | 6.750 | 0.895 | 7.498 | 461537506750P625B |
| 4.000 | 3.375 | 0.715 | 3.998 | 461531203375P500B | 7.500 | 7.000 | 0.756 | 7.499 | 461525007000P562B |
| 4.000 | 3.500 | 0.550 | 3.999 | 461525003500P375B | 8.000 | 7.000 | 1.100 | 7.998 | 461550007000P750B |
| 4.000 | 3.625 | 0.523 | 3.999 | 461518703625P375B | 8.000 | 7.250 | 0.895 | 7.998 | 461537507250P625B |
| 4.250 | 3.750 | 0.550 | 4.249 | 461525003750P375B | 8.000 | 7.500 | 0.756 | 7.999 | 461525007500P562B |
| 4.250 | 3.875 | 0.523 | 4.249 | 461518703875P375B | 8.250 | 7.750 | 0.756 | 8.249 | 461525007750P562B |
| 4.375 | 4.000 | 0.523 | 4.374 | 461518704000P375B | 8.500 | 7.750 | 0.895 | 8.498 | 461537507750P625B |
| 4.500 | 3.750 | 0.895 | 4.498 | 461537503750P625B | 9.000 | 8.000 | 1.100 | 8.998 | 461550008000P750B |
| 4.500 | 4.000 | 0.550 | 4.499 | 461525004000P375B | 9.250 | 8.500 | 0.895 | 9.248 | 461537508500P625B |
| 4.500 | 4.000 | 0.756 | 4.499 | 461525004000P562B | 9.875 | 9.250 | 0.853 | 9.873 | 461531209250P625B |
| 4.750 | 4.000 | 0.895 | 4.748 | 461537504000P625B | 10.000 | 9.000 | 1.100 | 9.998 | 461550009000P750B |
| 4.750 | 4.250 | 0.550 | 4.749 | 461525004250P375B | 10.375 | 9.750 | 0.853 | 10.373 | 461531209750P625B |
| 4.750 | 4.250 | 0.756 | 4.749 | 461525004250P562B | 10.500 | 9.500 | 1.100 | 10.498 | 461550009500P750B |
| 4.875 | 4.250 | 0.783 | 4.873 | 461531204250P562B | 11.000 | 10.000 | 1.100 | 10.998 | 461550010000P750B |
| 5.000 | 4.000 | 1.100 | 4.998 | 461550004000P750B | 11.500 | 10.500 | 1.100 | 11.498 | 461550010500P750B |
| 5.000 | 4.250 | 0.895 | 4.998 | 461537504250P625B | 12.000 | 11.000 | 1.100 | 11.998 | 461550011000P750B |
| 5.000 | 4.375 | 0.783 | 4.998 | 461531204375P562B | 12.250 | 11.250 | 1.100 | 12.248 | 461550011250P750B |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-14. PIP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------|-------------------|----------------|--------------------|--------------------------|-----------------|-------------------|----------------|--------------------|---------------------------|
| 12.500 | 11.500 | 1.100 | 12.498 | 461550011500P750B | 16.000 | 14.500 | 1.788 | 15.997 | 461575014500P1250B |
| 12.875 | 11.875 | 1.100 | 12.873 | 461550011875P750B | 16.000 | 15.000 | 1.100 | 15.998 | 461550015000P750B |
| 13.000 | 12.000 | 1.100 | 12.998 | 461550012000P750B | 20.000 | 19.000 | 1.100 | 19.998 | 461550019000P750B |
| 13.000 | 12.250 | 0.895 | 12.998 | 461537512250P625B | 21.250 | 20.250 | 1.100 | 21.248 | 461550020250P750B |
| 14.000 | 13.500 | 0.756 | 13.998 | 461525013500P562B | 22.000 | 21.000 | 1.100 | 21.998 | 461550021000P750B |
| 15.000 | 14.000 | 1.100 | 14.998 | 461550014000P750B | 25.500 | 24.500 | 1.100 | 25.498 | 461550024500P750B |
| 15.000 | 14.250 | 0.895 | 14.998 | 461537514250P625B | 39.250 | 38.250 | 1.100 | 39.248 | 461550038250P750B |
| 15.750 | 14.750 | 1.100 | 15.748 | 461550014750P750B | 43.000 | 42.000 | 1.100 | 42.998 | 461550042000P750B |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal

B7 Profile

Catalog EPS 5370/USA



B7 Cross-Section

B7 Profile, U-cup Piston Seal


The B7 profile is a non-symmetrical, hydraulic cylinder piston seal. The knife trimmed, beveled lip contacts the bore to provide enhanced low to high pressure sealing and wiping action. When installed, the diameter of the B7 profile is stretched slightly to fit the gland. This ensures a tight static seal with the gland and improves stability in application. The B7 profile is available in Parker proprietary urethane compounds providing excellent wear, extrusion and compression set resistance. The B7 profile is a uni-directional seal. Two seals can be placed on a piston, back to back, in separate glands offering bi-directional fluid sealing.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|------------------------|-------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4301A90 | -65°F to 275°F (-54°C to 135°C) | 5000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P4700A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 3,500 psi (241 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).

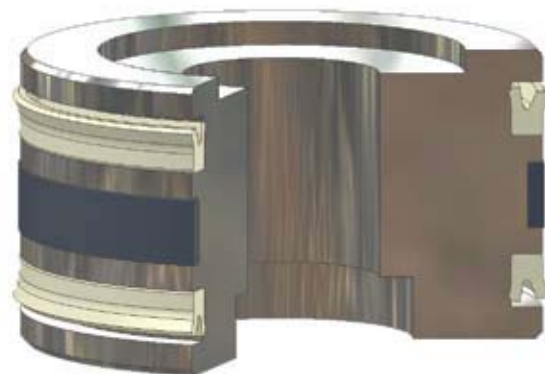

B7 installed in Piston Gland




09/01/07

B7 Profile

Part Number Nomenclature — B7 Profile

Table 7-15. B7 Profile — Inch

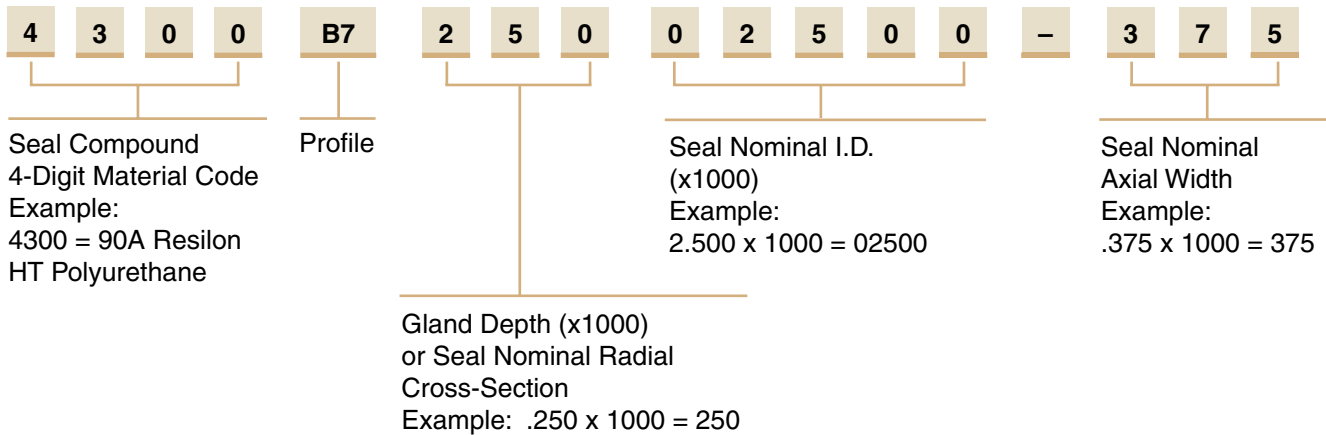

Gland Dimensions — B7 Profile

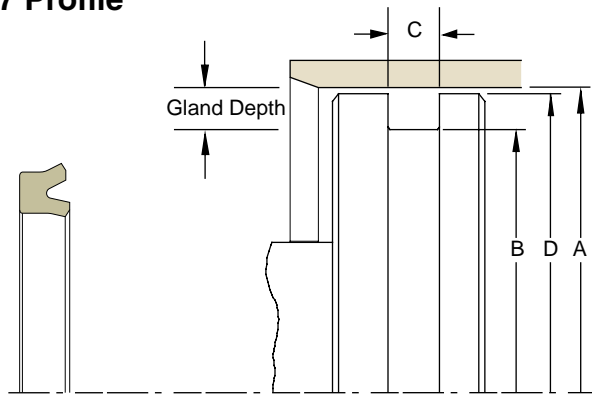


Table 7-16. Gland Dimension Tolerances

| Nominal Gland Depth | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +.002/- .000 | +.000/- .002 | +.015/- .000 | +.000/- .001 |
| 3/16 | +.002/- .000 | +.000/- .002 | | +.000/- .002 |
| 1/4 | +.003/- .000 | +.000/- .003 | | +.000/- .002 |
| 5/16 | +.003/- .000 | +.000/- .004 | | +.000/- .002 |
| 3/8 | +.004/- .000 | +.000/- .005 | | +.000/- .002 |

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-17. B7 Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code (X = Standard Offering) | | | Part Number | | |
|-----------------|-------------------|----------------|--------------------|---------------------------------------|------|------|---------------|--------------|--------------|
| | | | | 4300 | 4700 | 5065 | Compound Code | Profile Code | |
| 1.125 | 0.750 | 0.206 | 1.124 | X | | X | XXXX | B7 | 18700750-187 |
| 1.375 | 0.875 | 0.275 | 1.374 | X | | X | XXXX | B7 | 25000875-250 |
| 1.500 | 1.250 | 0.206 | 1.499 | X | | X | XXXX | B7 | 12501250-187 |
| 1.625 | 1.125 | 0.343 | 1.624 | | X | X | XXXX | B7 | 25001125-312 |
| 1.625 | 1.250 | 0.343 | 1.624 | X | | X | XXXX | B7 | 18701250-312 |
| 1.750 | 1.375 | 0.206 | 1.749 | X | | X | XXXX | B7 | 18701375-187 |
| 1.875 | 1.500 | 0.413 | 1.874 | X | | X | XXXX | B7 | 18701500-375 |
| 2.000 | 1.625 | 0.343 | 1.999 | X | | X | XXXX | B7 | 18701625-312 |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-17. B7 Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code (X = Standard Offering) | | | Part Number | | |
|-----------------------|-------------------------|----------------------|--------------------------|--|------|------|------------------|-----------------|--------------|
| | | | | 4300 | 4700 | 5065 | Compound Code | Profile Code | |
| 2.250 | 2.000 | 0.275 | 2.249 | X | | X | XXXX | B7 | 12502000-250 |
| 2.375 | 2.000 | 0.343 | 2.374 | X | | X | XXXX | B7 | 18702000-312 |
| 2.500 | 2.000 | 0.413 | 2.499 | X | | X | XXXX | B7 | 25002000-375 |
| 2.625 | 2.000 | 0.275 | 2.624 | X | | X | XXXX | B7 | 25002125-250 |
| 2.750 | 2.250 | 0.413 | 2.749 | X | | X | XXXX | B7 | 25002250-375 |
| 3.000 | 2.250 | 0.413 | 2.998 | | X | X | XXXX | B7 | 37502250-375 |
| 3.000 | 2.625 | 0.343 | 2.999 | X | | X | XXXX | B7 | 18702625-312 |
| 3.125 | 2.625 | 0.275 | 3.124 | X | | X | XXXX | B7 | 25002625-250 |
| 3.250 | 2.500 | 0.481 | 3.248 | | X | X | XXXX | B7 | 37502500-437 |
| 3.250 | 2.750 | 0.413 | 3.249 | X | | X | XXXX | B7 | 25002750-375 |
| 4.000 | 3.250 | 0.413 | 3.998 | | X | X | XXXX | B7 | 37503250-375 |
| 4.000 | 3.500 | 0.413 | 3.999 | X | | X | XXXX | B7 | 25003500-375 |
| 4.500 | 3.750 | 0.550 | 4.498 | | X | X | XXXX | B7 | 37503750-500 |
| 6.000 | 4.250 | 0.550 | 5.998 | | X | X | XXXX | B7 | 37505250-500 |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.


Part Number Nomenclature — B7 Profile

Table 7-18. B7 Profile — Metric

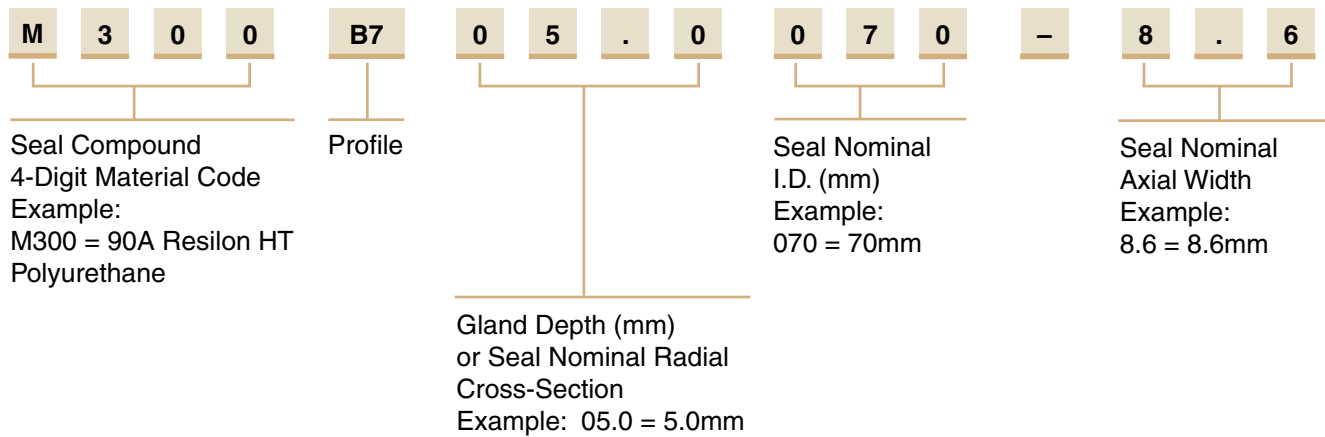

B7 Profile

Gland Dimensions — B7 Profiles

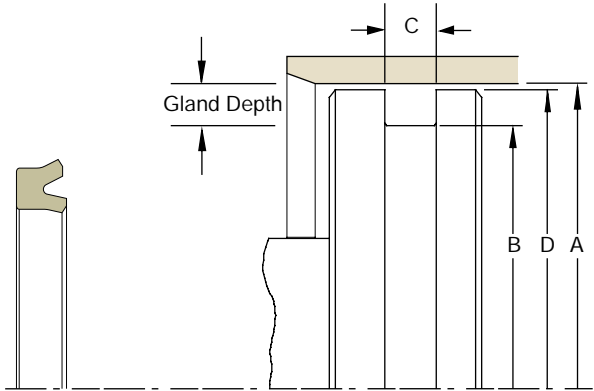

Please refer to Engineering [Section 2](#), [Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-19. B7 Gland Dimensions — Metric (mm)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code (X = Standard Offering) | | | Part Number | | |
|---|-------------------------|----------------------|--------------------------|--|------|------|------------------|-----------------|--------------|
| | | | | M300 | M700 | M065 | Compound Code | Profile Code | |
| H9 | h9 | + .25/- .00 | f8 | | | | | | |
| For ISO tolerances refer to Appendix F. | | | | | | | | | |
| 40 | 30 | 8 | 40 | X | | X | XXXX | B7 | 05.0030-7.3 |
| 43 | 35 | 10 | 43 | X | | X | XXXX | B7 | 04.0035-9 |
| 45 | 34 | 8 | 45 | | X | X | XXXX | B7 | 05.5034-7.3 |
| 45 | 35 | 8 | 45 | X | | X | XXXX | B7 | 05.0035-7.3 |
| 50 | 40 | 8 | 50 | X | | X | XXXX | B7 | 05.0040-7.3 |
| 55 | 45 | 8 | 55 | X | | X | XXXX | B7 | 05.0045-7.3 |
| 60 | 50 | 7 | 60 | X | | X | XXXX | B7 | 05.0050-6 |
| 60 | 50 | 8 | 60 | X | | X | XXXX | B7 | 05.0050-7.3 |
| 60 | 50 | 8 | 60 | | X | X | XXXX | B7 | 05.0050-7.3 |
| 65 | 55 | 7.6 | 65 | X | | X | XXXX | B7 | 05.0055-7 |
| 70 | 60 | 8 | 70 | X | | X | XXXX | B7 | 05.0060-7.3 |
| 75 | 63 | 8 | 75 | X | | X | XXXX | B7 | 06.0063-7.3 |
| 80 | 65 | 12.5 | 80 | X | | X | XXXX | B7 | 07.5065-11.4 |
| 80 | 70 | 7.6 | 80 | X | | X | XXXX | B7 | 05.0070-7.0 |
| 80 | 70 | 9.5 | 80 | X | | X | XXXX | B7 | 05.0070-8.6 |
| 120 | 100 | 16 | 120 | X | | X | XXXX | B7 | 10.0100-14.5 |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal

UP Profile

Catalog EPS 5370/USA

UP Profile, Industrial U-cup Piston Seal

The UP profile is a non-symmetrical, hydraulic piston seal. The knife trimmed, beveled lip faces the bore to provide enhanced low to high pressure sealing and wiping action. The UP profile is a uni-directional seal. Two UP seals can be used, back to back, in separate grooves to provide bi-directional pressure sealing. The UP profile is an economical choice, available in Parker's wear and extrusion resistant Molythane compound.



Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|-----------------------------------|------------------------|-------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | 5,000 psi (344 bar) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



UP Cross-Section

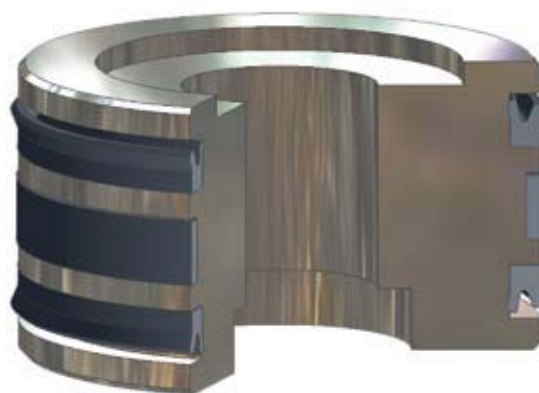

UP installed in Piston Gland


7

09/01/07

UP Profile

Part Number Nomenclature — UP Profile

Table 7-20. UP Profile — Inch

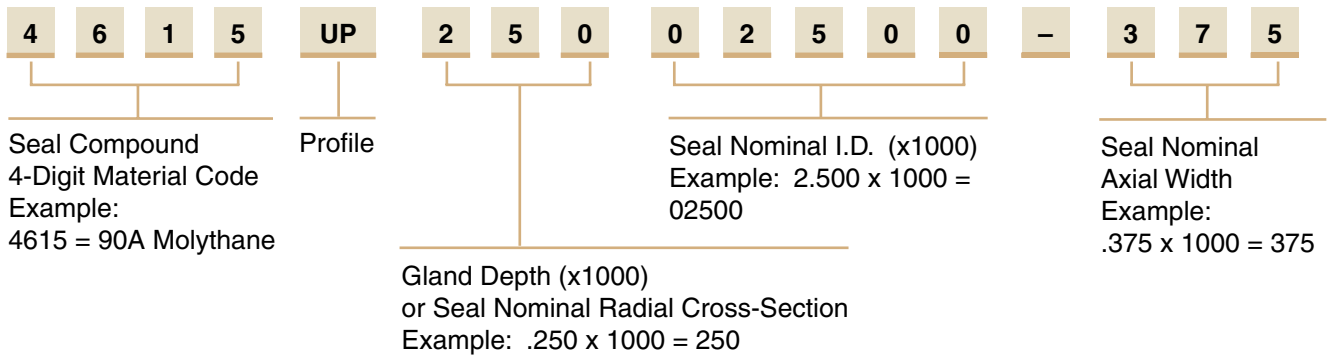

Gland Dimensions — UP Profile

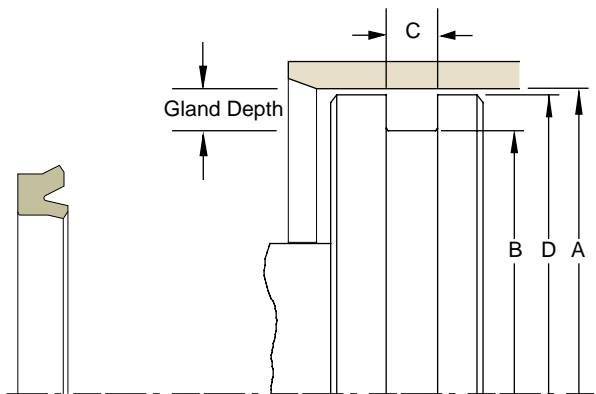


Table 7-21. Gland Dimension Tolerances

| Nominal Gland Depth | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |

7

Please refer to Engineering [Section 2](#), [Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-22. UP Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------|-------------------|----------------|--------------------|---------------------------|
| 0.750 | 0.500 | 0.206 | 0.749 | 4615UP12500500-187 |
| 0.750 | 0.500 | 0.275 | 0.749 | 4615UP12500500-250 |
| 1.250 | 1.000 | 0.206 | 1.249 | 4615UP12501000-187 |
| 1.500 | 1.000 | 0.413 | 1.499 | 4615UP25001000-375 |
| 1.625 | 1.250 | 0.343 | 1.624 | 4615UP18701250-312 |
| 1.750 | 1.250 | 0.413 | 1.749 | 4615UP25001250-375 |
| 2.000 | 1.500 | 0.413 | 1.999 | 4615UP25001500-375 |
| 2.000 | 1.625 | 0.343 | 1.999 | 4615UP18701625-312 |
| 2.000 | 1.625 | 0.413 | 1.999 | 4615UP18701625-375 |
| 2.500 | 1.875 | 0.550 | 2.498 | 4615UP31201875-500 |
| 2.500 | 2.000 | 0.413 | 2.499 | 4615UP25002000-375 |
| 2.500 | 2.125 | 0.343 | 2.499 | 4615UP18702125-312 |
| 2.500 | 2.125 | 0.413 | 2.499 | 4615UP18702125-375 |
| 2.625 | 2.125 | 0.413 | 2.624 | 4615UP25002125-375 |
| 2.750 | 2.250 | 0.413 | 2.749 | 4615UP25002250-375 |
| 3.000 | 2.375 | 0.550 | 2.998 | 4615UP31202375-500 |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

Table 7-22. UP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------|
| 3.000 | 2.500 | 0.413 | 2.999 | 4615UP25002500-375 |
| 3.250 | 2.750 | 0.413 | 3.249 | 4615UP25002750-375 |
| 3.250 | 2.875 | 0.413 | 3.249 | 4615UP18702875-375 |
| 3.500 | 2.875 | 0.550 | 3.498 | 4615UP31202875-500 |
| 3.500 | 3.000 | 0.413 | 3.499 | 4615UP25003000-375 |
| 3.750 | 3.000 | 0.688 | 3.748 | 4615UP37503000-625 |
| 3.750 | 3.125 | 0.550 | 3.748 | 4615UP31203125-500 |
| 3.750 | 3.250 | 0.413 | 3.749 | 4615UP25003250-375 |
| 4.000 | 3.250 | 0.688 | 3.998 | 4615UP37503250-625 |
| 4.000 | 3.375 | 0.550 | 3.998 | 4615UP31203375-500 |
| 4.000 | 3.500 | 0.413 | 3.999 | 4615UP25003500-375 |
| 4.000 | 3.625 | 0.413 | 3.999 | 4615UP18703625-375 |
| 4.250 | 3.750 | 0.413 | 4.249 | 4615UP25003750-375 |
| 4.500 | 3.750 | 0.688 | 4.498 | 4615UP37503750-625 |
| 4.500 | 4.000 | 0.413 | 4.499 | 4615UP25004000-375 |
| 5.000 | 4.250 | 0.688 | 4.998 | 4615UP37504250-625 |
| 5.000 | 4.375 | 0.618 | 4.998 | 4615UP31204375-562 |
| 5.000 | 4.500 | 0.413 | 4.999 | 4615UP25004500-375 |
| 5.000 | 4.500 | 0.618 | 4.999 | 4615UP25004500-562 |
| 5.500 | 5.000 | 0.413 | 5.499 | 4615UP25005000-375 |
| 5.500 | 5.000 | 0.618 | 5.499 | 4615UP25005000-562 |
| 6.000 | 5.250 | 0.688 | 5.998 | 4615UP37505250-625 |
| 6.000 | 5.500 | 0.413 | 5.999 | 4615UP25005500-375 |
| 6.500 | 5.750 | 0.688 | 6.498 | 4615UP37505750-625 |
| 7.000 | 6.250 | 0.688 | 6.998 | 4615UP37506250-625 |
| 7.500 | 6.750 | 0.688 | 7.498 | 4615UP37506750-625 |
| 9.000 | 8.250 | 0.688 | 8.998 | 4615UP37508250-625 |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal

E4 Profile

Catalog EPS 5370/USA



E4 Profile, Premium Rounded Lip U-cup Piston Seal

Parker's E4 profile is a non-symmetrical piston seal designed to seal both lubricated and non-lubricated air. To ensure that critical surfaces retain lubrication, the radius edge of the lip is designed to hydroplane over pre-lubricated surfaces. The standard compound for the E4 profile is Parker proprietary Nitroxile ELF compound N4274A85. This compound is formulated with proprietary internal lubricants to provide "Extreme Low Friction" and excellent wear resistance. This compound provides extended cycle life over standard nitrile and carboxylated nitrile compounds.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|---------------------|---------------------|
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| N4180A80 | -40°F to 250°F (-40°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



E4 Cross-Section




E4 installed in Piston Gland


09/01/07

Part Number Nomenclature — E4 Profile

Table 7-23. E4 Profile — Inch

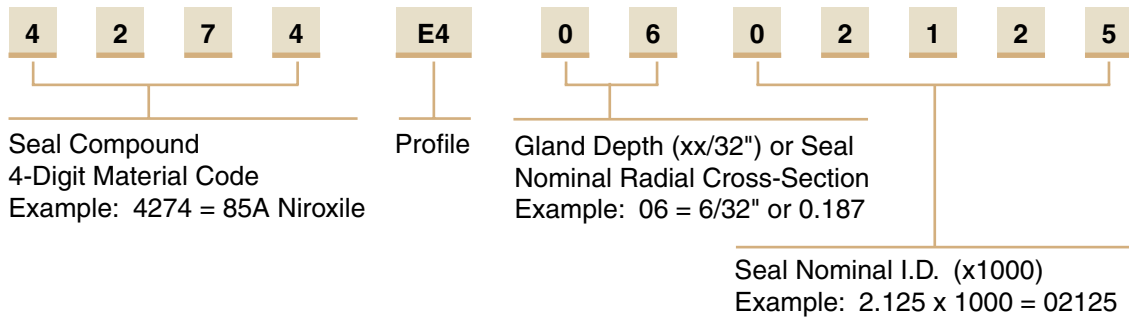

Gland Dimensions — E4 Profile

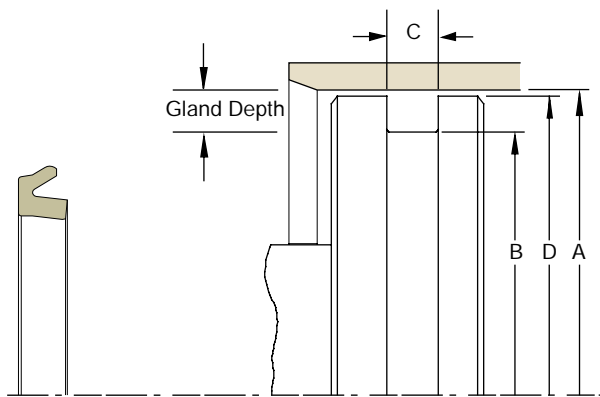

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-24. Gland Dimension Tolerances

| Nominal Gland Depth | A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter |
|---------------------|-----------------|-------------------|----------------|-------------------|
| 1/8 | +0.002/-0.000 | +0.000/-0.002 | +0.015/-0.000 | +0.000/-0.001 |
| 3/16 | +0.002/-0.000 | +0.000/-0.002 | | +0.000/-0.002 |
| 1/4 | +0.003/-0.000 | +0.000/-0.003 | | +0.000/-0.002 |
| 5/16 | +0.003/-0.000 | +0.000/-0.004 | | +0.000/-0.002 |
| 3/8 | +0.004/-0.000 | +0.000/-0.005 | | +0.000/-0.002 |
| 7/16 | +0.005/-0.000 | +0.000/-0.006 | | +0.000/-0.002 |
| 1/2 | +0.005/-0.000 | +0.000/-0.007 | | +0.000/-0.003 |
| 9/16 | +0.006/-0.000 | +0.000/-0.008 | | +0.000/-0.003 |
| 5/8 | +0.006/-0.000 | +0.000/-0.009 | | +0.000/-0.003 |
| 3/4 | +0.007/-0.000 | +0.000/-0.010 | | +0.000/-0.004 |
| 7/8 | +0.008/-0.000 | +0.000/-0.011 | | +0.000/-0.005 |
| 1 | +0.009/-0.000 | +0.000/-0.012 | | +0.000/-0.005 |

Table 7-25. E4 Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code | | | | Part Number | |
|-----------------|-------------------|----------------|--------------------|---------------|------|------|------|---------------|-----------|
| | | | | 4180 | 4274 | 4208 | 5065 | Compound Code | |
| 0.625 | 0.375 | 0.156 | 0.623 | X | X | | X | XXXX | E40400375 |
| 0.750 | 0.500 | 0.156 | 0.748 | X | X | | | XXXX | E40400500 |
| 0.875 | 0.625 | 0.156 | 0.873 | X | X | | | XXXX | E40400625 |
| 1.000 | 0.750 | 0.156 | 0.998 | X | X | | X | XXXX | E40400750 |
| 1.062 | 0.812 | 0.156 | 1.060 | X | | | | XXXX | E40400812 |
| 1.125 | 0.875 | 0.156 | 1.123 | X | X | | | XXXX | E40400875 |
| 1.500 | 1.250 | 0.156 | 1.498 | | X | | | XXXX | E40401250 |
| 1.500 | 1.187 | 0.188 | 1.498 | X | X | X | X | XXXX | E40501187 |
| 1.500 | 1.000 | 0.281 | 1.497 | | X | | | XXXX | E40801000 |
| 1.625 | 1.312 | 0.188 | 1.623 | | X | | | XXXX | E40501312 |
| 1.750 | 1.375 | 0.219 | 1.748 | X | X | | | XXXX | E40601375 |
| 1.813 | 1.500 | 0.188 | 1.811 | X | | | | XXXX | E40501500 |
| 2.000 | 1.625 | 0.219 | 1.998 | X | X | X | X | XXXX | E40601625 |
| 2.125 | 1.750 | 0.219 | 2.123 | | X | | | XXXX | E40601750 |
| 2.500 | 2.125 | 0.219 | 2.498 | X | X | X | X | XXXX | E40602125 |
| 3.000 | 2.562 | 0.250 | 2.998 | X | X | X | X | XXXX | E40702562 |
| 3.250 | 2.812 | 0.250 | 3.248 | X | X | X | | XXXX | E40702812 |
| 4.000 | 3.500 | 0.281 | 3.997 | X | X | | X | XXXX | E40803500 |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.



E4 Profile

Table 7-25. E4 Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code | | | | Part Number | |
|-----------------------|-------------------------|----------------------|--------------------------|---------------|------|------|------|------------------|-----------|
| | | | | 4180 | 4274 | 4208 | 5065 | Compound Code | |
| 5.000 | 4.500 | 0.281 | 4.997 | X | | X | | XXXX | E40804500 |
| 5.000 | 4.437 | 0.312 | 4.997 | | X | | | XXXX | E40904437 |
| 6.000 | 5.500 | 0.281 | 5.997 | | X | | | XXXX | E40805500 |
| 6.000 | 5.437 | 0.312 | 5.997 | | X | | | XXXX | E40905437 |
| 6.000 | 5.375 | 0.344 | 5.997 | | X | | | XXXX | E41005375 |
| 8.000 | 7.375 | 0.344 | 7.997 | | X | | | XXXX | E41007375 |
| 8.000 | 7.250 | 0.406 | 7.997 | | X | | | XXXX | E41207250 |
| 10.000 | 9.312 | 0.375 | 9.997 | | X | | | XXXX | E41109312 |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.


Part Number Nomenclature — E4 Profile

Table 7-26. E4 Profile — Metric

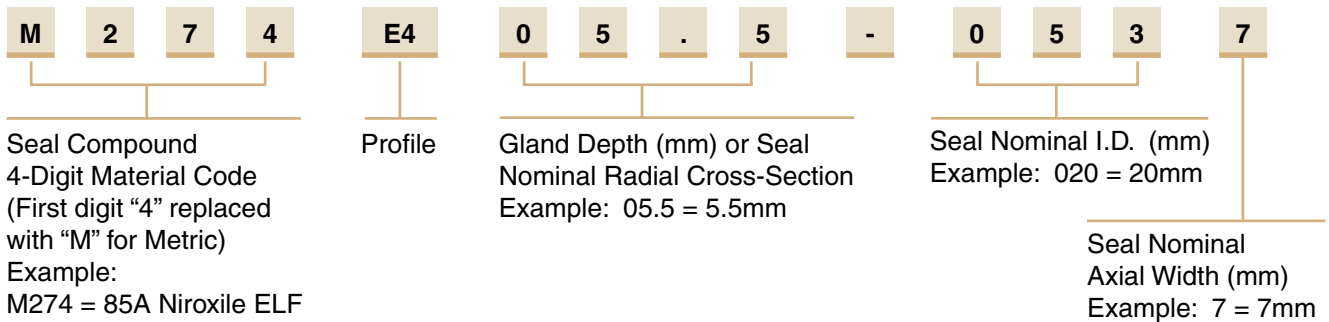

7

Gland Dimensions — E4 Profile

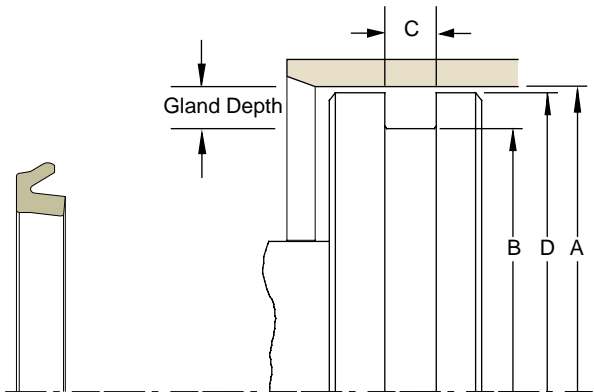

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-27. E4 Gland Dimensions — Metric (mm)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Compound Code | | | | Part Number | |
|-----------------------|-------------------------|----------------------|--------------------------|---------------|------|------|------|------------------|--------------|
| | | | | 4180 | 4274 | 4208 | 5065 | Compound Code | |
| H11 | h9 | +0.20/-0.00 | f8 | | | | | | |
| 43 | 33 | 7.5 | 43 | | X | | | XXXX | E405.0033-7 |
| 45 | 37 | 4.5 | 45 | | X | | | XXXX | E404.0037-4 |
| 63 | 53 | 7.5 | 63 | | X | | | XXXX | E405.0053-7 |
| 200 | 190 | 15 | 200 | | | X | | XXXX | E405.0190-14 |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07



Piston Seal BMP Profile

Catalog EPS 5370/USA



BMP Profile, Rounded Lip Seal with Bumper Cushion

The Parker BMP profile is a low friction bumper and seal providing quiet deceleration and reduced end stroke noise in pneumatic piston applications. Designed to mount on the ends of the piston and to be used along with Parker's V6 profile cushion seal, the bumper pad absorbs the final inertia which prevents contact between the piston and tube ends. The BMP profile can also be used without cushion seals in less critical applications. The BMP profile has a rounded sealing edge which hydroplanes over pre-lubricated surfaces extending cycle life and reducing friction. The BMP profile is available in Parker proprietary Nitroxile compound, offering low friction and wear resistance, as well as fluorocarbon for extended temperature range.

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|------------------------------------|---------------------|---------------------|
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | 250 psi (17 bar) | < 3 ft/s (1 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).



BMP Cross-Section



BMP installed in Piston Gland

09/01/07


BMP Profile

Part Number Nomenclature — BMP Profile

Table 7-28. BMP Profile — Inch

| | | | | | | | | | | | | |
|--|---|---|---|------------|--|---|---|---|---|---|---|---|
| 4 | 2 | 7 | 4 | BMP | 2 | 5 | 0 | 0 | - | 3 | 7 | 5 |
| ----- | | | | | ----- | | | | | ----- | | |
| Seal Compound 4-Digit Material Code Example: 4274 = 85A Nitroxile | | | | Profile | Bore Diameter or Nominal Seal O.D. (x1000) Example: 2.500 x 1000 = 2500 | | | | | Seal Nominal Axial Width Example: .375 x 1000 = 375 | | |

Gland Dimensions — BMP Profile

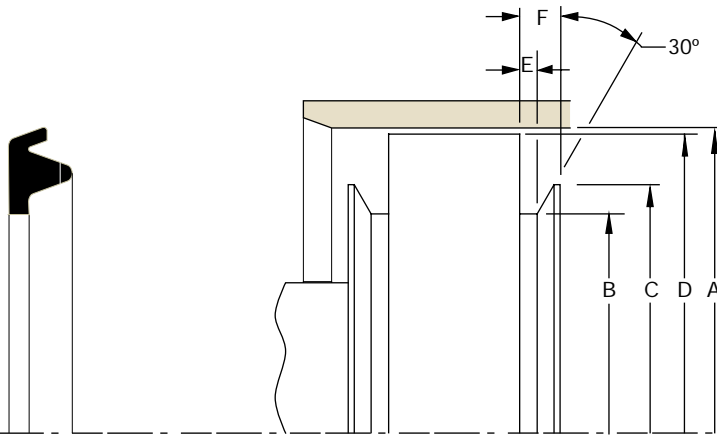

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-29. BMP Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Shoulder Diameter | D Piston Diameter* | E Groove Width | F Shoulder Height | Compound Codes | | Part Number | |
|-----------------------|-------------------------|---------------------------|--------------------------|----------------------|-------------------------|-------------------|------|------------------|--------------------|
| | | | | | | 4274 | 4208 | Compound Code | |
| + .002/- .000 | + .000/- .005 | + .000/- .005 | + .000/- .002 | + .005/- .000 | + .005/- .000 | | | | |
| 1.125 | 0.639 | 0.851 | 1.123 | 0.110 | 0.204 | X | X | XXXX | BMP1125-312 |
| 1.500 | 0.810 | 1.050 | 1.498 | 0.138 | 0.256 | X | X | XXXX | BMP1500-312 |
| 2.000 | 1.202 | 1.440 | 1.998 | 0.138 | 0.256 | X | X | XXXX | BMP2000-312 |
| 2.500 | 1.640 | 1.925 | 2.498 | 0.157 | 0.315 | X | X | XXXX | BMP2500-375 |
| 3.250 | 2.150 | 2.550 | 3.248 | 0.157 | 0.315 | X | X | XXXX | BMP3250-375 |
| 4.000 | 2.810 | 3.268 | 3.998 | 0.157 | 0.315 | X | X | XXXX | BMP4000-375 |
| 5.000 | 3.525 | 4.095 | 4.998 | 0.157 | 0.315 | X | X | XXXX | BMP5000-500 |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal TP Profile

Catalog EPS 5370/USA



TP Profile (Piston T-seal), Compact Seal with Anti-Extrusion Technology

Parker's Piston T-seal is designed to retrofit o-rings in no back-up, single back-up and two back-up standard industrial reciprocating glands. Its compact design provides improved stability and extrusion resistance in dynamic fluid sealing applications. The flange or base of the T-seal forms a tight seal in the gland and supports the anti-extrusion back-up rings. When energized, the back-up rings bridge the extrusion gap to protect the rubber sealing element from extrusion and system contamination. The Piston T-seal eliminates the spiral or twisting failure that can occur when o-rings are used against a dynamic surface. Parker offers the Piston T-seal in a variety of elastomer and back-up ring compounds to cover a wide range of fluid compatibility, pressure and temperature.

Profile **TP0** for **no** back-up o-ring gland (standard offering)

Profile **TPS** for **single** back-up o-ring gland

Profile **TPT** for **two** back-up o-ring gland

The TP profile is sold only as an assembly (elastomer and back-up).

Technical Data

Standard Materials




TP Cross-Section

Base

| Elastomer* | Temperature Range | Surface Speed |
|------------|---------------------------------|----------------------|
| N4115A75 | -40°F to 225°F (-40°C to 107°C) | < 1.6 ft/s (0.5 m/s) |
| N4274A85 | -10°F to 250°F (-23°C to 121°C) | < 1.6 ft/s (0.5 m/s) |
| V4205A75 | -20°F to 400°F (-29°C to 204°C) | < 1.6 ft/s (0.5 m/s) |
| E4259A80 | -65°F to 300°F (-54°C to 149°C) | < 1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please [see Section 3](#) for alternate elastomer materials.

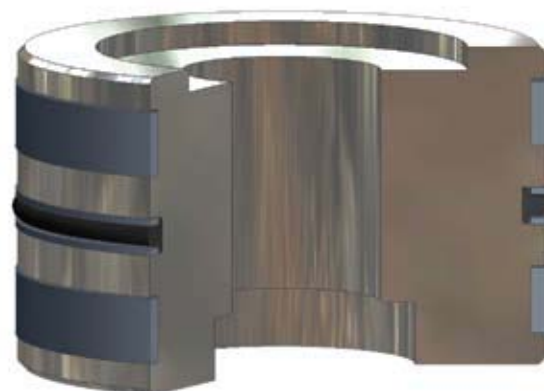

TP installed in Piston Gland

7

09/01/07

TP Profile

Technical Data (Continued)

Standard Materials

Back-up Rings**


| | Temperature Range | Pressure Range† |
|------------------|---------------------------------|------------------------|
| B001 Nylatron | -65°F to 250°F (-54°C to 121°C) | 5,000 psi (344 bar) |
| B011 Virgin PTFE | -20°F to 250°F (-29°C to 121°C) | 3,000 psi (206 bar) |
| B085 PEEK | -65°F to 500°F (-54°C to 260°C) | 10,000 psi (689 bar) |

****Alternate Materials:** For applications that may require an alternate material, please see Section 3 for T-seal back-up materials.

†**Pressure Range** without wear rings (see Table 2-4, page 2-5).


Part Number Nomenclature — T-seal Profile

Table 7-30. T-seal Profile — Inch

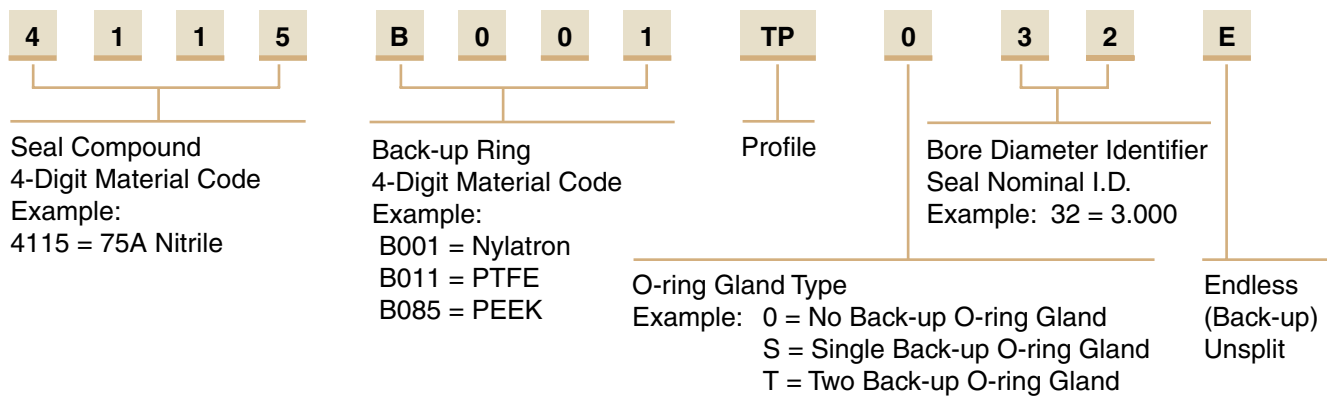

7

Gland Dimensions — TP Profile

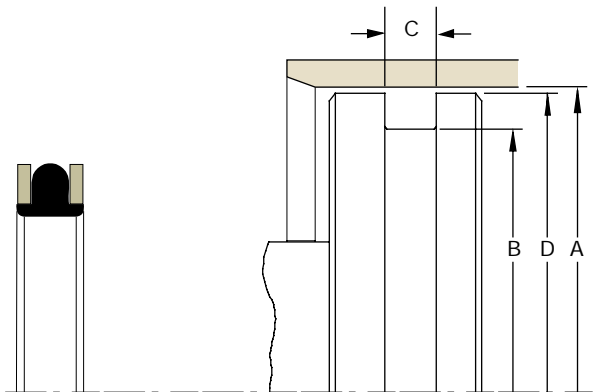

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-31. TP Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C | | | D Piston Diameter* | Ref. O-ring Dash Number | Compound Code | | | | Part Number | | |
|-----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|----------------------------------|---------------|------|------|------|------------------|-------------------------|---------------------------|
| | | TP0 Groove Width | TPS Groove Width | TPT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Compound Code | Back-up Ring Code | Groove Width Code** |
| +0.002/ -0.000 | +0.000/ -0.002 | +0.005/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.000/ -0.001 | | | | | | | | |
| 0.374 | 0.198 | 0.140 | 0.171 | 0.238 | 0.372 | 106 | X | | X | | XXXX | B0xx | TP0 01 |
| 0.437 | 0.261 | 0.140 | 0.171 | 0.238 | 0.435 | 108 | X | | X | | XXXX | B0xx | TP0 02 |
| 0.499 | 0.323 | 0.140 | 0.171 | 0.238 | 0.497 | 109 | X | | X | | XXXX | B0xx | TP0 03 |
| 0.562 | 0.320 | 0.187 | 0.208 | 0.275 | 0.559 | 203 | X | | X | | XXXX | B0xx | TP0 04 |

* If used with wear rings, refer to wear ring piston diameter, see Section 9.

**Chart reflects availability for TP0 only. For availability of TPS and TPT contact your local Parker Seal representative.

Table 7-31. TP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C | | | D Piston Diameter* | Ref. O-ring Dash Number | Compound Code | | | | Part Number | | | |
|-----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|----------------------------------|---------------|------|------|------|------------------|-------------------------|---------------------------|--------------|
| | | TP0 Groove Width | TPS Groove Width | TPT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Compound Code | Back-up Ring Code | Groove Width Code** | Size Code |
| +0.002/ -0.000 | +0.000/ -0.002 | +0.005/ -0.000 | +0.005/ -0.000 | +0.005/ -0.000 | +0.000/ -0.001 | | | | | | | | | |
| 0.625 | 0.383 | 0.187 | 0.208 | 0.275 | 0.662 | 204 | X | | X | | XXXX | B0xx | TP0 | 05 |
| 0.687 | 0.445 | 0.187 | 0.208 | 0.275 | 0.684 | 205 | X | | X | | XXXX | B0xx | TP0 | 06 |
| 0.750 | 0.508 | 0.187 | 0.208 | 0.275 | 0.747 | 206 | X | | X | X | XXXX | B0xx | TP0 | 07 |
| 0.812 | 0.570 | 0.187 | 0.208 | 0.275 | 0.809 | 207 | X | | X | | XXXX | B0xx | TP0 | 08 |
| 0.875 | 0.633 | 0.187 | 0.208 | 0.275 | 0.872 | 208 | X | | X | X | XXXX | B0xx | TP0 | 09 |
| 0.937 | 0.695 | 0.187 | 0.208 | 0.275 | 0.934 | 209 | X | | | | XXXX | B0xx | TP0 | 10 |
| 1.000 | 0.758 | 0.187 | 0.208 | 0.275 | 0.997 | 210 | X | X | X | X | XXXX | B0xx | TP0 | 11 |
| 1.062 | 0.820 | 0.187 | 0.208 | 0.275 | 1.059 | 211 | X | | X | X | XXXX | B0xx | TP0 | 12 |
| 1.125 | 0.833 | 0.187 | 0.208 | 0.275 | 1.122 | 212 | X | X | X | X | XXXX | B0xx | TP0 | 13 |
| 1.187 | 0.945 | 0.187 | 0.208 | 0.275 | 1.184 | 213 | X | | X | | XXXX | B0xx | TP0 | 14 |
| 1.250 | 1.008 | 0.187 | 0.208 | 0.275 | 1.247 | 214 | X | | X | | XXXX | B0xx | TP0 | 15 |
| 1.312 | 1.070 | 0.187 | 0.208 | 0.275 | 1.309 | 215 | X | | X | | XXXX | B0xx | TP0 | 16 |
| 1.375 | 1.133 | 0.187 | 0.208 | 0.275 | 1.372 | 216 | X | | X | X | XXXX | B0xx | TP0 | 17 |
| 1.437 | 1.195 | 0.187 | 0.208 | 0.275 | 1.434 | 217 | X | | X | | XXXX | B0xx | TP0 | 18 |
| 1.500 | 1.258 | 0.187 | 0.208 | 0.275 | 1.497 | 218 | X | X | X | X | XXXX | B0xx | TP0 | 19 |
| 1.562 | 1.320 | 0.187 | 0.208 | 0.275 | 1.559 | 219 | X | | | | XXXX | B0xx | TP0 | 20 |
| 1.625 | 1.383 | 0.187 | 0.208 | 0.275 | 1.622 | 220 | X | X | X | | XXXX | B0xx | TP0 | 21 |
| 1.750 | 1.508 | 0.187 | 0.208 | 0.275 | 1.747 | 222 | X | X | X | X | XXXX | B0xx | TP0 | 22 |
| 1.875 | 1.505 | 0.281 | 0.311 | 0.410 | 1.872 | 325 | X | X | X | X | XXXX | B0xx | TP0 | 23 |
| 2.000 | 1.630 | 0.281 | 0.311 | 0.410 | 1.997 | 326 | X | X | X | X | XXXX | B0xx | TP0 | 24 |
| 2.125 | 1.755 | 0.281 | 0.311 | 0.410 | 2.122 | 327 | X | | X | X | XXXX | B0xx | TP0 | 25 |
| 2.250 | 1.880 | 0.281 | 0.311 | 0.410 | 2.247 | 328 | X | | X | | XXXX | B0xx | TP0 | 26 |
| 2.375 | 2.005 | 0.281 | 0.311 | 0.410 | 2.372 | 329 | X | | X | | XXXX | B0xx | TP0 | 27 |
| 2.500 | 2.130 | 0.281 | 0.311 | 0.410 | 2.497 | 330 | X | X | X | X | XXXX | B0xx | TP0 | 28 |
| 2.625 | 2.255 | 0.281 | 0.311 | 0.410 | 2.622 | 331 | X | | X | X | XXXX | B0xx | TP0 | 29 |
| 2.750 | 2.380 | 0.281 | 0.311 | 0.410 | 2.747 | 332 | X | | X | | XXXX | B0xx | TP0 | 30 |
| 2.875 | 2.505 | 0.281 | 0.311 | 0.410 | 2.872 | 333 | X | | X | X | XXXX | B0xx | TP0 | 31 |
| 3.000 | 2.630 | 0.281 | 0.311 | 0.410 | 2.997 | 334 | X | X | X | | XXXX | B0xx | TP0 | 32 |
| 3.125 | 2.755 | 0.281 | 0.311 | 0.410 | 3.122 | 335 | X | | X | | XXXX | B0xx | TP0 | 33 |
| 3.250 | 2.880 | 0.281 | 0.311 | 0.410 | 3.247 | 336 | X | X | X | X | XXXX | B0xx | TP0 | 34 |
| 3.500 | 3.130 | 0.281 | 0.311 | 0.410 | 3.497 | 338 | X | X | X | X | XXXX | B0xx | TP0 | 35 |
| 3.625 | 3.255 | 0.281 | 0.311 | 0.410 | 3.622 | 339 | X | | X | | XXXX | B0xx | TP0 | 36 |
| 3.750 | 3.380 | 0.281 | 0.311 | 0.410 | 3.747 | 340 | X | | X | | XXXX | B0xx | TP0 | 37 |
| 3.875 | 3.505 | 0.281 | 0.311 | 0.410 | 3.872 | 341 | X | | X | | XXXX | B0xx | TP0 | 38 |
| 4.000 | 3.630 | 0.281 | 0.311 | 0.410 | 3.997 | 342 | X | X | X | X | XXXX | B0xx | TP0 | 39 |
| 4.125 | 3.755 | 0.281 | 0.311 | 0.410 | 4.122 | 343 | X | | X | X | XXXX | B0xx | TP0 | 40 |
| 4.250 | 3.880 | 0.281 | 0.311 | 0.410 | 4.247 | 344 | X | X | X | | XXXX | B0xx | TP0 | 41 |
| 4.375 | 4.005 | 0.281 | 0.311 | 0.410 | 4.372 | 345 | X | | X | | XXXX | B0xx | TP0 | 42 |
| 4.500 | 4.130 | 0.281 | 0.311 | 0.410 | 4.497 | 346 | X | X | X | X | XXXX | B0xx | TP0 | 43 |
| 4.625 | 4.255 | 0.281 | 0.311 | 0.410 | 4.622 | 347 | X | | | | XXXX | B0xx | TP0 | 44 |
| 4.750 | 4.380 | 0.281 | 0.311 | 0.410 | 4.747 | 348 | X | X | X | X | XXXX | B0xx | TP0 | 45 |
| 4.875 | 4.505 | 0.281 | 0.311 | 0.410 | 4.872 | 349 | X | | X | | XXXX | B0xx | TP0 | 46 |
| 5.002 | 4.630 | 0.281 | 0.311 | 0.410 | 4.997 | 350 | X | X | X | | XXXX | B0xx | TP0 | 47 |
| 5.127 | 4.653 | 0.375 | 0.408 | 0.538 | 5.123 | 426 | X | | X | | XXXX | B0xx | TP0 | 48 |
| 5.252 | 4.778 | 0.375 | 0.408 | 0.538 | 5.248 | 427 | X | X | X | | XXXX | B0xx | TP0 | 49 |
| 5.377 | 4.903 | 0.375 | 0.408 | 0.538 | 5.373 | 428 | X | X | X | | XXXX | B0xx | TP0 | 50 |

* If used with wear rings, refer to wear ring piston diameter, see Section 9.

**Chart reflects availability for TP0 only. For availability of TPS and TPT contact your local Parker Seal representative.

7

Table 7-31. TP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C | | | D Piston Diameter* | Ref. O-ring Dash Number | Compound Code | | | | Part Number | | | |
|-----------------------|-------------------------|------------------------|------------------------|------------------------|--------------------------|----------------------------------|---------------|------|------|------|------------------|-------------------------|---------------------------|--------------|
| | | TP0 Groove Width | TPS Groove Width | TPT Groove Width | | | 4115 | 4274 | 4205 | 4259 | Compound Code | Back-up Ring Code | Groove Width Code** | Size Code |
| + .002/ - .000 | + .000/ - .002 | + .005/ - .000 | + .005/ - .000 | + .005/ - .000 | + .000/ - .001 | | | | | | | | | |
| 5.502 | 5.028 | 0.375 | 0.408 | 0.538 | 5.498 | 429 | X | X | | X | XXXX | B0xx | TP0 | 51 |
| 5.627 | 5.153 | 0.375 | 0.408 | 0.538 | 5.623 | 430 | X | | | | XXXX | B0xx | TP0 | 52 |
| 5.752 | 5.278 | 0.375 | 0.408 | 0.538 | 5.748 | 431 | X | X | X | X | XXXX | B0xx | TP0 | 53 |
| 5.877 | 5.403 | 0.375 | 0.408 | 0.538 | 5.873 | 432 | X | | | | XXXX | B0xx | TP0 | 54 |
| 6.002 | 5.528 | 0.375 | 0.408 | 0.538 | 5.998 | 433 | X | X | X | | XXXX | B0xx | TP0 | 55 |
| 6.127 | 5.653 | 0.375 | 0.408 | 0.538 | 6.123 | 434 | X | | | | XXXX | B0xx | TP0 | 56 |
| 6.252 | 5.778 | 0.375 | 0.408 | 0.538 | 6.248 | 435 | X | | | | XXXX | B0xx | TP0 | 57 |
| 6.502 | 6.028 | 0.375 | 0.408 | 0.538 | 6.498 | 437 | X | | X | | XXXX | B0xx | TP0 | 58 |
| 6.752 | 6.278 | 0.375 | 0.408 | 0.538 | 6.748 | 438 | X | | X | | XXXX | B0xx | TP0 | 59 |
| 7.002 | 6.528 | 0.375 | 0.408 | 0.538 | 6.998 | 439 | X | | X | | XXXX | B0xx | TP0 | 60 |
| 7.252 | 6.778 | 0.375 | 0.408 | 0.538 | 7.248 | 440 | X | | X | | XXXX | B0xx | TP0 | 61 |
| 7.502 | 7.028 | 0.375 | 0.408 | 0.538 | 7.498 | 441 | X | | | X | XXXX | B0xx | TP0 | 62 |
| 7.752 | 7.278 | 0.375 | 0.408 | 0.538 | 7.748 | 442 | X | | | | XXXX | B0xx | TP0 | 63 |
| 8.002 | 7.528 | 0.375 | 0.408 | 0.538 | 7.998 | 443 | X | X | X | | XXXX | B0xx | TP0 | 64 |
| 8.252 | 7.778 | 0.375 | 0.408 | 0.538 | 8.248 | 444 | X | | | | XXXX | B0xx | TP0 | 65 |
| 8.502 | 8.028 | 0.375 | 0.408 | 0.538 | 8.498 | 445 | X | | X | | XXXX | B0xx | TP0 | 66 |
| 9.002 | 8.528 | 0.375 | 0.408 | 0.538 | 8.998 | 446 | X | | | | XXXX | B0xx | TP0 | 67 |
| 9.502 | 9.028 | 0.375 | 0.408 | 0.538 | 9.498 | 447 | X | | | | XXXX | B0xx | TP0 | 68 |
| 10.002 | 9.528 | 0.375 | 0.408 | 0.538 | 9.998 | 448 | X | | | | XXXX | B0xx | TP0 | 69 |
| 10.502 | 10.028 | 0.375 | 0.408 | 0.538 | 10.498 | 449 | X | | | | XXXX | B0xx | TP0 | 70 |
| 11.002 | 10.528 | 0.375 | 0.408 | 0.538 | 10.998 | 450 | X | | | | XXXX | B0xx | TP0 | 71 |
| 11.502 | 11.028 | 0.375 | 0.408 | 0.538 | 11.498 | 451 | X | | | | XXXX | B0xx | TP0 | 72 |
| 12.002 | 11.528 | 0.375 | 0.408 | 0.538 | 11.998 | 452 | X | | X | | XXXX | B0xx | TP0 | 73 |
| 14.002 | 13.528 | 0.375 | 0.408 | 0.538 | 13.998 | 456 | X | | | X | XXXX | B0xx | TP0 | 77 |
| 15.502 | 15.028 | 0.375 | 0.408 | 0.538 | 15.498 | 459 | X | | | | XXXX | B0xx | TP0 | 80 |
| 16.002 | 15.528 | 0.375 | 0.408 | 0.538 | 15.998 | 460 | X | | | X | XXXX | B0xx | TP0 | 81 |
| 17.002 | 16.528 | 0.375 | 0.408 | 0.538 | 16.998 | 462 | X | | | | XXXX | B0xx | TP0 | 83 |
| 17.502 | 17.028 | 0.375 | 0.408 | 0.538 | 17.498 | 463 | X | | | | XXXX | B0xx | TP0 | 84 |
| 24.002 | 23.528 | 0.375 | 0.408 | 0.538 | 23.998 | N/A | X | | X | X | XXXX | B0xx | TP0 | 97 |

* If used with wear rings, refer to wear ring piston diameter, see Section 9.

**Chart reflects availability for TP0 only. For availability of TPS and TPT contact your local Parker Seal representative.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal S5 Profile

Catalog EPS 5370/USA



S5 Cross-Section

S5 Profile, Square PTFE Cap Seal

The Parker S5 profile is a bi-directional piston seal for use in low to medium duty hydraulic actuators and is suitable for sealing against hardened surfaces in pneumatic applications. The S5 profile is a two piece design comprised of a standard size Parker o-ring energizing a glass-filled PTFE cap. The S5 profile offers long wear, low friction and because of its short assembly length requires minimal gland space on the piston. The seal is commonly used in applications such as agriculture hydraulics, mobile hydraulics, machine tools, and hydraulic presses. Parker's S5 profile will retrofit non-Parker seals of similar design and is an updated version of the Parker S5000 piston seal.


The S5 profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data

| Standard Materials* | | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|----------------------------|--------------------------------------|-----------------------|------------------------|
| 0203 | 15% fiberglass filled PTFE | -200°F to 575°F (-129°C to 302°C) | 3500 psi (241 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | | |
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.

†**Pressure Range** without wear rings ([see Table 2-4, page 2-5](#)).

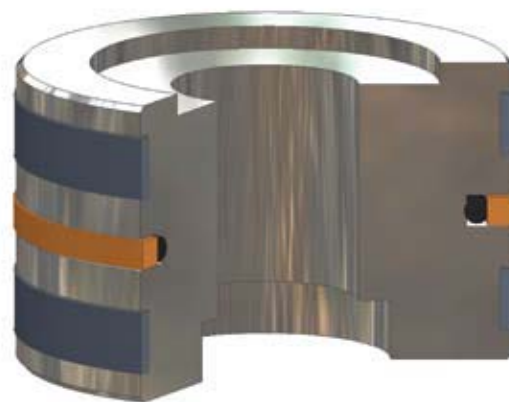

S5 installed in Piston Gland

7


09/01/07

S5 Profile

Technical Data (Continued)

Options

Split Rings: To aid in installation, the PTFE ring can be supplied in one of the following split configurations. To indicate that the S5 profile is to be split, add the appropriate split type indicator to the end of the part number.




Metric: To configure metric part numbering, see Table 7-34 on page 7-38, and call your local Parker Seal representative for availability.

Part Number Nomenclature — S5 Profile

Table 7-32. S5 Profile — Inch

| | | | | | | | | | | | | | | | | | |
|---|---|---|---|---------|---|---|---|---|---|---|---|---|---|--|---|---|---|
| 0 | 2 | 0 | 3 | S5 | 1 | 9 | 6 | 0 | 3 | 5 | 0 | 0 | - | 1 | 2 | 9 | A |
| Seal Compound 4-Digit Material Code Example: 0203 = 15% Fiberglass-filled PTFE | | | | Profile | Gland Depth (x1000) Example: .196 X 1000 = 196 | | | | Bore Diameter (x1000) Example: 3.500 X 1000 = 03500 | | | | | Groove Width (x1000) Example: .129 X 1000 = 129 | | | Energizer Material Code A = 70A Nitrile Omit = No energizer See Table 3-5, page 3-18 |
| Option: Split Ring Options | | | | | | | | | | | | | | | | | |
| S = Step Cut <input type="checkbox"/> | | | | | | | | | | | | | | | | | |
| T = Butt Cut <input type="checkbox"/> | | | | | | | | | | | | | | | | | |
| V = Bevel Cut <input type="checkbox"/> | | | | | | | | | | | | | | | | | |

Gland Dimensions — S5 Profile

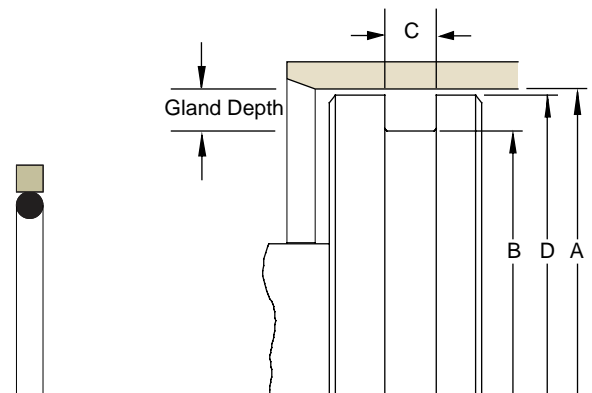

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-33. S5 Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +0.002/-0.000 | +0.001/-0.001 | +0.002/-0.002 | +0.000/-0.002 | | |
| 0.500 | 0.240 | 0.083 | 0.499 | 009 | 0203S513000500-083A |
| 0.625 | 0.365 | 0.083 | 0.624 | 011 | 0203S513000625-083A |
| 0.750 | 0.490 | 0.083 | 0.749 | 013 | 0203S513000750-083A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

09/01/07

Table 7-33. S5 Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +0.002/-0.000 | +0.001/-0.001 | +0.002/-0.002 | +0.000/-0.002 | | |
| 0.875 | 0.615 | 0.083 | 0.874 | 016 | 0203S513000875-083A |
| 1.000 | 0.740 | 0.083 | 0.999 | 017 | 0203S513001000-083A |
| 1.125 | 0.865 | 0.083 | 1.124 | 019 | 0203S513001125-083A |
| 1.250 | 0.990 | 0.083 | 1.249 | 022 | 0203S513001250-083A |
| 1.375 | 1.115 | 0.083 | 1.374 | 022 | 0203S513001375-083A |
| 1.500 | 1.240 | 0.083 | 1.499 | 025 | 0203S513001500-083A |
| +0.002/-0.000 | +0.002/-0.002 | +0.002/-0.002 | +0.000/-0.002 | | |
| 1.625 | 1.233 | 0.122 | 1.624 | 123 | 0203S519601625-122A |
| 1.750 | 1.358 | 0.122 | 1.749 | 125 | 0203S519601750-122A |
| 1.875 | 1.483 | 0.122 | 1.874 | 127 | 0203S519601875-122A |
| +0.003/-0.000 | +0.002/-0.002 | +0.003/-0.003 | +0.000/-0.003 | | |
| 2.000 | 1.608 | 0.130 | 1.999 | 129 | 0203S519602000-130A |
| 2.125 | 1.733 | 0.130 | 2.14 | 131 | 0203S519602125-130A |
| 2.250 | 1.858 | 0.130 | 2.249 | 133 | 0203S519602250-130A |
| 2.375 | 1.983 | 0.130 | 2.374 | 135 | 0203S519602375-130A |
| 2.500 | 2.108 | 0.130 | 2.499 | 137 | 0203S519602500-130A |
| 2.625 | 2.233 | 0.130 | 2.624 | 139 | 0203S519602625-130A |
| 2.750 | 2.358 | 0.130 | 2.749 | 141 | 0203S519602750-130A |
| 2.875 | 2.483 | 0.130 | 2.874 | 143 | 0203S519602875-130A |
| 3.000 | 2.608 | 0.130 | 2.999 | 145 | 0203S519603000-130A |
| 3.250 | 2.858 | 0.130 | 3.249 | 149 | 0203S519603250-130A |
| 3.375 | 2.983 | 0.130 | 3.374 | 150 | 0203S519603375-130A |
| 3.500 | 3.108 | 0.130 | 3.499 | 151 | 0203S519603500-130A |
| 3.625 | 3.233 | 0.130 | 3.624 | 152 | 0203S519603625-130A |
| 3.750 | 3.358 | 0.130 | 3.749 | 152 | 0203S519603750-130A |
| 4.000 | 3.608 | 0.130 | 3.999 | 153 | 0203S519604000-130A |
| 4.250 | 3.858 | 0.130 | 4.249 | 154 | 0203S519604250-130A |
| 4.500 | 4.108 | 0.130 | 4.499 | 155 | 0203S519604500-130A |
| 4.750 | 4.358 | 0.130 | 4.749 | 156 | 0203S519604750-130A |
| 4.875 | 4.483 | 0.130 | 4.874 | 156 | 0203S519604875-130A |
| 5.000 | 4.608 | 0.130 | 4.999 | 157 | 0203S519605000-130A |
| 5.250 | 4.858 | 0.130 | 5.249 | 158 | 0203S519605250-130A |
| 5.500 | 5.108 | 0.130 | 5.499 | 159 | 0203S519605500-130A |
| +0.004/-0.000 | +0.003/-0.003 | +0.004/-0.004 | +0.000/-0.003 | | |
| 5.750 | 5.232 | 0.160 | 5.748 | 251 | 0203S525905750-160A |
| 5.875 | 5.357 | 0.160 | 5.873 | 252 | 0203S525905875-160A |
| 6.000 | 5.482 | 0.160 | 5.998 | 253 | 0203S525906000-160A |
| 6.250 | 5.732 | 0.160 | 6.248 | 255 | 0203S525906250-160A |
| 6.500 | 5.982 | 0.160 | 6.498 | 257 | 0203S525906500-160A |
| 6.750 | 6.232 | 0.160 | 6.748 | 258 | 0203S525906750-160A |
| 7.000 | 6.482 | 0.160 | 6.998 | 259 | 0203S525907000-160A |
| 7.125 | 6.607 | 0.160 | 7.123 | 260 | 0203S525907125-160A |
| 7.250 | 6.732 | 0.160 | 7.248 | 260 | 0203S525907250-160A |
| 7.500 | 6.982 | 0.160 | 7.498 | 261 | 0203S525907500-160A |
| 7.750 | 7.232 | 0.160 | 7.748 | 262 | 0203S525907750-160A |
| 8.000 | 7.482 | 0.160 | 7.998 | 263 | 0203S525908000-160A |
| 8.250 | 7.732 | 0.160 | 8.248 | 264 | 0203S525908250-160A |
| 8.500 | 7.982 | 0.160 | 8.498 | 265 | 0203S525908500-160A |
| 8.750 | 8.232 | 0.160 | 8.748 | 266 | 0203S525908750-160A |
| 9.000 | 8.482 | 0.160 | 8.998 | 267 | 0203S525909000-160A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

09/01/07



S5 Profile

Table 7-33. S5 Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|----------------------------|
| + .004/-.000 | + .003/-.003 | + .004/-.004 | + .000/-.003 | | |
| 9.250 | 8.732 | 0.160 | 9.248 | 268 | 0203S525909250-160A |
| 9.500 | 8.982 | 0.160 | 9.498 | 269 | 0203S525909500-160A |
| 9.750 | 9.232 | 0.160 | 9.748 | 270 | 0203S525909750-160A |
| 10.000 | 9.482 | 0.160 | 9.998 | 271 | 0203S525910000-160A |
| 10.250 | 9.732 | 0.160 | 10.248 | 272 | 0203S525910250-160A |
| 10.500 | 9.982 | 0.160 | 10.498 | 273 | 0203S525910500-160A |
| 10.750 | 10.232 | 0.160 | 10.748 | 274 | 0203S525910750-160A |
| 11.000 | 10.482 | 0.160 | 10.998 | 275 | 0203S525911000-160A |
| 11.500 | 10.982 | 0.160 | 11.498 | 276 | 0203S525911500-160A |
| 12.000 | 11.482 | 0.160 | 11.998 | 277 | 0203S525912000-160A |
| 12.500 | 11.982 | 0.160 | 12.498 | 278 | 0203S525912500-160A |
| 13.000 | 12.482 | 0.160 | 12.998 | 278 | 0203S525913000-160A |
| 14.000 | 13.482 | 0.160 | 13.998 | 279 | 0203S525914000-160A |
| 15.000 | 14.482 | 0.160 | 14.998 | 280 | 0203S525915000-160A |
| 16.000 | 15.482 | 0.160 | 15.998 | 281 | 0203S525916000-160A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — S5 Profile

Table 7-34. S5 Profile — Metric (mm)

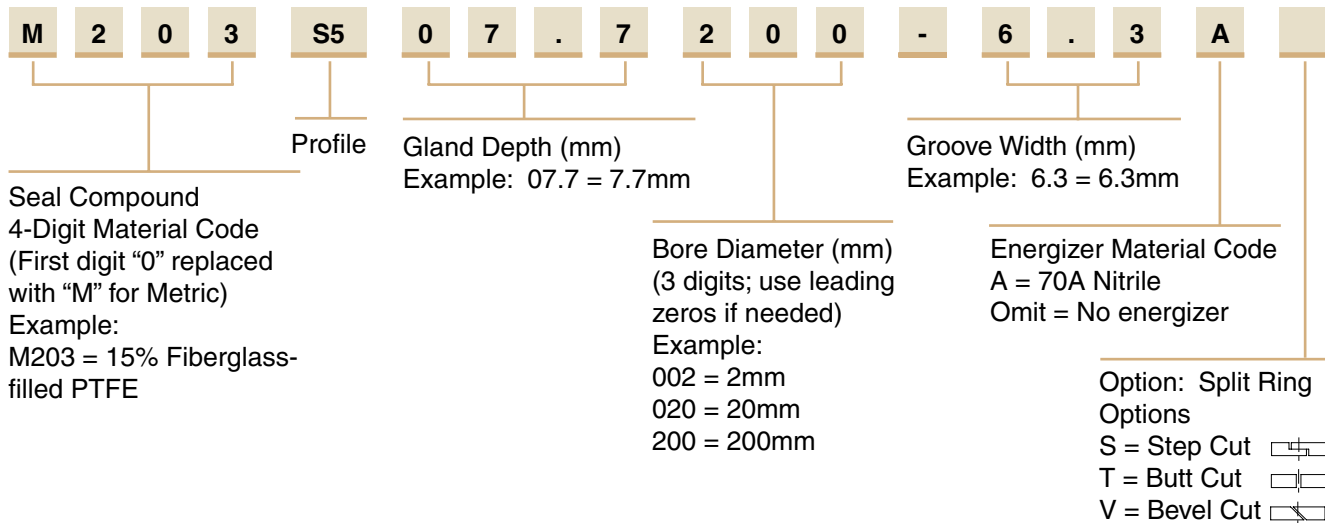

Piston Seal R5 Profile

Catalog EPS 5370/USA



R5 Profile, Rectangular PTFE Cap Seal

The Parker R5 profile is a bi-directional piston seal for use in medium to heavy duty hydraulic actuators and is suitable for sealing against hardened surfaces in pneumatic applications. The R5 profile is a two piece design comprised of a standard size rubber square ring energizing a rectangular shaped PTFE cap. The R5 profile offers excellent stability, long wear, low friction and extrusion protection. The seal is commonly used in applications such as agriculture hydraulics, mobile hydraulics, machine tools and hydraulic presses. Parker's R5 profile will retrofit non-Parker seals of similar design and is an updated version of the Parker R5100 piston seal.

The R5 profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data


| Standard Materials* | | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|----------------------------|--------------------------------------|-----------------------|------------------------|
| Cap | | | | |
| 0203 | 15% fiberglass filled PTFE | -200°F to 575°F (-129°C to 302°C) | 3500 psi (241 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | | |
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

****Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.

†**Pressure Range** without wear rings ([see Table 2-4, page 2-5](#)).



R5 Cross-Section

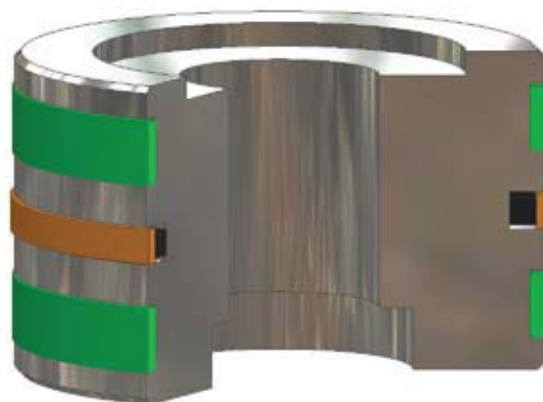

R5 installed in Piston Gland

7


09/01/07

R5 Profile

Technical Data (Continued)

Options


Split Rings: To aid in installation, the PTFE ring can be supplied in one of the following split configurations. To indicate that the R5 profile is to be split, add the appropriate split type indicator to the end of the part number.



Metric: To configure metric part numbering, see [Table 7-37 on page 7-42](#), and call your local Parker Seal representative for availability.


Part Number Nomenclature — R5 Profile

Table 7-35. R5 Profile — Inch

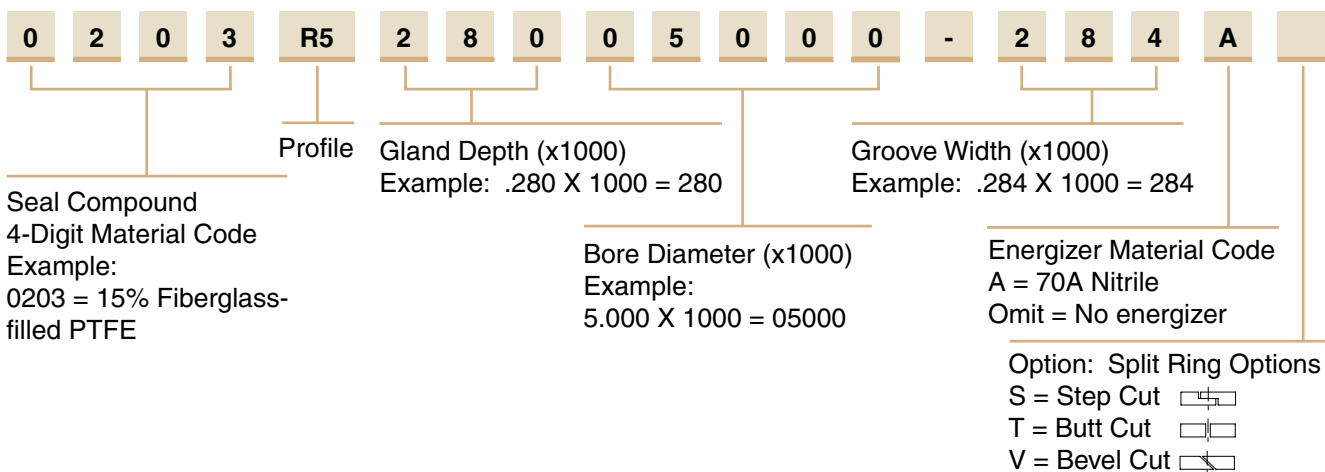

7

Gland Dimensions — R5 Profile

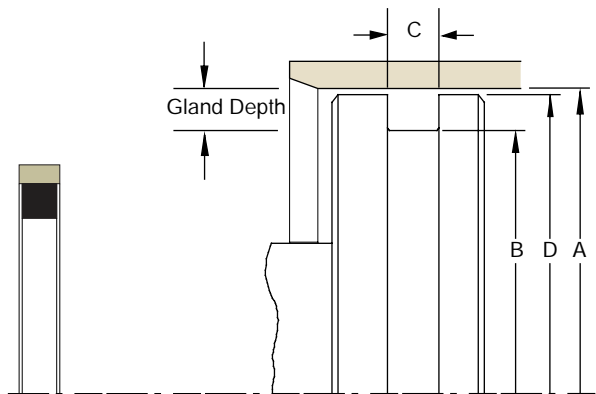

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-36. R5 Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Square Ring Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +0.002/-0.000 | +0.001/-0.001 | +0.002/-0.002 | +0.000/-0.001 | | |
| 1.000 | 0.692 | 0.129 | 0.999 | 115 | 0203R515501000-129A |
| 1.250 | 0.942 | 0.129 | 1.249 | 119 | 0203R515501250-129A |
| 1.500 | 1.192 | 0.129 | 1.499 | 123 | 0203R515501500-129A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

Table 7-36. R5 Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Square Ring Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .002/- .000 | + .001/- .001 | + .002/- .002 | + .000/- .001 | | |
| 1.750 | 1.442 | 0.129 | 1.749 | 127 | 0203R515501750-129A |
| 2.000 | 1.692 | 0.129 | 1.999 | 131 | 0203R515502000-129A |
| 2.250 | 1.942 | 0.129 | 2.249 | 135 | 0203R515502250-129A |
| 2.500 | 2.192 | 0.129 | 2.499 | 139 | 0203R515502500-129A |
| 2.750 | 2.442 | 0.129 | 2.749 | 143 | 0203R515502750-129A |
| + .003/- .000 | + .002/- .002 | + .003/- .003 | + .000/- .002 | | |
| 3.000 | 2.444 | 0.284 | 2.998 | 333 | 0203R528003000-284A |
| 3.250 | 2.694 | 0.284 | 3.248 | 335 | 0203R528003250-284A |
| 3.500 | 2.944 | 0.284 | 3.498 | 337 | 0203R528003500-284A |
| 3.750 | 3.194 | 0.284 | 3.748 | 339 | 0203R528003750-284A |
| 4.000 | 3.444 | 0.284 | 3.998 | 341 | 0203R528004000-284A |
| 4.125 | 3.569 | 0.284 | 4.123 | 342 | 0203R528004125-284A |
| 4.250 | 3.694 | 0.284 | 4.248 | 343 | 0203R528004250-284A |
| 4.500 | 3.944 | 0.284 | 4.498 | 345 | 0203R528004500-284A |
| 4.750 | 4.194 | 0.284 | 4.748 | 347 | 0203R528004750-284A |
| 5.000 | 4.444 | 0.284 | 4.998 | 349 | 0203R528005000-284A |
| + .004/- .000 | + .003/- .003 | + .004/- .004 | + .000/- .003 | | |
| 5.250 | 4.488 | 0.379 | 5.247 | 425 | 0203R538105250-379A |
| 5.500 | 4.738 | 0.379 | 5.497 | 427 | 0203R538105500-379A |
| 5.750 | 4.988 | 0.379 | 5.747 | 429 | 0203R538105750-379A |
| 6.000 | 5.238 | 0.379 | 5.997 | 431 | 0203R538106000-379A |
| 6.250 | 5.488 | 0.379 | 6.247 | 433 | 0203R538106250-379A |
| 6.500 | 5.738 | 0.379 | 6.497 | 435 | 0203R538106500-379A |
| 6.750 | 5.988 | 0.379 | 6.747 | 437 | 0203R538106750-379A |
| 7.000 | 6.238 | 0.379 | 6.997 | 438 | 0203R538107000-379A |
| 7.250 | 6.488 | 0.379 | 7.247 | 439 | 0203R538107250-379A |
| 7.500 | 6.738 | 0.379 | 7.497 | 440 | 0203R538107500-379A |
| 7.750 | 6.988 | 0.379 | 7.747 | 441 | 0203R538107750-379A |
| 8.000 | 7.238 | 0.379 | 7.997 | 442 | 0203R538108000-379A |
| 8.250 | 7.488 | 0.379 | 8.247 | 443 | 0203R538108250-379A |
| 8.500 | 7.738 | 0.379 | 8.497 | 444 | 0203R538108500-379A |
| + .004/- .000 | + .004/- .004 | + .004/- .004 | + .000/- .004 | | |
| 9.000 | 8.122 | 0.379 | 8.996 | 445 | 0203R543909000-379A |
| 9.500 | 8.622 | 0.379 | 9.496 | 446 | 0203R543909500-379A |
| 10.000 | 9.122 | 0.379 | 9.996 | 447 | 0203R543910000-379A |
| 11.000 | 10.122 | 0.379 | 10.996 | 449 | 0203R543911000-379A |
| 12.000 | 11.122 | 0.379 | 11.996 | 451 | 0203R543912000-379A |
| 13.000 | 12.122 | 0.379 | 12.996 | 453 | 0203R543913000-379A |
| 14.000 | 13.122 | 0.379 | 13.996 | 455 | 0203R543914000-379A |


*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

R5 Profile

Part Number Nomenclature — R5 Profile

Table 7-37. R5 Profile — Metric (mm)

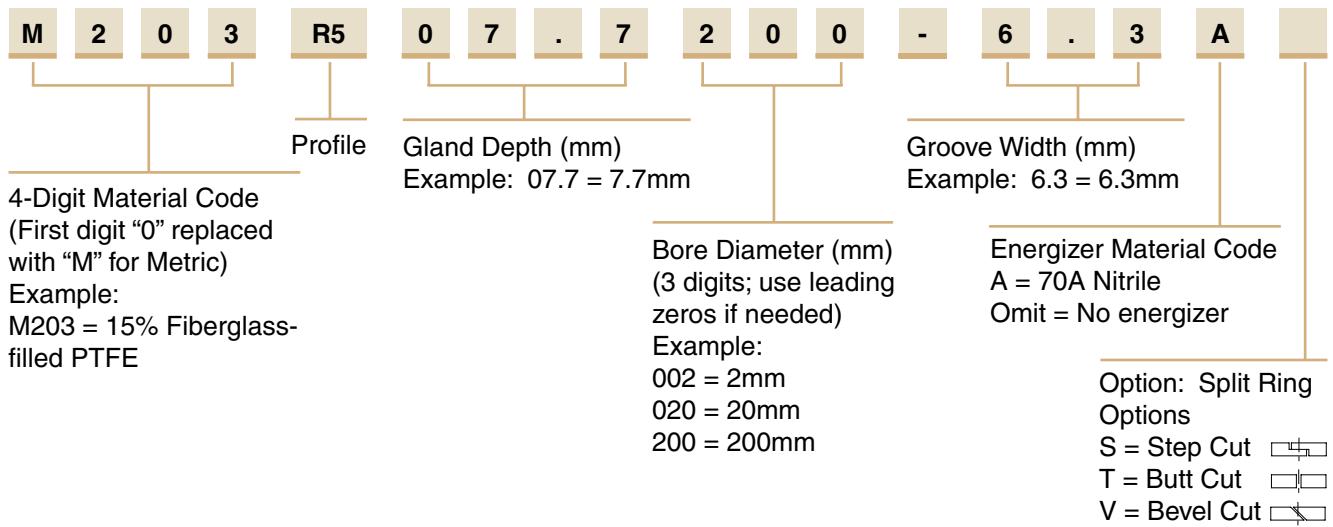

Piston Seal CT Profile

Catalog EPS 5370/USA

CT Profile, Premium PTFE Cap Seal with Anti-Extrusion Technology



The Parker CT Profile is a robust design for heavy duty hydraulic applications. The CT Profile is an excellent choice for sealing mobile hydraulic applications that experience shock loads. The CT profile is a four piece assembly made up of a rubber energizer, PTFE cap and two back-up rings. In application, fluid pressure forces the rubber energizer to apply increased load against the PTFE cap and back-up rings. This results in increased sealing force against the bore and allows the back-up rings to close off the extrusion gap between the piston and the bore. Once activated by pressure, the back-up rings protect the seal from extruding and keep internal contamination away from the PTFE cap. Parker's CT profile will retrofit non-Parker seals of similar design.

The CT Profile is sold only as an assembly (seal and energizer). [See part number nomenclature.](#)

Technical Data


| Standard Materials* | Temperature Range** | Surface Speed |
|---|--------------------------------------|-------------------------|
| Cap 0401 40% bronze filled PTFE | -200°F to 575°F (-129°C to 302°C) | < 5 ft/s (1.5 m/sec) |
| Energizer A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | |

***Alternate Materials:** For applications that may require an alternate material, please [see Section 3](#) for alternate PTFE, energizer and back-up materials.

****The temperature range of the CT profile is limited to the energizer.** A wider temperature range can be achieved by using alternate energizer and back-up ring compounds.



CT Cross-Section
Standard

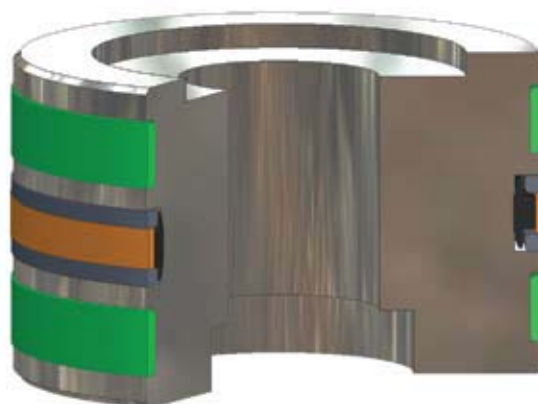

CT installed in Piston Gland

7

09/01/07

CT Profile

Technical Data (Continued)

Standard Materials*

| Back-up Rings | Temperature Range | Pressure Range† |
|---------------|------------------------------------|------------------------|
| B001 Nylatron | -65°F to 250°F (-44°C to 121°C) | 7,500 psi (500 bar) |

***Alternate Materials:** For applications that may require an alternate material, please see [Section 3](#) for alternate PTFE, energizer and back-up materials.


†**Pressure Range** without wear rings (see [Table 2-4, page 2-5](#)).

Options

Metric: To configure metric part numbering, see [Table 7-41 on page 7-47](#), and call your local Parker Seal representative for availability.


Part Number Nomenclature — CT Profile

Table 7-38. CT Profile — Inch

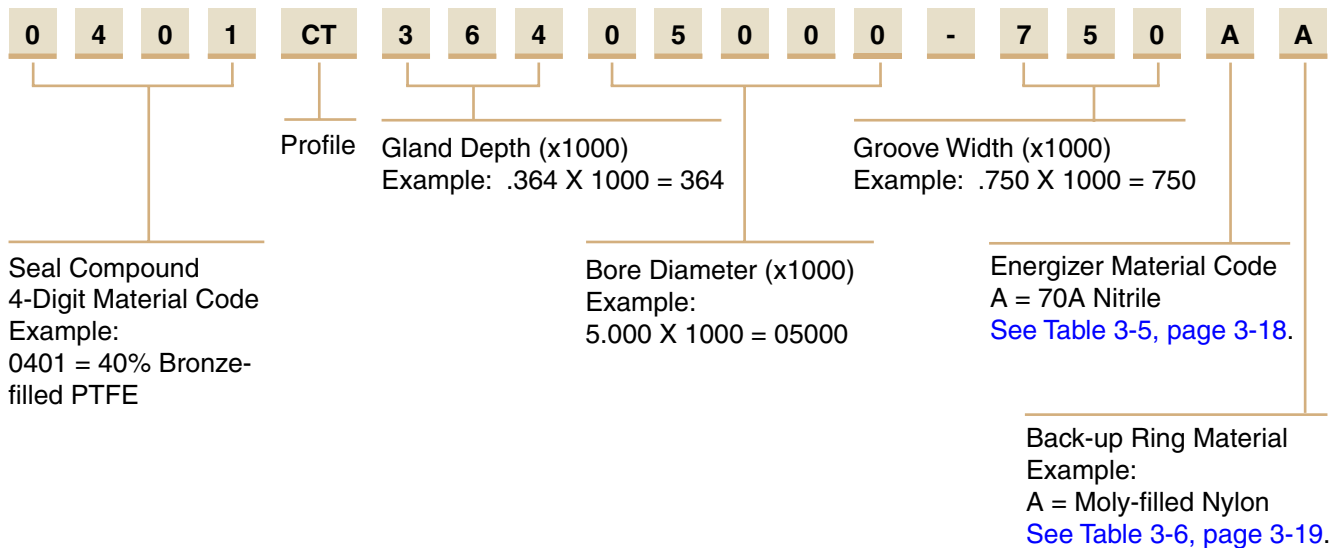

7

Gland Dimensions — CT Profile

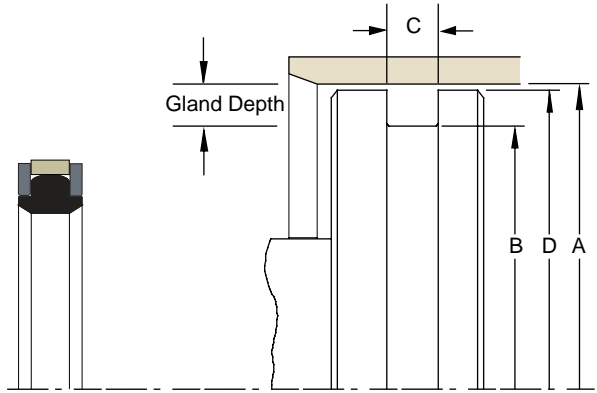

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-39. CT Gland Dimensions (Narrow Style) — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number (Narrow Style) |
|-----------------------|-------------------------|----------------------|--------------------------|-------------------------------|
| + .002/- .000 | + .000/- .002 | + .010/- .000 | + .000/- .002 | |
| 1.500 | 0.942 | 0.295 | 1.499 | 0401CT27901500-295AA |
| 2.000 | 1.442 | 0.295 | 1.999 | 0401CT27902000-295AA |
| 2.250 | 1.692 | 0.295 | 2.249 | 0401CT27902250-295AA |
| 2.500 | 1.942 | 0.295 | 2.499 | 0401CT27902500-295AA |
| 2.750 | 2.192 | 0.295 | 2.749 | 0401CT27902750-295AA |
| + .003/- .000 | + .000/- .002 | + .010/- .000 | + .000/- .002 | |
| 3.000 | 2.442 | 0.420 | 2.998 | 0401CT27903000-420AA |
| 3.250 | 2.692 | 0.420 | 3.248 | 0401CT27903250-420AA |
| 3.500 | 2.942 | 0.420 | 3.498 | 0401CT27903500-420AA |
| 3.750 | 3.192 | 0.420 | 3.748 | 0401CT27903750-420AA |
| 4.000 | 3.442 | 0.420 | 3.998 | 0401CT27904000-420AA |
| 4.250 | 3.692 | 0.420 | 4.248 | 0401CT27904250-420AA |
| 4.500 | 3.942 | 0.420 | 4.498 | 0401CT27904500-420AA |
| 4.750 | 4.192 | 0.420 | 4.748 | 0401CT27904750-420AA |
| 5.000 | 4.442 | 0.420 | 4.998 | 0401CT27905000-420AA |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Table 7-40. CT Gland Dimensions (Standard Style) — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number (Standard Style) |
|-----------------------|-------------------------|----------------------|--------------------------|---------------------------------|
| + .002/- .000 | + .000/- .002 | + .010/- .000 | + .000/- .002 | |
| 1.000 | 0.628 | 0.424 | 0.999 | 0401CT18601000-424AA |
| 1.063 | 0.691 | 0.424 | 1.062 | 0401CT18601063-424AA |
| 1.125 | 0.753 | 0.424 | 1.124 | 0401CT18601125-424AA |
| 1.188 | 0.816 | 0.424 | 1.187 | 0401CT18601188-424AA |
| 1.250 | 0.878 | 0.424 | 1.249 | 0401CT18601250-424AA |
| 1.313 | 0.941 | 0.424 | 1.312 | 0401CT18601313-424AA |
| 1.375 | 1.003 | 0.424 | 1.374 | 0401CT18601375-424AA |
| 1.438 | 1.066 | 0.424 | 1.437 | 0401CT18601438-424AA |
| 1.500 | 1.128 | 0.424 | 1.499 | 0401CT18601500-424AA |
| 1.563 | 1.191 | 0.424 | 1.562 | 0401CT18601563-424AA |
| 1.625 | 1.253 | 0.424 | 1.624 | 0401CT18601625-424AA |
| 1.688 | 1.316 | 0.424 | 1.687 | 0401CT18601688-424AA |
| 1.750 | 1.378 | 0.424 | 1.749 | 0401CT18601750-424AA |
| 1.875 | 1.503 | 0.424 | 1.874 | 0401CT18601875-424AA |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

09/01/07

Table 7-40. CT Gland Dimensions (Standard Style) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number (Standard Style) |
|-----------------------|-------------------------|----------------------|--------------------------|---------------------------------|
| +0.003/-0.000 | +0.000/-0.003 | +0.010/-0.000 | +0.000/-0.003 | |
| 2.000 | 1.628 | 0.424 | 1.999 | 0401CT18602000-424AA |
| 2.125 | 1.753 | 0.424 | 2.124 | 0401CT18602125-424AA |
| 2.250 | 1.878 | 0.424 | 2.249 | 0401CT18602250-424AA |
| 2.375 | 2.003 | 0.424 | 2.374 | 0401CT18602375-424AA |
| 2.500 | 2.128 | 0.424 | 2.499 | 0401CT18602500-424AA |
| 2.625 | 2.253 | 0.424 | 2.624 | 0401CT18602625-424AA |
| 2.750 | 2.378 | 0.424 | 2.749 | 0401CT18602750-424AA |
| 2.875 | 2.503 | 0.424 | 2.874 | 0401CT18602875-424AA |
| +0.004/-0.000 | +0.000/-0.003 | +0.010/-0.000 | +0.000/-0.003 | |
| 3.000 | 2.522 | 0.579 | 2.998 | 0401CT23903000-579AA |
| 3.125 | 2.647 | 0.579 | 3.123 | 0401CT23903125-579AA |
| 3.250 | 2.772 | 0.579 | 3.248 | 0401CT23903250-579AA |
| 3.375 | 2.897 | 0.579 | 3.373 | 0401CT23903375-579AA |
| 3.500 | 3.022 | 0.579 | 3.498 | 0401CT23903500-579AA |
| 3.625 | 3.147 | 0.579 | 3.623 | 0401CT23903625-579AA |
| 3.750 | 3.272 | 0.579 | 3.748 | 0401CT23903750-579AA |
| 3.875 | 3.397 | 0.579 | 3.873 | 0401CT23903875-579AA |
| 4.000 | 3.522 | 0.579 | 3.998 | 0401CT23904000-579AA |
| 4.125 | 3.647 | 0.579 | 4.123 | 0401CT23904125-579AA |
| 4.250 | 3.772 | 0.579 | 4.248 | 0401CT23904250-579AA |
| 4.375 | 3.897 | 0.579 | 4.373 | 0401CT23904375-579AA |
| 4.500 | 4.022 | 0.579 | 4.498 | 0401CT23904500-579AA |
| 4.625 | 4.147 | 0.579 | 4.623 | 0401CT23904625-579AA |
| 4.750 | 4.272 | 0.579 | 4.748 | 0401CT23904750-579AA |
| 4.875 | 4.397 | 0.579 | 4.873 | 0401CT23904875-579AA |
| 5.000 | 4.272 | 0.750 | 4.998 | 0401CT36405000-750AA |
| 5.125 | 4.397 | 0.750 | 5.123 | 0401CT36405125-750AA |
| 5.250 | 4.522 | 0.750 | 5.248 | 0401CT36405250-750AA |
| 5.375 | 4.647 | 0.750 | 5.373 | 0401CT36405375-750AA |
| +0.004/-0.000 | +0.000/-0.004 | +0.010/-0.000 | +0.000/-0.004 | |
| 5.500 | 4.772 | 0.750 | 5.497 | 0401CT36405500-750AA |
| 5.625 | 4.897 | 0.750 | 5.622 | 0401CT36405625-750AA |
| 5.750 | 5.022 | 0.750 | 5.747 | 0401CT36405750-750AA |
| 5.875 | 5.147 | 0.750 | 5.872 | 0401CT36405875-750AA |
| 6.000 | 5.272 | 0.750 | 5.997 | 0401CT36406000-750AA |
| 6.125 | 5.397 | 0.750 | 6.122 | 0401CT36406125-750AA |
| 6.250 | 5.522 | 0.750 | 6.247 | 0401CT36406250-750AA |
| 6.375 | 5.647 | 0.750 | 6.372 | 0401CT36406375-750AA |
| 6.500 | 5.772 | 0.750 | 6.497 | 0401CT36406500-750AA |
| 6.750 | 6.022 | 0.750 | 6.747 | 0401CT36406750-750AA |
| 7.000 | 6.272 | 0.750 | 6.997 | 0401CT36407000-750AA |
| +0.005/-0.000 | +0.000/-0.004 | +0.010/-0.000 | +0.000/-0.004 | |
| 7.250 | 6.522 | 0.750 | 7.247 | 0401CT36407250-750AA |
| 7.500 | 6.772 | 0.750 | 7.497 | 0401CT36407500-750AA |
| 7.750 | 7.022 | 0.750 | 7.747 | 0401CT36407750-750AA |
| +0.005/-0.000 | +0.000/-0.005 | +0.010/-0.000 | +0.000/-0.005 | |
| 8.000 | 7.272 | 0.750 | 7.996 | 0401CT36408000-750AA |
| 8.250 | 7.522 | 0.750 | 8.246 | 0401CT36408250-750AA |
| 8.500 | 7.772 | 0.750 | 8.496 | 0401CT36408500-750AA |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.



Table 7-40. CT Gland Dimensions (Standard Style) — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Part Number (Standard Style) |
|----------------------|----------------------|----------------------|----------------------|------------------------------|
| + .005/- .000 | + .000/- .005 | + .010/- .000 | + .000/- .005 | |
| 8.750 | 8.022 | 0.750 | 8.746 | 0401CT36408750-750AA |
| 9.000 | 8.272 | 0.750 | 8.996 | 0401CT36409000-750AA |
| 9.500 | 8.772 | 0.750 | 9.496 | 0401CT36409500-750AA |
| 10.000 | 9.272 | 0.750 | 9.996 | 0401CT36410000-750AA |
| 10.500 | 9.772 | 0.750 | 10.496 | 0401CT36410500-750AA |
| 11.000 | 10.272 | 0.750 | 10.996 | 0401CT36411000-750AA |
| 11.500 | 10.772 | 0.750 | 11.496 | 0401CT36411500-750AA |
| 12.000 | 11.272 | 0.750 | 11.996 | 0401CT36412000-750AA |
| + .006/- .000 | + .000/- .005 | + .010/- .000 | + .000/- .005 | |
| 12.500 | 11.772 | 0.750 | 12.496 | 0401CT36412500-750AA |
| 13.000 | 12.272 | 0.750 | 12.996 | 0401CT36413000-750AA |
| + .006/- .000 | + .000/- .006 | + .010/- .000 | + .000/- .006 | |
| 13.500 | 12.772 | 0.750 | 13.495 | 0401CT36413500-750AA |
| 14.000 | 13.272 | 0.750 | 13.995 | 0401CT36414000-750AA |
| 14.500 | 13.772 | 0.750 | 14.495 | 0401CT36414500-750AA |
| 15.000 | 14.272 | 0.750 | 14.995 | 0401CT36415000-750AA |
| 15.500 | 14.772 | 0.750 | 15.495 | 0401CT36415500-750AA |
| 16.000 | 15.272 | 0.750 | 15.995 | 0401CT36416000-750AA |
| 16.500 | 15.772 | 0.750 | 16.495 | 0401CT36416500-750AA |
| 17.000 | 16.272 | 0.750 | 16.995 | 0401CT36417000-750AA |
| 17.500 | 16.772 | 0.750 | 17.495 | 0401CT36417500-750AA |
| 18.000 | 17.272 | 0.750 | 17.995 | 0401CT36418000-750AA |
| 18.500 | 17.772 | 0.750 | 18.495 | 0401CT36418500-750AA |
| 19.000 | 18.272 | 0.750 | 18.995 | 0401CT36419000-750AA |
| 19.500 | 18.772 | 0.750 | 19.495 | 0401CT36419500-750AA |
| 20.000 | 19.272 | 0.750 | 19.995 | 0401CT36420000-750AA |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — CT Profile

Table 7-41. CT Profile — Metric (mm)

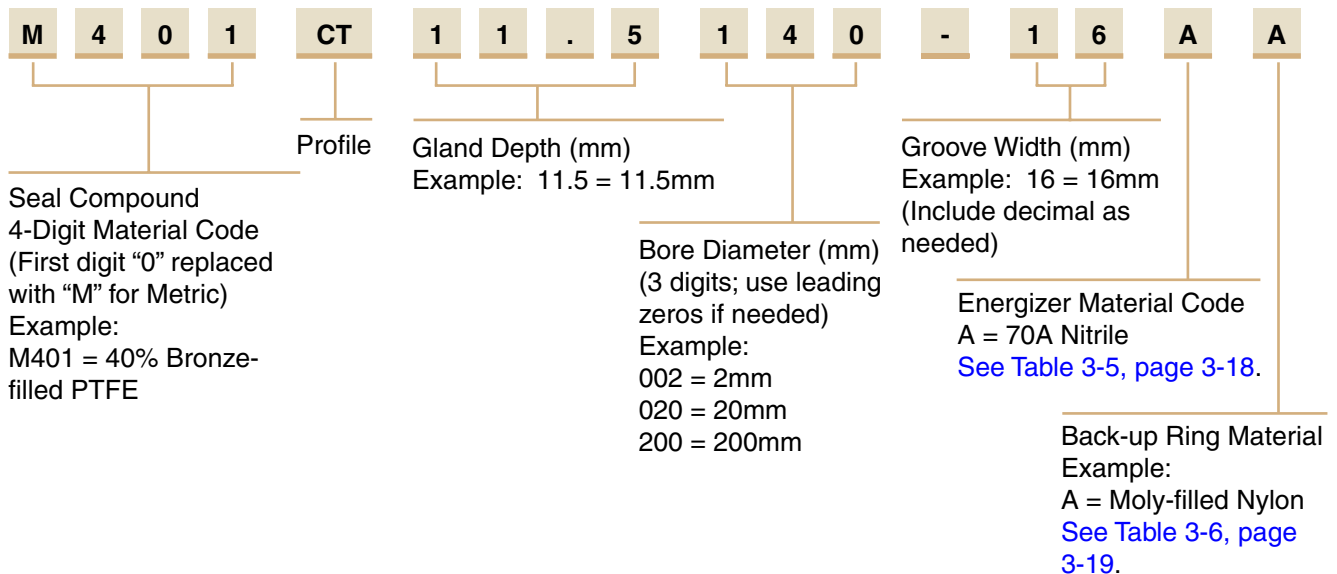

02/15/08



Piston Seal CQ Profile

Catalog EPS 5370/USA

CQ Profile, Premium PTFE Cap Seal with Anti-Drift Technology



The Parker CQ profile is a bi-directional piston seal for use in medium to heavy duty hydraulic applications. The CQ profile is a unique seal design that includes a rubber quad seal in the PTFE cap to ensure drift free performance. The PTFE cap is a stable rectangular shape and is energized, depending on its cross section, by a single square energizer or dual Parker o-rings. The CQ piston seal is commonly used in applications such as mobile hydraulics, lift trucks, standard cylinders and piston accumulators. Parker's CQ profile will retrofit non-Parker seals of similar design.

The CQ profile may be ordered without the energizer and quad seal by omitting the energizer/quad seal code. [See part number nomenclature.](#)

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|---|--------------------------------------|-----------------------|-------------------------|
| Cap 0401 40% bronze filled PTFE | -200°F to 575°F (-129°C to 302°C) | 5000 psi (344 bar) | < 9.8 ft/s (3 m/sec) |
| Energizer/Quad Seal A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.


†Pressure Range without wear rings ([see Table 2-4, page 2-5](#)).

Options


Notched Walls: Adding an "N" to the end of the part number indicates that notches are to be added to the side walls of the PTFE cap. Notches can help optimize the seal's response to fluid pressure. In application, the void created by the notch allows fluid pressure to fill the cavity between the side face of the gland and the seal. Consult your local Parker Seal representative for the availability and cost to add side notches to the CQ profile.

N = Notched walls 


Metric: To configure metric part numbering, [see Table 7-45 on page 7-52](#), and call your local Parker Seal representative for availability.



CQ Cross-Section Square Ring



CQ Cross-Section dual O-ring

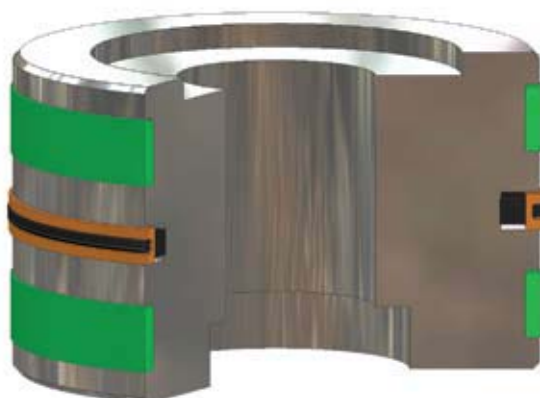


CQ installed in Piston Gland

02/15/08

Part Number Nomenclature — CQ Profile

Table 7-42. CQ Profile — Inch

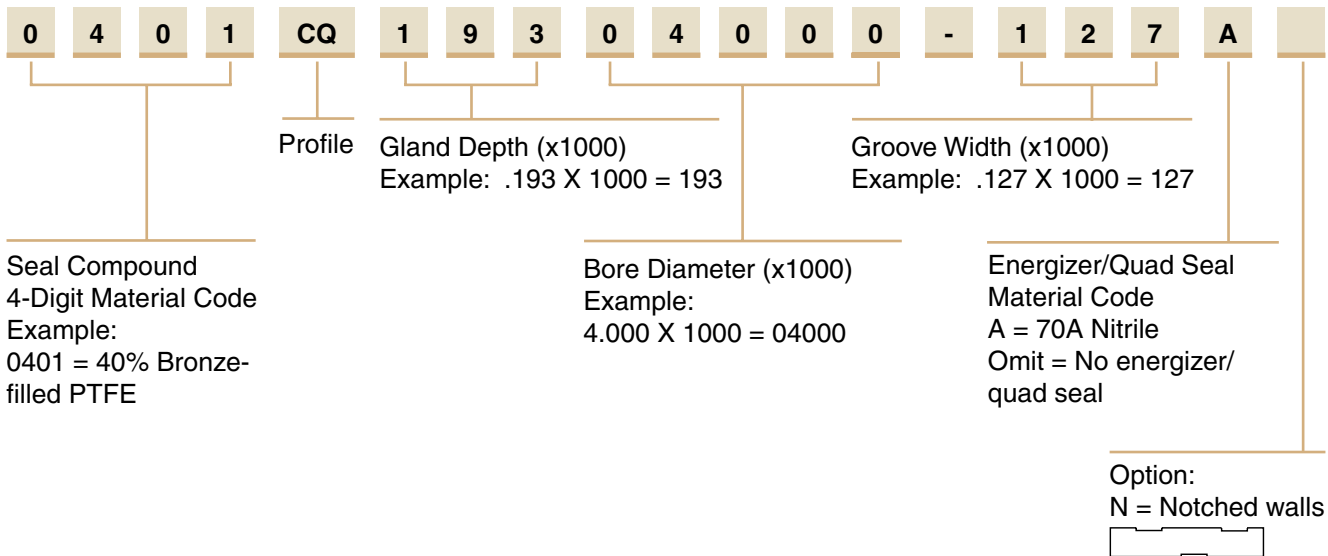

Gland Dimension — CQ Profile — Square Ring

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

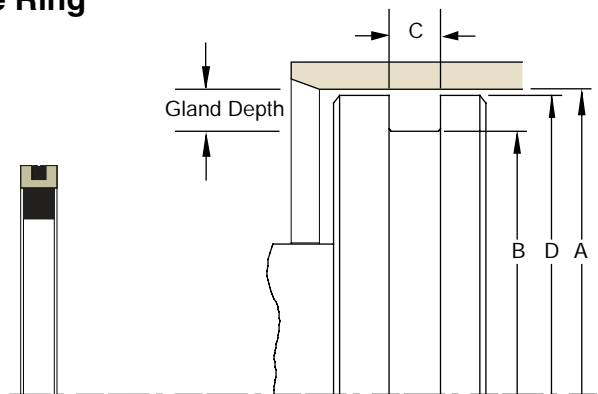


Table 7-43. CQ Gland Dimensions (Square Ring) — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Quad Seal Dash Number | Square Ring Number | Part Number (Square Ring) |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------------|--------------------------|------------------------------|
| +.002/-.000 | +.000/-.003 | +.005/-.000 | +.000/-.002 | | | |
| 1.500 | 0.884 | 0.288 | 1.499 | 125 | 316 | 0401CQ30801500-288A |
| 2.000 | 1.384 | 0.288 | 1.999 | 133 | 324 | 0401CQ30802000-288A |
| 2.250 | 1.634 | 0.288 | 2.249 | 136 | 326 | 0401CQ30802250-288A |
| 2.500 | 1.884 | 0.288 | 2.499 | 140 | 328 | 0401CQ30802500-288A |
| 2.750 | 2.134 | 0.288 | 2.749 | 145 | 330 | 0401CQ30802750-288A |
| 3.000 | 2.384 | 0.288 | 2.999 | 148 | 332 | 0401CQ30803000-288A |
| 3.250 | 2.634 | 0.288 | 3.249 | 151 | 334 | 0401CQ30803250-288A |
| 3.500 | 2.884 | 0.288 | 3.499 | 152 | 336 | 0401CQ30803500-288A |
| 3.750 | 3.134 | 0.288 | 3.749 | 153 | 338 | 0401CQ30803750-288A |
| 4.000 | 3.384 | 0.288 | 3.999 | 154 | 340 | 0401CQ30804000-288A |
| 4.250 | 3.634 | 0.288 | 4.249 | 155 | 342 | 0401CQ30804250-288A |
| 4.500 | 3.884 | 0.288 | 4.499 | 156 | 344 | 0401CQ30804500-288A |
| 4.750 | 4.134 | 0.288 | 4.749 | 157 | 346 | 0401CQ30804750-288A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).


Table 7-43. CQ Gland Dimensions (Square Ring) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Quad Seal Dash Number | Square Ring Number | Part Number (Square Ring) |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------------|--------------------------|------------------------------|
| +0.004/-0.000 | +0.000/-0.006 | +0.005/-0.000 | +0.000/-0.004 | | | |
| 5.000 | 4.384 | 0.288 | 4.998 | 158 | 348 | 0401CQ30805000-288A |
| 5.250 | 4.542 | 0.288 | 5.248 | 159 | 350 | 0401CQ30805250-288A |
| 5.500 | 4.660 | 0.375 | 5.498 | 160 | 426 | 0401CQ42005500-375A |
| 5.750 | 4.910 | 0.375 | 5.748 | 161 | 428 | 0401CQ42005750-375A |
| 6.000 | 5.160 | 0.375 | 5.998 | 162 | 430 | 0401CQ42006000-375A |
| 6.500 | 5.660 | 0.375 | 6.498 | 164 | 434 | 0401CQ42006500-375A |
| 7.000 | 6.160 | 0.375 | 6.998 | 166 | 437 | 0401CQ42007000-375A |
| 7.500 | 6.660 | 0.375 | 7.498 | 168 | 439 | 0401CQ42007500-375A |
| 8.000 | 7.160 | 0.375 | 7.998 | 170 | 441 | 0401CQ42008000-375A |
| 9.000 | 8.160 | 0.375 | 8.998 | 174 | 445 | 0401CQ42009000-375A |
| 10.000 | 9.160 | 0.375 | 9.998 | 178 | 447 | 0401CQ42010000-375A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Gland Dimension — CQ Profile — Dual O-ring

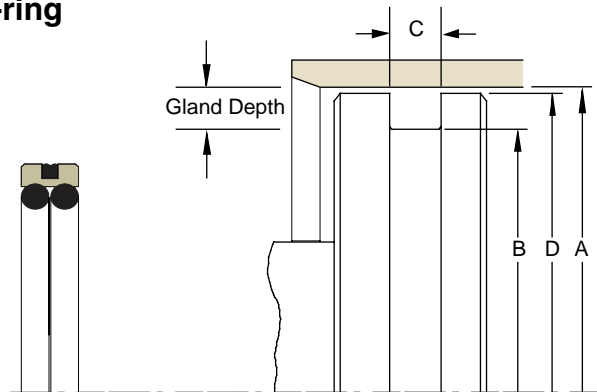

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

Table 7-44. CQ Gland Dimensions (Dual O-ring) — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Quad Seal Dash Number | Dual O-ring Number | CQ Part Number (Dual O-ring) |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------------|--------------------------|---------------------------------|
| +0.002/-0.000 | +0.000/-0.003 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 1.500 | 1.106 | 0.248 | 1.499 | 028 | 121 | 0401CQ19701500-248A |
| 1.562 | 1.168 | 0.248 | 1.561 | 028 | 122 | 0401CQ19701562-248A |
| 1.625 | 1.231 | 0.248 | 1.624 | 029 | 123 | 0401CQ19701625-248A |
| 1.687 | 1.293 | 0.248 | 1.686 | 029 | 124 | 0401CQ19701687-248A |
| 1.750 | 1.356 | 0.248 | 1.749 | 030 | 125 | 0401CQ19701750-248A |
| 1.875 | 1.481 | 0.248 | 1.874 | 031 | 127 | 0401CQ19701875-248A |
| 2.000 | 1.606 | 0.248 | 1.999 | 032 | 129 | 0401CQ19702000-248A |
| 2.125 | 1.731 | 0.248 | 2.124 | 033 | 131 | 0401CQ19702125-248A |
| 2.250 | 1.856 | 0.248 | 2.249 | 034 | 133 | 0401CQ19702250-248A |
| 2.375 | 1.981 | 0.248 | 2.373 | 035 | 135 | 0401CQ19702375-248A |
| 2.500 | 2.106 | 0.248 | 2.498 | 036 | 137 | 0401CQ19702500-248A |
| 2.625 | 2.231 | 0.248 | 2.623 | 037 | 139 | 0401CQ19702625-248A |
| 2.750 | 2.356 | 0.248 | 2.748 | 038 | 141 | 0401CQ19702750-248A |
| 2.875 | 2.481 | 0.248 | 2.873 | 039 | 143 | 0401CQ19702875-248A |
| 3.000 | 2.488 | 0.326 | 2.998 | 149 | 229 | 0401CQ25603000-326A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-44. CQ Gland Dimensions (Dual O-ring) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Quad Seal Dash Number | Dual O-ring Number | CQ Part Number (Dual O-ring) |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------------|--------------------------|---------------------------------|
| +0.002/-0.000 | +0.000/-0.003 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 3.125 | 2.613 | 0.326 | 3.123 | 150 | 230 | 0401CQ25603125-326A |
| 3.250 | 2.738 | 0.326 | 3.248 | 151 | 231 | 0401CQ25603250-326A |
| 3.375 | 2.863 | 0.326 | 3.373 | 151 | 232 | 0401CQ25603375-326A |
| 3.500 | 2.988 | 0.326 | 3.498 | 152 | 233 | 0401CQ25603500-326A |
| 3.625 | 3.113 | 0.326 | 3.623 | 152 | 234 | 0401CQ25603625-326A |
| 3.750 | 3.238 | 0.326 | 3.748 | 153 | 235 | 0401CQ25603750-326A |
| 3.875 | 3.363 | 0.326 | 3.873 | 153 | 236 | 0401CQ25603875-326A |
| 4.000 | 3.488 | 0.326 | 3.998 | 154 | 237 | 0401CQ25604000-326A |
| 4.125 | 3.613 | 0.326 | 4.123 | 154 | 238 | 0401CQ25604125-326A |
| 4.250 | 3.738 | 0.326 | 4.248 | 155 | 239 | 0401CQ25604250-326A |
| 4.375 | 3.863 | 0.326 | 4.373 | 155 | 240 | 0401CQ25604375-326A |
| 4.500 | 3.988 | 0.326 | 4.498 | 156 | 241 | 0401CQ25604500-326A |
| 4.625 | 4.113 | 0.326 | 4.623 | 156 | 242 | 0401CQ25604625-326A |
| 4.750 | 4.238 | 0.326 | 4.748 | 157 | 243 | 0401CQ25604750-326A |
| 4.875 | 4.363 | 0.326 | 4.873 | 157 | 244 | 0401CQ25604875-326A |
| +0.004/-0.000 | +0.000/-0.006 | +0.005/-0.000 | +0.000/-0.004 | | | |
| 5.000 | 4.292 | 0.484 | 4.998 | 248 | 346 | 0401CQ35405000-484A |
| 5.125 | 4.417 | 0.484 | 5.123 | 249 | 347 | 0401CQ35405125-484A |
| 5.250 | 4.542 | 0.484 | 5.248 | 250 | 348 | 0401CQ35405250-484A |
| 5.375 | 4.667 | 0.484 | 5.373 | 251 | 349 | 0401CQ35405375-484A |
| 5.500 | 4.792 | 0.484 | 5.498 | 252 | 350 | 0401CQ35405500-484A |
| 5.625 | 4.917 | 0.484 | 5.623 | 253 | 351 | 0401CQ35405625-484A |
| 5.750 | 5.042 | 0.484 | 5.748 | 254 | 352 | 0401CQ35405750-484A |
| 5.875 | 5.167 | 0.484 | 5.873 | 255 | 353 | 0401CQ35405875-484A |
| 6.000 | 5.292 | 0.484 | 5.998 | 256 | 354 | 0401CQ35406000-484A |
| 6.250 | 5.542 | 0.484 | 6.248 | 258 | 356 | 0401CQ35406250-484A |
| 6.500 | 5.792 | 0.484 | 6.498 | 259 | 358 | 0401CQ35406500-484A |
| 6.750 | 6.042 | 0.484 | 6.748 | 260 | 360 | 0401CQ35406750-484A |
| 7.000 | 6.292 | 0.484 | 6.998 | 261 | 361 | 0401CQ35407000-484A |
| 7.250 | 6.542 | 0.484 | 7.248 | 262 | 362 | 0401CQ35407250-484A |
| 7.500 | 6.792 | 0.484 | 7.498 | 263 | 363 | 0401CQ35407500-484A |
| 7.750 | 7.042 | 0.484 | 7.748 | 264 | 364 | 0401CQ35407750-484A |
| 8.000 | 7.292 | 0.484 | 7.998 | 265 | 365 | 0401CQ35408000-484A |
| 8.250 | 7.542 | 0.484 | 8.248 | 266 | 366 | 0401CQ35408250-484A |
| 8.500 | 7.792 | 0.484 | 8.498 | 267 | 367 | 0401CQ35408500-484A |
| 8.750 | 8.042 | 0.484 | 8.748 | 268 | 368 | 0401CQ35408750-484A |
| 9.000 | 8.292 | 0.484 | 8.998 | 269 | 369 | 0401CQ35409000-484A |
| 9.250 | 8.542 | 0.484 | 9.248 | 270 | 370 | 0401CQ35409250-484A |
| 9.500 | 8.792 | 0.484 | 9.498 | 271 | 371 | 0401CQ35409500-484A |
| 9.750 | 9.042 | 0.484 | 9.748 | 272 | 372 | 0401CQ35409750-484A |
| 10.000 | 9.292 | 0.484 | 9.998 | 273 | 373 | 0401CQ35410000-484A |
| 10.500 | 9.792 | 0.484 | 10.498 | 274 | 375 | 0401CQ35410500-484A |
| 11.000 | 10.292 | 0.484 | 10.998 | 275 | 377 | 0401CQ35411000-484A |
| 11.500 | 10.792 | 0.484 | 11.498 | 276 | 378 | 0401CQ35411500-484A |
| +0.006/-0.000 | +0.000/-0.008 | +0.005/-0.000 | +0.000/-0.006 | | | |
| 12.000 | 10.780 | 0.642 | 11.998 | 380 | 450 | 0401CQ61012000-642A |
| 12.500 | 11.280 | 0.642 | 12.498 | 381 | 451 | 0401CQ61012500-642A |
| 13.000 | 11.780 | 0.642 | 12.998 | 381 | 452 | 0401CQ61013000-642A |
| 13.500 | 12.280 | 0.642 | 13.498 | 382 | 453 | 0401CQ61013500-642A |
| 14.000 | 12.780 | 0.642 | 13.998 | 382 | 454 | 0401CQ61014000-642A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

09/01/07



CQ Profile

Table 7-44. CQ Gland Dimensions (Dual O-ring) — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Quad Seal Dash Number | Dual O-ring Number | CQ Part Number (Dual O-ring) |
|-----------------|-------------------|----------------|--------------------|-----------------------|--------------------|------------------------------|
| 14.500 | 13.280 | 0.642 | 14.498 | 383 | 455 | 0401CQ61014500-642A |
| 15.000 | 13.780 | 0.642 | 14.998 | 383 | 456 | 0401CQ61015000-642A |
| 15.500 | 14.280 | 0.642 | 15.498 | 384 | 457 | 0401CQ61015500-642A |
| 16.000 | 14.780 | 0.642 | 15.998 | 384 | 458 | 0401CQ61016000-642A |
| 16.500 | 15.280 | 0.642 | 16.498 | 385 | 459 | 0401CQ61016500-642A |
| 17.000 | 15.780 | 0.642 | 16.998 | 385 | 460 | 0401CQ61017000-642A |
| 17.500 | 16.280 | 0.642 | 17.498 | 386 | 461 | 0401CQ61017500-642A |
| 18.000 | 16.780 | 0.642 | 17.998 | 386 | 462 | 0401CQ61018000-642A |
| 18.500 | 17.280 | 0.642 | 18.498 | 387 | 463 | 0401CQ61018500-642A |
| 19.000 | 17.780 | 0.642 | 18.998 | 387 | 464 | 0401CQ61019000-642A |
| 19.500 | 18.280 | 0.642 | 19.498 | 388 | 465 | 0401CQ61019500-642A |
| 20.000 | 18.780 | 0.642 | 19.998 | 388 | 466 | 0401CQ61020000-642A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — CQ Profile

Table 7-45. CQ Profile — Metric (mm)

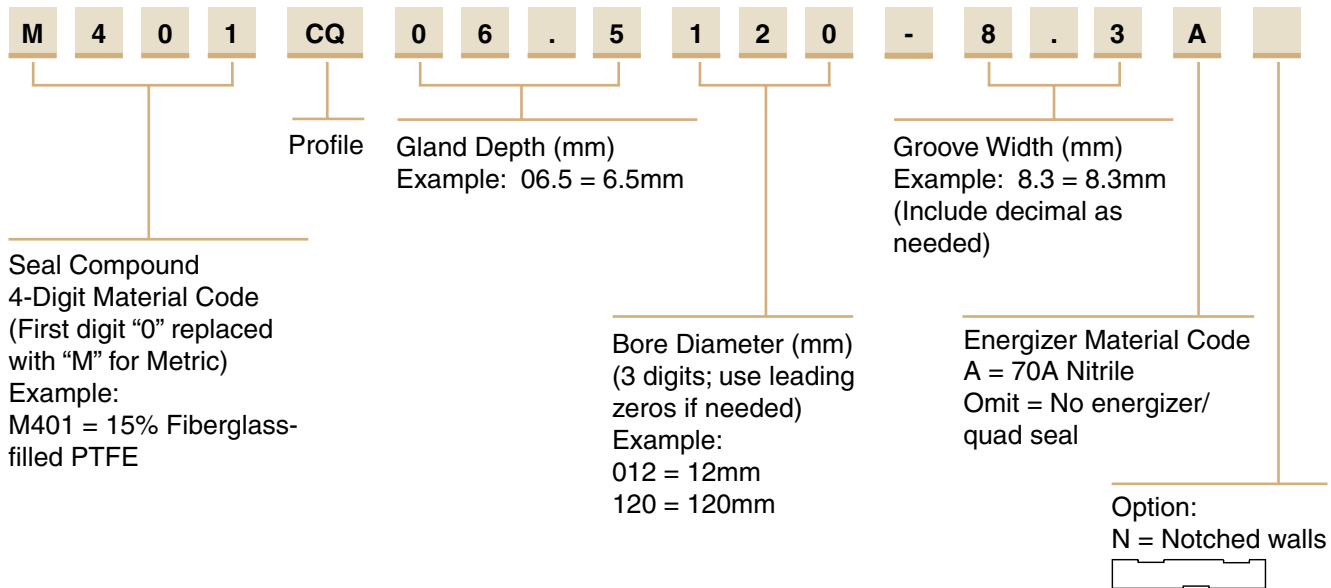

7

Piston Seal OE Profile

Catalog EPS 5370/USA



OE Profile, PTFE Piston Cap Seal

The Parker OE profile is a bi-directional piston seal for use in low to medium duty hydraulic applications. The OE profile is a two piece design comprised of a standard size Parker o-ring energizing a wear resistant PTFE cap. The OE profile offers long wear, low friction and because of its short assembly length requires minimal gland space on the piston. The seal is commonly used in applications such as mobile hydraulics, machine tools, injection molding machines and hydraulic presses. Parker's OE profile will retrofit non-Parker seals of similar design.

The OE profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------|--------------------------------------|-----------------------|------------------------|
| Cap | | | |
| 0401 40% bronze filled PTFE | -200°F to 575°F (-129°C to 302°C) | 5000 psi (344 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | |
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.


†Pressure Range without wear rings ([see Table 2-4, page 2-5](#)).

Options


Notched side walls: Adding an "N" to the end of the part number indicates that notches are to be added to the side walls of the PTFE cap. Notches can help optimize the seal's response to fluid pressure.

In application, the void created by the notch allows fluid pressure to fill the cavity between the side face of the gland and the seal. Consult your local Parker Seal representative for the availability and cost to add side notches to the OE profile.

N = Notched walls 



OE Cross-Section

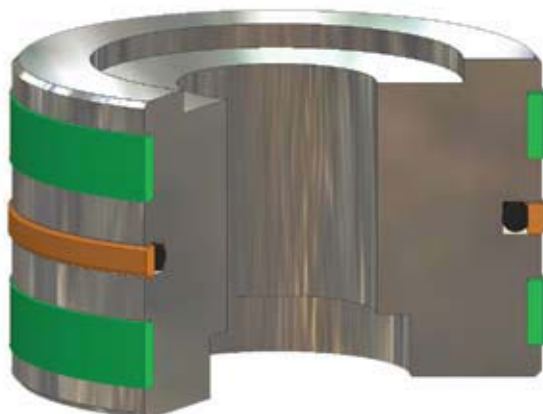

OE installed in Piston Gland

7

09/01/07

Table 7-47. OE Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.002/-0.000 | +.000/-0.002 | +.005/-0.000 | +.000/-0.002 | | |
| 0.500 | 0.244 | 0.081 | 0.499 | 010 | 0401OE12800500-081A |
| 0.562 | 0.306 | 0.081 | 0.561 | 011 | 0401OE12800562-081A |
| 0.625 | 0.369 | 0.081 | 0.624 | 012 | 0401OE12800625-081A |
| 0.687 | 0.431 | 0.081 | 0.686 | 013 | 0401OE12800687-081A |
| 0.750 | 0.494 | 0.081 | 0.749 | 014 | 0401OE12800750-081A |
| 0.812 | 0.556 | 0.081 | 0.811 | 015 | 0401OE12800812-081A |
| 0.875 | 0.619 | 0.081 | 0.874 | 016 | 0401OE12800875-081A |
| 0.937 | 0.681 | 0.081 | 0.936 | 017 | 0401OE12800937-081A |
| 1.000 | 0.744 | 0.081 | 0.999 | 018 | 0401OE12801000-081A |
| 1.062 | 0.806 | 0.081 | 1.061 | 019 | 0401OE12801062-081A |
| 1.125 | 0.869 | 0.081 | 1.124 | 020 | 0401OE12801125-081A |
| 1.187 | 0.931 | 0.081 | 1.186 | 021 | 0401OE12801187-081A |
| 1.250 | 0.994 | 0.081 | 1.249 | 022 | 0401OE12801250-081A |
| 1.312 | 1.056 | 0.081 | 1.311 | 023 | 0401OE12801312-081A |
| 1.375 | 1.119 | 0.081 | 1.374 | 024 | 0401OE12801375-081A |
| 1.437 | 1.181 | 0.081 | 1.436 | 025 | 0401OE12801437-081A |
| 1.500 | 1.244 | 0.081 | 1.499 | 026 | 0401OE12801500-081A |
| +.002/-0.000 | +.000/-0.003 | +.005/-0.000 | +.000/-0.002 | | |
| 0.750 | 0.452 | 0.126 | 0.749 | 111 | 0401OE14900750-126A |
| 0.812 | 0.514 | 0.126 | 0.811 | 112 | 0401OE14900812-126A |
| 0.875 | 0.577 | 0.126 | 0.874 | 113 | 0401OE14900875-126A |
| 0.937 | 0.639 | 0.126 | 0.936 | 114 | 0401OE14900937-126A |
| 1.000 | 0.702 | 0.126 | 0.999 | 115 | 0401OE14901000-126A |
| 1.062 | 0.764 | 0.126 | 1.061 | 116 | 0401OE14901062-126A |
| 1.125 | 0.827 | 0.126 | 1.124 | 117 | 0401OE14901125-126A |
| 1.187 | 0.889 | 0.126 | 1.186 | 118 | 0401OE14901187-126A |
| 1.250 | 0.952 | 0.126 | 1.249 | 119 | 0401OE14901250-126A |
| 1.312 | 1.014 | 0.126 | 1.311 | 120 | 0401OE14901312-126A |
| 1.375 | 1.077 | 0.126 | 1.374 | 121 | 0401OE14901375-126A |
| 1.437 | 1.139 | 0.126 | 1.436 | 122 | 0401OE14901437-126A |
| 1.500 | 1.202 | 0.126 | 1.499 | 123 | 0401OE14901500-126A |
| 1.562 | 1.264 | 0.126 | 1.561 | 124 | 0401OE14901562-126A |
| 1.625 | 1.327 | 0.126 | 1.624 | 125 | 0401OE14901625-126A |
| 1.687 | 1.389 | 0.126 | 1.686 | 126 | 0401OE14901687-126A |
| 1.750 | 1.452 | 0.126 | 1.749 | 127 | 0401OE14901750-126A |
| 1.875 | 1.577 | 0.126 | 1.874 | 129 | 0401OE14901875-126A |
| 2.000 | 1.702 | 0.126 | 1.999 | 131 | 0401OE14902000-126A |
| 2.125 | 1.827 | 0.126 | 2.124 | 133 | 0401OE14902125-126A |
| 2.250 | 1.952 | 0.126 | 2.249 | 135 | 0401OE14902250-126A |
| 2.375 | 2.077 | 0.126 | 2.374 | 137 | 0401OE14902375-126A |
| 2.500 | 2.202 | 0.126 | 2.499 | 139 | 0401OE14902500-126A |
| 2.625 | 2.327 | 0.126 | 2.624 | 141 | 0401OE14902625-126A |
| 2.750 | 2.452 | 0.126 | 2.749 | 143 | 0401OE14902750-126A |
| 1.562 | 1.176 | 0.120 | 1.561 | 123 | 0401OE19301562-120A |
| 1.625 | 1.239 | 0.120 | 1.624 | 124 | 0401OE19301625-120A |
| 1.687 | 1.301 | 0.120 | 1.686 | 125 | 0401OE19301687-120A |
| 1.750 | 1.364 | 0.120 | 1.749 | 126 | 0401OE19301750-120A |
| 1.875 | 1.489 | 0.120 | 1.874 | 128 | 0401OE19301875-120A |
| 2.000 | 1.614 | 0.127 | 1.999 | 130 | 0401OE19302000-127A |
| 2.125 | 1.739 | 0.127 | 2.124 | 132 | 0401OE19302125-127A |
| 2.250 | 1.864 | 0.127 | 2.249 | 134 | 0401OE19302250-127A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

09/01/07



Table 7-47. OE Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +0.002/-0.000 | +0.000/-0.003 | +0.005/-0.000 | +0.000/-0.002 | | |
| 2.375 | 1.989 | 0.127 | 2.374 | 136 | 0401OE19302375-127A |
| 2.500 | 2.114 | 0.127 | 2.499 | 138 | 0401OE19302500-127A |
| 2.625 | 2.239 | 0.127 | 2.624 | 140 | 0401OE19302625-127A |
| 2.750 | 2.364 | 0.127 | 2.749 | 142 | 0401OE19302750-127A |
| 2.875 | 2.489 | 0.127 | 2.874 | 144 | 0401OE19302875-127A |
| 3.000 | 2.614 | 0.127 | 2.999 | 146 | 0401OE19303000-127A |
| 3.125 | 2.739 | 0.127 | 3.124 | 148 | 0401OE19303125-127A |
| 3.250 | 2.864 | 0.127 | 3.249 | 150 | 0401OE19303250-127A |
| 3.375 | 2.989 | 0.127 | 3.374 | 151 | 0401OE19303375-127A |
| 3.500 | 3.114 | 0.127 | 3.499 | 151 | 0401OE19303500-127A |
| 3.625 | 3.239 | 0.127 | 3.624 | 152 | 0401OE19303625-127A |
| 3.750 | 3.364 | 0.127 | 3.749 | 152 | 0401OE19303750-127A |
| 3.875 | 3.489 | 0.127 | 3.874 | 153 | 0401OE19303875-127A |
| 4.000 | 3.614 | 0.127 | 3.999 | 153 | 0401OE19304000-127A |
| 4.125 | 3.739 | 0.127 | 4.124 | 154 | 0401OE19304125-127A |
| 4.250 | 3.864 | 0.127 | 4.249 | 154 | 0401OE19304250-127A |
| 4.375 | 3.989 | 0.127 | 4.374 | 155 | 0401OE19304375-127A |
| 4.500 | 4.114 | 0.127 | 4.499 | 155 | 0401OE19304500-127A |
| 4.625 | 4.239 | 0.127 | 4.624 | 156 | 0401OE19304625-127A |
| 4.750 | 4.364 | 0.127 | 4.749 | 156 | 0401OE19304750-127A |
| 4.875 | 4.489 | 0.127 | 4.874 | 157 | 0401OE19304875-127A |
| 5.000 | 4.614 | 0.127 | 4.999 | 157 | 0401OE19305000-127A |
| 5.125 | 4.739 | 0.127 | 5.124 | 158 | 0401OE19305125-127A |
| 5.250 | 4.864 | 0.127 | 5.249 | 158 | 0401OE19305250-127A |
| 5.375 | 4.989 | 0.127 | 5.374 | 159 | 0401OE19305375-127A |
| 5.500 | 5.114 | 0.127 | 5.499 | 159 | 0401OE19305500-127A |
| +0.003/-0.000 | +0.000/-0.004 | +0.005/-0.000 | +0.000/-0.003 | | |
| 1.562 | 1.138 | 0.166 | 1.561 | 217 | 0401OE21201562-166A |
| 1.625 | 1.201 | 0.166 | 1.624 | 218 | 0401OE21201625-166A |
| 1.687 | 1.263 | 0.166 | 1.686 | 219 | 0401OE21201687-166A |
| 1.750 | 1.326 | 0.166 | 1.749 | 221 | 0401OE21201750-166A |
| 1.875 | 1.451 | 0.166 | 1.874 | 222 | 0401OE21201875-166A |
| 2.000 | 1.576 | 0.166 | 1.999 | 223 | 0401OE21202000-166A |
| 2.125 | 1.701 | 0.166 | 2.124 | 224 | 0401OE21202125-166A |
| 2.250 | 1.826 | 0.166 | 2.249 | 225 | 0401OE21202250-166A |
| 2.375 | 1.951 | 0.166 | 2.374 | 226 | 0401OE21202375-166A |
| 2.500 | 2.076 | 0.166 | 2.499 | 227 | 0401OE21202500-166A |
| 2.625 | 2.201 | 0.166 | 2.624 | 228 | 0401OE21202625-166A |
| 2.750 | 2.326 | 0.166 | 2.749 | 229 | 0401OE21202750-166A |
| 2.875 | 2.451 | 0.166 | 2.874 | 230 | 0401OE21202875-166A |
| 3.000 | 2.576 | 0.166 | 2.999 | 231 | 0401OE21203000-166A |
| 3.125 | 2.701 | 0.166 | 3.124 | 232 | 0401OE21203125-166A |
| 3.250 | 2.826 | 0.166 | 3.249 | 233 | 0401OE21203250-166A |
| 3.375 | 2.951 | 0.166 | 3.374 | 234 | 0401OE21203375-166A |
| 3.500 | 3.076 | 0.166 | 3.499 | 235 | 0401OE21203500-166A |
| 3.625 | 3.201 | 0.166 | 3.624 | 236 | 0401OE21203625-166A |
| 3.750 | 3.326 | 0.166 | 3.749 | 237 | 0401OE21203750-166A |
| 3.875 | 3.451 | 0.166 | 3.874 | 238 | 0401OE21203875-166A |
| 4.000 | 3.576 | 0.166 | 3.999 | 239 | 0401OE21204000-166A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-47. OE Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +.003/-0.000 | +.000/-0.004 | +.005/-0.000 | +.000/-0.003 | | |
| 4.125 | 3.701 | 0.166 | 4.124 | 240 | 0401OE21204125-166A |
| 4.250 | 3.826 | 0.166 | 4.249 | 241 | 0401OE21204250-166A |
| 4.375 | 3.951 | 0.166 | 4.374 | 242 | 0401OE21204375-166A |
| 4.500 | 4.076 | 0.166 | 4.499 | 243 | 0401OE21204500-166A |
| 4.625 | 4.201 | 0.166 | 4.624 | 244 | 0401OE21204625-166A |
| 4.750 | 4.326 | 0.166 | 4.749 | 245 | 0401OE21204750-166A |
| 4.875 | 4.451 | 0.166 | 4.874 | 246 | 0401OE21204875-166A |
| 5.000 | 4.576 | 0.166 | 4.999 | 247 | 0401OE21205000-166A |
| 5.125 | 4.701 | 0.166 | 5.124 | 248 | 0401OE21205125-166A |
| 5.250 | 4.826 | 0.166 | 5.249 | 249 | 0401OE21205250-166A |
| 5.375 | 4.951 | 0.166 | 5.374 | 250 | 0401OE21205375-166A |
| 5.500 | 5.076 | 0.166 | 5.499 | 251 | 0401OE21205500-166A |
| +.003/-0.000 | +.000/-0.005 | +.005/-0.000 | +.000/-0.003 | | |
| 5.625 | 5.109 | 0.157 | 5.623 | 251 | 0401OE25805625-157A |
| 5.750 | 5.234 | 0.157 | 5.748 | 252 | 0401OE25805750-157A |
| 5.875 | 5.359 | 0.157 | 5.873 | 253 | 0401OE25805875-157A |
| 6.000 | 5.484 | 0.157 | 5.998 | 254 | 0401OE25806000-157A |
| 6.125 | 5.609 | 0.157 | 6.123 | 255 | 0401OE25806125-157A |
| 6.250 | 5.734 | 0.157 | 6.248 | 256 | 0401OE25806250-157A |
| 6.375 | 5.859 | 0.157 | 6.373 | 257 | 0401OE25806375-157A |
| 6.500 | 5.984 | 0.157 | 6.498 | 258 | 0401OE25806500-157A |
| 6.750 | 6.234 | 0.157 | 6.748 | 259 | 0401OE25806750-157A |
| 7.000 | 6.484 | 0.157 | 6.998 | 260 | 0401OE25807000-157A |
| 7.250 | 6.734 | 0.157 | 7.248 | 261 | 0401OE25807250-157A |
| 7.500 | 6.984 | 0.157 | 7.498 | 262 | 0401OE25807500-157A |
| 7.750 | 7.234 | 0.157 | 7.748 | 263 | 0401OE25807750-157A |
| 8.000 | 7.484 | 0.157 | 7.998 | 264 | 0401OE25808000-157A |
| 8.250 | 7.734 | 0.157 | 8.248 | 265 | 0401OE25808250-157A |
| 8.500 | 7.984 | 0.157 | 8.498 | 266 | 0401OE25808500-157A |
| 9.000 | 8.484 | 0.157 | 8.998 | 268 | 0401OE25809000-157A |
| 9.500 | 8.984 | 0.157 | 9.498 | 270 | 0401OE25809500-157A |
| 10.000 | 9.484 | 0.157 | 9.998 | 272 | 0401OE25810000-157A |
| 10.500 | 9.984 | 0.157 | 10.498 | 274 | 0401OE25810500-157A |
| 11.000 | 10.484 | 0.157 | 10.998 | 275 | 0401OE25811000-157A |
| 11.500 | 10.984 | 0.157 | 11.498 | 276 | 0401OE25811500-157A |
| 12.000 | 11.484 | 0.157 | 11.998 | 277 | 0401OE25812000-157A |
| +.003/-0.000 | +.000/-0.006 | +.005/-0.000 | +.000/-0.003 | | |
| 3.125 | 2.509 | 0.247 | 3.123 | 333 | 0401OE30803125-247A |
| 3.250 | 2.634 | 0.247 | 3.248 | 334 | 0401OE30803250-247A |
| 3.375 | 2.759 | 0.247 | 3.373 | 335 | 0401OE30803375-247A |
| 3.500 | 2.884 | 0.247 | 3.498 | 336 | 0401OE30803500-247A |
| 3.625 | 3.009 | 0.247 | 3.623 | 337 | 0401OE30803625-247A |
| 3.750 | 3.134 | 0.247 | 3.748 | 338 | 0401OE30803750-247A |
| 3.875 | 3.259 | 0.247 | 3.873 | 339 | 0401OE30803875-247A |
| 4.000 | 3.384 | 0.247 | 3.998 | 340 | 0401OE30804000-247A |
| 4.125 | 3.509 | 0.247 | 4.123 | 341 | 0401OE30804125-247A |
| 4.250 | 3.634 | 0.247 | 4.248 | 342 | 0401OE30804250-247A |
| 4.375 | 3.759 | 0.247 | 4.373 | 343 | 0401OE30804375-247A |
| 4.500 | 3.884 | 0.247 | 4.498 | 344 | 0401OE30804500-247A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-47. OE Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|---------------------|
| +0.003/-0.000 | +0.000/-0.006 | +0.005/-0.000 | +0.000/-0.003 | | |
| 4.625 | 4.009 | 0.247 | 4.623 | 345 | 0401OE30804625-247A |
| 4.750 | 4.134 | 0.247 | 4.748 | 346 | 0401OE30804750-247A |
| 4.875 | 4.259 | 0.247 | 4.873 | 347 | 0401OE30804875-247A |
| 5.000 | 4.384 | 0.247 | 4.998 | 348 | 0401OE30805000-247A |
| 5.125 | 4.509 | 0.247 | 5.123 | 349 | 0401OE30805125-247A |
| 5.250 | 4.634 | 0.247 | 5.248 | 350 | 0401OE30805250-247A |
| 5.375 | 4.759 | 0.247 | 5.373 | 351 | 0401OE30805375-247A |
| 5.500 | 4.884 | 0.247 | 5.498 | 352 | 0401OE30805500-247A |
| 5.625 | 5.009 | 0.247 | 5.623 | 353 | 0401OE30805625-247A |
| 5.750 | 5.134 | 0.247 | 5.748 | 354 | 0401OE30805750-247A |
| 5.875 | 5.259 | 0.247 | 5.873 | 355 | 0401OE30805875-247A |
| 6.000 | 5.384 | 0.247 | 5.998 | 356 | 0401OE30806000-247A |
| 6.125 | 5.509 | 0.247 | 6.123 | 357 | 0401OE30806125-247A |
| 6.250 | 5.634 | 0.247 | 6.248 | 358 | 0401OE30806250-247A |
| 6.375 | 5.759 | 0.247 | 6.373 | 359 | 0401OE30806375-247A |
| 6.500 | 5.884 | 0.247 | 6.498 | 360 | 0401OE30806500-247A |
| 6.750 | 6.134 | 0.247 | 6.748 | 361 | 0401OE30806750-247A |
| 7.000 | 6.384 | 0.247 | 6.998 | 362 | 0401OE30807000-247A |
| 7.250 | 6.634 | 0.247 | 7.248 | 363 | 0401OE30807250-247A |
| 7.500 | 6.884 | 0.247 | 7.498 | 364 | 0401OE30807500-247A |
| 7.750 | 7.134 | 0.247 | 7.748 | 365 | 0401OE30807750-247A |
| 8.000 | 7.384 | 0.247 | 7.998 | 366 | 0401OE30808000-247A |
| 8.250 | 7.634 | 0.247 | 8.248 | 367 | 0401OE30808250-247A |
| 8.500 | 7.884 | 0.247 | 8.498 | 368 | 0401OE30808500-247A |
| 9.000 | 8.384 | 0.247 | 8.998 | 370 | 0401OE30809000-247A |
| 9.500 | 8.884 | 0.247 | 9.498 | 372 | 0401OE30809500-247A |
| 10.000 | 9.384 | 0.247 | 9.998 | 374 | 0401OE30810000-247A |
| 10.500 | 9.884 | 0.247 | 10.498 | 376 | 0401OE30810500-247A |
| 11.000 | 10.384 | 0.247 | 10.998 | 377 | 0401OE30811000-247A |
| 11.500 | 10.884 | 0.247 | 11.498 | 378 | 0401OE30811500-247A |
| 12.000 | 11.384 | 0.247 | 11.998 | 379 | 0401OE30812000-247A |
| +0.004/-0.000 | +0.000/-0.007 | +0.005/-0.000 | +0.000/-0.004 | | |
| 5.375 | 4.545 | 0.320 | 5.373 | 425 | 0401OE41505375-320A |
| 5.500 | 4.670 | 0.320 | 5.498 | 426 | 0401OE41505500-320A |
| 5.625 | 4.795 | 0.320 | 5.623 | 427 | 0401OE41505625-320A |
| 5.750 | 4.920 | 0.320 | 5.748 | 428 | 0401OE41505750-320A |
| 5.875 | 5.045 | 0.320 | 5.873 | 429 | 0401OE41505875-320A |
| 6.000 | 5.170 | 0.320 | 5.998 | 430 | 0401OE41506000-320A |
| 6.125 | 5.295 | 0.320 | 6.123 | 431 | 0401OE41506125-320A |
| 6.250 | 5.420 | 0.320 | 6.248 | 432 | 0401OE41506250-320A |
| 6.375 | 5.545 | 0.320 | 6.373 | 433 | 0401OE41506375-320A |
| 6.500 | 5.670 | 0.320 | 6.498 | 435 | 0401OE41506500-320A |
| 6.750 | 5.920 | 0.320 | 6.748 | 436 | 0401OE41506750-320A |
| 7.000 | 6.170 | 0.320 | 6.998 | 437 | 0401OE41507000-320A |
| 7.250 | 6.420 | 0.320 | 7.248 | 438 | 0401OE41507250-320A |
| 7.500 | 6.670 | 0.320 | 7.498 | 439 | 0401OE41507500-320A |
| 7.750 | 6.920 | 0.320 | 7.748 | 440 | 0401OE41507750-320A |
| 8.000 | 7.170 | 0.320 | 7.998 | 441 | 0401OE41508000-320A |
| 8.250 | 7.420 | 0.320 | 8.248 | 442 | 0401OE41508250-320A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-47. OE Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------|-------------------|----------------|--------------------|--------------------|---------------------|
| 8.500 | 7.670 | 0.320 | 8.498 | 443 | 0401OE41508500-320A |
| 9.000 | 8.170 | 0.320 | 8.998 | 445 | 0401OE41509000-320A |
| 9.500 | 8.670 | 0.320 | 9.498 | 446 | 0401OE41509500-320A |
| 10.000 | 9.170 | 0.320 | 9.998 | 447 | 0401OE41510000-320A |
| 10.500 | 9.670 | 0.320 | 10.498 | 448 | 0401OE41510500-320A |
| 11.000 | 10.170 | 0.320 | 10.998 | 449 | 0401OE41511000-320A |
| 11.500 | 10.670 | 0.320 | 11.498 | 450 | 0401OE41511500-320A |
| 12.000 | 11.170 | 0.320 | 11.998 | 451 | 0401OE41512000-320A |
| 12.500 | 11.670 | 0.320 | 12.498 | 452 | 0401OE41512500-320A |
| 13.000 | 12.170 | 0.320 | 12.998 | 453 | 0401OE41513000-320A |
| 13.500 | 12.670 | 0.320 | 13.498 | 454 | 0401OE41513500-320A |
| 14.000 | 13.170 | 0.320 | 13.998 | 455 | 0401OE41514000-320A |
| 14.500 | 13.670 | 0.320 | 14.498 | 456 | 0401OE41514500-320A |
| 15.000 | 14.170 | 0.320 | 14.998 | 457 | 0401OE41515000-320A |
| 15.500 | 14.670 | 0.320 | 15.498 | 458 | 0401OE41515500-320A |
| 16.000 | 15.170 | 0.320 | 15.998 | 459 | 0401OE41516000-320A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.


NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature — OE Profile

Table 7-48. OE Profile — Metric (mm)

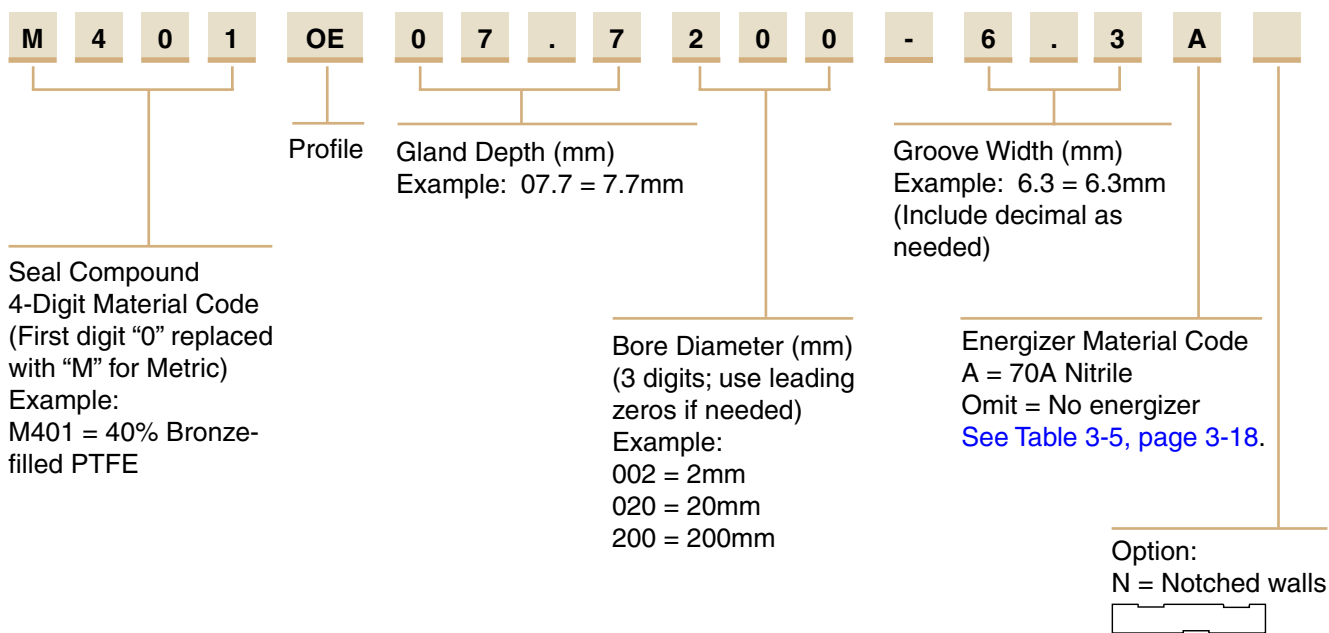

Gland Dimension — OE Profile

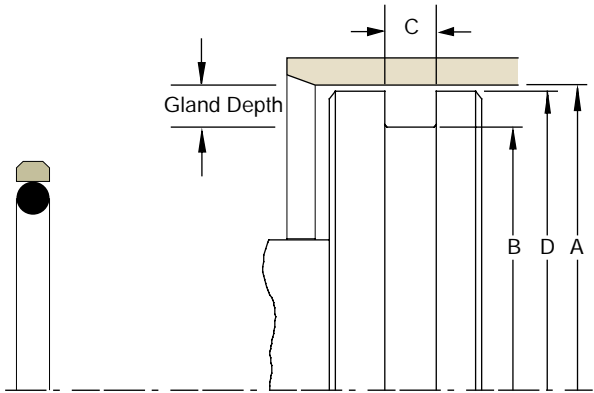

Please refer to Engineering [Section 2](#), [Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-49. OE Gland Dimensions — Metric (mm)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| H9 | h9 | +0.02/-0.00 | h8 | | |
| 8.00 | 3.00 | 2.20 | 7.97 | 005 | M401OE02.5008-2.2A |
| 10.00 | 5.00 | 2.20 | 9.97 | 010 | M401OE02.5010-2.2A |
| 11.00 | 6.00 | 2.20 | 10.97 | 010 | M401OE02.5011-2.2A |
| 12.00 | 7.00 | 2.20 | 11.97 | 010 | M401OE02.5012-2.2A |
| 13.00 | 8.00 | 2.20 | 12.97 | 011 | M401OE02.5013-2.2A |
| 14.00 | 9.00 | 2.20 | 13.97 | 011 | M401OE02.5014-2.2A |
| 16.00 | 8.50 | 3.20 | 15.94 | 109 | M401OE03.7016-3.2A |
| 18.00 | 10.50 | 3.20 | 17.94 | 110 | M401OE03.7018-3.2A |
| 20.00 | 12.50 | 3.20 | 19.94 | 112 | M401OE03.7020-3.2A |
| 22.00 | 14.50 | 3.20 | 21.94 | 113 | M401OE03.7022-3.2A |
| 24.00 | 16.50 | 3.20 | 23.94 | 114 | M401OE03.7024-3.2A |
| 25.00 | 17.50 | 3.20 | 24.94 | 115 | M401OE03.7025-3.2A |
| 28.00 | 20.50 | 3.20 | 27.94 | 117 | M401OE03.7028-3.2A |
| 30.00 | 22.50 | 3.20 | 29.94 | 118 | M401OE03.7030-3.2A |
| 32.00 | 24.50 | 3.20 | 31.94 | 119 | M401OE03.7032-3.2A |
| 35.00 | 27.50 | 3.20 | 34.94 | 121 | M401OE03.7035-3.2A |
| 36.00 | 28.50 | 3.20 | 35.94 | 122 | M401OE03.7036-3.2A |
| 38.00 | 30.50 | 3.20 | 37.94 | 123 | M401OE03.7038-3.2A |
| 40.00 | 32.50 | 3.20 | 39.94 | 124 | M401OE03.7040-3.2A |
| 25.00 | 14.00 | 4.20 | 24.94 | 207 | M401OE05.5025-4.2A |
| 32.00 | 21.00 | 4.20 | 31.94 | 211 | M401OE05.5032-4.2A |
| 40.00 | 29.00 | 4.20 | 39.94 | 216 | M401OE05.5040-4.2A |
| 45.00 | 34.00 | 4.20 | 44.94 | 219 | M401OE05.5045-4.2A |
| 50.00 | 39.00 | 4.20 | 49.94 | 222 | M401OE05.5050-4.2A |
| 55.00 | 44.00 | 4.20 | 54.94 | 224 | M401OE05.5055-4.2A |
| 60.00 | 49.00 | 4.20 | 59.94 | 225 | M401OE05.5060-4.2A |
| 63.00 | 52.00 | 4.20 | 62.94 | 226 | M401OE05.5063-4.2A |
| 65.00 | 54.00 | 4.20 | 64.94 | 227 | M401OE05.5065-4.2A |
| 70.00 | 59.00 | 4.20 | 69.94 | 228 | M401OE05.5070-4.2A |
| 75.00 | 64.00 | 4.20 | 74.94 | 230 | M401OE05.5075-4.2A |
| 80.00 | 69.00 | 4.20 | 79.94 | 231 | M401OE05.5080-4.2A |
| 100.00 | 89.00 | 4.20 | 99.94 | 238 | M401OE05.5100-4.2A |
| 50.00 | 34.50 | 6.30 | 49.90 | 324 | M401OE07.7050-6.3A |
| 63.00 | 47.50 | 6.30 | 62.90 | 328 | M401OE07.7063-6.3A |
| 70.00 | 54.50 | 6.30 | 69.90 | 330 | M401OE07.7070-6.3A |
| 80.00 | 64.50 | 6.30 | 79.90 | 333 | M401OE07.7080-6.3A |
| 85.00 | 69.50 | 6.30 | 84.90 | 335 | M401OE07.7085-6.3A |
| 90.00 | 74.50 | 6.30 | 89.90 | 336 | M401OE07.7090-6.3A |
| 95.00 | 79.50 | 6.30 | 94.90 | 338 | M401OE07.7095-6.3A |
| 100.00 | 84.50 | 6.30 | 99.90 | 339 | M401OE07.7100-6.3A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

Table 7-49. OE Gland Dimensions — Metric (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| H9 | h9 | + .02/- .00 | h8 | | |
| 105.00 | 89.50 | 6.30 | 104.90 | 341 | M401OE07.7105-6.3A |
| 110.00 | 94.50 | 6.30 | 109.90 | 342 | M401OE07.7110-6.3A |
| 115.00 | 99.50 | 6.30 | 114.90 | 344 | M401OE07.7115-6.3A |
| 120.00 | 104.50 | 6.30 | 119.90 | 345 | M401OE07.7120-6.3A |
| 125.00 | 109.50 | 6.30 | 124.90 | 347 | M401OE07.7125-6.3A |
| 130.00 | 114.50 | 6.30 | 129.90 | 349 | M401OE07.7130-6.3A |
| 132.00 | 116.50 | 6.30 | 131.90 | 349 | M401OE07.7132-6.3A |
| 135.00 | 119.50 | 6.30 | 134.90 | 350 | M401OE07.7135-6.3A |
| 140.00 | 124.50 | 6.30 | 139.90 | 352 | M401OE07.7140-6.3A |
| 145.00 | 129.50 | 6.30 | 144.90 | 353 | M401OE07.7145-6.3A |
| 160.00 | 144.50 | 6.30 | 159.90 | 358 | M401OE07.7160-6.3A |
| 200.00 | 184.50 | 6.30 | 199.90 | 366 | M401OE07.7200-6.3A |
| 135.00 | 114.00 | 8.10 | 134.90 | 425 | M401OE10.5135-8.1A |
| 140.00 | 119.00 | 8.10 | 139.90 | 426 | M401OE10.5140-8.1A |
| 145.00 | 124.00 | 8.10 | 144.90 | 428 | M401OE10.5145-8.1A |
| 150.00 | 129.00 | 8.10 | 149.90 | 430 | M401OE10.5150-8.1A |
| 155.00 | 134.00 | 8.10 | 154.90 | 431 | M401OE10.5155-8.1A |
| 160.00 | 139.00 | 8.10 | 159.90 | 433 | M401OE10.5160-8.1A |
| 165.00 | 144.00 | 8.10 | 164.90 | 434 | M401OE10.5165-8.1A |
| 170.00 | 149.00 | 8.10 | 169.90 | 435 | M401OE10.5170-8.1A |
| 175.00 | 154.00 | 8.10 | 174.90 | 437 | M401OE10.5175-8.1A |
| 180.00 | 159.00 | 8.10 | 179.90 | 438 | M401OE10.5180-8.1A |
| 185.00 | 164.00 | 8.10 | 184.90 | 438 | M401OE10.5185-8.1A |
| 190.00 | 169.00 | 8.10 | 189.90 | 439 | M401OE10.5190-8.1A |
| 195.00 | 174.00 | 8.10 | 194.90 | 440 | M401OE10.5195-8.1A |
| 200.00 | 179.00 | 8.10 | 199.90 | 441 | M401OE10.5200-8.1A |
| 205.00 | 184.00 | 8.10 | 204.90 | 442 | M401OE10.5205-8.1A |
| 210.00 | 189.00 | 8.10 | 209.90 | 443 | M401OE10.5210-8.1A |
| 215.00 | 194.00 | 8.10 | 214.90 | 443 | M401OE10.5215-8.1A |
| 220.00 | 199.00 | 8.10 | 219.90 | 444 | M401OE10.5220-8.1A |
| 225.00 | 204.00 | 8.10 | 224.90 | 445 | M401OE10.5225-8.1A |
| 230.00 | 209.00 | 8.10 | 229.90 | 445 | M401OE10.5230-8.1A |
| 235.00 | 214.00 | 8.10 | 234.90 | 445 | M401OE10.5235-8.1A |
| 240.00 | 219.00 | 8.10 | 239.90 | 446 | M401OE10.5240-8.1A |
| 245.00 | 224.00 | 8.10 | 244.90 | 446 | M401OE10.5245-8.1A |
| 250.00 | 229.00 | 8.10 | 249.90 | 447 | M401OE10.5250-8.1A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal CP Profile

Catalog EPS 5370/USA



CP Profile, PTFE Piston Cap Seal

The Parker CP profile is a cap seal with anti-extrusion, low friction and low wear features. The CP profile is a bi-directional piston seal for use in low to medium duty applications. The CP profile retrofits into a standard size o-ring groove without modification. There are three CP profiles to match the groove width for a single o-ring, o-ring with one back-up, or an o-ring with two back-up rings. Because of the unique design of the filled PTFE cap, the CP profile offers long wear, low friction and anti-extrusion. Because of its short assembly length, only minimal gland space is needed to fit the seal on the piston. Parker's CP profile will retrofit non-Parker seals of similar design.

- CP0 — a standard o-ring groove.
- CP1 — an o-ring groove designed for one back-up ring.
- CP2 — an o-ring groove designed for two back-up rings.

The CP profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data

| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|-----------------------------|--------------------------------------|------------------------|------------------------|
| Cap | | | |
| 0401 40% bronze filled PTFE | -200°F to 575°F (-129°C to 302°C) | 3,500 psi (240 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | |
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |



CP Cross-Section

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.

†Pressure Range without wear rings ([see Table 2-4, page 2-5](#)).

Options

Notched side walls: Adding an “N” to the end of the part number indicates that notches are to be added to the side walls of the PTFE cap. Notches can help optimize the seal’s response to fluid pressure. In application, the void created by the notch allows fluid pressure to fill the cavity between the side face of the gland and the seal. Consult your local Parker Seal representative for the availability and cost to add side notches to the CP profile.

N = Notched walls 




CP installed in Piston Gland

09/01/07

Part Number Nomenclature — CP Profile

Table 7-50. CP Profile — Inch

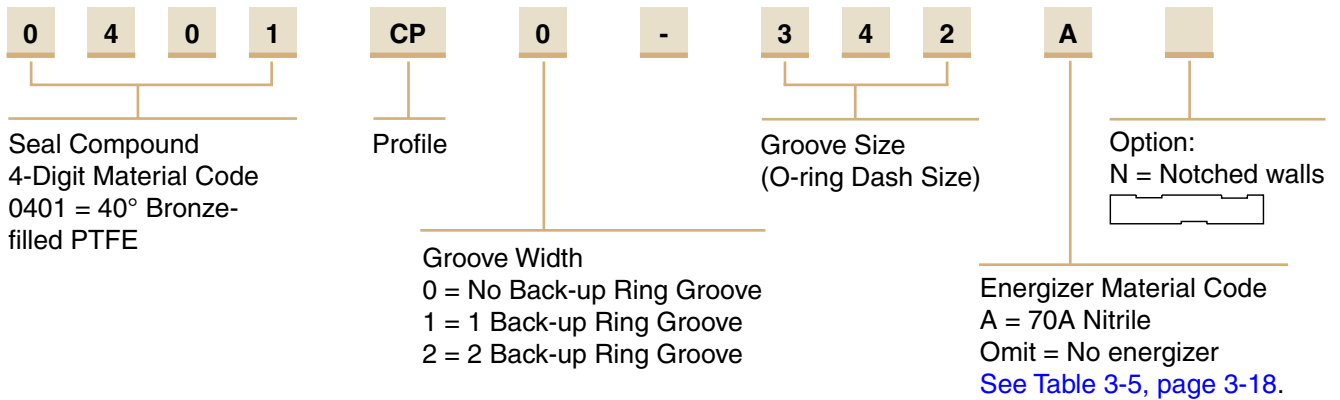

Gland Dimension — CP Profile

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

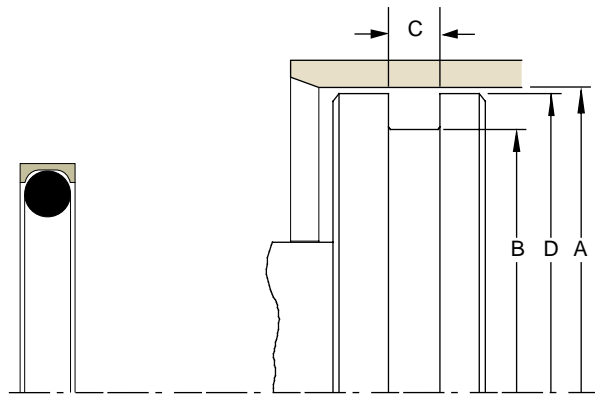


Table 7-51. CP Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width (CP0) | C Groove Width (CP1) | C Groove Width (CP2) | D Piston Diameter* 5000 psi (345 bar) | O-ring Dash Number | CP Part Number (X = Groove Width of 0, 1 or 2) |
|-----------------------|-------------------------|----------------------------|----------------------------|----------------------------|---|--------------------------|--|
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.000/-0.001 | | |
| 0.250 | 0.140 | 0.093 | 0.138 | 0.205 | 0.249 | 006 | 0401CPX-006A |
| 0.281 | 0.171 | 0.093 | 0.138 | 0.205 | 0.280 | 007 | 0401CPX-007A |
| 0.312 | 0.202 | 0.093 | 0.138 | 0.205 | 0.311 | 008 | 0401CPX-008A |
| 0.344 | 0.234 | 0.093 | 0.138 | 0.205 | 0.343 | 009 | 0401CPX-009A |
| 0.375 | 0.265 | 0.093 | 0.138 | 0.205 | 0.374 | 010 | 0401CPX-010A |
| 0.437 | 0.327 | 0.093 | 0.138 | 0.205 | 0.436 | 011 | 0401CPX-011A |
| 0.500 | 0.390 | 0.093 | 0.138 | 0.205 | 0.499 | 012 | 0401CPX-012A |
| 0.562 | 0.452 | 0.093 | 0.138 | 0.205 | 0.560 | 013 | 0401CPX-013A |
| 0.625 | 0.515 | 0.093 | 0.138 | 0.205 | 0.623 | 014 | 0401CPX-014A |
| 0.687 | 0.577 | 0.093 | 0.138 | 0.205 | 0.685 | 015 | 0401CPX-015A |
| 0.750 | 0.640 | 0.093 | 0.138 | 0.205 | 0.748 | 016 | 0401CPX-016A |
| 0.812 | 0.702 | 0.093 | 0.138 | 0.205 | 0.810 | 017 | 0401CPX-017A |
| 0.875 | 0.765 | 0.093 | 0.138 | 0.205 | 0.873 | 018 | 0401CPX-018A |
| 0.937 | 0.827 | 0.093 | 0.138 | 0.205 | 0.935 | 019 | 0401CPX-019A |
| 1.000 | 0.890 | 0.093 | 0.138 | 0.205 | 0.998 | 020 | 0401CPX-020A |
| 1.062 | 0.952 | 0.093 | 0.138 | 0.205 | 1.060 | 021 | 0401CPX-021A |
| 1.125 | 1.015 | 0.093 | 0.138 | 0.205 | 1.123 | 022 | 0401CPX-022A |
| 1.187 | 1.077 | 0.093 | 0.138 | 0.205 | 1.185 | 023 | 0401CPX-023A |
| 1.250 | 1.140 | 0.093 | 0.138 | 0.205 | 1.248 | 024 | 0401CPX-024A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.



CP Profile

Table 7-51. CP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width (CP0) | C Groove Width (CP1) | C Groove Width (CP2) | D Piston Diameter* 5000 psi (345 bar) | O-ring Dash Number | CP Part Number (X = Groove Width of 0, 1 or 2) |
|---------------------|---------------------|----------------------|----------------------|----------------------|---------------------------------------|--------------------|--|
| +.002/-0.000 | +.000/-0.002 | +.005/-0.000 | +.005/-0.000 | +.005/-0.000 | +.00/-0.001 | | |
| 1.312 | 1.202 | 0.093 | 0.138 | 0.205 | 1.310 | 025 | 0401CPX-025A |
| 1.375 | 1.265 | 0.093 | 0.138 | 0.205 | 1.373 | 026 | 0401CPX-026A |
| 1.437 | 1.327 | 0.093 | 0.138 | 0.205 | 1.435 | 027 | 0401CPX-027A |
| 1.500 | 1.390 | 0.093 | 0.138 | 0.205 | 1.498 | 028 | 0401CPX-028A |
| +.002/-0.000 | +.000/-0.002 | +.005/-0.000 | +.005/-0.000 | +.005/-0.000 | +.000/-0.002 | | |
| 0.312 | 0.136 | 0.140 | 0.171 | 0.238 | 0.311 | 104 | 0401CPX-104A |
| 0.343 | 0.167 | 0.140 | 0.171 | 0.238 | 0.342 | 105 | 0401CPX-105A |
| 0.375 | 0.199 | 0.140 | 0.171 | 0.238 | 0.374 | 106 | 0401CPX-106A |
| 0.406 | 0.230 | 0.140 | 0.171 | 0.238 | 0.405 | 107 | 0401CPX-107A |
| 0.437 | 0.261 | 0.140 | 0.171 | 0.238 | 0.436 | 108 | 0401CPX-108A |
| 0.500 | 0.324 | 0.140 | 0.171 | 0.238 | 0.499 | 109 | 0401CPX-109A |
| 0.562 | 0.386 | 0.140 | 0.171 | 0.238 | 0.561 | 110 | 0401CPX-110A |
| 0.625 | 0.449 | 0.140 | 0.171 | 0.238 | 0.624 | 111 | 0401CPX-111A |
| 0.687 | 0.511 | 0.140 | 0.171 | 0.238 | 0.686 | 112 | 0401CPX-112A |
| 0.750 | 0.574 | 0.140 | 0.171 | 0.238 | 0.749 | 113 | 0401CPX-113A |
| 0.812 | 0.636 | 0.140 | 0.171 | 0.238 | 0.811 | 114 | 0401CPX-114A |
| 0.875 | 0.699 | 0.140 | 0.171 | 0.238 | 0.874 | 115 | 0401CPX-115A |
| 0.937 | 0.761 | 0.140 | 0.171 | 0.238 | 0.936 | 116 | 0401CPX-116A |
| 1.000 | 0.824 | 0.140 | 0.171 | 0.238 | 0.999 | 117 | 0401CPX-117A |
| 1.062 | 0.886 | 0.140 | 0.171 | 0.238 | 1.061 | 118 | 0401CPX-118A |
| 1.125 | 0.949 | 0.140 | 0.171 | 0.238 | 1.124 | 119 | 0401CPX-119A |
| 1.187 | 1.011 | 0.140 | 0.171 | 0.238 | 1.186 | 120 | 0401CPX-120A |
| 1.250 | 1.074 | 0.140 | 0.171 | 0.238 | 1.249 | 121 | 0401CPX-121A |
| 1.312 | 1.136 | 0.140 | 0.171 | 0.238 | 1.311 | 122 | 0401CPX-122A |
| 1.375 | 1.199 | 0.140 | 0.171 | 0.238 | 1.374 | 123 | 0401CPX-123A |
| 1.437 | 1.261 | 0.140 | 0.171 | 0.238 | 1.436 | 124 | 0401CPX-124A |
| 1.500 | 1.324 | 0.140 | 0.171 | 0.238 | 1.499 | 125 | 0401CPX-125A |
| 1.562 | 1.386 | 0.140 | 0.171 | 0.238 | 1.561 | 126 | 0401CPX-126A |
| 1.625 | 1.449 | 0.140 | 0.171 | 0.238 | 1.624 | 127 | 0401CPX-127A |
| 1.687 | 1.511 | 0.140 | 0.171 | 0.238 | 1.686 | 128 | 0401CPX-128A |
| 1.750 | 1.574 | 0.140 | 0.171 | 0.238 | 1.749 | 129 | 0401CPX-129A |
| 1.812 | 1.636 | 0.140 | 0.171 | 0.238 | 1.810 | 130 | 0401CPX-130A |
| 1.875 | 1.699 | 0.140 | 0.171 | 0.238 | 1.873 | 131 | 0401CPX-131A |
| 1.937 | 1.761 | 0.140 | 0.171 | 0.238 | 1.935 | 132 | 0401CPX-132A |
| 2.000 | 1.824 | 0.140 | 0.171 | 0.238 | 1.998 | 133 | 0401CPX-133A |
| 2.062 | 1.886 | 0.140 | 0.171 | 0.238 | 2.060 | 134 | 0401CPX-134A |
| 2.125 | 1.949 | 0.140 | 0.171 | 0.238 | 2.123 | 135 | 0401CPX-135A |
| 2.187 | 2.011 | 0.140 | 0.171 | 0.238 | 2.185 | 136 | 0401CPX-136A |
| 2.250 | 2.074 | 0.140 | 0.171 | 0.238 | 2.248 | 137 | 0401CPX-137A |
| 2.312 | 2.136 | 0.140 | 0.171 | 0.238 | 2.310 | 138 | 0401CPX-138A |
| 2.375 | 2.199 | 0.140 | 0.171 | 0.238 | 2.373 | 139 | 0401CPX-139A |
| 2.437 | 2.261 | 0.140 | 0.171 | 0.238 | 2.435 | 140 | 0401CPX-140A |
| +.002/-0.000 | +.000/-0.002 | +.005/-0.000 | +.005/-0.000 | .005/-0.000 | +.000/-0.003 | | |
| 2.500 | 2.324 | 0.140 | 0.171 | 0.238 | 2.498 | 141 | 0401CPX-141A |
| 2.562 | 2.386 | 0.140 | 0.171 | 0.238 | 2.560 | 142 | 0401CPX-142A |
| 2.625 | 2.449 | 0.140 | 0.171 | 0.238 | 2.623 | 143 | 0401CPX-143A |
| 2.687 | 2.511 | 0.140 | 0.171 | 0.238 | 2.685 | 144 | 0401CPX-144A |
| 2.750 | 2.574 | 0.140 | 0.171 | 0.238 | 2.748 | 145 | 0401CPX-145A |
| 2.812 | 2.636 | 0.140 | 0.171 | 0.238 | 2.810 | 146 | 0401CPX-146A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.



Table 7-51. CP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width (CP0) | C Groove Width (CP1) | C Groove Width (CP2) | D Piston Diameter* 5000 psi (345 bar) | O-ring Dash Number | CP Part Number (X = Groove Width of 0, 1 or 2) |
|-----------------------|-------------------------|----------------------------|----------------------------|----------------------------|---|--------------------------|--|
| + .002/- .000 | + .000/- .002 | + .005/- .000 | + .005/- .000 | .005/- .000 | + .000/- .003 | | |
| 2.875 | 2.699 | 0.140 | 0.171 | 0.238 | 2.873 | 147 | 0401CPX-147A |
| 2.937 | 2.761 | 0.140 | 0.171 | 0.238 | 2.935 | 148 | 0401CPX-148A |
| 3.000 | 2.824 | 0.140 | 0.171 | 0.238 | 2.998 | 149 | 0401CPX-149A |
| + .002/- .000 | + .000/- .002 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .000/- .002 | | |
| 0.437 | 0.195 | 0.187 | 0.208 | 0.275 | 0.436 | 201 | 0401CPX-201A |
| 0.500 | 0.258 | 0.187 | 0.208 | 0.275 | 0.499 | 202 | 0401CPX-202A |
| 0.562 | 0.320 | 0.187 | 0.208 | 0.275 | 0.561 | 203 | 0401CPX-203A |
| 0.625 | 0.383 | 0.187 | 0.208 | 0.275 | 0.624 | 204 | 0401CPX-204A |
| 0.687 | 0.445 | 0.187 | 0.208 | 0.275 | 0.686 | 205 | 0401CPX-205A |
| 0.750 | 0.508 | 0.187 | 0.208 | 0.275 | 0.749 | 206 | 0401CPX-206A |
| 0.812 | 0.570 | 0.187 | 0.208 | 0.275 | 0.811 | 207 | 0401CPX-207A |
| 0.875 | 0.633 | 0.187 | 0.208 | 0.275 | 0.874 | 208 | 0401CPX-208A |
| 0.937 | 0.695 | 0.187 | 0.208 | 0.275 | 0.936 | 209 | 0401CPX-209A |
| 1.000 | 0.758 | 0.187 | 0.208 | 0.275 | 0.999 | 210 | 0401CPX-210A |
| 1.062 | 0.820 | 0.187 | 0.208 | 0.275 | 1.061 | 211 | 0401CPX-211A |
| 1.125 | 0.883 | 0.187 | 0.208 | 0.275 | 1.124 | 212 | 0401CPX-212A |
| 1.187 | 0.945 | 0.187 | 0.208 | 0.275 | 1.186 | 213 | 0401CPX-213A |
| 1.250 | 1.008 | 0.187 | 0.208 | 0.275 | 1.249 | 214 | 0401CPX-214A |
| 1.312 | 1.070 | 0.187 | 0.208 | 0.275 | 1.311 | 215 | 0401CPX-215A |
| 1.375 | 1.133 | 0.187 | 0.208 | 0.275 | 1.374 | 216 | 0401CPX-216A |
| 1.437 | 1.195 | 0.187 | 0.208 | 0.275 | 1.436 | 217 | 0401CPX-217A |
| 1.500 | 1.258 | 0.187 | 0.208 | 0.275 | 1.499 | 218 | 0401CPX-218A |
| 1.562 | 1.320 | 0.187 | 0.208 | 0.275 | 1.561 | 219 | 0401CPX-219A |
| 1.625 | 1.383 | 0.187 | 0.208 | 0.275 | 1.624 | 220 | 0401CPX-220A |
| 1.687 | 1.445 | 0.187 | 0.208 | 0.275 | 1.686 | 221 | 0401CPX-221A |
| 1.750 | 1.508 | 0.187 | 0.208 | 0.275 | 1.749 | 222 | 0401CPX-222A |
| 1.875 | 1.633 | 0.187 | 0.208 | 0.275 | 1.873 | 223 | 0401CPX-223A |
| 2.000 | 1.758 | 0.187 | 0.208 | 0.275 | 1.998 | 224 | 0401CPX-224A |
| 2.125 | 1.883 | 0.187 | 0.208 | 0.275 | 2.123 | 225 | 0401CPX-225A |
| 2.250 | 2.008 | 0.187 | 0.208 | 0.275 | 2.248 | 226 | 0401CPX-226A |
| 2.375 | 2.133 | 0.187 | 0.208 | 0.275 | 2.373 | 227 | 0401CPX-227A |
| + .002/- .000 | + .000/- .002 | + .005/- .000 | + .005/- .000 | + .0005/- .000 | + .000/- .003 | | |
| 2.500 | 2.258 | 0.187 | 0.208 | 0.275 | 2.498 | 228 | 0401CPX-228A |
| 2.625 | 2.383 | 0.187 | 0.208 | 0.275 | 2.623 | 229 | 0401CPX-229A |
| 2.750 | 2.508 | 0.187 | 0.208 | 0.275 | 2.748 | 230 | 0401CPX-230A |
| 2.875 | 2.633 | 0.187 | 0.208 | 0.275 | 2.873 | 231 | 0401CPX-231A |
| 3.000 | 2.758 | 0.187 | 0.208 | 0.275 | 2.998 | 232 | 0401CPX-232A |
| 3.125 | 2.883 | 0.187 | 0.208 | 0.275 | 3.123 | 233 | 0401CPX-233A |
| 3.250 | 3.008 | 0.187 | 0.208 | 0.275 | 3.248 | 234 | 0401CPX-234A |
| 3.375 | 3.133 | 0.187 | 0.208 | 0.275 | 3.373 | 235 | 0401CPX-235A |
| 3.500 | 3.258 | 0.187 | 0.208 | 0.275 | 3.498 | 236 | 0401CPX-236A |
| 3.625 | 3.383 | 0.187 | 0.208 | 0.275 | 3.623 | 237 | 0401CPX-237A |
| 3.750 | 3.508 | 0.187 | 0.208 | 0.275 | 3.748 | 238 | 0401CPX-238A |
| 3.875 | 3.633 | 0.187 | 0.208 | 0.275 | 3.873 | 239 | 0401CPX-239A |
| 4.000 | 3.758 | 0.187 | 0.208 | 0.275 | 3.998 | 240 | 0401CPX-240A |
| 4.125 | 3.883 | 0.187 | 0.208 | 0.275 | 4.123 | 241 | 0401CPX-241A |
| 4.250 | 4.008 | 0.187 | 0.208 | 0.275 | 4.248 | 242 | 0401CPX-242A |
| 4.375 | 4.133 | 0.187 | 0.208 | 0.275 | 4.373 | 243 | 0401CPX-243A |
| 4.500 | 4.258 | 0.187 | 0.208 | 0.275 | 4.497 | 244 | 0401CPX-244A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-51. CP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width (CP0) | C Groove Width (CP1) | C Groove Width (CP2) | D Piston Diameter* 5000 psi (345 bar) | O-ring Dash Number | CP Part Number (X = Groove Width of 0, 1 or 2) |
|----------------------|----------------------|----------------------|----------------------|-----------------------|---------------------------------------|--------------------|--|
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.005/-0.000 | +0.0005/-0.000 | +0.000/-0.003 | | |
| 4.625 | 4.383 | 0.187 | 0.208 | 0.275 | 4.622 | 245 | 0401CPX-245A |
| 4.750 | 4.508 | 0.187 | 0.208 | 0.275 | 4.747 | 246 | 0401CPX-246A |
| 4.875 | 4.633 | 0.187 | 0.208 | 0.275 | 4.872 | 247 | 0401CPX-247A |
| 5.000 | 4.758 | 0.187 | 0.208 | 0.275 | 4.997 | 248 | 0401CPX-248A |
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.000/-0.002 | | |
| 0.812 | 0.442 | 0.281 | 0.311 | 0.410 | 0.810 | 309 | 0401CPX-309A |
| 0.875 | 0.505 | 0.281 | 0.311 | 0.410 | 0.873 | 310 | 0401CPX-310A |
| 0.937 | 0.567 | 0.281 | 0.311 | 0.410 | 0.935 | 311 | 0401CPX-311A |
| 1.000 | 0.630 | 0.281 | 0.311 | 0.410 | 0.998 | 312 | 0401CPX-312A |
| 1.062 | 0.692 | 0.281 | 0.311 | 0.410 | 1.060 | 313 | 0401CPX-313A |
| 1.125 | 0.755 | 0.281 | 0.311 | 0.410 | 1.123 | 314 | 0401CPX-314A |
| 1.187 | 0.817 | 0.281 | 0.311 | 0.410 | 1.185 | 315 | 0401CPX-315A |
| 1.250 | 0.880 | 0.281 | 0.311 | 0.410 | 1.248 | 316 | 0401CPX-316A |
| 1.312 | 0.942 | 0.281 | 0.311 | 0.410 | 1.310 | 317 | 0401CPX-317A |
| 1.375 | 1.005 | 0.281 | 0.311 | 0.410 | 1.373 | 318 | 0401CPX-318A |
| 1.437 | 1.067 | 0.281 | 0.311 | 0.410 | 1.435 | 319 | 0401CPX-319A |
| 1.500 | 1.130 | 0.281 | 0.311 | 0.410 | 1.498 | 320 | 0401CPX-320A |
| 1.562 | 1.192 | 0.281 | 0.311 | 0.410 | 1.560 | 321 | 0401CPX-321A |
| 1.625 | 1.255 | 0.281 | 0.311 | 0.410 | 1.623 | 322 | 0401CPX-322A |
| 1.687 | 1.317 | 0.281 | 0.311 | 0.410 | 1.685 | 323 | 0401CPX-323A |
| 1.750 | 1.380 | 0.281 | 0.311 | 0.410 | 1.748 | 324 | 0401CPX-324A |
| 1.875 | 1.505 | 0.281 | 0.311 | 0.410 | 1.873 | 325 | 0401CPX-325A |
| 2.000 | 1.630 | 0.281 | 0.311 | 0.410 | 1.998 | 326 | 0401CPX-326A |
| 2.125 | 1.755 | 0.281 | 0.311 | 0.410 | 2.123 | 327 | 0401CPX-327A |
| 2.250 | 1.880 | 0.281 | 0.311 | 0.410 | 2.248 | 328 | 0401CPX-328A |
| 2.375 | 2.005 | 0.281 | 0.311 | 0.410 | 2.373 | 329 | 0401CPX-329A |
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.000/-0.003 | | |
| 2.500 | 2.130 | 0.281 | 0.311 | 0.410 | 2.498 | 330 | 0401CPX-330A |
| 2.625 | 2.255 | 0.281 | 0.311 | 0.410 | 2.623 | 331 | 0401CPX-331A |
| 2.750 | 2.380 | 0.281 | 0.311 | 0.410 | 2.748 | 332 | 0401CPX-332A |
| 2.875 | 2.505 | 0.281 | 0.311 | 0.410 | 2.873 | 333 | 0401CPX-333A |
| 3.000 | 2.630 | 0.281 | 0.311 | 0.410 | 2.998 | 334 | 0401CPX-334A |
| 3.125 | 2.755 | 0.281 | 0.311 | 0.410 | 3.123 | 335 | 0401CPX-335A |
| 3.250 | 2.880 | 0.281 | 0.311 | 0.410 | 3.248 | 336 | 0401CPX-336A |
| 3.375 | 3.005 | 0.281 | 0.311 | 0.410 | 3.373 | 337 | 0401CPX-337A |
| 3.500 | 3.130 | 0.281 | 0.311 | 0.410 | 3.498 | 338 | 0401CPX-338A |
| 3.625 | 3.255 | 0.281 | 0.311 | 0.410 | 3.623 | 339 | 0401CPX-339A |
| 3.750 | 3.380 | 0.281 | 0.311 | 0.410 | 3.748 | 340 | 0401CPX-340A |
| 3.875 | 3.505 | 0.281 | 0.311 | 0.410 | 3.873 | 341 | 0401CPX-341A |
| 4.000 | 3.630 | 0.281 | 0.311 | 0.410 | 3.998 | 342 | 0401CPX-342A |
| 4.125 | 3.755 | 0.281 | 0.311 | 0.410 | 4.123 | 343 | 0401CPX-343A |
| 4.250 | 3.880 | 0.281 | 0.311 | 0.410 | 4.247 | 344 | 0401CPX-344A |
| 4.375 | 4.005 | 0.281 | 0.311 | 0.410 | 4.372 | 345 | 0401CPX-345A |
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.005/-0.000 | +0.005/-0.000 | +0.000/-0.003 | | |
| 4.500 | 4.130 | 0.281 | 0.311 | 0.410 | 4.497 | 346 | 0401CPX-346A |
| 4.625 | 4.255 | 0.281 | 0.311 | 0.410 | 4.622 | 347 | 0401CPX-347A |
| 4.750 | 4.380 | 0.281 | 0.311 | 0.410 | 4.747 | 348 | 0401CPX-348A |
| 4.875 | 4.505 | 0.281 | 0.311 | 0.410 | 4.872 | 349 | 0401CPX-349A |
| 5.000 | 4.630 | 0.281 | 0.311 | 0.410 | 4.997 | 350 | 0401CPX-350A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-51. CP Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width (CP0) | C Groove Width (CP1) | C Groove Width (CP2) | D Piston Diameter* 5000 psi (345 bar) | O-ring Dash Number | CP Part Number (X = Groove Width of 0, 1 or 2) |
|-----------------------|-------------------------|----------------------------|----------------------------|----------------------------|---|--------------------------|--|
| + .002/- .000 | + .000/- .002 | + .005/- .000 | + .005/- .000 | + .005/- .000 | + .000/- .004 | | |
| 5.000 | 4.526 | 0.375 | 0.408 | 0.538 | 4.997 | 425 | 0401CPX-425A |
| 5.125 | 4.651 | 0.375 | 0.408 | 0.538 | 5.122 | 426 | 0401CPX-426A |
| 5.250 | 4.776 | 0.375 | 0.408 | 0.538 | 5.247 | 427 | 0401CPX-427A |
| 5.375 | 4.901 | 0.375 | 0.408 | 0.538 | 5.372 | 428 | 0401CPX-428A |
| 5.500 | 5.026 | 0.375 | 0.408 | 0.538 | 5.497 | 429 | 0401CPX-429A |
| 5.625 | 5.151 | 0.375 | 0.408 | 0.538 | 5.622 | 430 | 0401CPX-430A |
| 5.750 | 5.276 | 0.375 | 0.408 | 0.538 | 5.747 | 431 | 0401CPX-431A |
| 5.875 | 5.401 | 0.375 | 0.408 | 0.538 | 5.872 | 432 | 0401CPX-432A |
| 6.000 | 5.526 | 0.375 | 0.408 | 0.538 | 5.997 | 433 | 0401CPX-433A |
| 6.125 | 5.651 | 0.375 | 0.408 | 0.538 | 6.122 | 434 | 0401CPX-434A |
| 6.250 | 5.776 | 0.375 | 0.408 | 0.538 | 6.247 | 435 | 0401CPX-435A |
| 6.375 | 5.901 | 0.375 | 0.408 | 0.538 | 6.372 | 436 | 0401CPX-436A |
| 6.500 | 6.026 | 0.375 | 0.408 | 0.538 | 6.497 | 437 | 0401CPX-437A |
| 6.750 | 6.276 | 0.375 | 0.408 | 0.538 | 6.747 | 438 | 0401CPX-438A |
| 7.000 | 6.526 | 0.375 | 0.408 | 0.538 | 6.997 | 439 | 0401CPX-439A |
| 7.250 | 6.776 | 0.375 | 0.408 | 0.538 | 7.247 | 440 | 0401CPX-440A |
| 7.500 | 7.026 | 0.375 | 0.408 | 0.538 | 7.497 | 441 | 0401CPX-441A |
| 7.750 | 7.276 | 0.375 | 0.408 | 0.538 | 7.747 | 442 | 0401CPX-442A |
| 8.000 | 7.526 | 0.375 | 0.408 | 0.538 | 7.997 | 443 | 0401CPX-443A |
| 8.250 | 7.776 | 0.375 | 0.408 | 0.538 | 8.247 | 444 | 0401CPX-444A |
| 8.500 | 8.026 | 0.375 | 0.408 | 0.538 | 8.497 | 445 | 0401CPX-445A |
| 9.000 | 8.526 | 0.375 | 0.408 | 0.538 | 8.996 | 446 | 0401CPX-446A |
| 9.500 | 9.026 | 0.375 | 0.408 | 0.538 | 9.496 | 447 | 0401CPX-447A |
| 10.000 | 9.526 | 0.375 | 0.408 | 0.538 | 9.996 | 448 | 0401CPX-448A |
| 10.500 | 10.026 | 0.375 | 0.408 | 0.538 | 10.496 | 449 | 0401CPX-449A |
| 11.000 | 10.526 | 0.375 | 0.408 | 0.538 | 10.996 | 450 | 0401CPX-450A |
| 11.500 | 11.026 | 0.375 | 0.408 | 0.538 | 11.496 | 451 | 0401CPX-451A |
| 12.000 | 11.526 | 0.375 | 0.408 | 0.538 | 11.996 | 452 | 0401CPX-452A |
| 12.500 | 12.026 | 0.375 | 0.408 | 0.538 | 12.496 | 453 | 0401CPX-453A |
| 13.000 | 12.526 | 0.375 | 0.408 | 0.538 | 12.996 | 454 | 0401CPX-454A |
| 13.500 | 13.026 | 0.375 | 0.408 | 0.538 | 13.496 | 455 | 0401CPX-455A |
| 14.000 | 13.526 | 0.375 | 0.408 | 0.538 | 13.996 | 456 | 0401CPX-456A |
| 14.500 | 14.026 | 0.375 | 0.408 | 0.538 | 14.496 | 457 | 0401CPX-457A |
| 15.000 | 14.526 | 0.375 | 0.408 | 0.538 | 14.996 | 458 | 0401CPX-458A |
| 15.500 | 15.026 | 0.375 | 0.408 | 0.538 | 15.496 | 459 | 0401CPX-459A |
| 16.000 | 15.526 | 0.375 | 0.408 | 0.538 | 15.996 | 460 | 0401CPX-460A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal OA Profile

Catalog EPS 5370/USA

OA Profile, Compact PTFE Piston Cap Seal



The Parker OA profile is a bi-directional piston seal for use in pneumatic and low to medium duty hydraulic applications. The OA profile is a two piece design utilizing a rectangular PTFE cap and standard size o-ring. The OA profile is an excellent choice for applications requiring a compact design. The unique properties of the modified PTFE provide added wear resistance for improved cycle life. Parker's OA profile will retrofit non-Parker seals of similar design.

The OA profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data

| Standard Materials* | | Temperature Range | Pressure Range† | Surface Speed |
|---------------------|---------------|--------------------------------------|------------------------|------------------------|
| Cap | | | | |
| 0102 | Modified PTFE | -320°F to 450°F (-195°C to 282°C) | 1,500 psi (103 bar) | < 13 ft/s (4 m/sec) |
| Energizer | | | | |
| A | 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |


***Alternate Materials:** For applications that may require an alternate material, please [see Section 3](#) for alternate PTFE and energizer materials.

†**Pressure Range** without wear rings ([see Table 2-4, page 2-5](#)).


Options

Notched side walls: Notches can be added to the side walls of the PTFE cap. This can help to optimize the seal's response to fluid pressure. Notched side walls help ensure that fluid pressure fills the cavity between the side face of the seal and the side face of the seal gland. Consult your local Parker Seal representative for the availability and cost to add side notches to the OA profile.

N = Notched walls 



OA Cross-Section

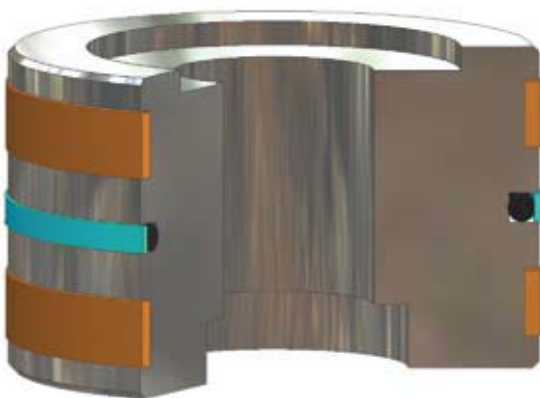


OA Installed in Piston Gland

09/01/07

Part Number Nomenclature —OA Profile

Table 7-52. OA Profile — Inch

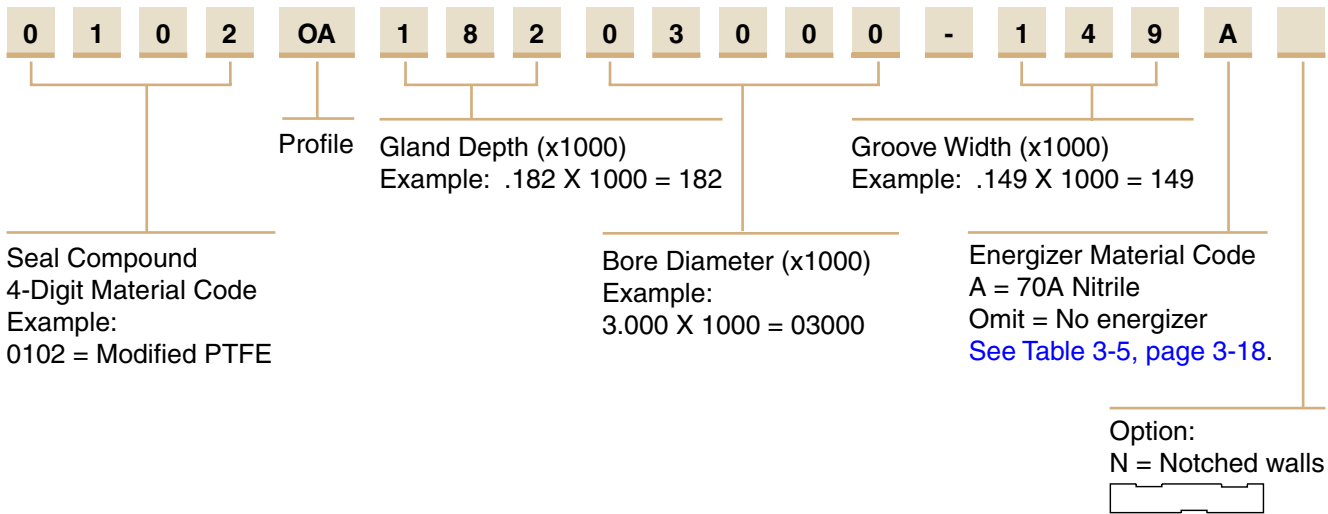

Gland Dimensions — OA Profile

Please refer to Engineering Section 2, Page 2-8 for surface finish and additional hardware considerations.

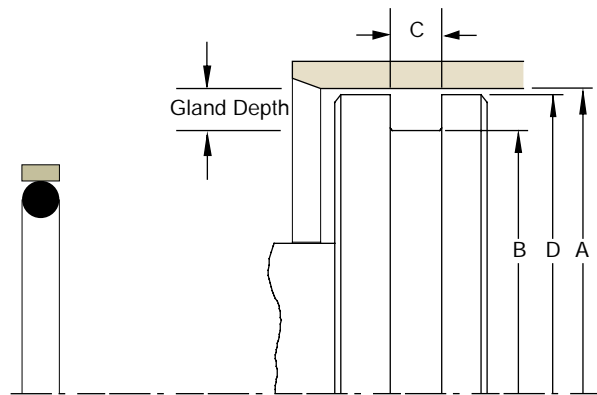


Table 7-53. OA Profile — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Max Radius | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|---------------|--------------------------|---------------------|
| +.001/-.000 | +.000/-.001 | +.005/-.000 | +.000/-.001 | | | |
| 0.281 | 0.139 | 0.079 | 0.277 | 0.020 | 006 | 0102OA07200281-079A |
| 0.312 | 0.169 | 0.079 | 0.308 | 0.020 | 007 | 0102OA07200312-079A |
| 0.344 | 0.200 | 0.079 | 0.340 | 0.020 | 008 | 0102OA07200344-079A |
| 0.375 | 0.231 | 0.079 | 0.371 | 0.020 | 009 | 0102OA07200375-079A |
| 0.437 | 0.263 | 0.079 | 0.433 | 0.020 | 010 | 0102OA07200437-079A |
| 0.500 | 0.326 | 0.079 | 0.496 | 0.020 | 011 | 0102OA08700500-079A |
| +.002/-.000 | +.000/-.002 | +.005/-.000 | +.000/-.001 | | | |
| 0.562 | 0.388 | 0.079 | 0.557 | 0.020 | 012 | 0102OA08700562-079A |
| 0.625 | 0.452 | 0.079 | 0.620 | 0.020 | 013 | 0102OA08700625-079A |
| 0.687 | 0.515 | 0.079 | 0.682 | 0.020 | 014 | 0102OA08700687-079A |
| 0.750 | 0.577 | 0.079 | 0.745 | 0.020 | 015 | 0102OA08700750-079A |
| 0.812 | 0.640 | 0.079 | 0.807 | 0.020 | 016 | 0102OA08700812-079A |
| 0.875 | 0.702 | 0.079 | 0.870 | 0.020 | 017 | 0102OA08700875-079A |
| 0.937 | 0.765 | 0.079 | 0.932 | 0.020 | 018 | 0102OA08700937-079A |
| 1.000 | 0.827 | 0.079 | 0.995 | 0.020 | 019 | 0102OA08701000-079A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-53. OA Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Max Radius | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------|--------------------|---------------------|
| +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | +0.000/-0.001 | | | |
| 1.062 | 0.890 | 0.079 | 1.057 | 0.020 | 020 | 0102OA08701062-079A |
| 1.125 | 0.952 | 0.079 | 1.120 | 0.020 | 021 | 0102OA08701125-079A |
| 1.187 | 1.015 | 0.079 | 1.182 | 0.020 | 022 | 0102OA08701187-079A |
| 1.250 | 1.078 | 0.079 | 1.245 | 0.020 | 023 | 0102OA08701250-079A |
| 1.312 | 1.140 | 0.079 | 1.307 | 0.020 | 024 | 0102OA08701312-079A |
| 1.375 | 1.202 | 0.079 | 1.370 | 0.020 | 025 | 0102OA08701375-079A |
| 1.437 | 1.265 | 0.079 | 1.432 | 0.020 | 026 | 0102OA08701437-079A |
| 1.500 | 1.327 | 0.079 | 1.495 | 0.020 | 027 | 0102OA08701500-079A |
| +0.003/-0.000 | +0.000/-0.003 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 0.625 | 0.388 | 0.112 | 0.620 | 0.020 | 110 | 0102OA11800625-112A |
| 0.687 | 0.451 | 0.112 | 0.682 | 0.020 | 111 | 0102OA11800687-112A |
| 0.750 | 0.513 | 0.112 | 0.745 | 0.020 | 112 | 0102OA11800750-112A |
| 0.812 | 0.576 | 0.112 | 0.807 | 0.020 | 113 | 0102OA11800812-112A |
| 0.875 | 0.638 | 0.112 | 0.870 | 0.020 | 114 | 0102OA11800875-112A |
| 0.937 | 0.701 | 0.112 | 0.932 | 0.020 | 115 | 0102OA11800937-112A |
| 1.000 | 0.763 | 0.112 | 0.995 | 0.020 | 116 | 0102OA11801000-112A |
| 1.062 | 0.826 | 0.112 | 1.057 | 0.020 | 117 | 0102OA11801062-112A |
| 1.125 | 0.888 | 0.112 | 1.120 | 0.020 | 118 | 0102OA11801125-112A |
| 1.187 | 0.951 | 0.112 | 1.182 | 0.020 | 119 | 0102OA11801187-112A |
| 1.250 | 1.013 | 0.112 | 1.245 | 0.020 | 120 | 0102OA11801250-112A |
| 1.312 | 1.076 | 0.112 | 1.307 | 0.020 | 121 | 0102OA11801312-112A |
| 1.375 | 1.138 | 0.112 | 1.370 | 0.020 | 122 | 0102OA11801375-112A |
| 1.437 | 1.201 | 0.112 | 1.432 | 0.020 | 123 | 0102OA11801437-112A |
| 1.500 | 1.263 | 0.112 | 1.495 | 0.020 | 124 | 0102OA11801500-112A |
| 1.562 | 1.326 | 0.112 | 1.557 | 0.020 | 125 | 0102OA11801562-112A |
| 1.625 | 1.388 | 0.112 | 1.620 | 0.020 | 126 | 0102OA11801625-112A |
| 1.687 | 1.451 | 0.112 | 1.682 | 0.020 | 127 | 0102OA11801687-112A |
| 1.750 | 1.513 | 0.112 | 1.745 | 0.020 | 128 | 0102OA11801750-112A |
| 1.812 | 1.576 | 0.112 | 1.807 | 0.020 | 129 | 0102OA11801812-112A |
| 1.875 | 1.638 | 0.112 | 1.870 | 0.020 | 130 | 0102OA11801875-112A |
| 1.937 | 1.701 | 0.112 | 1.932 | 0.020 | 131 | 0102OA11801937-112A |
| 2.000 | 1.763 | 0.112 | 1.995 | 0.020 | 132 | 0102OA11802000-112A |
| 2.062 | 1.826 | 0.112 | 2.057 | 0.020 | 133 | 0102OA11802062-112A |
| 2.125 | 1.888 | 0.112 | 2.120 | 0.020 | 134 | 0102OA11802125-112A |
| 2.187 | 1.951 | 0.112 | 2.182 | 0.020 | 135 | 0102OA11802187-112A |
| 2.250 | 2.013 | 0.112 | 2.245 | 0.020 | 136 | 0102OA11802250-112A |
| 2.312 | 2.076 | 0.112 | 2.307 | 0.020 | 137 | 0102OA11802312-112A |
| 2.375 | 2.138 | 0.112 | 2.370 | 0.020 | 138 | 0102OA11802375-112A |
| 2.437 | 2.201 | 0.112 | 2.432 | 0.020 | 139 | 0102OA11802437-112A |
| 2.500 | 2.263 | 0.112 | 2.495 | 0.020 | 140 | 0102OA11802500-112A |
| 2.562 | 2.326 | 0.112 | 2.557 | 0.020 | 141 | 0102OA11802562-112A |
| 2.625 | 2.388 | 0.112 | 2.620 | 0.020 | 142 | 0102OA11802625-112A |
| 2.687 | 2.451 | 0.112 | 2.682 | 0.020 | 143 | 0102OA11802687-112A |
| 2.750 | 2.513 | 0.112 | 2.745 | 0.020 | 144 | 0102OA11802750-112A |
| 2.812 | 2.576 | 0.112 | 2.807 | 0.020 | 145 | 0102OA11802812-112A |
| 2.875 | 2.638 | 0.112 | 2.870 | 0.020 | 146 | 0102OA11802875-112A |
| 2.937 | 2.701 | 0.112 | 2.932 | 0.020 | 147 | 0102OA11802937-112A |
| 3.000 | 2.763 | 0.112 | 2.995 | 0.020 | 148 | 0102OA11803000-112A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-53. OA Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Max Radius | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|---------------|--------------------------|---------------------|
| + .004/- .000 | + .000/- .004 | + .005/- .000 | + .000/- .002 | | | |
| 1.062 | 0.762 | 0.149 | 1.056 | 0.030 | 210 | 0102OA15001062-149A |
| 1.125 | 0.824 | 0.149 | 1.119 | 0.030 | 211 | 0102OA15001125-149A |
| 1.187 | 0.887 | 0.149 | 1.181 | 0.030 | 212 | 0102OA15001187-149A |
| 1.250 | 0.950 | 0.149 | 1.244 | 0.030 | 213 | 0102OA15001250-149A |
| 1.312 | 1.012 | 0.149 | 1.306 | 0.030 | 214 | 0102OA15001312-149A |
| 1.375 | 1.074 | 0.149 | 1.369 | 0.030 | 215 | 0102OA15001375-149A |
| 1.437 | 1.137 | 0.149 | 1.431 | 0.030 | 216 | 0102OA15001437-149A |
| 1.500 | 1.199 | 0.149 | 1.494 | 0.030 | 217 | 0102OA15001500-149A |
| 1.562 | 1.262 | 0.149 | 1.556 | 0.030 | 218 | 0102OA15001562-149A |
| 1.625 | 1.324 | 0.149 | 1.619 | 0.030 | 219 | 0102OA15001625-149A |
| 1.687 | 1.387 | 0.149 | 1.681 | 0.030 | 220 | 0102OA15001687-149A |
| 1.750 | 1.450 | 0.149 | 1.744 | 0.030 | 221 | 0102OA15001750-149A |
| 1.875 | 1.512 | 0.149 | 1.869 | 0.030 | 222 | 0102OA18201875-149A |
| 2.000 | 1.637 | 0.149 | 1.994 | 0.030 | 223 | 0102OA18202000-149A |
| 2.125 | 1.762 | 0.149 | 2.119 | 0.030 | 224 | 0102OA18202125-149A |
| 2.250 | 1.887 | 0.149 | 2.244 | 0.030 | 225 | 0102OA18202250-149A |
| 2.375 | 2.012 | 0.149 | 2.369 | 0.030 | 226 | 0102OA18202375-149A |
| 2.500 | 2.137 | 0.149 | 2.494 | 0.030 | 227 | 0102OA18202500-149A |
| 2.625 | 2.262 | 0.149 | 2.619 | 0.030 | 228 | 0102OA18202625-149A |
| 2.750 | 2.387 | 0.149 | 2.744 | 0.030 | 229 | 0102OA18202750-149A |
| 2.875 | 2.512 | 0.149 | 2.869 | 0.030 | 230 | 0102OA18202875-149A |
| 3.000 | 2.637 | 0.149 | 2.994 | 0.030 | 231 | 0102OA18203000-149A |
| 3.125 | 2.762 | 0.149 | 3.119 | 0.030 | 232 | 0102OA18203125-149A |
| 3.250 | 2.887 | 0.149 | 3.244 | 0.030 | 233 | 0102OA18203250-149A |
| 3.375 | 3.012 | 0.149 | 3.369 | 0.030 | 234 | 0102OA18203375-149A |
| 3.500 | 3.137 | 0.149 | 3.494 | 0.030 | 235 | 0102OA18203500-149A |
| 3.625 | 3.262 | 0.149 | 3.619 | 0.030 | 236 | 0102OA18203625-149A |
| 3.750 | 3.387 | 0.149 | 3.744 | 0.030 | 237 | 0102OA18203750-149A |
| 3.875 | 3.512 | 0.149 | 3.869 | 0.030 | 238 | 0102OA18203875-149A |
| 4.000 | 3.637 | 0.149 | 3.994 | 0.030 | 239 | 0102OA18204000-149A |
| 4.125 | 3.762 | 0.149 | 4.119 | 0.030 | 240 | 0102OA18204125-149A |
| 4.250 | 3.887 | 0.149 | 4.244 | 0.030 | 241 | 0102OA18204250-149A |
| 4.375 | 4.012 | 0.149 | 4.369 | 0.030 | 242 | 0102OA18204375-149A |
| 4.500 | 4.137 | 0.149 | 4.494 | 0.030 | 243 | 0102OA18204500-149A |
| 4.625 | 4.262 | 0.149 | 4.619 | 0.030 | 244 | 0102OA18204625-149A |
| 4.750 | 4.387 | 0.149 | 4.744 | 0.030 | 245 | 0102OA18204750-149A |
| 4.875 | 4.512 | 0.149 | 4.869 | 0.030 | 246 | 0102OA18204875-149A |
| 5.000 | 4.637 | 0.149 | 4.994 | 0.030 | 247 | 0102OA18205000-149A |
| + .005/- .000 | + .000/- .005 | + .005/- .000 | + .000/- .002 | | | |
| 2.000 | 1.509 | 0.221 | 1.993 | 0.050 | 325 | 0102OA24602000-221A |
| 2.125 | 1.634 | 0.221 | 2.118 | 0.050 | 326 | 0102OA24602125-221A |
| 2.250 | 1.759 | 0.221 | 2.243 | 0.050 | 327 | 0102OA24602250-221A |
| 2.375 | 1.884 | 0.221 | 2.368 | 0.050 | 328 | 0102OA24602375-221A |
| 2.500 | 2.009 | 0.221 | 2.493 | 0.050 | 329 | 0102OA24602500-221A |
| 2.625 | 2.134 | 0.221 | 2.618 | 0.050 | 330 | 0102OA24602625-221A |
| 2.750 | 2.259 | 0.221 | 2.743 | 0.050 | 331 | 0102OA24602750-221A |
| 2.875 | 2.384 | 0.221 | 2.868 | 0.050 | 332 | 0102OA24602875-221A |
| 3.000 | 2.509 | 0.221 | 2.993 | 0.050 | 333 | 0102OA24603000-221A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-53. OA Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Max Radius | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------|--------------------|---------------------|
| +0.005/-0.000 | +0.000/-0.005 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 3.125 | 2.634 | 0.221 | 3.118 | 0.050 | 334 | 0102OA24603125-221A |
| 3.250 | 2.759 | 0.221 | 3.243 | 0.050 | 335 | 0102OA24603250-221A |
| 3.375 | 2.884 | 0.221 | 3.368 | 0.050 | 336 | 0102OA24603375-221A |
| 3.500 | 3.009 | 0.221 | 3.493 | 0.050 | 337 | 0102OA24603500-221A |
| 3.625 | 3.134 | 0.221 | 3.618 | 0.050 | 338 | 0102OA24603625-221A |
| 3.750 | 3.259 | 0.221 | 3.743 | 0.050 | 339 | 0102OA24603750-221A |
| 3.875 | 3.384 | 0.221 | 3.868 | 0.050 | 340 | 0102OA24603875-221A |
| 4.000 | 3.509 | 0.221 | 3.993 | 0.050 | 341 | 0102OA24604000-221A |
| 4.125 | 3.634 | 0.221 | 4.118 | 0.050 | 342 | 0102OA24604125-221A |
| 4.250 | 3.759 | 0.221 | 4.243 | 0.050 | 343 | 0102OA24604250-221A |
| 4.375 | 3.884 | 0.221 | 4.368 | 0.050 | 344 | 0102OA24604375-221A |
| 4.500 | 4.009 | 0.221 | 4.493 | 0.050 | 345 | 0102OA24604500-221A |
| 4.625 | 4.134 | 0.221 | 4.618 | 0.050 | 346 | 0102OA24604625-221A |
| 4.750 | 4.259 | 0.221 | 4.743 | 0.050 | 347 | 0102OA24604750-221A |
| 4.875 | 4.384 | 0.221 | 4.868 | 0.050 | 348 | 0102OA24604875-221A |
| 5.000 | 4.509 | 0.221 | 4.993 | 0.050 | 349 | 0102OA24605000-221A |
| +0.006/-0.000 | +0.000/-0.006 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 5.125 | 4.532 | 0.297 | 5.117 | 0.060 | 425 | 0102OA29705125-297A |
| 5.250 | 4.657 | 0.297 | 5.242 | 0.060 | 426 | 0102OA29705250-297A |
| 5.375 | 4.782 | 0.297 | 5.367 | 0.060 | 427 | 0102OA29705375-297A |
| 5.500 | 4.907 | 0.297 | 5.492 | 0.060 | 428 | 0102OA29705500-297A |
| 5.625 | 5.032 | 0.297 | 5.617 | 0.060 | 429 | 0102OA29705625-297A |
| 5.750 | 5.157 | 0.297 | 5.742 | 0.060 | 430 | 0102OA29705750-297A |
| 5.875 | 5.282 | 0.297 | 5.867 | 0.060 | 431 | 0102OA29705875-297A |
| 6.000 | 5.407 | 0.297 | 5.992 | 0.060 | 432 | 0102OA29706000-297A |
| 6.125 | 5.532 | 0.297 | 6.117 | 0.060 | 433 | 0102OA29706125-297A |
| 6.250 | 5.657 | 0.297 | 6.242 | 0.060 | 434 | 0102OA29706250-297A |
| 6.375 | 5.782 | 0.297 | 6.367 | 0.060 | 435 | 0102OA29706375-297A |
| 6.500 | 5.907 | 0.297 | 6.492 | 0.060 | 436 | 0102OA29706500-297A |
| 6.750 | 6.032 | 0.297 | 6.742 | 0.060 | 437 | 0102OA35906750-297A |
| 7.000 | 6.282 | 0.297 | 6.992 | 0.060 | 438 | 0102OA35907000-297A |
| 7.250 | 6.532 | 0.297 | 7.242 | 0.060 | 439 | 0102OA35907250-297A |
| 7.500 | 6.782 | 0.297 | 7.492 | 0.060 | 440 | 0102OA35907500-297A |
| 7.750 | 7.032 | 0.297 | 7.742 | 0.060 | 441 | 0102OA35907750-297A |
| 8.000 | 7.282 | 0.297 | 7.992 | 0.060 | 442 | 0102OA35908000-297A |
| 8.250 | 7.532 | 0.297 | 8.242 | 0.060 | 443 | 0102OA35908250-297A |
| 8.500 | 7.782 | 0.297 | 8.492 | 0.060 | 444 | 0102OA35908500-297A |
| 9.000 | 8.032 | 0.297 | 8.992 | 0.060 | 445 | 0102OA48409000-297A |
| 9.500 | 8.532 | 0.297 | 9.492 | 0.060 | 446 | 0102OA48409500-297A |
| 10.000 | 9.032 | 0.297 | 9.992 | 0.060 | 447 | 0102OA48410000-297A |
| +0.003/-0.000 | +0.000/-0.003 | +0.005/-0.000 | +0.000/-0.002 | | | |
| 10.500 | 9.532 | 0.297 | 10.492 | 0.060 | 448 | 0102OA48410500-297A |
| 11.000 | 10.032 | 0.297 | 10.992 | 0.060 | 449 | 0102OA48411000-297A |
| 11.500 | 10.532 | 0.297 | 11.492 | 0.060 | 450 | 0102OA48411500-297A |
| 12.000 | 11.032 | 0.297 | 11.992 | 0.060 | 451 | 0102OA48412000-297A |
| 12.500 | 11.532 | 0.297 | 12.492 | 0.060 | 452 | 0102OA48412500-297A |
| 13.000 | 12.032 | 0.297 | 12.992 | 0.060 | 453 | 0102OA48413000-297A |
| 13.500 | 12.532 | 0.297 | 13.492 | 0.060 | 454 | 0102OA48413500-297A |
| 14.000 | 13.032 | 0.297 | 13.992 | 0.060 | 455 | 0102OA48414000-297A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

09/01/07

Table 7-53. OA Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | Max Radius | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|---------------|--------------------------|----------------------------|
| + .003/- .000 | + .000/- .003 | + .005/- .000 | + .000/- .002 | | | |
| 14.500 | 13.532 | 0.297 | 14.492 | 0.060 | 456 | 0102OA48414500-297A |
| 15.000 | 14.032 | 0.297 | 14.992 | 0.060 | 457 | 0102OA48415000-297A |
| 15.500 | 14.532 | 0.297 | 15.492 | 0.060 | 458 | 0102OA48415500-297A |
| 16.000 | 15.032 | 0.297 | 15.992 | 0.060 | 459 | 0102OA48416000-297A |

*If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Piston Seal

OQ Profile

Catalog EPS 5370/USA



OQ Profile, Rotary PTFE Cap Seal

The Parker OQ profile is a bi-directional piston seal for use in low to medium duty rotary or oscillating applications. The OQ profile is a two piece design comprised of a standard size o-ring energizing a wear resistant PTFE cap. The OQ profile offers long wear and low friction, without stickslip. The PTFE inner diameter is designed with a special interference with the o-ring to eliminate spinning between the o-ring and seal. Special grooves are designed into the PTFE outer diameter to provide lubrication and create a labyrinth effect for reduced leakage. Parker's OQ profile will retrofit non-Parker seals of similar design.

The OQ profile may be ordered without the energizer by omitting the energizer code. [See part number nomenclature.](#)

Technical Data


| Standard Materials* | Temperature Range | Pressure Range† | Surface Speed |
|--|--------------------------------------|-----------------------|---------------------------|
| Cap 0205 15% fiberglass-, 5% molybdenum disulfide-filled PTFE | -200°F to 575°F (-129°C to 302°C) | 3000 psi (206 bar) | < 3.3 ft/s (1.0 m/sec) |
| Energizer A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) | | |

***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.

†**Pressure Range** without wear rings ([see Table 2-4, page 2-5](#)).

Options

Metric: For metric part numbering and availability, see [Table 7-56 on page 7-77](#) and [Table 7-57 on page 7-78](#).



OQ Cross-Section




OQ installed in Rotary Gland


09/01/07

Part Number Nomenclature — OQ Profile

Table 7-54. OQ Profile — Inch

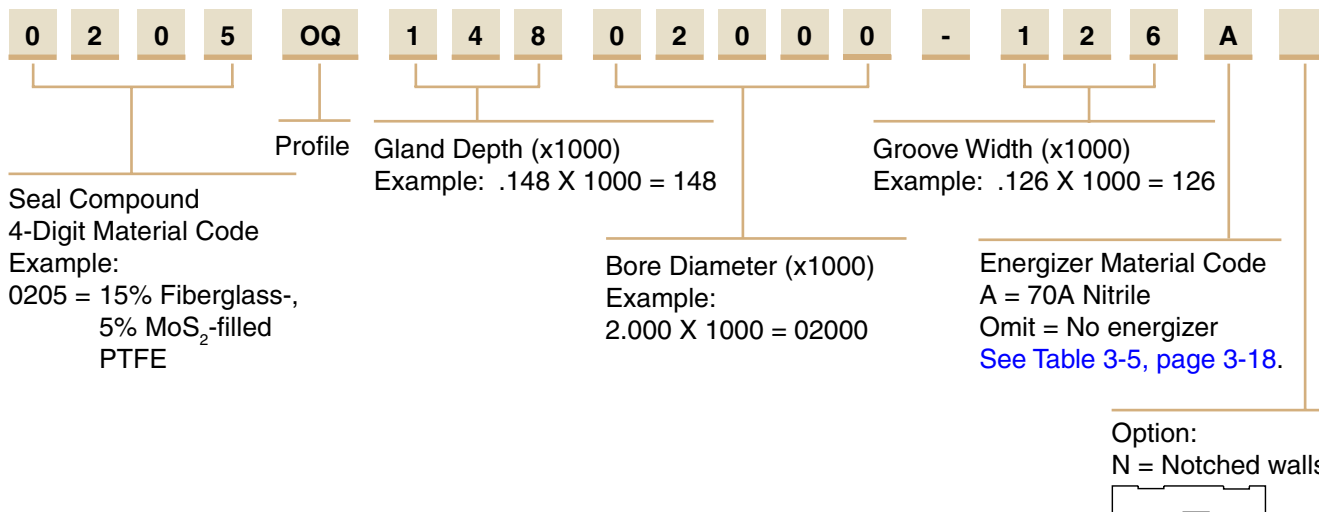

Gland Dimensions — OQ Profile

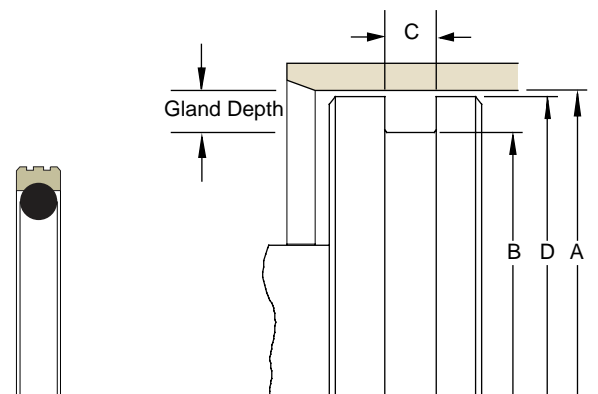

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.



Table 7-55. OQ Profile — Inch

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|----------------------------|
| +0.001/-0.000 | +0.000/-0.001 | +0.008/-0.000 | +0.000/-0.002 | | |
| 0.375 | 0.182 | 0.087 | 0.374 | 008 | 0205OQ09700375-087A |
| +0.002/-0.000 | +0.000/-0.002 | +0.008/-0.000 | +0.000/-0.002 | | |
| 0.438 | 0.245 | 0.087 | 0.437 | 010 | 0205OQ09700438-087A |
| 0.500 | 0.307 | 0.087 | 0.499 | 011 | 0205OQ09700500-087A |
| 0.563 | 0.370 | 0.087 | 0.562 | 012 | 0205OQ09700563-087A |
| 0.625 | 0.432 | 0.087 | 0.624 | 013 | 0205OQ09700625-087A |
| 0.688 | 0.495 | 0.087 | 0.687 | 014 | 0205OQ09700688-087A |
| 0.750 | 0.557 | 0.087 | 0.749 | 015 | 0205OQ09700750-087A |
| 0.813 | 0.620 | 0.087 | 0.812 | 016 | 0205OQ09700813-087A |
| 0.875 | 0.682 | 0.087 | 0.874 | 017 | 0205OQ09700875-087A |
| 0.938 | 0.745 | 0.087 | 0.937 | 018 | 0205OQ09700938-087A |
| 1.000 | 0.807 | 0.087 | 0.999 | 019 | 0205OQ09701000-087A |
| 1.125 | 0.932 | 0.087 | 1.124 | 021 | 0205OQ09701125-087A |
| 1.250 | 1.057 | 0.087 | 1.249 | 023 | 0205OQ09701250-087A |
| 1.375 | 1.182 | 0.087 | 1.374 | 025 | 0205OQ09701375-087A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

Table 7-55. OQ Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .002/- .000 | + .000/- .002 | + .008/- .000 | + .000/- .002 | | |
| 1.500 | 1.205 | 0.126 | 1.499 | 123 | 0205OQ14801500-126A |
| 1.625 | 1.330 | 0.126 | 1.624 | 125 | 0205OQ14801625-126A |
| 1.750 | 1.455 | 0.126 | 1.749 | 127 | 0205OQ14801750-126A |
| 1.875 | 1.580 | 0.126 | 1.874 | 129 | 0205OQ14801875-126A |
| + .003/- .000 | + .000/- .003 | + .008/- .000 | + .000/- .002 | | |
| 2.000 | 1.705 | 0.126 | 1.999 | 131 | 0205OQ14802000-126A |
| 2.125 | 1.830 | 0.126 | 2.124 | 133 | 0205OQ14802125-126A |
| 2.250 | 1.955 | 0.126 | 2.249 | 135 | 0205OQ14802250-126A |
| 2.375 | 2.080 | 0.126 | 2.374 | 137 | 0205OQ14802375-126A |
| 2.500 | 2.205 | 0.126 | 2.499 | 139 | 0205OQ14802500-126A |
| 2.625 | 2.330 | 0.126 | 2.624 | 141 | 0205OQ14802625-126A |
| 2.750 | 2.455 | 0.126 | 2.749 | 143 | 0205OQ14802750-126A |
| 2.875 | 2.580 | 0.126 | 2.874 | 145 | 0205OQ14802875-126A |
| + .003/- .000 | + .000/- .003 | + .008/- .000 | + .000/- .003 | | |
| 3.000 | 2.567 | 0.165 | 2.999 | 230 | 0205OQ21703000-165A |
| 3.125 | 2.692 | 0.165 | 3.124 | 231 | 0205OQ21703125-165A |
| 3.250 | 2.817 | 0.165 | 3.249 | 232 | 0205OQ21703250-165A |
| 3.375 | 2.942 | 0.165 | 3.374 | 233 | 0205OQ21703375-165A |
| 3.500 | 3.067 | 0.165 | 3.499 | 234 | 0205OQ21703500-165A |
| 3.625 | 3.192 | 0.165 | 3.624 | 235 | 0205OQ21703625-165A |
| 3.750 | 3.317 | 0.165 | 3.749 | 236 | 0205OQ21703750-165A |
| 3.875 | 3.442 | 0.165 | 3.874 | 237 | 0205OQ21703875-165A |
| 4.000 | 3.567 | 0.165 | 3.999 | 238 | 0205OQ21704000-165A |
| 4.125 | 3.692 | 0.165 | 4.124 | 239 | 0205OQ21704125-165A |
| 4.250 | 3.817 | 0.165 | 4.249 | 240 | 0205OQ21704250-165A |
| 4.375 | 3.942 | 0.165 | 4.374 | 241 | 0205OQ21704375-165A |
| 4.500 | 4.067 | 0.165 | 4.499 | 242 | 0205OQ21704500-165A |
| 4.625 | 4.192 | 0.165 | 4.624 | 243 | 0205OQ21704625-165A |
| + .004/- .000 | + .000/- .004 | + .008/- .000 | + .000/- .003 | | |
| 4.750 | 4.317 | 0.165 | 4.749 | 244 | 0205OQ21704750-165A |
| 4.875 | 4.442 | 0.165 | 4.874 | 245 | 0205OQ21704875-165A |
| 5.000 | 4.567 | 0.165 | 4.999 | 246 | 0205OQ21705000-165A |
| 5.125 | 4.692 | 0.165 | 5.124 | 247 | 0205OQ21705125-165A |
| 5.250 | 4.817 | 0.165 | 5.249 | 248 | 0205OQ21705250-165A |
| 5.375 | 4.942 | 0.165 | 5.374 | 249 | 0205OQ21705375-165A |
| 5.500 | 5.067 | 0.165 | 5.499 | 250 | 0205OQ21705500-165A |
| 5.625 | 5.192 | 0.165 | 5.624 | 251 | 0205OQ21705625-165A |
| 5.750 | 5.317 | 0.165 | 5.749 | 252 | 0205OQ21705750-165A |
| 5.875 | 5.442 | 0.165 | 5.874 | 253 | 0205OQ21705875-165A |
| + .004/- .000 | + .000/- .004 | + .008/- .000 | + .000/- .004 | | |
| 6.000 | 5.390 | 0.248 | 5.999 | 355 | 0205OQ30506000-248A |
| 6.250 | 5.640 | 0.248 | 6.249 | 357 | 0205OQ30506250-248A |
| 6.500 | 5.890 | 0.248 | 6.499 | 359 | 0205OQ30506500-248A |
| 6.750 | 6.140 | 0.248 | 6.749 | 361 | 0205OQ30506750-248A |
| 7.000 | 6.390 | 0.248 | 6.999 | 362 | 0205OQ30507000-248A |
| + .005/- .000 | + .000/- .005 | + .008/- .000 | + .000/- .004 | | |
| 7.250 | 6.640 | 0.248 | 7.248 | 363 | 0205OQ30507250-248A |
| 7.500 | 6.890 | 0.248 | 7.498 | 364 | 0205OQ30507500-248A |
| 7.750 | 7.140 | 0.248 | 7.748 | 365 | 0205OQ30507750-248A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 7-55. OQ Gland Dimensions — Inch (Continued)


| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|----------------------|----------------------|----------------------|----------------------|--------------------|---------------------|
| + .005/- .000 | + .000/- .005 | + .008/- .000 | + .000/- .004 | | |
| 8.000 | 7.390 | 0.248 | 7.998 | 366 | 0205OQ30508000-248A |
| 8.250 | 7.640 | 0.248 | 8.248 | 367 | 0205OQ30508250-248A |
| 8.500 | 7.890 | 0.248 | 8.498 | 368 | 0205OQ30508500-248A |
| 8.750 | 8.140 | 0.248 | 8.748 | 369 | 0205OQ30508750-248A |
| 9.000 | 8.390 | 0.248 | 8.998 | 370 | 0205OQ30509000-248A |
| 9.250 | 8.640 | 0.248 | 9.248 | 371 | 0205OQ30509250-248A |
| 9.500 | 8.890 | 0.248 | 9.498 | 372 | 0205OQ30509500-248A |
| 9.750 | 9.140 | 0.248 | 9.748 | 373 | 0205OQ30509750-248A |
| 10.000 | 9.390 | 0.248 | 9.998 | 374 | 0205OQ30510000-248A |
| 10.500 | 9.890 | 0.248 | 10.498 | 376 | 0205OQ30510500-248A |
| 11.000 | 10.390 | 0.248 | 10.998 | 377 | 0205OQ30511000-248A |
| 11.500 | 10.890 | 0.248 | 11.498 | 378 | 0205OQ30511500-248A |
| + .006/- .000 | + .000/- .006 | + .008/- .000 | + .000/- .005 | | |
| 12.000 | 11.173 | 0.319 | 11.998 | 451 | 0205OQ41412000-319A |
| 12.500 | 11.673 | 0.319 | 12.498 | 452 | 0205OQ41412500-319A |
| 13.000 | 12.173 | 0.319 | 12.998 | 453 | 0205OQ41413000-319A |
| 13.500 | 12.673 | 0.319 | 13.498 | 454 | 0205OQ41413500-319A |
| 14.000 | 13.173 | 0.319 | 13.998 | 455 | 0205OQ41414000-319A |
| 14.500 | 13.673 | 0.319 | 14.498 | 456 | 0205OQ41414500-319A |
| 15.000 | 14.173 | 0.319 | 14.998 | 457 | 0205OQ41415000-319A |
| 15.500 | 14.673 | 0.319 | 15.498 | 458 | 0205OQ41415500-319A |
| 16.000 | 15.173 | 0.319 | 15.998 | 459 | 0205OQ41416000-319A |
| 16.500 | 15.673 | 0.319 | 16.498 | 460 | 0205OQ41416500-319A |
| 17.000 | 16.173 | 0.319 | 16.998 | 461 | 0205OQ41417000-319A |
| 17.500 | 16.673 | 0.319 | 17.498 | 462 | 0205OQ41417500-319A |
| 18.000 | 17.173 | 0.319 | 17.998 | 463 | 0205OQ41418000-319A |
| 18.500 | 17.673 | 0.319 | 18.498 | 464 | 0205OQ41418500-319A |
| 19.000 | 18.173 | 0.319 | 18.998 | 465 | 0205OQ41419000-319A |
| 19.500 | 18.673 | 0.319 | 19.498 | 466 | 0205OQ41419500-319A |
| + .007/- .000 | + .000/- .007 | + .008/- .000 | + .000/- .005 | | |
| 20.000 | 19.173 | 0.319 | 19.998 | 467 | 0205OQ41420000-319A |

*If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Part Number Nomenclature —OQ Profile


Table 7-56. OQ Profile — Metric

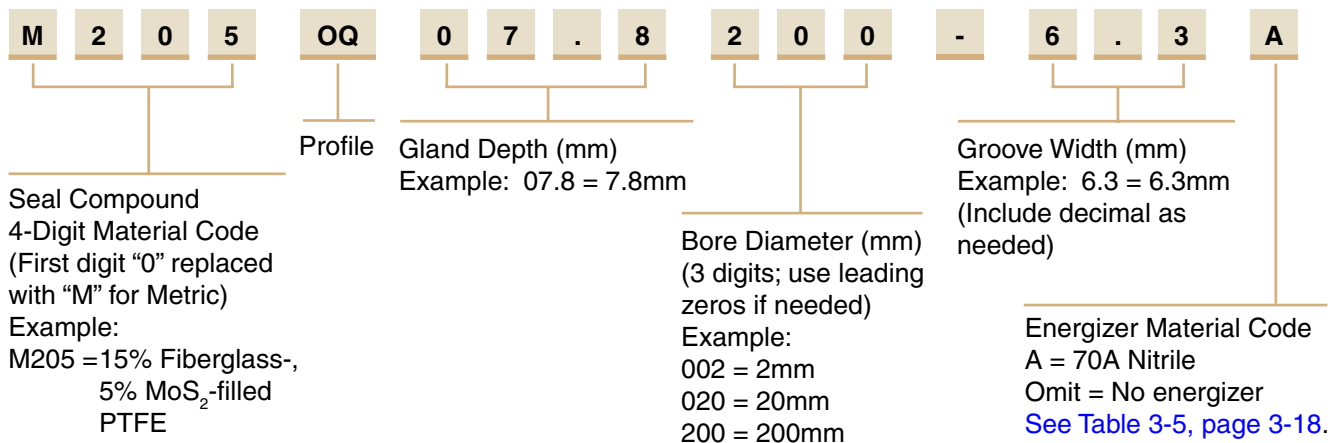

09/01/07



Gland Dimensions — OQ Profile

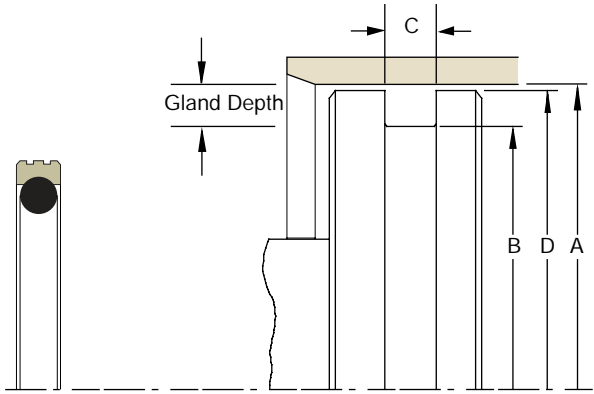

Please refer to Engineering [Section 2, Page 2-8](#) for surface finish and additional hardware considerations.

Table 7-57. OQ Profile — Metric

| A Bore Diameter | B Groove Diameter | C Groove Width | D Piston Diameter* | O-ring Dash Number | Part Number |
|-----------------------|-------------------------|----------------------|--------------------------|--------------------------|--------------------|
| H9 | h9 | +0.20/-0.00 | h8 | | |
| 8.00 | 3.10 | 2.20 | 7.97 | 006 | M205OQ02.5008-2.2A |
| 10.00 | 5.10 | 2.20 | 9.97 | 008 | M205OQ02.5010-2.2A |
| 12.00 | 7.10 | 2.20 | 11.97 | 010 | M205OQ02.5012-2.2A |
| 16.00 | 11.10 | 2.20 | 15.97 | 016 | M205OQ02.5016-2.2A |
| 20.00 | 15.10 | 2.20 | 19.97 | 015 | M205OQ02.5020-2.2A |
| 22.00 | 17.10 | 2.20 | 21.97 | 016 | M205OQ02.5022-2.2A |
| 25.00 | 20.10 | 2.20 | 24.97 | 018 | M205OQ02.5025-2.2A |
| 30.00 | 25.10 | 2.20 | 29.97 | 021 | M205OQ02.5030-2.2A |
| 32.00 | 27.10 | 2.20 | 31.97 | 023 | M205OQ02.5032-2.2A |
| 40.00 | 32.50 | 3.20 | 39.94 | 124 | M205OQ03.8040-3.2A |
| 45.00 | 37.50 | 3.20 | 44.94 | 127 | M205OQ03.8045-3.2A |
| 50.00 | 42.50 | 3.20 | 49.94 | 130 | M205OQ03.8050-3.2A |
| 55.00 | 47.50 | 3.20 | 54.94 | 133 | M205OQ03.8055-3.2A |
| 63.00 | 55.50 | 3.20 | 62.94 | 138 | M205OQ03.8063-3.2A |
| 70.00 | 62.50 | 3.20 | 69.94 | 143 | M205OQ03.8070-3.2A |
| 80.00 | 69.00 | 4.20 | 79.90 | 231 | M205OQ05.5080-4.2A |
| 90.00 | 79.00 | 4.20 | 89.90 | 234 | M205OQ05.5090-4.2A |
| 100.00 | 89.00 | 4.20 | 99.90 | 237 | M205OQ05.5100-4.2A |
| 110.00 | 99.00 | 4.20 | 109.90 | 241 | M205OQ05.5110-4.2A |
| 120.00 | 109.00 | 4.20 | 119.90 | 244 | M205OQ05.5120-4.2A |
| 125.00 | 114.00 | 4.20 | 124.90 | 245 | M205OQ05.5125-4.2A |
| 130.00 | 119.00 | 4.20 | 129.90 | 247 | M205OQ05.5130-4.2A |
| 140.00 | 124.50 | 6.30 | 139.90 | 352 | M205OQ07.8140-6.3A |
| 150.00 | 134.50 | 6.30 | 149.90 | 355 | M205OQ07.8150-6.3A |
| 160.00 | 144.50 | 6.30 | 159.90 | 358 | M205OQ07.8160-6.3A |
| 200.00 | 184.50 | 6.30 | 199.90 | 366 | M205OQ07.8200-6.3A |
| 220.00 | 204.50 | 6.30 | 219.90 | 369 | M205OQ07.8220-6.3A |
| 230.00 | 214.50 | 6.30 | 229.90 | 370 | M205OQ07.8230-6.3A |
| 240.00 | 224.50 | 6.30 | 239.90 | 372 | M205OQ07.8240-6.3A |
| 250.00 | 234.50 | 6.30 | 249.90 | 374 | M205OQ07.8250-6.3A |
| 300.00 | 284.50 | 6.30 | 299.90 | 379 | M205OQ07.8300-6.3A |
| 320.00 | 304.50 | 6.30 | 319.90 | 381 | M205OQ07.8320-6.3A |
| 400.00 | 379.00 | 8.10 | 399.90 | 458 | M205OQ10.5400-8.1A |
| 500.00 | 479.00 | 8.10 | 499.90 | 467 | M205OQ10.5500-8.1A |
| 600.00 | 579.00 | 8.10 | 599.90 | 472 | M205OQ10.5600-8.1A |

*If used with wear rings, refer to wear ring piston diameter, see [Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Contents

| | |
|------------------------|------|
| Product Offering | 8-3 |
| Decision Tree | 8-4 |
| Product Profiles | |
| YD | 8-5 |
| SHD | 8-6 |
| SHX | 8-7 |
| SH959 | 8-11 |
| SX959 | 8-12 |
| AH | 8-15 |
| J | 8-17 |
| AY | 8-19 |
| H / 8600 | 8-21 |
| K | 8-27 |
| AD | 8-30 |
| SG | 8-36 |

Wiper Introduction

One of the primary causes of premature component failure in a fluid power system is contamination. Contaminants such as moisture, dirt, and dust can cause extensive damage to cylinder walls, rods, seals and other components. It has always been Parker's design philosophy to use aggressive wiping geometries to prevent the damage that is caused when trace amounts of dirt or water are allowed to enter a fluid power system. This philosophy goes hand in hand with reducing the down time and high costs associated with replacing rusted components, scored rods, filters and leaking seals.

Choosing a Wiper

Some of the considerations that need to be made when choosing a wiper include:

1. Application Requirements
2. Groove Geometry
3. Lip Geometry
4. Redundant Sealing Lips
5. Environment
6. Rod Seal Interaction

Also see the Wiper Decision Tree found on [page 8-4](#).

1. Application Requirements: Whether hydraulic or pneumatic, high temperature, or low friction, Parker's broad range of materials and wiper profiles allow you to choose the right wiper for every application.

2. Groove Geometry: When choosing the groove geometry, machining costs, wiper costs and the costs of replacing the wiper while in the field must be considered. The majority of mobile equipment manufacturers use press-fit canned wipers. While canned wipers are more costly, the gland machining costs are less and the wiper lips are more aggressive for this harsh environment.

3. Lip Geometry: Parker wipers are designed to give the best possible exclusion performance by featuring perpendicular, or "straight-cut" lip geometries. The footprint of a sharp, straight-cut wiper causes a high concentration of forces which maximizes fluid film breakage while allowing contaminants to be pushed away from the wiping edge. (See Figure 8-1.) The footprint of a radiused lip, however,

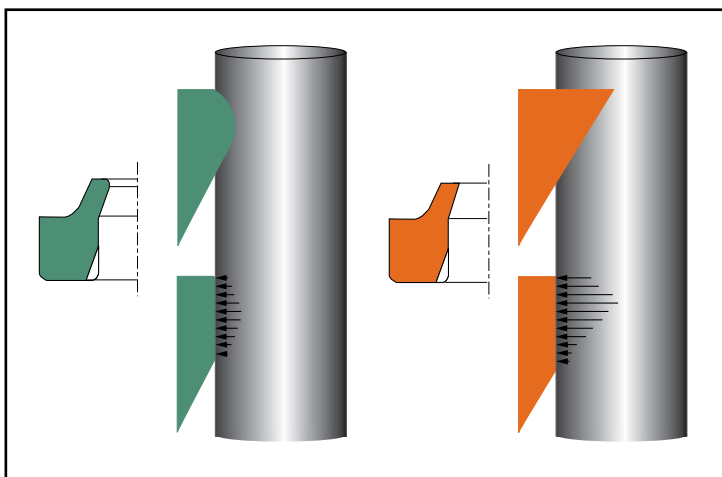


Figure 8-1. Radius vs. Straight Cut Lip Geometry

Wipers

often results in a poor concentration of forces. Although they are less costly, radiused lip geometries can also trap contamination against the rod, lifting the wiper up and opening a gateway for further contamination. For ultimate performance, Parker offers profiles with a knife trimmed wiping lip. These profiles include the YD and J profiles.

- 4. Redundant Sealing Lips:** One of the most effective ways to improve a system's sealing performance is to incorporate the use of multiple or redundant sealing lips. This can be accomplished by using Parker's AY, AH, H or 8600, doubled lip profiles. Because these wipers have a redundant sealing lip, there is no way for them to relieve a pressure trap out of the system. It is critical, therefore, to pair redundant lip wipers with the correct rod seals, such as the BT and B3 u-cup profiles. These rod seal profiles enable fluid pressure relief back into the system.
- 5. Environment:** In certain applications where cylinders are in a vertical or rod-up orientation, it's possible for moisture or other contaminants to collect in the wiper gland. These situations can be found in everything from forklifts and agricultural cylinders to heavy duty construction equipment that is exposed to all-weather conditions. For this reason, Parker offers

several wiper profiles that feature O.D. exclusion technology to keep contamination out on both the dynamic and static surfaces. For snap-in applications, the Parker YD, SHX and SX959 profiles offer an additional lip contact to exclude contamination at the O.D. For more aggressive sealing at the O.D., Parker offers the AH and J style metal encased wipers which utilize a metal to metal interference fit for high performance in harsh environments.

- 6. Rod Seal Interaction:** It is important to properly pair rod seals and wiper combinations to minimize leakage. When the rod extends past the rod seal, there is a thin film of oil that remains trapped in microscopic surface imperfections. The thickness of this film depends on the aggressiveness of the rod seal, rod surface finish and rod speed. If the rod seal chosen is less aggressive than the wiper, the wiper can wipe away the oil film during retract, resulting in system leakage.






























Examples of poor wiper/rod seal combinations include using a soft rubber u-cup with an aggressive urethane wiper, or a rod seal with net molded lips paired with a knife trimmed wiper. In both cases a less aggressive rod seal is improperly paired with a more aggressive wiper.


Wiper Product Offering

Catalog EPS 5370/USA


Profiles

Table 8-1: Product Profiles

| Series | Description | Application (Duty) | | | | Page | Series | Description | Application (Duty) | | | | Page |
|--------|---|---|---|---|---|------|----------|------------------------------|---|---|---|---|------|
| | | Light | Medium | Heavy | Pneumatic | | | | Light | Medium | Heavy | Pneumatic | |
| YD | Premium Snap-In Wiper with O.D. Exclusion Technology | |  |  | | 8-5 | J | Performance Canned Wiper | |  |  | | 8-17 |
| SHD | Industrial Snap-In Wiper |  |  | |  | 8-6 | AY | Premium Double-Lip Wiper |  |  |  | | 8-19 |
| SHX | Performance Snap-In Wiper with O.D. Exclusion Technology |  |  | | | 8-7 | H / 8600 | Performance Double-Lip Wiper |  |  | |  | 8-21 |
| SH959 | AN-Style Snap-In Wiper |  |  | |  | 8-11 | K | Industrial Snap-In Wiper |  | | | | 8-27 |
| SX959 | Performance AN-Style Wiper with O.D. Exclusion Technology |  |  | |  | 8-12 | AD | PTFE Wiper Seal |  |  | |  | 8-30 |
| AH | Premium Double-Lip Canned Wiper | |  |  | | 8-15 | SG | Metal Scraper | |  |  | | 8-36 |



Wiper Decision Tree

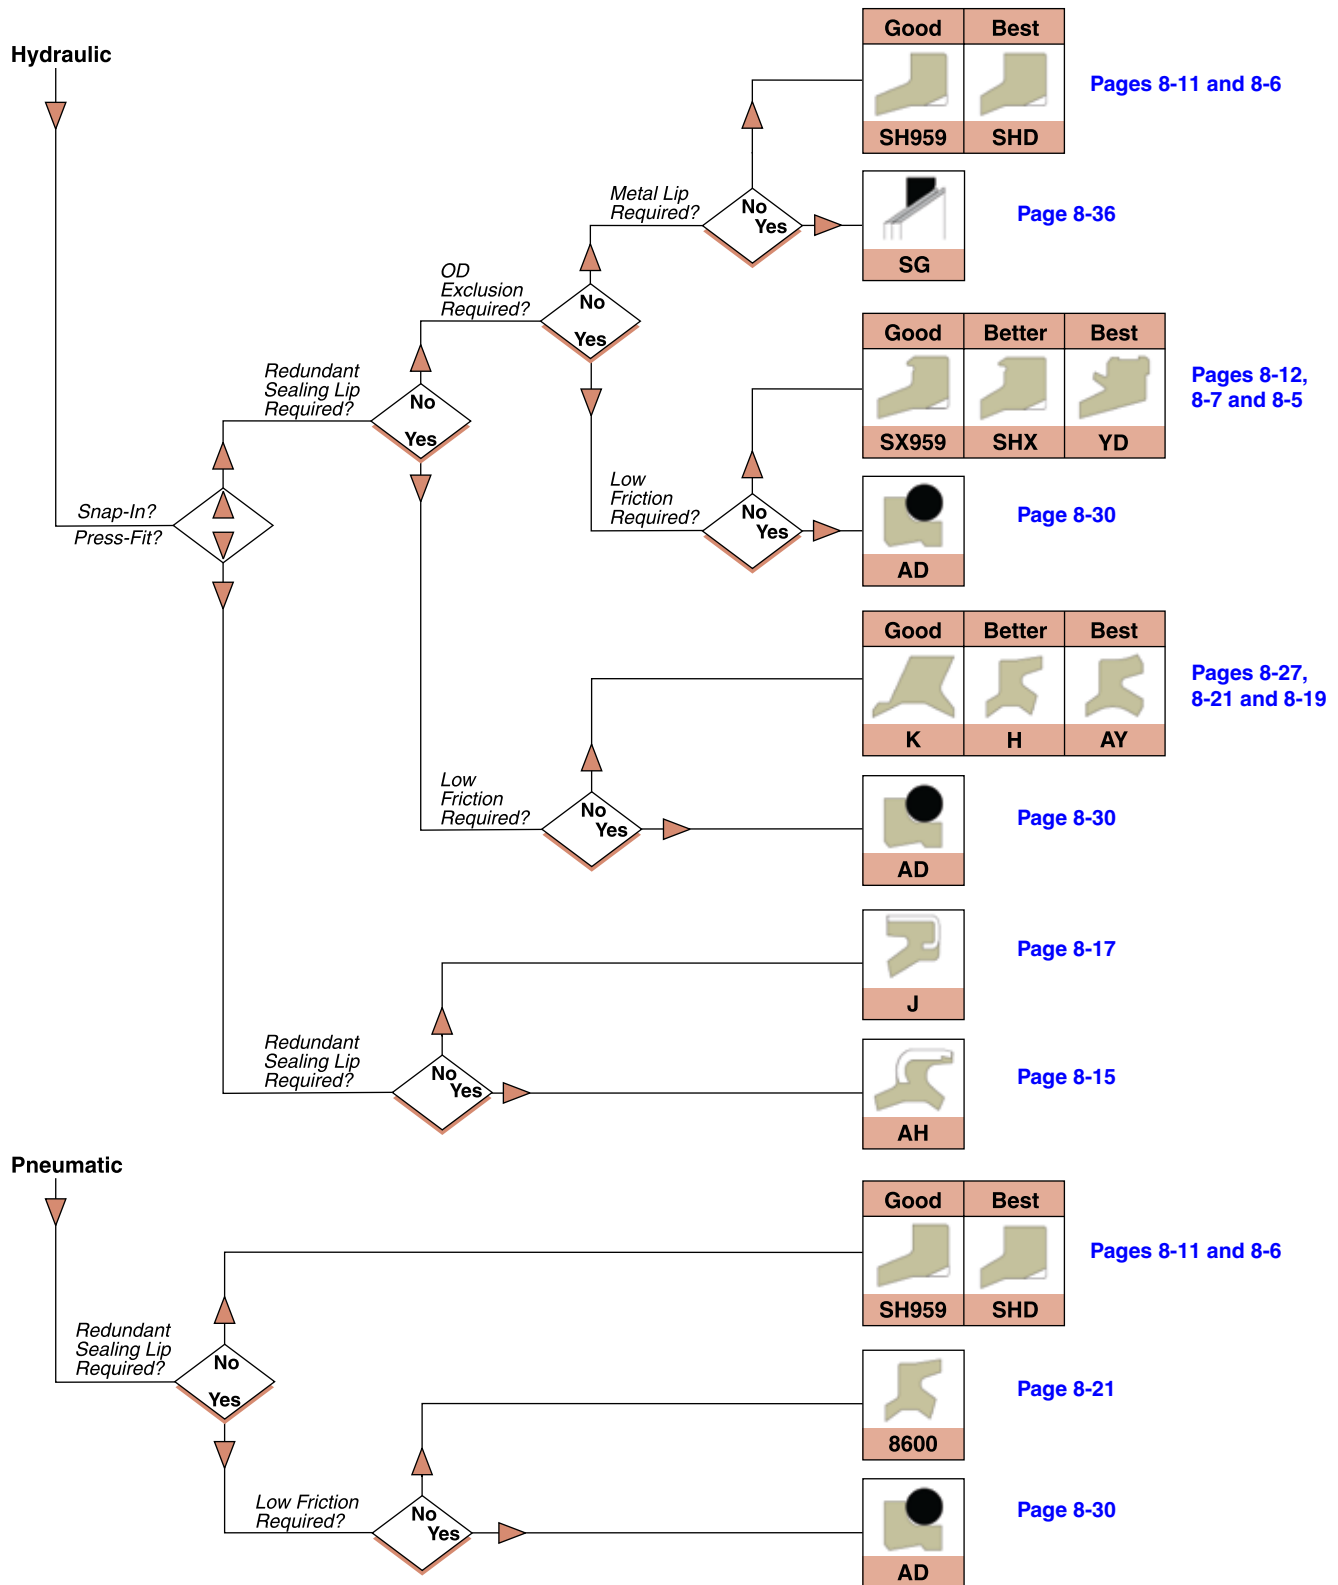

Note: Decision Tree is for Profile geometry only. Please consult pages 8-5 through 8-40 for proper material selection.

Wiper YD Profile

Catalog EPS 5370/USA



YD Profile, Premium Snap-in Wiper with O.D. Exclusion Technology

The YD wiper is the premier design among high performance, snap-in excluders. Featuring a secondary O.D. lip which seals against the shoulder region of the gland, the YD prevents water and other contaminants from entering around the static side of the wiper. For ultimate performance, the YD also incorporates an aggressive, knife-trimmed wiping lip to ensure maximum exclusion along the rod. A true zero-radius lip provides the most effective wiping action available.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|-----------------------------------|------------------------|
| P4300A90 | -65°F to 275°F (-54° to 135°C) | <1.6 ft/s (0.5 m/s) |

*Alternate Materials: For applications that may require an alternate material, please contact your local Parker Seal representative.

Part Number Nomenclature —YD Profile

Table 8-2. YD Profile — Inch


| | | | | | | | | | |
|---|---|---|---|---------|---|---|---|---|---|
| 4 | 3 | 0 | 0 | YD | 0 | 1 | 5 | 0 | 0 |
| └──────────┘ | | | | └──┘ | └──────────┘ | | | | |
| Seal Compound 4-Digit Material Code Example: 4300 = 90A Resilon HT Polyurethane | | | | Profile | Nominal Rod Diameter (x1000) Example: 1.500 x 1000 = 01500 | | | | |



YD Cross-Section

Gland Dimensions — YD Profile

YD gland dimensions are provided in [Table 8-5 on page 8-8](#).

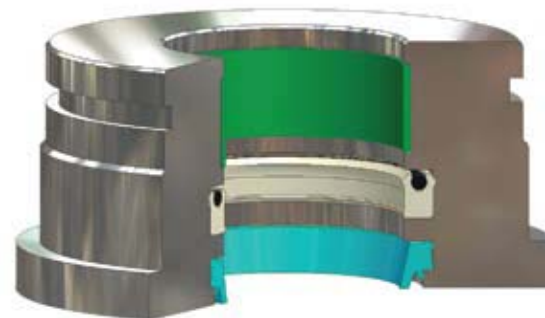

YD installed in Rod Gland

8

09/01/07

Wiper SHD Profile



SHD Profile, Industrial Snap-In Wiper

Parker SHD wipers are an outstanding choice for light and medium duty hydraulic and pneumatic applications. The slotted heel design prevents pressure traps from forming between the rod seal and wiper. Broad tooling availability, up to 30", makes the SHD a good choice for large rod diameters. The snap-in design is oversized for a snug fit and excellent stability. This makes the SHD a great all-round wiper in an economical package.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|-----------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 f/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | <1.6 f/s (0.5 m/s) |
| N4263A90 | -20°F to 275°F (-29°C to 135°C) | <3.3 f/s (1.0 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | <3.3 f/s (1.0 m/s) |
| E4207A90 | -65°F to 300°F (-54°F to 149°C) | <3.3 f/s (1.0 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

Part Number Nomenclature — SHD Profile

Table 8-3. SHD Profile — Inch


| | | | | | | | | | |
|---------------------------|---|---|---|---------|-------------------------------|---|---|---|---|
| 4 | 2 | 6 | 3 | SHD | 0 | 1 | 0 | 0 | 0 |
| └──────────┘ | | | | └──┘ | └──────────┘ | | | | |
| Seal Compound | | | | Profile | Nominal Rod Diameter (x1000) | | | | |
| 4-Digit Material Code | | | | | Example: 1.000 x 1000 = 01000 | | | | |
| Example: 4263 = Nitroxile | | | | | | | | | |



SHD Cross-Section

Gland Dimensions — SHD Profile

SHD gland dimensions are provided in [Table 8-5 on page 8-8](#).

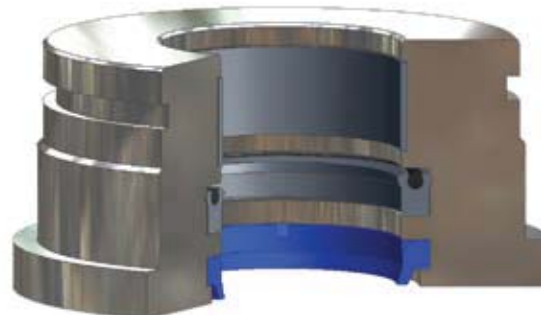

SHD installed in Rod Gland

Wiper SHX Profile

Catalog EPS 5370/USA



SHX Profile, Performance Snap-In Wiper with O.D. exclusion technology

Parker SHX wipers offer an improvement over standard D-style wipers by adding O.D. exclusion technology that prevents water and other contamination from entering the system from the static side of the groove. This profile is ideal for applications where the rod is positioned vertically and could allow moisture to collect in the wiper gland. SHX wipers retrofit industry standard D wiper grooves, making the upgrade process simple and economical.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|-----------------------------------|------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

Part Number Nomenclature — SHX Profile


Table 8-4. SHX Profile — Inch

| | | | | | | | | | |
|--|---|---|---|---------|---|---|---|---|---|
| 5 | 0 | 6 | 5 | SHX | 0 | 1 | 3 | 7 | 5 |
| └──────────┬──────────┘ | | | | └──┬──┘ | └──────────┬──────────┘ | | | | |
| Seal Compound 4-Digit Material Code Example: 5065 = Polyurethane (Low Temperature Urethane) | | | | Profile | Nominal Rod Diameter (x1000) Example: 1.375 x 1000 = 01375 | | | | |



Gland Dimensions — SHX Profile

SHX gland dimensions are provided in [Table 8-5 on page 8-8](#).

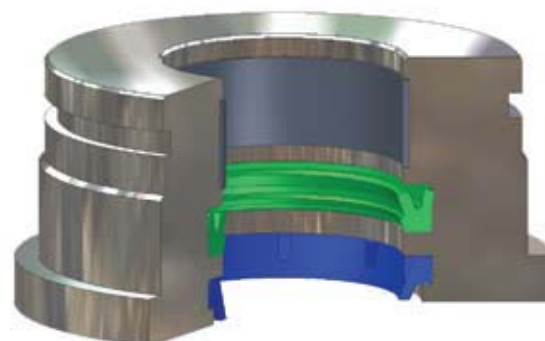


SHX installed in Rod Gland

09/01/07

Wiper YD, SHD and SHX Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — YD, SHD and SHX Profiles

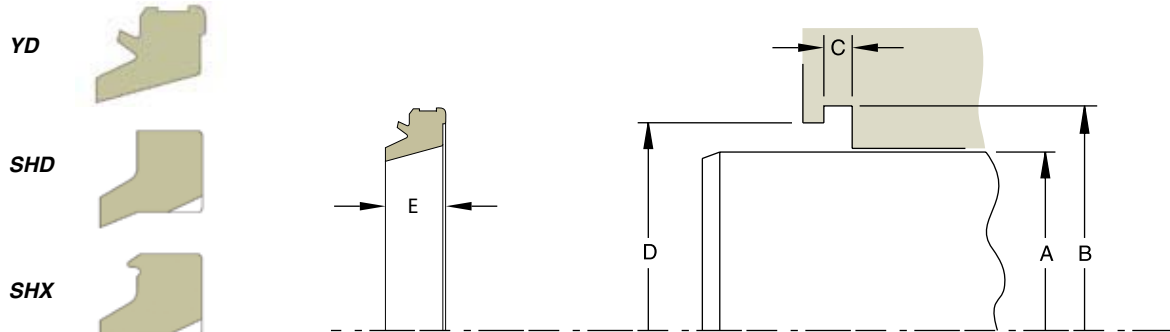

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 8-5. YD, SHD and SHX Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Compound Codes (X = Standard Offering) | | | | | | | | | Part Number | | | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------------|---|------|------|------|------|------|------|------|------------------|-------------|-------------|--|-------|--|
| | | | | | SHD | | | | | SHX | | YD | Compound Code | Profile | Rod Size | | | |
| | | | | | 4615 | 5065 | 4263 | 4208 | 4207 | 4615 | 5065 | 4300 | | | | | | |
| +0.000/-0.002 | +0.006/-0.000 | +0.004/-0.000 | +0.005/-0.000 | | | | | | | | | | | | | | | |
| 0.250 | 0.497 | 0.124 | 0.410 | 0.210 | x | x | | | x | | | | | XXXX | xxx | | 00250 | |
| 0.312 | 0.560 | 0.124 | 0.475 | 0.210 | x | x | x | | x | | | | | XXXX | xxx | | 00312 | |
| 0.375 | 0.622 | 0.124 | 0.535 | 0.210 | x | x | | | x | | | | | XXXX | xxx | | 00375 | |
| 0.437 | 0.685 | 0.124 | 0.600 | 0.210 | x | x | | | | | | | | XXXX | xxx | | 00437 | |
| 0.500 | 0.747 | 0.124 | 0.660 | 0.210 | x | x | x | x | | x | x | | | XXXX | xxx | | 00500 | |
| 0.562 | 0.810 | 0.124 | 0.725 | 0.210 | x | x | | x | | | | | | XXXX | xxx | | 00562 | |
| 0.625 | 0.872 | 0.124 | 0.785 | 0.210 | x | x | | x | | x | x | | | XXXX | xxx | | 00625 | |
| 0.687 | 0.935 | 0.124 | 0.850 | 0.210 | x | x | | | | | | | | XXXX | xxx | | 00687 | |
| 0.750 | 1.122 | 0.187 | 0.995 | 0.305 | x | x | x | x | x | x | x | x | | XXXX | xxx | | 00750 | |
| 0.875 | 1.247 | 0.187 | 1.120 | 0.305 | x | x | | | | x | x | | | XXXX | xxx | | 00875 | |
| 1.000 | 1.372 | 0.187 | 1.245 | 0.305 | x | x | | x | | x | x | x | | XXXX | xxx | | 01000 | |
| 1.125 | 1.497 | 0.187 | 1.370 | 0.305 | x | x | | | | x | x | x | | XXXX | xxx | | 01125 | |
| 1.187 | 1.560 | 0.187 | 1.435 | 0.305 | x | x | | | | | | | | XXXX | xxx | | 01187 | |
| 1.250 | 1.622 | 0.187 | 1.495 | 0.305 | x | x | | | | x | x | x | | XXXX | xxx | | 01250 | |
| 1.375 | 1.747 | 0.187 | 1.620 | 0.305 | x | x | x | | | x | x | x | | XXXX | xxx | | 01375 | |
| 1.500 | 1.872 | 0.187 | 1.745 | 0.305 | x | x | | | | x | x | x | | XXXX | xxx | | 01500 | |
| 1.625 | 1.997 | 0.187 | 1.870 | 0.305 | x | x | x | | | x | x | x | | XXXX | xxx | | 01625 | |
| 1.750 | 2.122 | 0.187 | 1.995 | 0.305 | x | x | x | x | x | x | x | x | | XXXX | xxx | | 01750 | |
| 1.875 | 2.247 | 0.187 | 2.120 | 0.305 | x | x | x | | | x | x | x | | XXXX | xxx | | 01875 | |
| 2.000 | 2.497 | 0.249 | 2.327 | 0.395 | x | x | x | | x | x | x | x | | XXXX | xxx | | 02000 | |
| +0.000/-0.003 | +0.006/-0.000 | +0.004/-0.000 | +0.005/-0.000 | | | | | | | | | | | | | | | |
| 2.125 | 2.622 | 0.249 | 2.452 | 0.395 | x | x | | x | | x | x | | | XXXX | xxx | | 02125 | |
| 2.250 | 2.747 | 0.249 | 2.577 | 0.395 | x | x | x | x | | x | x | x | | XXXX | xxx | | 02250 | |
| 2.375 | 2.872 | 0.249 | 2.702 | 0.395 | x | x | | x | | | | | | XXXX | xxx | | 02375 | |
| 2.500 | 2.997 | 0.249 | 2.827 | 0.395 | x | x | x | | | x | x | x | | XXXX | xxx | | 02500 | |
| 2.625 | 3.122 | 0.249 | 2.952 | 0.395 | x | x | x | x | | | | x | | XXXX | xxx | | 02625 | |

For custom groove calculations, see Appendix C.

09/01/07



Table 8-5. YD, SHD and SHX Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Compound Codes (X = Standard Offering) | | | | | | | | | Part Number | | | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------------|---|------|------|------|------|------|------|------|------------------|-------------|-------------|--|-------|--|
| | | | | | SHD | | | | | SHX | | YD | Compound Code | Profile | Rod Size | | | |
| | | | | | 4615 | 5065 | 4263 | 4208 | 4207 | 4615 | 5065 | 4300 | | | | | | |
| + .000/- .003 | + .006/- .000 | + .004/- .000 | + .005/- .000 | | | | | | | | | | | | | | | |
| 2.750 | 3.247 | 0.249 | 3.077 | 0.395 | x | x | x | x | | | | | x | XXXX | xxx | | 02750 | |
| 2.875 | 3.372 | 0.249 | 3.202 | 0.395 | x | x | x | x | | | | | x | XXXX | xxx | | 02875 | |
| 3.000 | 3.497 | 0.249 | 3.327 | 0.395 | x | x | | x | | | x | x | x | XXXX | xxx | | 03000 | |
| 3.125 | 3.622 | 0.249 | 3.452 | 0.395 | x | x | | | | | | | | XXXX | xxx | | 03125 | |
| 3.250 | 3.747 | 0.249 | 3.577 | 0.395 | x | x | x | | | | | | x | XXXX | xxx | | 03250 | |
| 3.375 | 3.872 | 0.249 | 3.702 | 0.395 | x | x | | x | | | | | | XXXX | xxx | | 03375 | |
| 3.500 | 3.997 | 0.249 | 3.827 | 0.395 | x | x | x | x | | | | | x | XXXX | xxx | | 03500 | |
| 3.625 | 4.122 | 0.249 | 3.952 | 0.395 | x | x | x | | | | | | | XXXX | xxx | | 03625 | |
| 3.750 | 4.247 | 0.249 | 4.077 | 0.395 | x | x | x | x | | | | | | XXXX | xxx | | 03750 | |
| 3.875 | 4.372 | 0.249 | 4.202 | 0.395 | x | x | x | x | | | | | | XXXX | xxx | | 03875 | |
| 4.000 | 4.497 | 0.249 | 4.327 | 0.395 | x | x | x | x | x | x | x | x | x | XXXX | xxx | | 04000 | |
| 4.125 | 4.622 | 0.249 | 4.452 | 0.395 | | | x | | | | | | | XXXX | xxx | | 04125 | |
| 4.250 | 4.747 | 0.249 | 4.577 | 0.395 | x | x | x | x | x | | | | x | XXXX | xxx | | 04250 | |
| 4.375 | 4.872 | 0.249 | 4.702 | 0.395 | x | x | | | | | | | | XXXX | xxx | | 04375 | |
| 4.500 | 5.247 | 0.374 | 4.993 | 0.585 | x | x | x | x | x | | | | x | XXXX | xxx | | 04500 | |
| 4.625 | 5.372 | 0.374 | 5.118 | 0.585 | | | x | x | | | | | | XXXX | xxx | | 04625 | |
| 4.750 | 5.497 | 0.374 | 5.243 | 0.585 | x | x | x | | | | | | | XXXX | xxx | | 04750 | |
| 4.875 | 5.622 | 0.374 | 5.368 | 0.585 | x | x | x | | | | | | | XXXX | xxx | | 04875 | |
| 5.000 | 5.747 | 0.374 | 5.493 | 0.585 | x | x | x | x | | | | | x | XXXX | xxx | | 05000 | |
| 5.250 | 5.997 | 0.374 | 5.743 | 0.585 | x | x | x | | | | | | | XXXX | xxx | | 05250 | |
| 5.375 | 6.122 | 0.374 | 5.868 | 0.585 | x | x | | | | | | | | XXXX | xxx | | 05375 | |
| 5.500 | 6.247 | 0.374 | 5.993 | 0.585 | x | x | x | | | | | | x | XXXX | xxx | | 05500 | |
| 5.625 | 6.372 | 0.374 | 6.118 | 0.585 | x | x | | | | | | | | XXXX | xxx | | 05625 | |
| 5.750 | 6.497 | 0.374 | 6.243 | 0.585 | | | | x | | | | | | XXXX | xxx | | 05750 | |
| 5.875 | 6.622 | 0.374 | 6.368 | 0.585 | x | x | | | | | | | | XXXX | xxx | | 05875 | |
| 6.000 | 6.747 | 0.374 | 6.493 | 0.585 | x | x | x | x | x | | | | | XXXX | xxx | | 06000 | |
| + .000/- .004 | + .006/- .000 | + .004/- .000 | + .005/- .000 | | | | | | | | | | | | | | | |
| 6.250 | 6.997 | 0.374 | 6.743 | 0.585 | | | x | x | x | | | | | XXXX | xxx | | 06250 | |
| 6.500 | 7.247 | 0.374 | 6.993 | 0.585 | x | x | x | | | | | | | XXXX | xxx | | 06500 | |
| 6.750 | 7.497 | 0.374 | 7.243 | 0.585 | | | x | | | | | | | XXXX | xxx | | 06750 | |
| 7.000 | 7.747 | 0.374 | 7.493 | 0.585 | x | x | | x | | | | | | XXXX | xxx | | 07000 | |
| 7.250 | 7.997 | 0.374 | 7.743 | 0.585 | | | x | x | | | | | | XXXX | xxx | | 07250 | |
| 7.500 | 8.247 | 0.374 | 7.993 | 0.585 | | | x | x | | | | | | XXXX | xxx | | 07500 | |
| 7.750 | 8.497 | 0.374 | 8.243 | 0.585 | | | | | | | | | | XXXX | xxx | | 07750 | |
| 8.000 | 8.747 | 0.374 | 8.493 | 0.585 | x | x | x | x | | | | | | XXXX | xxx | | 08000 | |
| 8.250 | 8.997 | 0.374 | 8.743 | 0.585 | | | | x | | | | | | XXXX | xxx | | 08250 | |
| 8.500 | 9.247 | 0.374 | 8.993 | 0.585 | x | x | | | | | | | | XXXX | xxx | | 08500 | |
| + .000/- .005 | + .006/- .000 | + .004/- .000 | + .005/- .000 | | | | | | | | | | | | | | | |
| 8.750 | 9.497 | 0.374 | 9.243 | 0.585 | | | x | | | | | | | XXXX | xxx | | 08750 | |
| 9.000 | 9.747 | 0.374 | 9.493 | 0.585 | x | x | | | | | | | x | XXXX | xxx | | 09000 | |
| 10.000 | 10.997 | 0.499 | 10.659 | 0.775 | x | x | | | | | | | | XXXX | xxx | | 10000 | |
| 10.750 | 11.747 | 0.499 | 11.409 | 0.775 | | | | | | | | | | XXXX | xxx | | 10625 | |
| 11.000 | 11.997 | 0.499 | 11.659 | 0.775 | x | x | | | | | | | | XXXX | xxx | | 11000 | |
| 12.000 | 12.997 | 0.499 | 12.659 | 0.775 | x | x | | | | | | | | XXXX | xxx | | 12000 | |
| 12.500 | 13.497 | 0.499 | 13.159 | 0.775 | x | x | | | | | | | | XXXX | xxx | | 12500 | |
| 14.000 | 14.997 | 0.499 | 14.659 | 0.775 | x | x | | x | | | | | | XXXX | xxx | | 14000 | |



For custom groove calculations, see Appendix C.



YD, SHD and SHX Profiles

Table 8-5. YD, SHD and SHX Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Compound Codes (X = Standard Offering) | | | | | | | Part Number | | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------------|---|------|------|------|------|------|------|-------------|------------------|---------|-------------|
| | | | | | SHD | | | | | SHX | | YD | Compound Code | Profile | Rod Size |
| | | | | | 4615 | 5065 | 4263 | 4208 | 4207 | 4615 | 5065 | 4300 | | | |
| +.000/-0.005 | +.006/-0.000 | +.004/-0.000 | +.005/-0.000 | | | | | | | | | | | | |
| 14.750 | 15.747 | 0.499 | 15.409 | 0.775 | x | | | | | | | | XXXX | xxx | 14750 |
| 15.000 | 15.997 | 0.499 | 15.659 | 0.775 | x | | | | | | | | XXXX | xxx | 15000 |
| 16.000 | 16.997 | 0.499 | 16.659 | 0.775 | x | x | | | | | | | XXXX | xxx | 16000 |
| 20.000 | 20.997 | 0.499 | 20.659 | 0.775 | x | x | | | | | | | XXXX | xxx | 20000 |
| 30.000 | 30.997 | 0.499 | 30.659 | 0.775 | x | x | | | | | | | XXXX | xxx | 30000 |

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Wiper SH959 Profile

Catalog EPS 5370/USA




SH959 Profile, AN-Style Snap-In Wiper

Parker SH959 wipers are AN style excluders designed to ensure proper fit with all MS-28776 (MS-33675) dash size grooves. The slotted heel design prevents pressure traps from forming between the rod seal and wiper. This profile of wiper requires very little radial or axial space. This is why they are ideal in light to medium duty hydraulic and pneumatic applications where such space constraints are present.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| N4263A90 | -20°F to 275°F (-29°C to 135°C) | <3.3 ft/s (1.0 m/s) |
| V4208A90 | -5°F to 400°F (-21°C to 204°C) | <3.3 ft/s (1.0 m/s) |
| E4207A90 | -65°F to 300°F (-54°C to 149°C) | <3.3 ft/s (1.0 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.



SH959 Cross-Section

Part Number Nomenclature — SH959 Profile


Table 8-6. SH959 Profile — Inch

| | | | | | | | |
|---------------------------|---|---|---|---------|--------------------------|---|---|
| 4 | 2 | 6 | 3 | SH959 | - | 2 | 1 |
| | | | | | | | |
| Seal Compound | | | | Profile | 959 Dash Size | | |
| 4-Digit Material Code | | | | | Example: | | |
| Example: 4263 = Nitroxile | | | | | 21 = 2.000" Rod Diameter | | |

8

Gland Dimensions — SH959 Profile

SH959 gland dimensions are provided in [Table 8-8 on page 8-13](#).

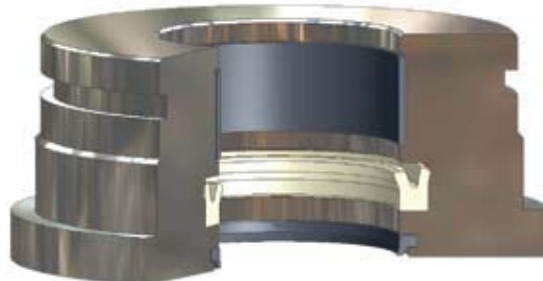

SH959 installed in Rod Gland

09/01/07

Wiper SX959 Profile

Catalog EPS 5370/USA



SX959 Profile, Performance AN-Style Wiper with O.D. exclusion technology

Parker's SX959 profile takes AN wipers to a new level by adding O.D. exclusion technology, while still retrofitting MS-28776 (MS-33675) dash size grooves. SX959 wipers offer the same compact size advantages as the SH959, while also improving contaminant exclusion in light to medium duty hydraulic and pneumatic applications.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|-----------------------------------|------------------------|
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P5065A88 | -70°F to 200°F (-57°C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

Part Number Nomenclature — SX959 Profile

Table 8-7. SX959 Profile — Inch

| | | | | | | | |
|---|---|---|---|---------|---|---|---|
| 5 | 0 | 6 | 5 | SX959 | - | 1 | 1 |
| └──────────┘ | | | | └──┘ | | └──┘ | |
| Seal Compound 4-Digit Material Code Example: 5065 = Polyurethane (Low Temperature Urethane) | | | | Profile | | 959 Dash Size Example: 11 = 1.125" Rod Diameter | |




SX Cross-Section

8

Gland Dimensions — SX959 Profile

SX959 gland dimensions are provided in [Table 8-8 on page 8-13](#).

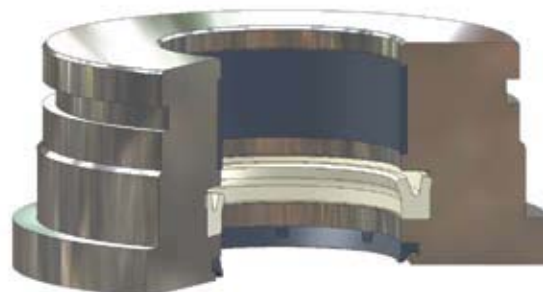


SX959 installed in Rod Gland

09/01/07

Wiper SH959 and SX959 Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — SH959 and SX959 Profiles

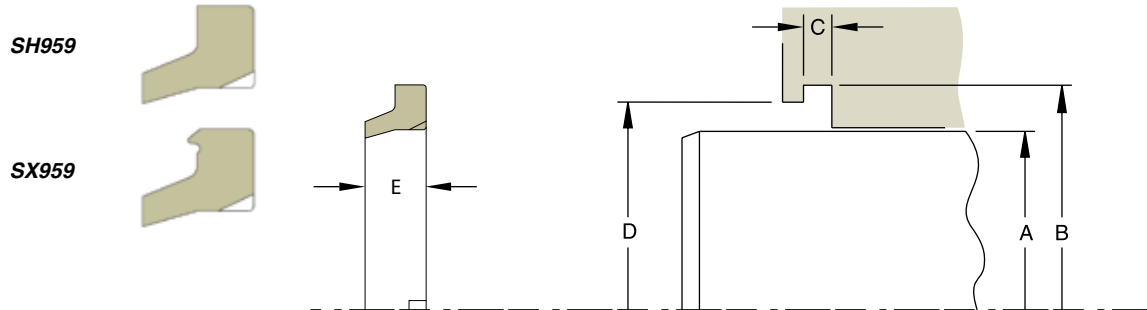

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 8-8. SH959 and SX959 Gland Dimensions — Inch

| Dash Size | A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Compound Code (X = Standard Offering) | | | | | | Part Number | | | | | |
|-----------|----------------------|----------------------|----------------------|----------------------|--------------------------|---------------------------------------|------|------|-------|------|------|---------------|---------|-------|--------|--|--|
| | | | | | | SH959 | | | SX959 | | | Compound Code | Profile | | | | |
| | | | | | | 4615 | 5065 | 4263 | 4208 | 4207 | 4615 | | | | 5065 | | |
| | +0.000/-0.002 | +0.004/-0.000 | +0.003/-0.003 | +0.005/-0.000 | | | | | | | | | | | | | |
| -1 | 0.500 | 0.760 | 0.107 | 0.647 | 0.187 | x | x | x | x | x | x | x | XXXX | xxxxx | 959-01 | | |
| -2 | 0.562 | 0.823 | 0.107 | 0.710 | 0.187 | x | x | | | | | | XXXX | xxxxx | 959-02 | | |
| -3 | 0.625 | 0.885 | 0.107 | 0.772 | 0.187 | x | x | x | x | | x | x | XXXX | xxxxx | 959-03 | | |
| -4 | 0.687 | 0.948 | 0.107 | 0.834 | 0.187 | x | x | x | | | | | XXXX | xxxxx | 959-04 | | |
| -5 | 0.750 | 1.010 | 0.107 | 0.897 | 0.187 | x | x | | x | x | x | x | XXXX | xxxxx | 959-05 | | |
| -6 | 0.812 | 1.084 | 0.107 | 0.960 | 0.187 | x | x | | | x | | | XXXX | xxxxx | 959-06 | | |
| -7 | 0.875 | 1.147 | 0.107 | 1.023 | 0.187 | x | x | x | x | | x | x | XXXX | xxxxx | 959-07 | | |
| -9 | 1.000 | 1.272 | 0.107 | 1.148 | 0.187 | x | x | x | x | x | x | x | XXXX | xxxxx | 959-09 | | |
| -10 | 1.062 | 1.334 | 0.107 | 1.210 | 0.187 | x | x | x | | x | | | XXXX | xxxxx | 959-10 | | |
| -11 | 1.125 | 1.397 | 0.107 | 1.273 | 0.187 | x | x | x | x | | x | x | XXXX | xxxxx | 959-11 | | |
| -12 | 1.187 | 1.459 | 0.107 | 1.335 | 0.187 | x | x | | | | | | XXXX | xxxxx | 959-12 | | |
| -13 | 1.250 | 1.522 | 0.107 | 1.398 | 0.187 | x | x | | | x | x | x | XXXX | xxxxx | 959-13 | | |
| -14 | 1.312 | 1.614 | 0.107 | 1.480 | 0.187 | x | x | x | x | x | | | XXXX | xxxxx | 959-14 | | |
| -15 | 1.375 | 1.677 | 0.107 | 1.542 | 0.187 | x | x | | | | x | x | XXXX | xxxxx | 959-15 | | |
| -16 | 1.437 | 1.739 | 0.107 | 1.605 | 0.187 | x | x | | | | | | XXXX | xxxxx | 959-16 | | |
| -17 | 1.500 | 1.802 | 0.107 | 1.668 | 0.187 | x | x | | x | | x | x | XXXX | xxxxx | 959-17 | | |
| -M | 1.562 | 1.865 | 0.107 | 1.731 | 0.187 | x | x | | | | | | XXXX | xxxxx | 959-M | | |
| -18 | 1.625 | 1.927 | 0.107 | 1.793 | 0.187 | x | x | | | | x | x | XXXX | xxxxx | 959-18 | | |
| -19 | 1.750 | 2.052 | 0.107 | 1.918 | 0.187 | x | x | | x | | x | x | XXXX | xxxxx | 959-19 | | |
| -A | 1.812 | 2.115 | 0.107 | 1.981 | 0.187 | x | x | | | | | | XXXX | xxxxx | 959-A | | |
| -20 | 1.875 | 2.117 | 0.107 | 2.043 | 0.187 | x | x | | | | x | x | XXXX | xxxxx | 959-20 | | |
| -21 | 2.000 | 2.302 | 0.107 | 2.178 | 0.187 | x | x | x | x | x | x | x | XXXX | xxxxx | 959-21 | | |
| | +0.000/-0.003 | +0.004/-0.000 | +0.003/-0.003 | +0.005/-0.000 | | | | | | | | | | | | | |
| -22 | 2.125 | 2.427 | 0.107 | 2.303 | 0.187 | x | x | | x | | x | x | XXXX | xxxxx | 959-22 | | |
| -23 | 2.250 | 2.552 | 0.107 | 2.428 | 0.187 | x | x | | | | x | x | XXXX | xxxxx | 959-23 | | |
| -24 | 2.375 | 2.677 | 0.107 | 2.553 | 0.187 | x | x | | x | | | | XXXX | xxxxx | 959-24 | | |
| -25 | 2.500 | 2.802 | 0.107 | 2.678 | 0.187 | x | x | | x | x | x | x | XXXX | xxxxx | 959-25 | | |

For custom groove calculations, see [Appendix C](#).

8

02/15/08



SH959 and SX959 Profile

Table 8-8. SH959 and SX959 Gland Dimensions — Inch (Continued)

| Dash Size | A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Compound Code (X = Standard Offering) | | | | | | Part Number | | | | | |
|-----------|----------------------|----------------------|----------------------|----------------------|--------------------------|---------------------------------------|------|------|-------|------|------|---------------|---------|-------|--------|--|--|
| | | | | | | SH959 | | | SX959 | | | Compound Code | Profile | | | | |
| | | | | | | 4615 | 5065 | 4263 | 4208 | 4207 | 4615 | | | | 5065 | | |
| | +0.000/-0.003 | +0.004/-0.000 | +0.003/-0.003 | +0.005/-0.000 | | | | | | | | | | | | | |
| -26 | 2.625 | 2.989 | 0.122 | 2.834 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-26 | | |
| -27 | 2.750 | 3.114 | 0.122 | 2.959 | 0.211 | x | x | x | x | | x | x | XXXX | xxxxx | 959-27 | | |
| -28 | 2.875 | 3.239 | 0.122 | 3.084 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-28 | | |
| -29 | 3.000 | 3.364 | 0.122 | 3.209 | 0.211 | x | x | | x | x | x | x | XXXX | xxxxx | 959-29 | | |
| -30 | 3.125 | 3.489 | 0.122 | 3.334 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-30 | | |
| -31 | 3.250 | 3.614 | 0.122 | 3.459 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-31 | | |
| -32 | 3.375 | 3.739 | 0.122 | 3.584 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-32 | | |
| -33 | 3.500 | 3.864 | 0.122 | 3.709 | 0.211 | x | x | | x | x | | | XXXX | xxxxx | 959-33 | | |
| -34 | 3.625 | 3.989 | 0.122 | 3.834 | 0.211 | | | | x | | | | XXXX | xxxxx | 959-34 | | |
| -35 | 3.750 | 4.114 | 0.122 | 3.959 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-35 | | |
| -36 | 3.875 | 4.239 | 0.122 | 4.084 | 0.211 | x | x | | | | | | XXXX | xxxxx | 959-36 | | |
| -37 | 4.000 | 4.427 | 0.138 | 4.240 | 0.238 | x | x | | x | x | x | x | XXXX | xxxxx | 959-37 | | |
| -38 | 4.125 | 4.552 | 0.138 | 4.365 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-38 | | |
| -39 | 4.250 | 4.677 | 0.138 | 4.490 | 0.238 | x | x | | x | | | | XXXX | xxxxx | 959-39 | | |
| -41 | 4.500 | 4.927 | 0.138 | 4.740 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-41 | | |
| -42 | 4.625 | 5.052 | 0.138 | 4.865 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-42 | | |
| -43 | 4.750 | 5.177 | 0.138 | 4.990 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-43 | | |
| -45 | 5.000 | 5.427 | 0.138 | 5.240 | 0.238 | x | x | x | x | x | | | XXXX | xxxxx | 959-45 | | |
| -47 | 5.250 | 5.677 | 0.138 | 5.490 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-47 | | |
| -49 | 5.500 | 5.927 | 0.138 | 5.740 | 0.238 | x | x | | | | | | XXXX | xxxxx | 959-49 | | |
| -51 | 5.750 | 6.239 | 0.154 | 6.022 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-51 | | |
| -53 | 6.000 | 6.489 | 0.154 | 6.272 | 0.264 | x | x | | x | | | | XXXX | xxxxx | 959-53 | | |
| | +0.000/-0.004 | +0.005/-0.000 | +0.003/-0.003 | +0.005/-0.000 | | | | | | | | | | | | | |
| -55 | 6.500 | 6.989 | 0.154 | 6.772 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-55 | | |
| -56 | 6.750 | 7.239 | 0.154 | 7.022 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-56 | | |
| -57 | 7.000 | 7.489 | 0.154 | 7.272 | 0.264 | x | x | | | x | | | XXXX | xxxxx | 959-57 | | |
| -L | 7.375 | 7.864 | 0.154 | 7.647 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-L | | |
| -59 | 7.500 | 7.989 | 0.154 | 7.772 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-59 | | |
| -62 | 8.500 | 8.989 | 0.154 | 8.772 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-62 | | |
| | +0.000/-0.005 | +0.005/-0.000 | +0.003/-0.003 | +0.010/-0.000 | | | | | | | | | | | | | |
| -63 | 9.000 | 9.489 | 0.154 | 9.272 | 0.264 | x | x | | x | | | | XXXX | xxxxx | 959-63 | | |
| -64 | 9.500 | 9.989 | 0.154 | 9.772 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-64 | | |
| -65 | 10.000 | 10.489 | 0.154 | 10.272 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-65 | | |
| -66 | 10.500 | 10.989 | 0.154 | 10.772 | 0.264 | x | x | | | | | | XXXX | xxxxx | 959-66 | | |
| -FF | 11.250 | 11.739 | 0.169 | 11.522 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-FF | | |
| -68 | 11.500 | 11.989 | 0.169 | 11.772 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-68 | | |
| -69 | 12.000 | 12.489 | 0.169 | 12.272 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-69 | | |
| -70 | 12.500 | 12.989 | 0.169 | 12.772 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-70 | | |
| -K | 13.750 | 14.239 | 0.169 | 14.022 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-K | | |
| -77 | 14.000 | 14.489 | 0.169 | 14.272 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-77 | | |
| -Q | 14.250 | 14.739 | 0.169 | 14.522 | 0.289 | x | x | | | | | | XXXX | xxxxx | 959-Q | | |

For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.



Wiper AH Profile

Catalog EPS 5370/USA

AH Profile, Premium Double-Lip Canned Wiper

Parker's AH profile is the ultimate metal-clad excluder for heavy duty hydraulic applications. Press-fit installation prevents O.D. contamination while the additional sealing lip works in conjunction with Parker rod seals to provide redundant sealing for leakage reduction. An aggressive wiping lip, facing the environment, ensures the utmost performance in contaminant exclusion along the rod.

IMPORTANT: When using the AH wiper in conjunction with other rod seals, it is important to select a rod seal profile that enables pressure relief of fluid into the system, otherwise a pressure trap may form between the wiper and rod seal. Suggested rod profiles are the **BT**, **BS**, and **B3** u-cups.




AH Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | <1.6 ft/s (0.5 m/s) |
| P4700A90 | -65° to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

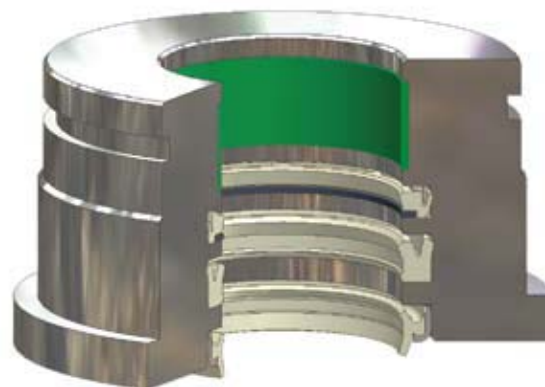

AH installed in Rod Gland


8

09/01/07

AH Profile

Part Number Nomenclature — AH Profile

Table 8-9. AH Profile — Inch

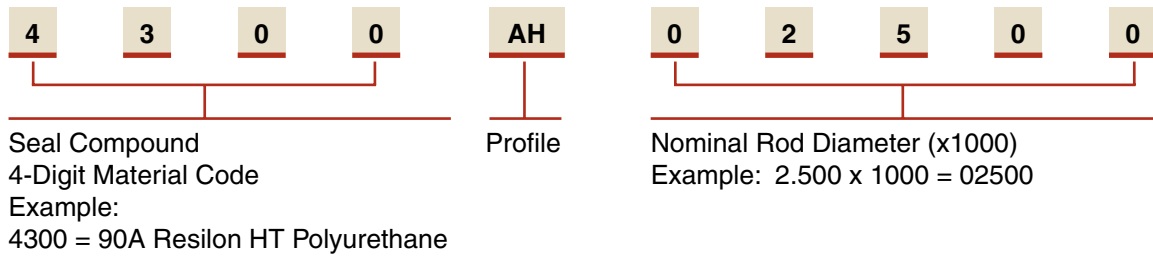

Gland Dimensions — AH Profile

AH gland dimensions are provided in [Table 8-11 on page 8-18](#).

Wiper J Profile

Catalog EPS 5370/USA



J Profile, Performance Canned Wiper

The press-fit installation of Parker's J wiper guards against O.D. contamination and results in simple counter-bore groove machining. The wiping lip on the J wiper is very aggressive, eliminating the ingestion of dust, mud and moisture from harsh work areas. J wipers are ideal for medium and heavy duty hydraulic cylinders in the most demanding applications.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | <1.6 ft/s (0.5 m/s) |
| P4700A90 | -65° to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P4615A90 | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

Part Number Nomenclature — J Profile

Table 8-10. J Profile — Inch


| | | | | | | | | | |
|---|---|---|---|---------|--|---|---|---|---|
| 4 | 7 | 0 | 0 | J | 0 | 3 | 0 | 0 | 0 |
| └──────────┘ | | | | └──┘ | └──────────┘ | | | | |
| Seal Compound 4-Digit Material Code Example: 4700 = Polyurethane | | | | Profile | Nominal Rod Diameter (x1000) Example: 3.00 x 1000 = 03000 | | | | |



J Cross-Section

Gland Dimensions — J Profile

J gland dimensions are provided in [Table 8-11 on page 8-18](#).

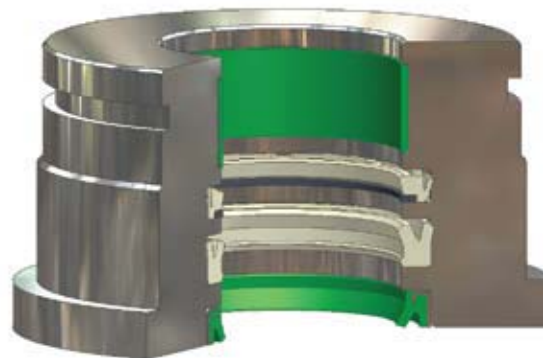

J installed in Rod Gland


8

09/01/07

Wiper AH and J Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — AH and J Profiles

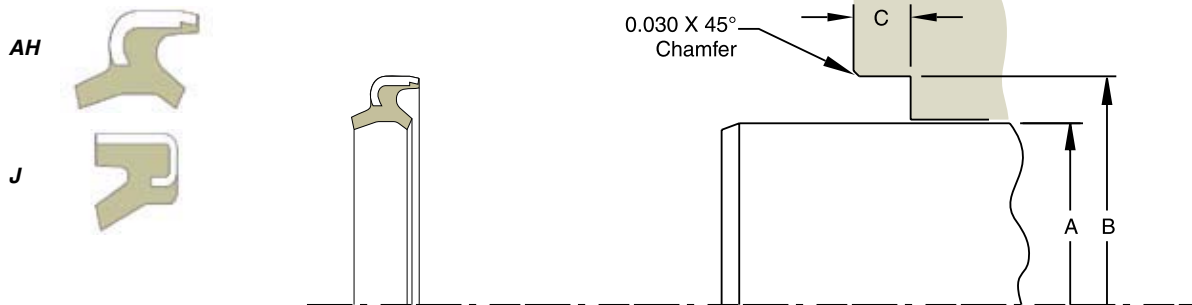

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 8-11. AH and J Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | Profile Code* | | Part Number | | |
|-------------------|-------------------|-------------------|---------------|---|---------------|--------------|----------|
| | | | AH | J | Compound Code | Profile Code | Rod Size |
| + .000/ - .002 | + .001/ - .001 | + .015/ - .000 | | | | | |
| 0.500 | 1.000 | 0.250 | | x | XXXX | xx | 00500 |
| 0.625 | 1.125 | 0.312 | x | x | XXXX | xx | 00625 |
| 0.750 | 1.250 | 0.312 | x | x | XXXX | xx | 00750 |
| 0.875 | 1.375 | 0.312 | x | x | XXXX | xx | 00875 |
| 1.000 | 1.500 | 0.312 | x | x | XXXX | xx | 01000 |
| 1.125 | 1.625 | 0.312 | x | x | XXXX | xx | 01125 |
| 1.250 | 1.750 | 0.312 | x | x | XXXX | xx | 01250 |
| 1.375 | 1.875 | 0.312 | x | x | XXXX | xx | 01375 |
| 1.500 | 2.000 | 0.312 | x | x | XXXX | xx | 01500 |
| 1.625 | 2.125 | 0.312 | x | x | XXXX | xx | 01625 |
| 1.750 | 2.250 | 0.312 | x | x | XXXX | xx | 01750 |
| 1.875 | 2.375 | 0.312 | x | x | XXXX | xx | 01875 |
| 2.000 | 2.500 | 0.312 | x | x | XXXX | xx | 02000 |
| + .000/ - .003 | + .001/ - .001 | + .015/ - .000 | | | | | |
| 2.125 | 2.625 | 0.312 | x | x | XXXX | xx | 02125 |
| 2.250 | 2.750 | 0.312 | x | x | XXXX | xx | 02250 |
| 2.375 | 2.875 | 0.312 | | x | XXXX | xx | 02375 |
| 2.500 | 3.000 | 0.312 | x | x | XXXX | xx | 02500 |
| 2.625 | 3.125 | 0.312 | | x | XXXX | xx | 02625 |
| 2.750 | 3.250 | 0.312 | x | x | XXXX | xx | 02750 |
| 2.875 | 3.375 | 0.312 | | | XXXX | xx | 02875 |
| 3.000 | 3.500 | 0.312 | x | x | XXXX | xx | 03000 |

*X = Standard Offering
For custom groove calculations, see [Appendix C](#).

| A Rod Diameter | B Groove Diameter | C Groove Width | Profile Code* | | Part Number | | |
|-------------------|-------------------|-------------------|---------------|---|---------------|--------------|----------|
| | | | AH | J | Compound Code | Profile Code | Rod Size |
| + .000/ - .003 | + .001/ - .001 | + .015/ - .000 | | | | | |
| 3.250 | 3.875 | 0.312 | | x | XXXX | xx | 03250 |
| 3.500 | 4.125 | 0.312 | | x | XXXX | xx | 03500 |
| 3.750 | 4.375 | 0.312 | | x | XXXX | xx | 03750 |
| 4.000 | 4.625 | 0.312 | x | x | XXXX | xx | 04000 |
| 4.250 | 4.875 | 0.312 | | x | XXXX | xx | 04250 |
| 4.500 | 5.125 | 0.312 | | x | XXXX | xx | 04500 |
| 4.750 | 5.375 | 0.312 | | | XXXX | xx | 04750 |
| 5.000 | 5.625 | 0.312 | | x | XXXX | xx | 05000 |
| 5.250 | 5.875 | 0.312 | | | XXXX | xx | 05250 |
| 5.500 | 6.125 | 0.375 | | x | XXXX | xx | 05500 |
| 5.750 | 6.375 | 0.375 | | | XXXX | xx | 05750 |
| 6.000 | 6.625 | 0.375 | | | XXXX | xx | 06000 |
| + .000/ - .004 | + .001/ - .001 | + .015/ - .015 | | | | | |
| 6.250 | 6.875 | 0.375 | | | XXXX | xx | 06250 |
| 6.500 | 7.125 | 0.375 | | | XXXX | xx | 06500 |
| 6.750 | 7.375 | 0.375 | | | XXXX | xx | 06750 |
| 7.000 | 7.625 | 0.375 | | | XXXX | xx | 07000 |
| 7.250 | 7.875 | 0.375 | | | XXXX | xx | 07250 |
| 7.500 | 8.125 | 0.375 | | | XXXX | xx | 07500 |
| 7.750 | 8.375 | 0.375 | | | XXXX | xx | 07750 |
| 8.000 | 8.625 | 0.375 | | | XXXX | xx | 08000 |

*X = Standard Offering
For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07

Wiper AY Profile

Catalog EPS 5370/USA



AY Profile, Premium Double-Lipped Wiper

The AY profile can be used as a heavy to light duty wiper. When used in high pressure applications in conjunction with the proper Parker rod seals, the AY compliments the sealing system by providing an additional beveled sealing lip, yielding excellent film-breaking and the driest rod sealing available. These dual acting features also enable it to be used by itself in low pressure applications as both the rod seal and the wiper. Knife-trimmed sealing lips ensure the best possible film breaking.

IMPORTANT: When using the AY wiper in conjunction with other rod seals, it is important to select a rod seal profile that enables pressure relief of fluid into the system, otherwise a pressure trap may form between the wiper and rod seal. Suggested rod profiles are the **BT**, **BS**, and **B3** u-cups.




AY Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|------------------------|
| P4300A90 | -65°F to 275°F (-54°C to 135°C) | <1.6 ft/s (0.5 m/s) |
| P4301A90 | -35°F to 225°F (-37°C to 107°C) | <1.6 ft/s (0.5 m/s) |
| P4700A90 | -65° to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

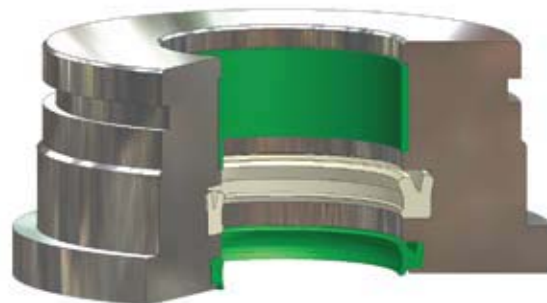

AY installed in Rod Gland


8

09/01/07

AY Profile


Part Number Nomenclature — AY Profile

Table 8-12. AY Profile — Inch

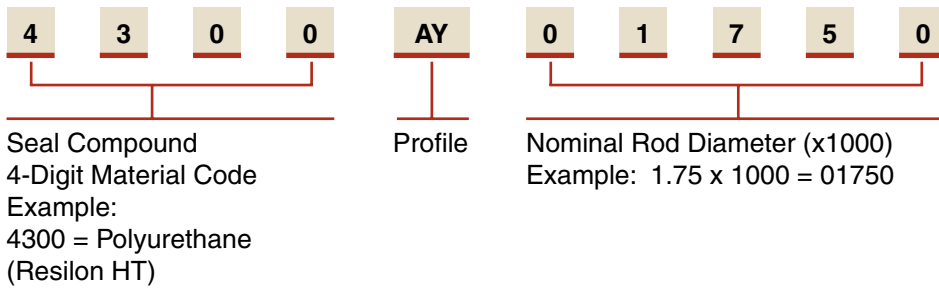

Part Number Nomenclature — AY Profile

Table 8-13. AY Profile — Metric

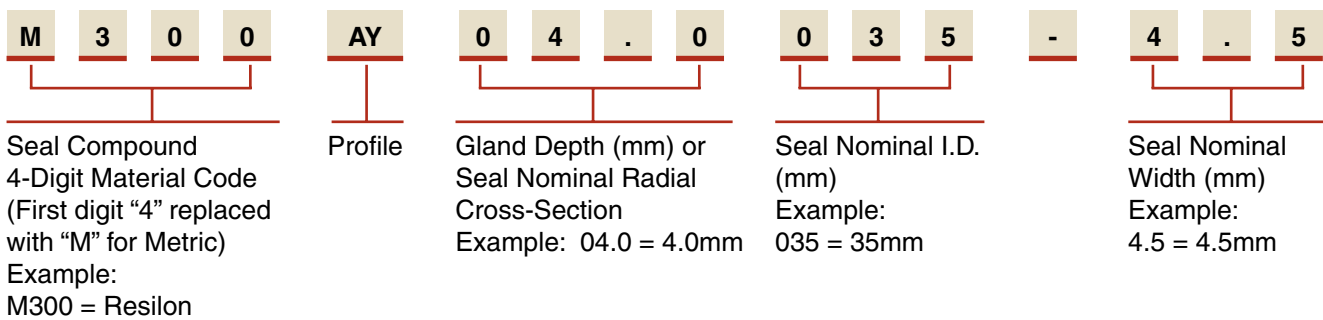

Gland Dimensions — AY Profile — Inch

AY gland dimensions are provided in [Table 8-15 on page 8-23](#).

8 Gland Dimensions — AY Profile — Metric

AY gland dimensions for metric sizes are provided in [Table 8-16 on page 8-26](#).

Wiper H and 8600 Profiles

Catalog EPS 5370/USA



H and 8600 Profiles, Performance Double-Lip Wiper

Parker's H and 8600 style wipers are double-lip excluders sharing identical geometries for combining the actions of rod sealing and wiping. H wipers, available in plastic compounds, are intended for medium pressure hydraulic applications as a redundant rod seal or for low pressure systems as the sole rod seal and wiper. 8600 wipers, available in rubber compounds, are typically used for pneumatic cylinders where lower friction is required. As with the H wiper, the 8600 can be used in tandem with another rod seal or by itself as a dual-acting sealing/wiping unit.

IMPORTANT: When using H and 8600 wipers in conjunction with other rod seals, it is important to select a rod seal profile that enables pressure relief of fluid into the system, otherwise a pressure trap may form between the wiper and rod seal. Suggested rod profiles are the **BT, BS, B3, 8400, 8500** and **E5** u-cups.



H / 8600 Cross-Section

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|------------------------------------|------------------------|
| P4615A90 (H) | -65°F to 200°F (-54°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| P5065A88 (H) | -70°F to 200°F (-57°C to 93°C) | <1.6 ft/s (0.5 m/s) |
| N4181A80 (8600) | -40°F to 250°F (-40°C to 121°C) | <3.3 ft/s (1.0 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.




H and 8600 installed in Rod Gland

H and 8600 Profiles

Part Number Nomenclature — H and 8600 Profiles

Table 8-14. H and 8600 Profiles — Inch

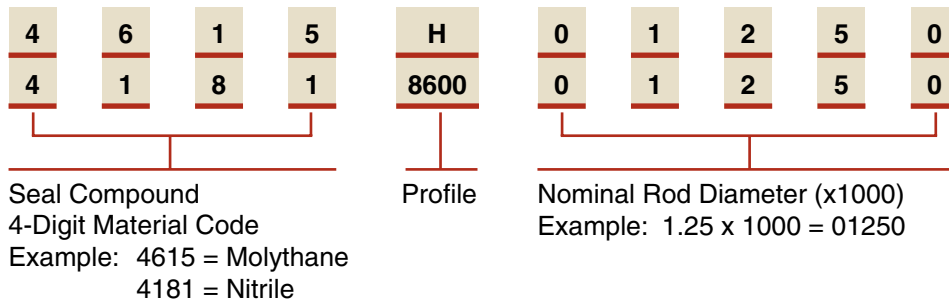


Gland Dimensions — H and 8600 Profiles

H and 8600 gland dimensions are provided in [Table 8-15 on page 8-23](#).

Wiper AY, H and 8600 Gland Dimensions

Catalog EPS 5370/USA

Gland Dimensions — AY, H and 8600 Profiles — Inch

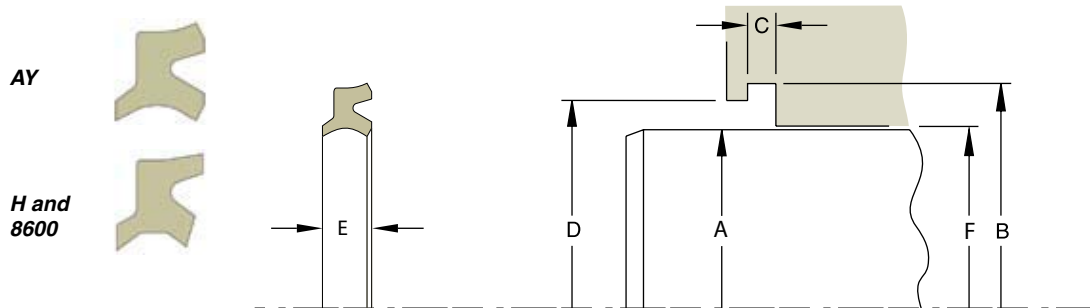

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 8-15. AY, H and 8600 Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | F Throat Diameter | Profile Code (X = Standard Offering) | | | Part Number | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------|-------------------------|---|---|------|------------------|---------|-------------|
| | | | | | | AY | H | 8600 | Compound Code | Profile | Rod Size |
| +0.000/-0.002 | +0.002/-0.000 | +0.005/-0.000 | +0.002/-0.000 | | +0.002/-0.000 | | | | | | |
| 0.250 | 0.552 | 0.203 | 0.370 | 0.245 | 0.251 | | x | x | XXXX | xxxx | 00250 |
| 0.312 | 0.615 | 0.203 | 0.432 | 0.245 | 0.313 | | x | x | XXXX | xxxx | 00312 |
| 0.375 | 0.677 | 0.203 | 0.495 | 0.245 | 0.376 | | x | x | XXXX | xxxx | 00375 |
| 0.437 | 0.740 | 0.203 | 0.557 | 0.245 | 0.438 | | x | x | XXXX | xxxx | 00437 |
| 0.500 | 0.802 | 0.203 | 0.620 | 0.245 | 0.501 | x | x | x | XXXX | xxxx | 00500 |
| 0.562 | 0.865 | 0.203 | 0.682 | 0.245 | 0.563 | | x | x | XXXX | xxxx | 00562 |
| 0.625 | 0.927 | 0.203 | 0.745 | 0.245 | 0.626 | x | x | x | XXXX | xxxx | 00625 |
| 0.687 | 0.990 | 0.203 | 0.808 | 0.245 | 0.688 | | x | x | XXXX | xxxx | 00687 |
| 0.750 | 1.052 | 0.203 | 0.870 | 0.245 | 0.751 | x | x | x | XXXX | xxxx | 00750 |
| 0.812 | 1.177 | 0.218 | 0.947 | 0.275 | 0.813 | | x | | XXXX | xxxx | 00812 |
| 0.875 | 1.240 | 0.218 | 1.010 | 0.275 | 0.876 | x | x | x | XXXX | xxxx | 00875 |
| 0.937 | 1.302 | 0.218 | 1.072 | 0.275 | 0.938 | | x | | XXXX | xxxx | 00937 |
| 1.000 | 1.365 | 0.218 | 1.135 | 0.275 | 1.001 | x | x | x | XXXX | xxxx | 01000 |
| 1.062 | 1.427 | 0.218 | 1.197 | 0.275 | 1.063 | | x | | XXXX | xxxx | 01062 |
| 1.125 | 1.490 | 0.218 | 1.260 | 0.275 | 1.126 | x | x | x | XXXX | xxxx | 01125 |
| 1.187 | 1.552 | 0.218 | 1.322 | 0.275 | 1.188 | | x | | XXXX | xxxx | 01187 |
| 1.250 | 1.615 | 0.218 | 1.385 | 0.275 | 1.251 | x | x | x | XXXX | xxxx | 01250 |
| 1.312 | 1.702 | 0.218 | 1.447 | 0.275 | 1.313 | | x | x | XXXX | xxxx | 01312 |
| 1.375 | 1.740 | 0.218 | 1.510 | 0.275 | 1.376 | x | x | x | XXXX | xxxx | 01375 |
| 1.437 | 1.802 | 0.218 | 1.572 | 0.275 | 1.438 | | x | | XXXX | xxxx | 01437 |
| 1.500 | 1.865 | 0.218 | 1.635 | 0.275 | 1.501 | x | x | x | XXXX | xxxx | 01500 |
| 1.562 | 1.927 | 0.218 | 1.697 | 0.275 | 1.563 | | x | | XXXX | xxxx | 01562 |
| 1.625 | 1.990 | 0.218 | 1.760 | 0.275 | 1.626 | x | x | x | XXXX | xxxx | 01625 |
| 1.687 | 2.052 | 0.218 | 1.823 | 0.275 | 1.688 | | x | | XXXX | xxxx | 01687 |
| 1.750 | 2.115 | 0.218 | 1.885 | 0.275 | 1.751 | x | x | x | XXXX | xxxx | 01750 |
| 1.812 | 2.177 | 0.218 | 1.947 | 0.275 | 1.813 | | x | | XXXX | xxxx | 01812 |
| 1.875 | 2.240 | 0.218 | 2.010 | 0.275 | 1.876 | x | x | x | XXXX | xxxx | 01875 |
| 1.937 | 2.302 | 0.218 | 2.072 | 0.275 | 1.938 | | x | | XXXX | xxxx | 01937 |
| 2.000 | 2.365 | 0.218 | 2.135 | 0.275 | 2.001 | x | x | x | XXXX | xxxx | 02000 |

For custom groove calculations, see Appendix C.

8

09/01/07



AY, H and 8600 Profiles

Table 8-15. AY, H and 8600 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | F Throat Diameter | Profile Code (X = Standard Offering) | | | Part Number | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------|-------------------------|---|---|------|------------------|---------|-------------|
| | | | | | | AY | H | 8600 | Compound Code | Profile | Rod Size |
| +0.000/-0.003 | +0.003/-0.000 | +0.005/-0.000 | +0.003/-0.000 | | +0.003/-0.000 | | | | | | |
| 2.062 | 2.427 | 0.218 | 2.197 | 0.275 | 2.063 | | x | | XXXX | xxxx | 02062 |
| 2.125 | 2.490 | 0.218 | 2.260 | 0.275 | 2.126 | x | x | x | XXXX | xxxx | 02125 |
| 2.187 | 2.683 | 0.281 | 2.323 | 0.351 | 2.188 | | x | | XXXX | xxxx | 02187 |
| 2.250 | 2.745 | 0.281 | 2.385 | 0.351 | 2.251 | x | x | x | XXXX | xxxx | 02250 |
| 2.312 | 2.807 | 0.281 | 2.447 | 0.351 | 2.313 | | x | | XXXX | xxxx | 02312 |
| 2.375 | 2.870 | 0.281 | 2.510 | 0.351 | 2.376 | | x | | XXXX | xxxx | 02375 |
| 2.437 | 2.932 | 0.281 | 2.572 | 0.351 | 2.438 | | x | x | XXXX | xxxx | 02437 |
| 2.500 | 2.995 | 0.281 | 2.635 | 0.351 | 2.501 | x | x | x | XXXX | xxxx | 02500 |
| 2.562 | 3.057 | 0.281 | 2.697 | 0.351 | 2.563 | | x | | XXXX | xxxx | 02562 |
| 2.625 | 3.120 | 0.281 | 2.760 | 0.351 | 2.626 | | x | | XXXX | xxxx | 02625 |
| 2.687 | 3.183 | 0.281 | 2.823 | 0.351 | 2.688 | | x | | XXXX | xxxx | 02687 |
| 2.750 | 3.245 | 0.281 | 2.885 | 0.351 | 2.751 | x | x | x | XXXX | xxxx | 02750 |
| 2.812 | 3.307 | 0.281 | 2.947 | 0.351 | 2.813 | | x | | XXXX | xxxx | 02812 |
| 2.875 | 3.370 | 0.281 | 3.010 | 0.351 | 2.876 | | x | x | XXXX | xxxx | 02875 |
| 2.937 | 3.433 | 0.281 | 3.073 | 0.351 | 2.938 | | x | x | XXXX | xxxx | 02937 |
| 3.000 | 3.495 | 0.281 | 3.135 | 0.351 | 3.001 | x | x | x | XXXX | xxxx | 03000 |
| 3.125 | 3.620 | 0.281 | 3.260 | 0.351 | 3.126 | | x | | XXXX | xxxx | 03125 |
| 3.250 | 3.745 | 0.281 | 3.385 | 0.351 | 3.251 | | x | x | XXXX | xxxx | 03250 |
| 3.375 | 3.870 | 0.281 | 3.510 | 0.351 | 3.376 | | x | | XXXX | xxxx | 03375 |
| 3.437 | 3.932 | 0.281 | 3.572 | 0.351 | 3.438 | | | x | XXXX | xxxx | 03437 |
| 3.500 | 3.995 | 0.281 | 3.635 | 0.351 | 3.501 | | x | x | XXXX | xxxx | 03500 |
| 3.625 | 4.120 | 0.281 | 3.760 | 0.351 | 3.626 | | x | | XXXX | xxxx | 03625 |
| 3.750 | 4.245 | 0.281 | 3.885 | 0.351 | 3.751 | | x | x | XXXX | xxxx | 03750 |
| 3.875 | 4.370 | 0.281 | 4.010 | 0.351 | 3.876 | | x | | XXXX | xxxx | 03875 |
| 4.000 | 4.495 | 0.281 | 4.135 | 0.351 | 4.001 | x | x | x | XXXX | xxxx | 04000 |
| 4.125 | 4.620 | 0.281 | 4.260 | 0.351 | 4.126 | | x | | XXXX | xxxx | 04125 |
| 4.250 | 4.745 | 0.281 | 4.385 | 0.351 | 4.251 | | x | x | XXXX | xxxx | 04250 |
| 4.375 | 4.870 | 0.281 | 4.510 | 0.351 | 4.376 | | x | | XXXX | xxxx | 04375 |
| 4.500 | 4.995 | 0.281 | 4.635 | 0.351 | 4.501 | | x | x | XXXX | xxxx | 04500 |
| 4.625 | 5.120 | 0.281 | 4.760 | 0.351 | 4.626 | | x | | XXXX | xxxx | 04625 |
| 4.750 | 5.245 | 0.281 | 4.885 | 0.351 | 4.751 | | x | | XXXX | xxxx | 04750 |
| 4.875 | 5.370 | 0.281 | 5.010 | 0.351 | 4.876 | | x | | XXXX | xxxx | 04875 |
| 5.000 | 5.495 | 0.281 | 5.135 | 0.351 | 5.001 | | x | x | XXXX | xxxx | 05000 |
| 5.125 | 5.620 | 0.281 | 5.260 | 0.351 | 5.126 | | x | | XXXX | xxxx | 05125 |
| 5.187 | 5.682 | 0.281 | 5.322 | 0.351 | 5.188 | | | x | XXXX | xxxx | 05187 |
| 5.250 | 5.745 | 0.281 | 5.385 | 0.351 | 5.251 | | x | | XXXX | xxxx | 05250 |
| 5.375 | 5.870 | 0.281 | 5.510 | 0.351 | 5.376 | | x | | XXXX | xxxx | 05375 |
| 5.500 | 5.995 | 0.281 | 5.635 | 0.351 | 5.501 | | x | x | XXXX | xxxx | 05500 |
| 5.625 | 6.120 | 0.281 | 5.760 | 0.351 | 5.626 | | x | | XXXX | xxxx | 05625 |
| 5.750 | 6.245 | 0.281 | 5.885 | 0.351 | 5.751 | | x | | XXXX | xxxx | 05750 |
| 5.875 | 6.370 | 0.281 | 6.010 | 0.351 | 5.876 | | x | | XXXX | xxxx | 05875 |
| 6.000 | 6.495 | 0.281 | 6.135 | 0.351 | 6.001 | | x | x | XXXX | xxxx | 06000 |

For custom groove calculations, see Appendix C.


Table 8-15. AY, H and 8600 Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | F Throat Diameter | Profile Code (X = Standard Offering) | | | Part Number | | |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------|-------------------------|---|---|------|------------------|---------|-------------|
| | | | | | | AY | H | 8600 | Compound Code | Profile | Rod Size |
| + .000/- .004 | + .003/- .000 | + .005/- .000 | + .003/- .000 | | + .003/- .000 | | | | | | |
| 6.250 | 6.745 | 0.281 | 6.385 | 0.351 | 6.251 | | x | | XXXX | xxxx | 06250 |
| 6.375 | 6.870 | 0.281 | 6.510 | 0.351 | 6.376 | | | x | XXXX | xxxx | 06375 |
| 6.500 | 6.995 | 0.281 | 6.635 | 0.351 | 6.501 | | x | | XXXX | xxxx | 06500 |
| 6.750 | 7.245 | 0.281 | 6.885 | 0.351 | 6.751 | | x | | XXXX | xxxx | 06750 |
| 7.000 | 7.495 | 0.281 | 7.135 | 0.351 | 7.001 | | x | x | XXXX | xxxx | 07000 |
| 7.250 | 7.745 | 0.281 | 7.385 | 0.351 | 7.251 | | x | x | XXXX | xxxx | 07250 |
| 7.500 | 7.995 | 0.281 | 7.635 | 0.351 | 7.501 | | x | | XXXX | xxxx | 07500 |
| 7.750 | 8.245 | 0.281 | 7.885 | 0.351 | 7.751 | | x | | XXXX | xxxx | 07750 |
| 8.000 | 8.495 | 0.281 | 8.135 | 0.351 | 8.001 | | x | x | XXXX | xxxx | 08000 |
| 8.250 | 8.745 | 0.281 | 8.385 | 0.351 | 8.251 | | x | | XXXX | xxxx | 08250 |
| 8.500 | 8.995 | 0.281 | 8.635 | 0.351 | 8.501 | | x | x | XXXX | xxxx | 08500 |
| + .000/- .005 | + .003/- .000 | + .005/- .000 | + .003/- .000 | | + .003/- .000 | | | | | | |
| 8.750 | 9.245 | 0.281 | 8.885 | 0.351 | 8.751 | | x | | XXXX | xxxx | 08750 |
| 9.000 | 9.495 | 0.281 | 9.135 | 0.351 | 9.001 | | x | x | XXXX | xxxx | 09000 |
| 9.250 | 9.745 | 0.281 | 9.385 | 0.351 | 9.251 | | x | | XXXX | xxxx | 09250 |
| 9.500 | 9.995 | 0.281 | 9.635 | 0.351 | 9.501 | | x | | XXXX | xxxx | 09500 |
| 9.750 | 10.245 | 0.281 | 9.885 | 0.351 | 9.751 | | x | x | XXXX | xxxx | 09750 |
| 10.000 | 10.495 | 0.281 | 10.135 | 0.351 | 10.001 | | x | x | XXXX | xxxx | 10000 |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Gland Dimensions — AY, H and 8600 Profiles — Metric

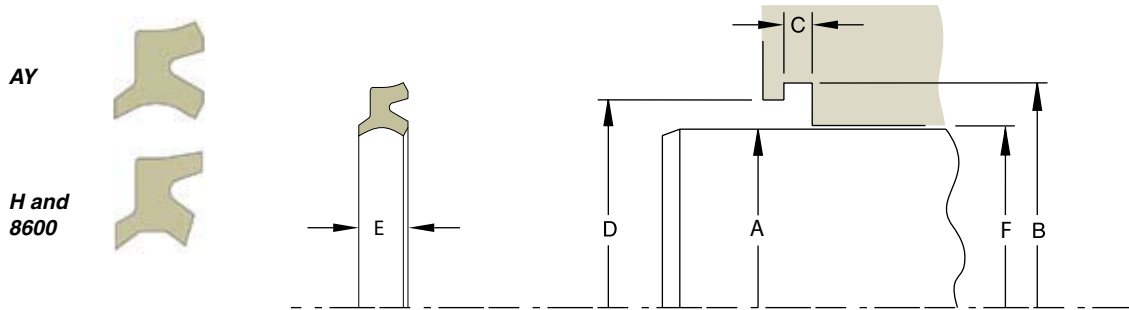

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 8-16. AY Gland Dimensions — Metric

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | F Throat Diameter | Part Number | | |
|---|-------------------------|----------------------|---------------------------|--------------------------------|-------------------------|------------------|---------|-------------|
| f7 | H11 | +0.2/-0.0 | H11 | | H8 | Compound Code | Profile | |
| For ISO tolerances refer to Appendix F. | | | | | | | | |
| 10.0 | 16.0 | 4.0 | 12.5 | 4.8 | 10.03 | M300 | AY | 03.0010-3.6 |
| 20.0 | 26.0 | 4.0 | 22.5 | 4.8 | 20.03 | M300 | AY | 03.0020-3.6 |
| 25.0 | 31.0 | 4.0 | 27.5 | 4.8 | 25.03 | M300 | AY | 03.0025-3.6 |
| 30.0 | 38.0 | 5.0 | 33.0 | 5.8 | 30.03 | M300 | AY | 04.0030-4.5 |
| 32.0 | 40.0 | 5.0 | 35.0 | 5.8 | 32.03 | M300 | AY | 04.0032-4.5 |
| 35.0 | 43.0 | 5.0 | 38.0 | 5.8 | 35.03 | M300 | AY | 04.0035-4.5 |
| 36.0 | 44.0 | 5.0 | 39.0 | 5.8 | 36.03 | M300 | AY | 04.0036-4.5 |
| 40.0 | 48.0 | 5.0 | 43.0 | 5.8 | 40.03 | M300 | AY | 04.0040-4.5 |
| 42.0 | 50.0 | 5.0 | 45.0 | 5.8 | 42.03 | M300 | AY | 04.0042-4.5 |
| 45.0 | 53.0 | 5.0 | 48.0 | 5.8 | 45.03 | M300 | AY | 04.0045-4.5 |
| 50.0 | 58.0 | 5.5 | 53.0 | 7.0 | 50.03 | M300 | AY | 04.0050-5.0 |
| 55.0 | 65.0 | 5.0 | 58.0 | 5.8 | 55.03 | M300 | AY | 05.0055-4.5 |
| 55.0 | 65.0 | 6.0 | 58.0 | 6.8 | 55.03 | M300 | AY | 05.0055-5.3 |
| 60.0 | 70.0 | 6.0 | 63.0 | 6.8 | 60.03 | M300 | AY | 05.0060-5.3 |
| 64.0 | 74.0 | 6.0 | 67.0 | 6.8 | 64.03 | M300 | AY | 05.0064-5.3 |
| 64.0 | 74.0 | 6.0 | 67.0 | 6.8 | 64.03 | M300 | AY | 05.0064-5.3 |
| 70.0 | 80.0 | 6.0 | 73.0 | 6.8 | 70.03 | M300 | AY | 05.0070-5.3 |
| 75.0 | 85.0 | 6.0 | 78.0 | 6.8 | 75.03 | M300 | AY | 05.0075-5.3 |
| 100.0 | 110.0 | 6.0 | 104.0 | 6.8 | 100.03 | M300 | AY | 05.0100-5.3 |
| 120.0 | 135.0 | 8.5 | 124.0 | 9.5 | 120.03 | M300 | AY | 07.5120-7.5 |

Wiper K Profile

Catalog EPS 5370/USA



K Profile, Industrial Snap-In Wiper

K wipers offer a unique, light-load contact lip on both the sealing and wiping lips, making these excluders suitable for light duty industrial hydraulic applications. They are most commonly used in conjunction with Parker rod seals to provide a redundant film-breaking lip.

Technical Data

| Standard Materials* | Temperature Range | Surface Speed |
|---------------------|----------------------------------|------------------------|
| P4615A90 | -65°F to 200°F (-54C to 93°C) | <1.6 ft/s (0.5 m/s) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


Part Number Nomenclature — K Profile

Table 8-17. K Profile — Inch

| | | | | | | | | | |
|--|---|---|---|---------|---|---|---|---|---|
| 4 | 6 | 1 | 5 | K | 0 | 0 | 7 | 5 | 0 |
| └──────────┘ | | | | └──┘ | └──────────┘ | | | | |
| Seal Compound 4-Digit Material Code Example: 4615 = Molythane | | | | Profile | Nominal Rod Diameter (x1000) Example: 0.750 x 1000 = 00750 | | | | |



K Cross-Section

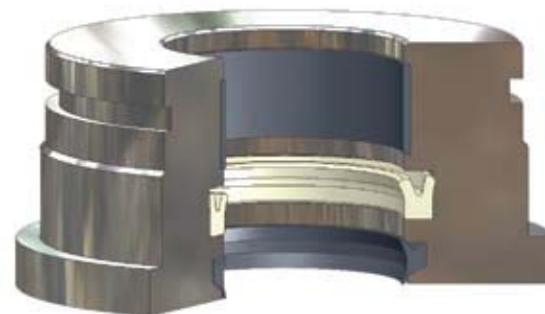


K installed in Rod Gland

8

09/01/07

K Profile

Gland Dimensions — K Profile

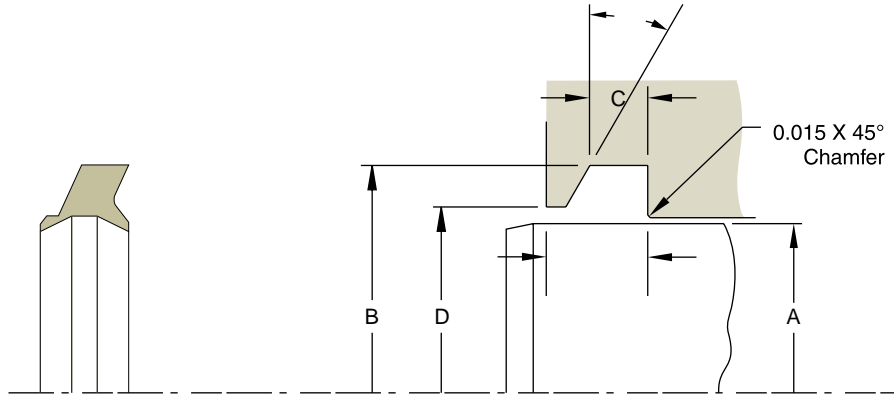

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 8-18. K Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------|----------------|
| + .000/- .002 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 0.500 | 0.760 | 0.155 | 0.625 | 0.315 | 4615K00500 |
| 0.562 | 0.822 | 0.155 | 0.687 | 0.315 | 4615K00562 |
| 0.625 | 0.885 | 0.155 | 0.750 | 0.315 | 4615K00625 |
| 0.687 | 0.947 | 0.155 | 0.812 | 0.315 | 4615K00687 |
| 0.750 | 1.135 | 0.195 | 0.832 | 0.366 | 4615K00750 |
| 0.812 | 1.197 | 0.195 | 0.894 | 0.366 | 4615K00812 |
| 0.875 | 1.260 | 0.195 | 0.957 | 0.366 | 4615K00875 |
| 0.937 | 1.322 | 0.195 | 1.019 | 0.366 | 4615K00937 |
| 1.000 | 1.385 | 0.195 | 1.082 | 0.366 | 4615K01000 |
| 1.062 | 1.447 | 0.195 | 1.144 | 0.366 | 4615K01062 |
| 1.125 | 1.510 | 0.195 | 1.207 | 0.366 | 4615K01125 |
| 1.187 | 1.572 | 0.195 | 1.269 | 0.366 | 4615K01187 |
| 1.250 | 1.635 | 0.195 | 1.332 | 0.366 | 4615K01250 |
| 1.312 | 1.697 | 0.195 | 1.394 | 0.366 | 4615K01312 |
| 1.375 | 1.760 | 0.195 | 1.457 | 0.366 | 4615K01375 |
| 1.437 | 1.822 | 0.195 | 1.519 | 0.366 | 4615K01437 |
| 1.500 | 1.885 | 0.195 | 1.582 | 0.366 | 4615K01500 |
| 1.562 | 1.947 | 0.195 | 1.644 | 0.366 | 4615K01562 |
| 1.625 | 2.010 | 0.195 | 1.707 | 0.366 | 4615K01625 |
| 1.687 | 2.072 | 0.195 | 1.769 | 0.366 | 4615K01687 |
| 1.750 | 2.135 | 0.195 | 1.832 | 0.366 | 4615K01750 |
| 1.812 | 2.197 | 0.195 | 1.894 | 0.366 | 4615K01812 |
| 1.875 | 2.260 | 0.195 | 1.957 | 0.366 | 4615K01875 |
| 1.937 | 2.322 | 0.195 | 2.019 | 0.366 | 4615K01937 |
| 2.000 | 2.385 | 0.195 | 2.082 | 0.366 | 4615K02000 |
| + .000/- .003 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 2.125 | 2.510 | 0.195 | 2.207 | 0.366 | 4615K02125 |
| 2.250 | 2.760 | 0.255 | 2.407 | 0.483 | 4615K02250 |
| 2.375 | 2.885 | 0.255 | 2.532 | 0.483 | 4615K02375 |
| 2.500 | 3.010 | 0.255 | 2.657 | 0.483 | 4615K02500 |
| 2.625 | 3.135 | 0.255 | 2.782 | 0.483 | 4615K02625 |
| 2.750 | 3.260 | 0.255 | 2.907 | 0.483 | 4615K02750 |
| 2.875 | 3.385 | 0.255 | 3.032 | 0.483 | 4615K02875 |

For custom groove calculations, see Appendix C.

Table 8-18. K Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Max. Wiper Axial Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------------|-------------------|
| + .000/- .003 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 3.000 | 3.510 | 0.255 | 3.157 | 0.483 | 4615K03000 |
| 3.125 | 3.635 | 0.255 | 3.282 | 0.483 | 4615K03125 |
| 3.250 | 3.760 | 0.255 | 3.407 | 0.483 | 4615K03250 |
| 3.375 | 3.885 | 0.255 | 3.532 | 0.483 | 4615K03375 |
| 3.500 | 4.010 | 0.255 | 3.657 | 0.483 | 4615K03500 |
| 3.625 | 4.135 | 0.255 | 3.782 | 0.483 | 4615K03625 |
| 3.750 | 4.260 | 0.255 | 3.907 | 0.483 | 4615K03750 |
| 3.875 | 4.385 | 0.255 | 4.032 | 0.483 | 4615K03875 |
| 4.000 | 4.510 | 0.255 | 4.157 | 0.483 | 4615K04000 |
| 4.125 | 4.635 | 0.255 | 4.282 | 0.483 | 4615K04125 |
| 4.250 | 4.760 | 0.255 | 4.407 | 0.483 | 4615K04250 |
| 4.375 | 4.885 | 0.255 | 4.532 | 0.483 | 4615K04375 |
| 4.500 | 5.010 | 0.255 | 4.657 | 0.483 | 4615K04500 |
| 4.625 | 5.135 | 0.255 | 4.782 | 0.483 | 4615K04625 |
| 4.750 | 5.260 | 0.255 | 4.907 | 0.483 | 4615K04750 |
| 4.875 | 5.385 | 0.255 | 5.032 | 0.483 | 4615K04875 |
| 5.000 | 5.510 | 0.255 | 5.157 | 0.483 | 4615K05000 |
| 5.250 | 5.760 | 0.255 | 5.407 | 0.483 | 4615K05250 |
| 5.500 | 6.010 | 0.255 | 5.657 | 0.483 | 4615K05500 |
| 5.750 | 6.260 | 0.255 | 5.907 | 0.483 | 4615K05750 |
| 6.000 | 6.510 | 0.255 | 6.157 | 0.483 | 4615K06000 |
| + .000/- .004 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 6.250 | 6.760 | 0.255 | 6.407 | 0.483 | 4615K06250 |
| 6.500 | 7.010 | 0.255 | 6.657 | 0.483 | 4615K06500 |
| 6.750 | 7.260 | 0.255 | 6.907 | 0.483 | 4615K06750 |
| 7.000 | 7.510 | 0.255 | 7.157 | 0.483 | 4615K07000 |
| 7.500 | 8.010 | 0.255 | 7.657 | 0.483 | 4615K07500 |
| 8.000 | 8.510 | 0.255 | 8.157 | 0.483 | 4615K08000 |
| 8.500 | 9.010 | 0.255 | 8.657 | 0.483 | 4615K08500 |
| + .000/- .005 | + .005/- .000 | + .005/- .000 | + .005/- .000 | | |
| 9.000 | 9.510 | 0.255 | 9.157 | 0.483 | 4615K09000 |
| 9.500 | 10.010 | 0.255 | 9.657 | 0.483 | 4615K09500 |
| 10.000 | 10.510 | 0.255 | 10.157 | 0.483 | 4615K10000 |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Wiper AD Profile

Catalog EPS 5370/USA



AD Profile, PTFE Wiper Seal

The Parker AD profile is a double acting wiper for use in low to medium duty hydraulic cylinders. It is a two piece design comprised of a filled PTFE cap that is energized by a standard size o-ring. The wiper and seal design of the AD profile assists the primary rod seal in preventing leakage by helping seal fluid in the cylinder when the rod extends. When the cylinder rod retracts, the outside sealing edge prevents contamination from entering the system. Parker's AD profile will retrofit non-Parker wipers of similar design.

The AD profile may be ordered without the energizer. [See part number nomenclature.](#)

Technical Data

Standard Materials

Standard Materials*


Cap

| Standard Materials* | Temperature Range | Surface Speed |
|-----------------------------|------------------------------------|----------------------|
| 0401 40% bronze-filled PTFE | -200°F to 575°F -129°C to 302°C | < 5 ft/s (1.5 m/sec) |


Energizer

| | |
|---------------|------------------------------------|
| A 70A Nitrile | -30°F to 250°F (-34°C to 121°C) |
|---------------|------------------------------------|


***Alternate Materials:** For applications that may require an alternate material, please see Section 3 for alternate PTFE ([Table 3-4](#)) and energizer ([Table 3-5](#)) materials.



Standard AD Cross-Section



Wide AD Cross-Section

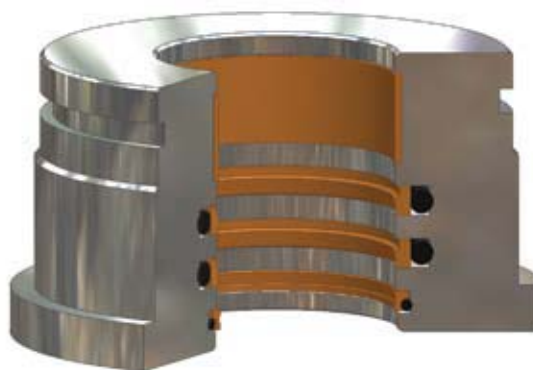


AD installed in Rod Gland


02/15/08

Part Number Nomenclature — AD Profile

Table 8-19. AD Profile — Inch

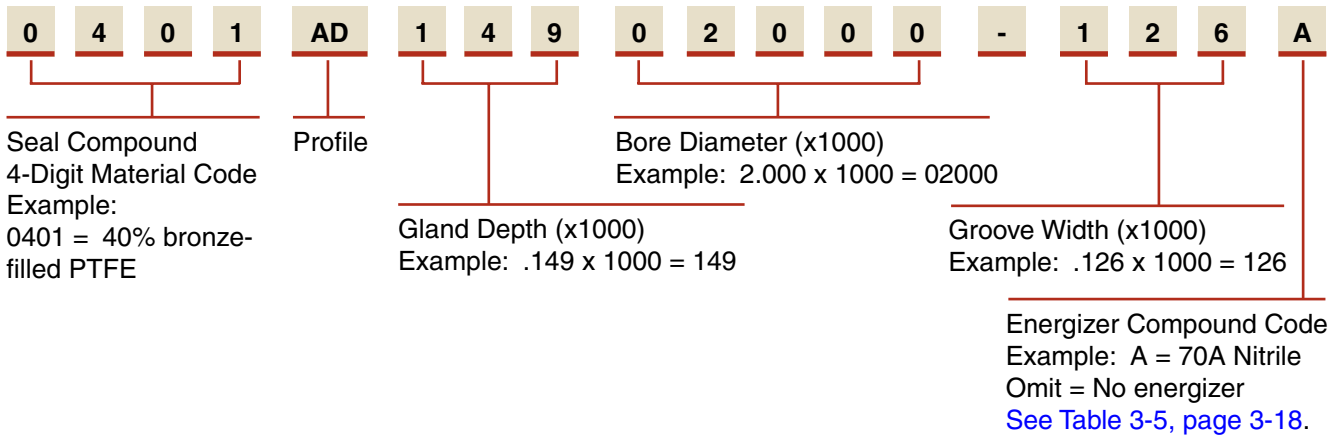

Gland Dimensions — AD Profile

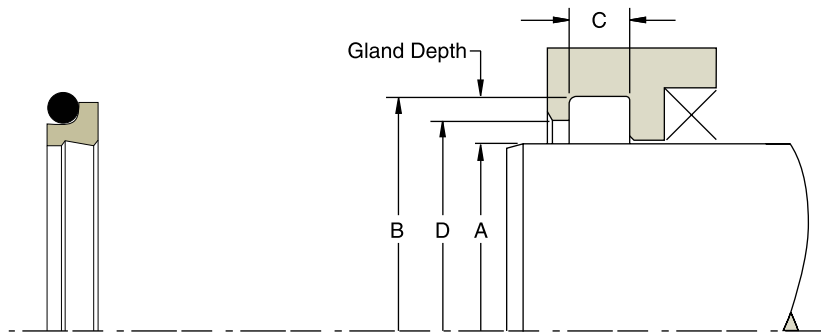

Please refer to **Engineering Section 2, page 2-8** for surface finish and additional hardware considerations.

Table 8-20. AD Gland Dimensions (Standard) — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | O-ring Dash Number | AD Part Number (Standard) |
|----------------------|----------------------|----------------------|----------------------|--------------------|----------------------------|
| + .000/- .002 | + .001/- .000 | + .008/- .000 | + .003/- .000 | | |
| 0.250 | 0.440 | 0.146 | 0.310 | 011 | 0401AD09500250-146A |
| 0.313 | 0.503 | 0.146 | 0.373 | 012 | 0401AD09500313-146A |
| 0.375 | 0.565 | 0.146 | 0.435 | 013 | 0401AD09500375-146A |
| + .000/- .002 | + .002/- .000 | + .008/- .000 | + .004/- .000 | | |
| 0.438 | 0.628 | 0.146 | 0.498 | 014 | 0401AD09500438-146A |
| 0.500 | 0.690 | 0.146 | 0.560 | 015 | 0401AD09500500-146A |
| 0.563 | 0.753 | 0.146 | 0.623 | 016 | 0401AD09500563-146A |
| 0.625 | 0.815 | 0.146 | 0.685 | 017 | 0401AD09500625-146A |
| 0.688 | 0.878 | 0.146 | 0.748 | 018 | 0401AD09500688-146A |
| 0.750 | 0.940 | 0.146 | 0.810 | 019 | 0401AD09500750-146A |
| 0.813 | 1.003 | 0.146 | 0.873 | 020 | 0401AD09500813-146A |
| 0.875 | 1.065 | 0.146 | 0.935 | 021 | 0401AD09500875-146A |
| 0.938 | 1.128 | 0.146 | 0.998 | 022 | 0401AD09500938-146A |
| 1.000 | 1.190 | 0.146 | 1.060 | 023 | 0401AD09501000-146A |
| + .000/- .002 | + .002/- .000 | + .008/- .000 | + .004/- .000 | | |
| 0.500 | 0.770 | 0.196 | 0.560 | 113 | 0401AD13500500-196A |
| 0.563 | 0.833 | 0.196 | 0.623 | 114 | 0401AD13500563-196A |
| 0.625 | 0.895 | 0.196 | 0.685 | 115 | 0401AD13500625-196A |

For custom groove calculations, see Appendix C.



AD Profile**Table 8-20. AD Gland Dimensions (Standard) — Inch (Continued)**

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | O-ring Dash Number | AD Part Number (Standard) |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------|------------------------------|
| + .000/- .002 | + .002/- .000 | + .008/- .000 | + .004/- .000 | | |
| 0.688 | 0.958 | 0.196 | 0.748 | 116 | 0401AD13500688-196A |
| 0.750 | 1.020 | 0.196 | 0.810 | 117 | 0401AD13500750-196A |
| 0.813 | 1.083 | 0.196 | 0.873 | 118 | 0401AD13500813-196A |
| 0.875 | 1.145 | 0.196 | 0.935 | 119 | 0401AD13500875-196A |
| 0.938 | 1.208 | 0.196 | 0.998 | 120 | 0401AD13500938-196A |
| 1.000 | 1.270 | 0.196 | 1.060 | 121 | 0401AD13501000-196A |
| 1.063 | 1.333 | 0.196 | 1.123 | 122 | 0401AD13501063-196A |
| 1.125 | 1.395 | 0.196 | 1.185 | 123 | 0401AD13501125-196A |
| 1.188 | 1.458 | 0.196 | 1.248 | 124 | 0401AD13501188-196A |
| 1.250 | 1.520 | 0.196 | 1.310 | 125 | 0401AD13501250-196A |
| 1.313 | 1.583 | 0.196 | 1.373 | 126 | 0401AD13501313-196A |
| 1.375 | 1.645 | 0.196 | 1.435 | 127 | 0401AD13501375-196A |
| 1.438 | 1.708 | 0.196 | 1.498 | 128 | 0401AD13501438-196A |
| 1.500 | 1.770 | 0.196 | 1.560 | 129 | 0401AD13501500-196A |
| 1.563 | 1.833 | 0.196 | 1.623 | 130 | 0401AD13501563-196A |
| 1.625 | 1.895 | 0.196 | 1.685 | 131 | 0401AD13501625-196A |
| 1.688 | 1.958 | 0.196 | 1.748 | 132 | 0401AD13501688-196A |
| 1.750 | 2.020 | 0.196 | 1.810 | 133 | 0401AD13501750-196A |
| 1.813 | 2.083 | 0.196 | 1.873 | 134 | 0401AD13501813-196A |
| 1.875 | 2.145 | 0.196 | 1.935 | 135 | 0401AD13501875-196A |
| 1.938 | 2.208 | 0.196 | 1.998 | 136 | 0401AD13501938-196A |
| + .000/- .003 | + .003/- .000 | + .008/- .000 | + .006/- .000 | | |
| 2.000 | 2.270 | 0.196 | 2.060 | 137 | 0401AD13502000-196A |
| 2.063 | 2.333 | 0.196 | 2.123 | 138 | 0401AD13502063-196A |
| 2.125 | 2.395 | 0.196 | 2.185 | 139 | 0401AD13502125-196A |
| 2.188 | 2.458 | 0.196 | 2.248 | 140 | 0401AD13502188-196A |
| 2.250 | 2.520 | 0.196 | 2.310 | 141 | 0401AD13502250-196A |
| 2.375 | 2.645 | 0.196 | 2.435 | 143 | 0401AD13502375-196A |
| 2.500 | 2.770 | 0.196 | 2.560 | 145 | 0401AD13502500-196A |
| 2.625 | 2.895 | 0.196 | 2.685 | 147 | 0401AD13502625-196A |
| 2.750 | 3.020 | 0.196 | 2.810 | 149 | 0401AD13502750-196A |
| 2.875 | 3.145 | 0.196 | 2.935 | 151 | 0401AD13502875-196A |
| 3.000 | 3.270 | 0.196 | 3.060 | 151 | 0401AD13503000-196A |
| 3.125 | 3.395 | 0.196 | 3.185 | 152 | 0401AD13503125-196A |
| 3.250 | 3.520 | 0.196 | 3.310 | 152 | 0401AD13503250-196A |
| 3.375 | 3.645 | 0.196 | 3.435 | 153 | 0401AD13503375-196A |
| 3.500 | 3.770 | 0.196 | 3.560 | 153 | 0401AD13503500-196A |
| 3.625 | 3.895 | 0.196 | 3.685 | 154 | 0401AD13503625-196A |
| 3.750 | 4.020 | 0.196 | 3.810 | 154 | 0401AD13503750-196A |
| 3.875 | 4.145 | 0.196 | 3.935 | 155 | 0401AD13503875-196A |
| 4.000 | 4.270 | 0.196 | 4.060 | 155 | 0401AD13504000-196A |
| 4.125 | 4.395 | 0.196 | 4.185 | 156 | 0401AD13504125-196A |
| 4.250 | 4.520 | 0.196 | 4.310 | 156 | 0401AD13504250-196A |
| 4.375 | 4.645 | 0.196 | 4.435 | 157 | 0401AD13504375-196A |
| 4.500 | 4.770 | 0.196 | 4.560 | 157 | 0401AD13504500-196A |
| 4.625 | 4.895 | 0.196 | 4.685 | 158 | 0401AD13504625-196A |

For custom groove calculations, see Appendix C.

09/01/07



Table 8-20. AD Gland Dimensions (Standard) — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | O-ring Dash Number | AD Part Number (Standard) |
|----------------------|-------------------------|----------------------|---------------------------|--------------------------|------------------------------|
| + .000/- .004 | + .004/- .000 | + .008/- .000 | + .008/- .000 | | |
| 4.750 | 5.020 | 0.196 | 4.810 | 158 | 0401AD13504750-196A |
| 4.875 | 5.145 | 0.196 | 4.935 | 159 | 0401AD13504875-196A |
| 5.000 | 5.270 | 0.196 | 5.060 | 159 | 0401AD13505000-196A |
| 5.125 | 5.395 | 0.196 | 5.185 | 160 | 0401AD13505125-196A |
| 5.250 | 5.520 | 0.196 | 5.310 | 160 | 0401AD13505250-196A |
| 5.375 | 5.645 | 0.196 | 5.435 | 161 | 0401AD13505375-196A |
| 5.500 | 5.770 | 0.196 | 5.560 | 161 | 0401AD13505500-196A |
| 5.625 | 5.895 | 0.196 | 5.685 | 162 | 0401AD13505625-196A |
| 5.750 | 6.020 | 0.196 | 5.810 | 162 | 0401AD13505750-196A |
| 6.000 | 6.270 | 0.196 | 6.060 | 163 | 0401AD13506000-196A |
| + .000/- .004 | + .004/- .000 | + .008/- .000 | + .008/- .000 | | |
| 6.000 | 6.344 | 0.236 | 6.060 | 258 | 0401AD17206000-236A |
| 6.250 | 6.594 | 0.236 | 6.310 | 259 | 0401AD17206250-236A |
| 6.500 | 6.844 | 0.236 | 6.560 | 260 | 0401AD17206500-236A |
| 6.750 | 7.094 | 0.236 | 6.810 | 261 | 0401AD17206750-236A |
| 7.000 | 7.344 | 0.236 | 7.060 | 262 | 0401AD17207000-236A |
| + .000/- .005 | + .005/- .000 | + .008/- .000 | + .010/- .000 | | |
| 7.250 | 7.594 | 0.236 | 7.310 | 263 | 0401AD17207250-236A |
| 7.500 | 7.844 | 0.236 | 7.560 | 264 | 0401AD17207500-236A |
| 7.750 | 8.094 | 0.236 | 7.810 | 265 | 0401AD17207750-236A |
| 8.000 | 8.344 | 0.236 | 8.060 | 266 | 0401AD17208000-236A |
| 8.250 | 8.594 | 0.236 | 8.310 | 267 | 0401AD17208250-236A |
| 8.500 | 8.844 | 0.236 | 8.560 | 268 | 0401AD17208500-236A |
| 8.750 | 9.094 | 0.236 | 8.810 | 269 | 0401AD17208750-236A |
| 9.000 | 9.344 | 0.236 | 9.060 | 270 | 0401AD17209000-236A |
| 9.250 | 9.594 | 0.236 | 9.310 | 271 | 0401AD17209250-236A |
| 9.500 | 9.844 | 0.236 | 9.560 | 272 | 0401AD17209500-236A |
| 9.750 | 10.094 | 0.236 | 9.810 | 273 | 0401AD17209750-236A |
| 10.000 | 10.344 | 0.236 | 10.060 | 274 | 0401AD17209875-236A |
| + .000/- .005 | + .005/- .000 | + .008/- .000 | + .010/- .000 | | |
| 10.000 | 10.480 | 0.332 | 10.080 | 377 | 0401AD24010000-332A |
| 10.500 | 10.980 | 0.332 | 10.580 | 378 | 0401AD24010500-332A |
| 11.000 | 11.480 | 0.332 | 11.080 | 379 | 0401AD24011000-332A |
| 11.500 | 11.980 | 0.332 | 11.580 | 380 | 0401AD24011500-332A |
| 12.000 | 12.480 | 0.332 | 12.080 | 381 | 0401AD24012000-332A |
| + .000/- .006 | + .006/- .000 | + .008/- .000 | + .012/- .000 | | |
| 12.500 | 12.980 | 0.332 | 12.580 | 381 | 0401AD24012500-332A |
| 13.000 | 13.480 | 0.332 | 13.080 | 382 | 0401AD24013000-332A |
| 13.500 | 13.980 | 0.332 | 13.580 | 382 | 0401AD24013500-332A |
| 14.000 | 14.480 | 0.332 | 14.080 | 383 | 0401AD24014000-332A |
| 14.500 | 14.980 | 0.332 | 14.580 | 383 | 0401AD24014500-332A |
| 15.000 | 15.480 | 0.332 | 15.080 | 384 | 0401AD24015000-332A |
| 15.500 | 15.980 | 0.332 | 15.580 | 384 | 0401AD24015500-332A |
| 16.000 | 16.480 | 0.332 | 16.080 | 385 | 0401AD24016000-332A |
| 16.500 | 16.980 | 0.332 | 16.580 | 385 | 0401AD24016500-332A |
| 17.000 | 17.480 | 0.332 | 17.080 | 386 | 0401AD24017000-332A |

For custom groove calculations, see Appendix C.

AD Profile**Table 8-21. AD Gland Dimensions (Wide) — Inch**

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | O-ring Dash Number | AD Part Number (Wide) |
|----------------------|----------------------|----------------------|----------------------|--------------------|-----------------------|
| +0.000/-0.002 | +0.002/-0.000 | +0.008/-0.000 | +0.004/-0.000 | | |
| 1.500 | 1.846 | 0.248 | 1.560 | 131 | 0401AD17301500-248A |
| 1.563 | 1.909 | 0.248 | 1.623 | 132 | 0401AD17301563-248A |
| 1.625 | 1.971 | 0.248 | 1.685 | 133 | 0401AD17301625-248A |
| 1.688 | 2.034 | 0.248 | 1.748 | 134 | 0401AD17301688-248A |
| 1.750 | 2.096 | 0.248 | 1.810 | 135 | 0401AD17301750-248A |
| 1.813 | 2.159 | 0.248 | 1.873 | 136 | 0401AD17301813-248A |
| 1.875 | 2.221 | 0.248 | 1.935 | 136 | 0401AD17301875-248A |
| 1.938 | 2.284 | 0.248 | 1.998 | 137 | 0401AD17301938-248A |
| +0.000/-0.003 | +0.003/-0.000 | +0.008/-0.000 | +0.006/-0.000 | | |
| 2.000 | 2.346 | 0.248 | 2.060 | 138 | 0401AD17302000-248A |
| 2.125 | 2.471 | 0.248 | 2.185 | 140 | 0401AD17302125-248A |
| 2.250 | 2.596 | 0.248 | 2.310 | 142 | 0401AD17302250-248A |
| 2.375 | 2.721 | 0.248 | 2.435 | 144 | 0401AD17302375-248A |
| 2.500 | 2.846 | 0.248 | 2.560 | 146 | 0401AD17302500-248A |
| 2.625 | 2.971 | 0.248 | 2.685 | 148 | 0401AD17302625-248A |
| +0.000/-0.003 | +0.003/-0.000 | +0.008/-0.000 | +0.006/-0.000 | | |
| 2.750 | 3.230 | 0.319 | 2.830 | 234 | 0401AD24002750-319A |
| 2.875 | 3.355 | 0.319 | 2.955 | 235 | 0401AD24002875-319A |
| 3.000 | 3.480 | 0.319 | 3.080 | 236 | 0401AD24003000-319A |
| 3.125 | 3.605 | 0.319 | 3.205 | 237 | 0401AD24003125-319A |
| 3.250 | 3.730 | 0.319 | 3.330 | 238 | 0401AD24003250-319A |
| 3.375 | 3.855 | 0.319 | 3.455 | 239 | 0401AD24003375-319A |
| 3.500 | 3.980 | 0.319 | 3.580 | 240 | 0401AD24003500-319A |
| 3.625 | 4.105 | 0.319 | 3.705 | 240 | 0401AD24003625-319A |
| 3.750 | 4.230 | 0.319 | 3.830 | 241 | 0401AD24003750-319A |
| 3.875 | 4.355 | 0.319 | 3.955 | 242 | 0401AD24003875-319A |
| 4.000 | 4.480 | 0.319 | 4.080 | 243 | 0401AD24004000-319A |
| 4.125 | 4.605 | 0.319 | 4.205 | 244 | 0401AD24004125-319A |
| 4.250 | 4.730 | 0.319 | 4.330 | 245 | 0401AD24004250-319A |
| 4.375 | 4.855 | 0.319 | 4.455 | 246 | 0401AD24004375-319A |
| 4.500 | 4.980 | 0.319 | 4.580 | 247 | 0401AD24004500-319A |
| 4.625 | 5.105 | 0.319 | 4.705 | 248 | 0401AD24004625-319A |
| +0.000/-0.004 | +0.004/-0.000 | +0.008/-0.000 | +0.008/-0.000 | | |
| 4.750 | 5.230 | 0.319 | 4.830 | 249 | 0401AD24004750-319A |
| 4.875 | 5.355 | 0.319 | 4.955 | 250 | 0401AD24004875-319A |
| 5.000 | 5.480 | 0.319 | 5.080 | 251 | 0401AD24005000-319A |
| 5.125 | 5.605 | 0.319 | 5.205 | 252 | 0401AD24005125-319A |
| 5.250 | 5.730 | 0.319 | 5.330 | 253 | 0401AD24005250-319A |
| 5.375 | 5.855 | 0.319 | 5.455 | 254 | 0401AD24005375-319A |
| +0.000/-0.004 | +0.004/-0.000 | +0.008/-0.000 | +0.008/-0.000 | | |
| 5.500 | 6.130 | 0.374 | 5.600 | 359 | 0401AD31505500-374A |
| 5.625 | 6.255 | 0.374 | 5.725 | 360 | 0401AD31505625-374A |

For custom groove calculations, [see Appendix C](#).

Table 8-21. AD Gland Dimensions (Wide) — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | O-ring Dash Number | AD Part Number (Wide) |
|----------------------|----------------------|----------------------|----------------------|--------------------|-----------------------|
| + .000/- .004 | + .004/- .000 | + .008/- .000 | + .008/- .000 | | |
| 5.750 | 6.380 | 0.374 | 5.850 | 361 | 0401AD31505750-374A |
| 6.000 | 6.630 | 0.374 | 6.100 | 362 | 0401AD31506000-374A |
| 6.250 | 6.880 | 0.374 | 6.350 | 363 | 0401AD31506250-374A |
| 6.500 | 7.130 | 0.374 | 6.600 | 364 | 0401AD31506500-374A |
| 6.750 | 7.380 | 0.374 | 6.850 | 365 | 0401AD31506750-374A |
| 7.000 | 7.630 | 0.374 | 7.100 | 366 | 0401AD31507000-374A |
| + .000/- .005 | + .005/- .000 | + .008/- .000 | + .008/- .000 | | |
| 7.250 | 7.880 | 0.374 | 7.350 | 367 | 0401AD31507250-374A |
| 7.500 | 8.130 | 0.374 | 7.600 | 368 | 0401AD31507500-374A |
| 7.750 | 8.380 | 0.374 | 7.850 | 369 | 0401AD31507750-374A |
| 8.000 | 8.630 | 0.374 | 8.100 | 370 | 0401AD31508000-374A |
| 8.250 | 8.880 | 0.374 | 8.350 | 371 | 0401AD31508250-374A |
| 8.500 | 9.130 | 0.374 | 8.600 | 372 | 0401AD31508500-374A |
| 8.750 | 9.380 | 0.374 | 8.850 | 373 | 0401AD31508750-374A |
| 9.000 | 9.630 | 0.374 | 9.100 | 374 | 0401AD31509000-374A |
| 9.250 | 9.880 | 0.374 | 9.350 | 375 | 0401AD31509250-374A |
| 9.500 | 10.130 | 0.374 | 9.600 | 376 | 0401AD31509500-374A |
| 9.750 | 10.380 | 0.374 | 9.850 | 377 | 0401AD31509750-374A |
| + .000/- .005 | + .005/- .000 | + .008/- .000 | + .010/- .000 | | |
| 10.000 | 10.630 | 0.374 | 10.100 | 377 | 0401AD315010000-374A |
| 10.500 | 11.130 | 0.374 | 10.600 | 378 | 0401AD315010500-374A |
| 11.000 | 11.630 | 0.374 | 11.100 | 379 | 0401AD315011000-374A |
| 11.500 | 12.130 | 0.374 | 11.600 | 380 | 0401AD315011500-374A |
| 12.000 | 12.630 | 0.374 | 12.100 | 381 | 0401AD315012000-374A |
| 12.500 | 13.130 | 0.374 | 12.600 | 381 | 0401AD315012500-374A |
| 13.000 | 13.630 | 0.374 | 13.100 | 382 | 0401AD315013000-374A |
| 13.500 | 14.130 | 0.374 | 13.600 | 382 | 0401AD315013500-374A |
| 14.000 | 14.630 | 0.374 | 14.100 | 383 | 0401AD315014000-374A |
| 14.500 | 15.130 | 0.374 | 14.600 | 383 | 0401AD315014500-374A |
| 15.000 | 15.630 | 0.374 | 15.100 | 384 | 0401AD315015000-374A |
| 15.500 | 16.130 | 0.374 | 15.600 | 384 | 0401AD315015500-374A |
| + .000/- .006 | + .006/- .000 | + .008/- .000 | + .012/- .000 | | |
| 16.000 | 16.944 | 0.551 | 16.100 | 461 | 0401AD472016000-551A |
| 16.500 | 17.444 | 0.551 | 16.600 | 462 | 0401AD472016500-551A |
| 17.000 | 17.944 | 0.551 | 17.100 | 463 | 0401AD472017000-551A |
| 17.500 | 18.444 | 0.551 | 17.600 | 464 | 0401AD472017500-551A |
| 18.000 | 18.944 | 0.551 | 18.100 | 465 | 0401AD472018000-551A |
| 18.500 | 19.444 | 0.551 | 18.600 | 466 | 0401AD472018500-551A |
| 19.000 | 19.944 | 0.551 | 19.100 | 467 | 0401AD472019000-551A |
| 19.500 | 20.444 | 0.551 | 19.600 | 468 | 0401AD472019500-551A |
| 20.000 | 20.944 | 0.551 | 20.100 | 469 | 0401AD472020000-551A |

For custom groove calculations, see Appendix C.


NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Wiper SG Profile

Catalog EPS 5370/USA

SG Profile, Metal Scraper

Parker is pleased to offer SG profile metal scrapers as a means to remove the toughest, most abrasive contaminants that may adhere to cylinder rods, including ice, adhesives, coatings, tape and other potentially damaging materials. By using rubber energizing elements behind the dual-contact scrapers, SG provides the best possible removal of stubborn contaminants.

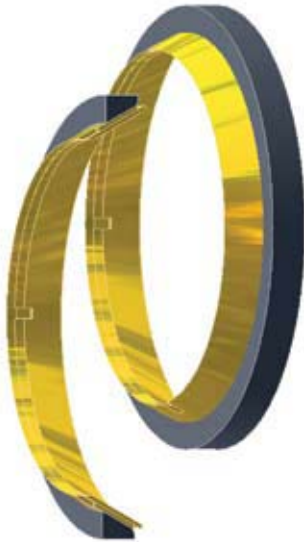


Technical Data

| Standard Materials* | Energizer | Scraper Ring | Temperature Range |
|---------------------|--------------------|--------------|------------------------------------|
| N6017 | Commercial Nitrile | Bronze | -40°F to 250°F (-40°C to 121°C) |
| V6083 | Commercial FKM | Bronze | -5°F to 400°F (-21°C to 204°C) |
| 4683 | Commercial PTFE | Bronze | -Cryogenic to 400°F (204°C) |



SG Cross-Section

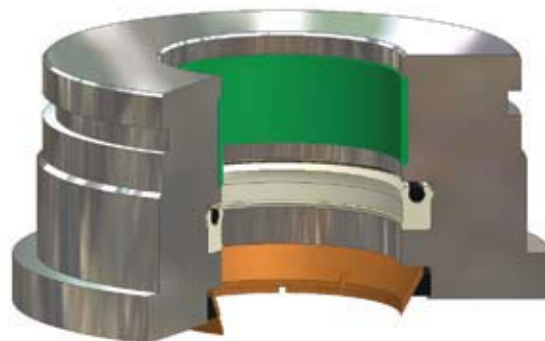


SG installed in Rod Gland


02/15/08

Part Number Nomenclature — SG Profile

Table 8-22. SG Profile — Inch

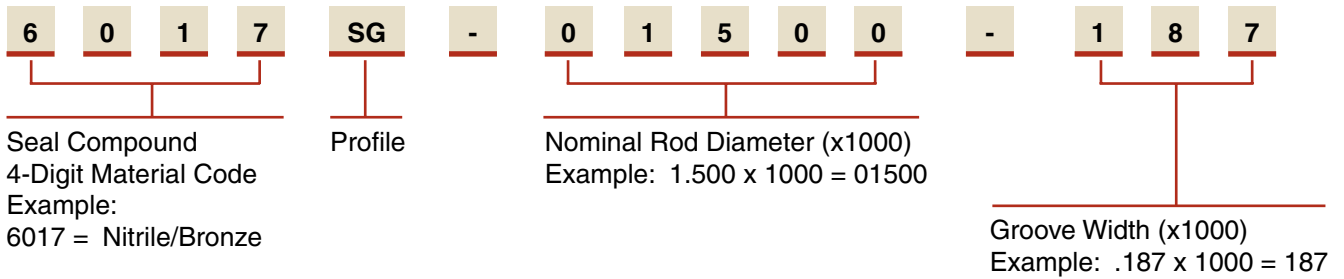

Gland Dimensions — SG Profile

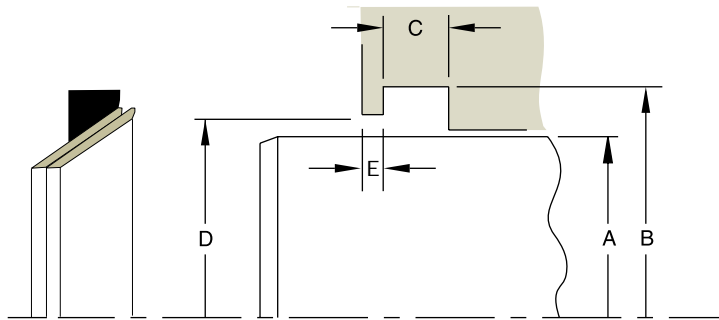

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 8-23. SG Gland Dimensions — Inch

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Shoulder Width | Part Number |
|----------------|-------------------|----------------|---------------------|------------------|------------------|
| + .000/- .002 | + .003/- .003 | + .003/- .001 | + .000/- .010 | + .015/- .000 | |
| 0.250 | 0.500 | 0.125 | 0.464 | 0.018 | XXXXSG-00250-125 |
| 0.312 | 0.562 | 0.125 | 0.526 | 0.018 | XXXXSG-00312-125 |
| 0.375 | 0.625 | 0.125 | 0.589 | 0.018 | XXXXSG-00375-125 |
| 0.437 | 0.687 | 0.125 | 0.651 | 0.018 | XXXXSG-00437-125 |
| 0.500 | 0.750 | 0.125 | 0.714 | 0.018 | XXXXSG-00500-125 |
| 0.562 | 0.812 | 0.125 | 0.776 | 0.018 | XXXXSG-00562-125 |
| 0.625 | 0.875 | 0.125 | 0.839 | 0.018 | XXXXSG-00625-125 |
| 0.687 | 0.937 | 0.125 | 0.901 | 0.018 | XXXXSG-00687-125 |
| 0.750 | 1.000 | 0.125 | 0.964 | 0.018 | XXXXSG-00750-125 |
| 0.750 | 1.125 | 0.188 | 1.082 | 0.022 | XXXXSG-00750-187 |
| 0.812 | 1.062 | 0.125 | 1.026 | 0.018 | XXXXSG-00812-125 |
| 0.812 | 1.187 | 0.188 | 1.144 | 0.022 | XXXXSG-00812-187 |
| 0.875 | 1.125 | 0.125 | 1.089 | 0.018 | XXXXSG-00875-125 |
| 0.875 | 1.250 | 0.188 | 1.207 | 0.022 | XXXXSG-00875-187 |
| 0.937 | 1.187 | 0.125 | 1.151 | 0.018 | XXXXSG-00937-125 |
| 0.937 | 1.312 | 0.188 | 1.269 | 0.022 | XXXXSG-00937-187 |
| 1.000 | 1.250 | 0.125 | 1.214 | 0.018 | XXXXSG-01000-125 |
| 1.000 | 1.375 | 0.188 | 1.332 | 0.022 | XXXXSG-01000-187 |
| 1.062 | 1.437 | 0.188 | 1.394 | 0.022 | XXXXSG-01062-187 |
| 1.125 | 1.375 | 0.125 | 1.339 | 0.018 | XXXXSG-01125-125 |

For custom groove calculations, see Appendix C.

09/01/07




Table 8-23. SG Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Shoulder Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|------------------------|------------------|
| +0.000/-0.002 | +0.003/-0.003 | +0.003/-0.001 | +0.000/-0.010 | +0.015/-0.000 | |
| 1.125 | 1.500 | 0.188 | 1.457 | 0.022 | XXXXSG-01125-187 |
| 1.187 | 1.562 | 0.188 | 1.519 | 0.022 | XXXXSG-01187-187 |
| 1.250 | 1.500 | 0.125 | 1.464 | 0.018 | XXXXSG-01250-125 |
| 1.250 | 1.625 | 0.188 | 1.582 | 0.022 | XXXXSG-01250-187 |
| 1.312 | 1.687 | 0.188 | 1.644 | 0.022 | XXXXSG-01312-187 |
| 1.375 | 1.750 | 0.188 | 1.707 | 0.022 | XXXXSG-01375-187 |
| 1.437 | 1.812 | 0.188 | 1.769 | 0.022 | XXXXSG-01437-187 |
| 1.500 | 1.875 | 0.188 | 1.832 | 0.022 | XXXXSG-01500-187 |
| 1.562 | 1.937 | 0.188 | 1.894 | 0.022 | XXXXSG-01562-187 |
| 1.625 | 2.000 | 0.188 | 1.957 | 0.022 | XXXXSG-01625-187 |
| 1.687 | 2.062 | 0.188 | 2.019 | 0.022 | XXXXSG-01687-187 |
| 1.750 | 2.125 | 0.188 | 2.082 | 0.022 | XXXXSG-01750-187 |
| 1.812 | 2.187 | 0.188 | 2.144 | 0.022 | XXXXSG-01812-187 |
| 1.875 | 2.250 | 0.188 | 2.207 | 0.022 | XXXXSG-01875-187 |
| 1.937 | 2.312 | 0.188 | 2.269 | 0.022 | XXXXSG-01937-187 |
| 2.000 | 2.375 | 0.188 | 2.332 | 0.022 | XXXXSG-02000-187 |
| 2.000 | 2.500 | 0.250 | 2.440 | 0.030 | XXXXSG-02000-250 |
| 2.062 | 2.437 | 0.188 | 2.394 | 0.022 | XXXXSG-02062-187 |
| 2.062 | 2.562 | 0.250 | 2.502 | 0.030 | XXXXSG-02062-250 |
| 2.125 | 2.500 | 0.188 | 2.457 | 0.022 | XXXXSG-02125-187 |
| 2.125 | 2.625 | 0.250 | 2.565 | 0.030 | XXXXSG-02125-250 |
| 2.187 | 2.562 | 0.188 | 2.519 | 0.022 | XXXXSG-02187-187 |
| 2.187 | 2.687 | 0.250 | 2.627 | 0.030 | XXXXSG-02187-250 |
| 2.250 | 2.625 | 0.188 | 2.582 | 0.022 | XXXXSG-02250-187 |
| 2.250 | 2.750 | 0.250 | 2.690 | 0.030 | XXXXSG-02250-250 |
| 2.312 | 2.687 | 0.188 | 2.644 | 0.022 | XXXXSG-02312-187 |
| 2.312 | 2.812 | 0.250 | 2.752 | 0.030 | XXXXSG-02312-250 |
| 2.375 | 2.750 | 0.188 | 2.707 | 0.022 | XXXXSG-02375-187 |
| 2.375 | 2.875 | 0.250 | 2.815 | 0.030 | XXXXSG-02375-250 |
| 2.437 | 2.812 | 0.188 | 2.769 | 0.022 | XXXXSG-02437-187 |
| 2.437 | 2.937 | 0.250 | 2.877 | 0.030 | XXXXSG-02437-250 |
| 2.500 | 2.875 | 0.188 | 2.832 | 0.022 | XXXXSG-02500-187 |
| 2.500 | 3.000 | 0.250 | 2.940 | 0.030 | XXXXSG-02500-250 |
| 2.562 | 2.937 | 0.188 | 2.894 | 0.022 | XXXXSG-02562-187 |
| 2.562 | 3.062 | 0.250 | 3.002 | 0.030 | XXXXSG-02562-250 |
| 2.625 | 3.000 | 0.188 | 2.957 | 0.022 | XXXXSG-02625-187 |
| 2.625 | 3.125 | 0.250 | 3.065 | 0.030 | XXXXSG-02625-250 |
| 2.687 | 3.062 | 0.188 | 3.019 | 0.022 | XXXXSG-02687-187 |
| 2.687 | 3.187 | 0.250 | 3.127 | 0.030 | XXXXSG-02687-250 |
| 2.750 | 3.125 | 0.188 | 3.082 | 0.022 | XXXXSG-02750-187 |
| 2.750 | 3.250 | 0.250 | 3.190 | 0.030 | XXXXSG-02750-250 |
| 2.812 | 3.187 | 0.188 | 3.144 | 0.022 | XXXXSG-02812-187 |

For custom groove calculations, see Appendix C.

09/01/07

Table 8-23. SG Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Shoulder Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|------------------------|------------------|
| + .000/- .002 | + .003/- .003 | + .003/- .001 | + .000/- .010 | + .015/- .000 | |
| 2.812 | 3.312 | 0.250 | 3.252 | 0.030 | XXXXSG-02812-250 |
| 2.875 | 3.250 | 0.188 | 3.207 | 0.022 | XXXXSG-02875-187 |
| 2.875 | 3.375 | 0.250 | 3.315 | 0.030 | XXXXSG-02875-250 |
| 2.937 | 3.312 | 0.188 | 3.269 | 0.022 | XXXXSG-02937-187 |
| 2.937 | 3.437 | 0.250 | 3.377 | 0.030 | XXXXSG-02937-250 |
| 3.000 | 3.375 | 0.188 | 3.332 | 0.022 | XXXXSG-03000-187 |
| 3.000 | 3.500 | 0.250 | 3.440 | 0.030 | XXXXSG-03000-250 |
| 3.125 | 3.625 | 0.250 | 3.565 | 0.030 | XXXXSG-03125-250 |
| 3.250 | 3.750 | 0.250 | 3.690 | 0.030 | XXXXSG-03250-250 |
| 3.375 | 3.875 | 0.250 | 3.815 | 0.030 | XXXXSG-03375-250 |
| 3.500 | 3.875 | 0.188 | 3.832 | 0.022 | XXXXSG-03500-187 |
| 3.500 | 4.000 | 0.250 | 3.940 | 0.030 | XXXXSG-03500-250 |
| 3.625 | 4.125 | 0.250 | 4.065 | 0.030 | XXXXSG-03625-250 |
| 3.750 | 4.250 | 0.250 | 4.190 | 0.030 | XXXXSG-03750-250 |
| 3.875 | 4.375 | 0.250 | 4.315 | 0.030 | XXXXSG-03875-250 |
| 4.000 | 4.375 | 0.188 | 4.332 | 0.022 | XXXXSG-04000-187 |
| 4.000 | 4.500 | 0.250 | 4.440 | 0.030 | XXXXSG-04000-250 |
| 4.125 | 4.625 | 0.250 | 4.565 | 0.030 | XXXXSG-04125-250 |
| 4.250 | 4.750 | 0.250 | 4.690 | 0.030 | XXXXSG-04250-250 |
| 4.375 | 4.875 | 0.250 | 4.815 | 0.030 | XXXXSG-04375-250 |
| 4.500 | 4.875 | 0.188 | 4.832 | 0.022 | XXXXSG-04500-187 |
| 4.500 | 5.000 | 0.250 | 4.940 | 0.030 | XXXXSG-04500-250 |
| 4.500 | 5.250 | 0.375 | 5.160 | 0.045 | XXXXSG-04500-375 |
| 4.625 | 5.125 | 0.250 | 5.065 | 0.030 | XXXXSG-04625-250 |
| 4.625 | 5.375 | 0.375 | 5.285 | 0.045 | XXXXSG-04625-375 |
| 4.750 | 5.250 | 0.250 | 5.190 | 0.030 | XXXXSG-04750-250 |
| 4.750 | 5.500 | 0.375 | 5.410 | 0.045 | XXXXSG-04750-375 |
| 4.875 | 5.375 | 0.250 | 5.315 | 0.030 | XXXXSG-04875-250 |
| 4.875 | 5.625 | 0.375 | 5.535 | 0.045 | XXXXSG-04875-375 |
| 5.000 | 5.375 | 0.188 | 5.332 | 0.022 | XXXXSG-05000-187 |
| 5.000 | 5.500 | 0.250 | 5.440 | 0.030 | XXXXSG-05000-250 |
| 5.000 | 5.750 | 0.375 | 5.660 | 0.045 | XXXXSG-05000-375 |
| 5.125 | 5.875 | 0.375 | 5.785 | 0.045 | XXXXSG-05125-375 |
| 5.250 | 5.750 | 0.250 | 5.690 | 0.030 | XXXXSG-05250-250 |
| 5.250 | 6.000 | 0.375 | 5.910 | 0.045 | XXXXSG-05250-375 |
| 5.375 | 6.125 | 0.375 | 6.035 | 0.045 | XXXXSG-05375-375 |
| 5.500 | 5.875 | 0.188 | 5.832 | 0.022 | XXXXSG-05500-187 |
| 5.500 | 6.000 | 0.250 | 5.940 | 0.030 | XXXXSG-05500-250 |
| 5.500 | 6.250 | 0.375 | 6.160 | 0.045 | XXXXSG-05500-375 |
| 5.625 | 6.375 | 0.375 | 6.285 | 0.045 | XXXXSG-05625-375 |
| 5.750 | 6.250 | 0.250 | 6.190 | 0.030 | XXXXSG-05750-250 |
| 5.750 | 6.500 | 0.375 | 6.410 | 0.045 | XXXXSG-05750-375 |

For custom groove calculations, see Appendix C.

09/01/07



Table 8-23. SG Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Shoulder Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|------------------------|------------------|
| +0.000/-0.002 | +0.003/-0.003 | +0.003/-0.001 | +0.000/-0.010 | +0.015/-0.000 | |
| 5.875 | 6.625 | 0.375 | 6.535 | 0.045 | XXXXSG-05875-375 |
| 6.000 | 6.375 | 0.188 | 6.332 | 0.022 | XXXXSG-06000-187 |
| 6.000 | 6.500 | 0.250 | 6.440 | 0.030 | XXXXSG-06000-250 |
| 6.000 | 6.750 | 0.375 | 6.660 | 0.045 | XXXXSG-06000-375 |
| 6.250 | 6.750 | 0.250 | 6.690 | 0.030 | XXXXSG-06250-250 |
| 6.250 | 7.000 | 0.375 | 6.910 | 0.045 | XXXXSG-06250-375 |
| 6.500 | 6.875 | 0.188 | 6.832 | 0.022 | XXXXSG-06500-187 |
| 6.500 | 7.000 | 0.250 | 6.940 | 0.030 | XXXXSG-06500-250 |
| 6.500 | 7.250 | 0.375 | 7.160 | 0.045 | XXXXSG-06500-375 |
| 6.750 | 7.250 | 0.250 | 7.190 | 0.030 | XXXXSG-06750-250 |
| 6.750 | 7.500 | 0.375 | 7.410 | 0.045 | XXXXSG-06750-375 |
| 7.000 | 7.375 | 0.188 | 7.332 | 0.022 | XXXXSG-07000-187 |
| 7.000 | 7.500 | 0.250 | 7.440 | 0.030 | XXXXSG-07000-250 |
| 7.000 | 7.750 | 0.375 | 7.660 | 0.045 | XXXXSG-07000-375 |
| 7.250 | 7.750 | 0.250 | 7.690 | 0.030 | XXXXSG-07250-250 |
| 7.250 | 8.000 | 0.375 | 7.910 | 0.045 | XXXXSG-07250-375 |
| 7.500 | 8.000 | 0.250 | 7.940 | 0.030 | XXXXSG-07500-250 |
| 7.500 | 8.250 | 0.375 | 8.160 | 0.045 | XXXXSG-07500-375 |
| 7.750 | 8.250 | 0.250 | 8.190 | 0.030 | XXXXSG-07750-250 |
| 7.750 | 8.500 | 0.375 | 8.410 | 0.045 | XXXXSG-07750-375 |
| 8.000 | 8.500 | 0.250 | 8.440 | 0.030 | XXXXSG-08000-250 |
| 8.000 | 8.750 | 0.375 | 8.660 | 0.045 | XXXXSG-08000-375 |
| 8.000 | 9.000 | 0.500 | 8.880 | 0.060 | XXXXSG-08000-500 |
| 8.125 | 9.125 | 0.500 | 9.005 | 0.060 | XXXXSG-08125-500 |
| 8.250 | 8.750 | 0.250 | 8.690 | 0.030 | XXXXSG-08250-250 |
| 8.250 | 9.000 | 0.375 | 8.910 | 0.045 | XXXXSG-08250-375 |
| 8.250 | 9.250 | 0.500 | 9.130 | 0.060 | XXXXSG-08250-500 |
| 8.375 | 9.375 | 0.500 | 9.255 | 0.060 | XXXXSG-08375-500 |
| 8.500 | 9.000 | 0.250 | 8.940 | 0.030 | XXXXSG-08500-250 |
| 8.500 | 9.250 | 0.375 | 9.160 | 0.045 | XXXXSG-08500-375 |
| 8.500 | 9.500 | 0.500 | 9.380 | 0.060 | XXXXSG-08500-500 |
| 8.625 | 9.625 | 0.500 | 9.505 | 0.060 | XXXXSG-08625-500 |
| 8.750 | 9.250 | 0.250 | 9.190 | 0.030 | XXXXSG-08750-250 |
| 8.750 | 9.500 | 0.375 | 9.410 | 0.045 | XXXXSG-08750-375 |
| 8.750 | 9.750 | 0.500 | 9.630 | 0.060 | XXXXSG-08750-500 |
| 8.875 | 9.875 | 0.500 | 9.755 | 0.060 | XXXXSG-08875-500 |
| 9.000 | 9.500 | 0.250 | 9.440 | 0.030 | XXXXSG-09000-250 |
| 9.000 | 9.750 | 0.375 | 9.660 | 0.045 | XXXXSG-09000-375 |
| 9.000 | 10.000 | 0.500 | 9.880 | 0.060 | XXXXSG-09000-500 |
| 9.250 | 10.000 | 0.375 | 9.910 | 0.045 | XXXXSG-09250-375 |

For custom groove calculations, see Appendix C.

Table 8-23. SG Gland Dimensions — Inch (Continued)

| A Rod Diameter | B Groove Diameter | C Groove Width | D Shoulder Diameter | E Shoulder Width | Part Number |
|----------------------|-------------------------|----------------------|---------------------------|------------------------|------------------|
| + .000/- .002 | + .003/- .003 | + .003/- .001 | + .000/- .010 | + .015/- .000 | |
| 9.250 | 10.250 | 0.500 | 10.130 | 0.060 | XXXXSG-09250-500 |
| 9.500 | 10.250 | 0.375 | 10.160 | 0.045 | XXXXSG-09500-375 |
| 9.500 | 10.500 | 0.500 | 10.380 | 0.060 | XXXXSG-09500-500 |
| 9.750 | 10.500 | 0.375 | 10.410 | 0.045 | XXXXSG-09750-375 |
| 9.750 | 10.750 | 0.500 | 10.630 | 0.060 | XXXXSG-09750-500 |
| 10.000 | 10.750 | 0.375 | 10.660 | 0.045 | XXXXSG-10000-375 |
| 10.000 | 11.000 | 0.500 | 10.880 | 0.060 | XXXXSG-10000-500 |
| 10.250 | 11.250 | 0.500 | 11.130 | 0.060 | XXXXSG-10250-500 |
| 10.500 | 11.250 | 0.375 | 11.160 | 0.045 | XXXXSG-10500-375 |
| 10.500 | 11.500 | 0.500 | 11.380 | 0.060 | XXXXSG-10500-500 |
| 10.750 | 11.750 | 0.500 | 11.630 | 0.060 | XXXXSG-10750-500 |
| 11.000 | 11.750 | 0.375 | 11.660 | 0.045 | XXXXSG-11000-375 |
| 11.000 | 12.000 | 0.500 | 11.880 | 0.060 | XXXXSG-11000-500 |
| 11.250 | 12.250 | 0.500 | 12.130 | 0.060 | XXXXSG-11250-500 |
| 11.500 | 12.250 | 0.375 | 12.160 | 0.045 | XXXXSG-11500-375 |
| 11.500 | 12.500 | 0.500 | 12.380 | 0.060 | XXXXSG-11500-500 |
| 11.750 | 12.750 | 0.500 | 12.630 | 0.060 | XXXXSG-11750-500 |
| 12.000 | 12.750 | 0.375 | 12.660 | 0.045 | XXXXSG-12000-375 |
| 12.000 | 13.000 | 0.500 | 12.880 | 0.060 | XXXXSG-12000-500 |
| 12.250 | 13.250 | 0.500 | 13.130 | 0.060 | XXXXSG-12250-500 |
| 12.500 | 13.500 | 0.500 | 13.380 | 0.060 | XXXXSG-12500-500 |
| 12.750 | 13.750 | 0.500 | 13.630 | 0.060 | XXXXSG-12750-500 |
| 13.000 | 14.000 | 0.500 | 13.880 | 0.060 | XXXXSG-13000-500 |
| 13.500 | 14.500 | 0.500 | 14.380 | 0.060 | XXXXSG-13500-500 |
| 14.000 | 15.000 | 0.500 | 14.880 | 0.060 | XXXXSG-14000-500 |
| 16.000 | 17.000 | 0.500 | 16.880 | 0.060 | XXXXSG-16000-500 |
| 18.000 | 19.000 | 0.500 | 18.880 | 0.060 | XXXXSG-18000-500 |
| 20.000 | 21.000 | 0.500 | 20.880 | 0.060 | XXXXSG-20000-500 |

For custom groove calculations, see [Appendix C](#).

Contents

Engineering 9-2
 Materials 9-4
 Product Offering 9-6
 Wear Rings / Bearings Profiles
 WPT 9-7
 WRT 9-11
 WN 9-14
 PDT 9-18
 PDW 9-27

Parker offers a complete line of wear rings and bearing products to fit any application. Expertise in both engineered hard plastics and in PTFE makes Parker the global leader for reciprocating bearing materials. By incorporating premium material blends with precision machining tolerances (down to ± 0.001 "), Parker meets the full spectrum of needs, from heavy-duty hydraulic cylinders operating under the highest temperatures and pressures to pneumatic applications requiring low friction, long life and self-lubrication. Parker wear rings are the best way to combine high performance with economical value.

Quality Assurance

All Parker wear ring product lines are available from ISO 9000 registered operations in Salt Lake City, Utah and Elgin, Illinois. As such, wear ring production is governed by rigorous quality standards and procedures through a highly trained and qualified workforce. With the assistance of precise, accurate measurement systems and detailed workmanship criteria, Parker delivers first class quality and consistency in every shipment.

Manufacturing Excellence

Parker wear rings utilize a precision manufacturing process that achieves precise flatness on the bearing surfaces, whereas conventional net-molded bearings can form "dog bone" cross-sections. The result is optimal bearing contact area and compressive strength. The cross-sections shown at left illustrate the differences between these manufacturing methods.

Additionally, available sizing is not limited to existing tooling. *Our processes allow for virtually any width to be produced without assessing a setup charge.*

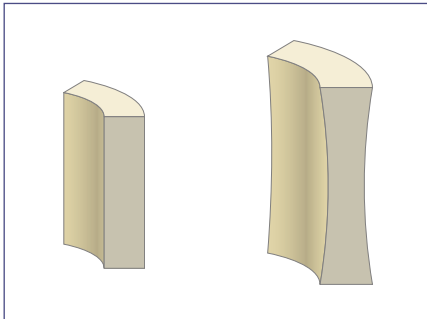


Figure 9-1. Parker's Precision-Manufactured Cross-Section (left) vs. Conventional Net-Molded Cross-Section (right).

Features, Advantages and Benefits

Table 9-1.

| Feature | Advantage | Benefit |
|---|---|--|
| Dynamic bearing surface contact | Eliminates metal-to-metal contact between components | Prevents rod, piston and seal damage due to scoring and reduces warranty costs |
| Precision-manufactured cross-section | Enables tighter hardware clearances than conventional wear rings | Increases seal life by reducing extrusion gaps associated with conventional wear rings |
| Low-friction, premium materials | Reduces frictional heat build-up | Lowers operating temperature and increases seal life |
| Precise flatness on bearing surface | Maximizes bearing contact area and compressive strength, eliminating the "dog bone" effect of conventional wear rings | Prolongs cylinder life through uniform sideload resistance |
| Advanced, high performance, polymeric materials | Metal particulates and other contaminants can be imbedded in the wear ring material | Increases cylinder life by helping to protect seals from contamination |

09/01/07



FAQs

There are many factors to consider when designing a system. Following is are the most frequently asked questions regarding bearing design and choosing the right wear ring.

What is the performance difference between standard-tolerance and tight-tolerance wear rings?

Standard-tolerance wear rings have a radial wall tolerance that is held to $\pm 0.0025"$, while tight-tolerance wear rings are held to $\pm 0.001"$ (under 6"). Tight-tolerance wear rings allow for a more precise fit of components, resulting in less dimensional "play." This allows the extrusion gap to be smaller for tight-tolerance wear rings, thus increasing the seal's pressure rating beyond that of standard-tolerance wear rings. This becomes very important at high temperatures, where pressure ratings of materials can further be reduced. Although it is critical to consider every aspect of each application, a general guideline for product selection can be found in [Table 9-2 on page 9-5](#).

Wear ring grooves call for larger extrusion gaps. How does this affect the seals' pressure rating?

Since wear rings are used to eliminate metal-to-metal contact between moving parts, there must be a larger gap between them, thus causing a wider extrusion gap. As a result, the seal's pressure ratings will decrease. Pre-established gland dimensions outlined in this catalog always result in a minimum 0.005" clearance for metal components. As such, standard-tolerance wear rings can reduce a seal's pressure capability by up to 50%. Using tight-tolerance wear rings enables the extrusion gaps to be held closer, and the seal's pressure ratings are only reduced by up to 30%. In either case, it is important to select proper seal and back-up materials to accommodate the increased extrusion gaps. Alternatively, Parker Integrated Pistons™ boost performance by providing all of the benefits of wear rings without any increase in extrusion gap whatsoever.

For applications where the seals will be stressed toward their maximum capabilities, gland dimensions can be developed using the equations that accompany each profile. Use these equations to apply desired machining tolerances and clearances. It is critical when determining metal-to-metal clearances to consider the material's compressive properties, which can be found on page 9-5. It is equally important to evaluate how the applied tolerances will affect the seals' extrusion gap. Please contact Parker or your authorized distributor for assistance in developing alternate gland dimensions.

How is a proper bearing width selected?

When selecting a bearing width, it is crucial to evaluate the side loads that the bearings will have to withstand. Figure 9-2 shows the total pressure area, A_p , that a radial force from a side load will affect. Area, A_p , is calculated as follows:

$$A_p = \text{Ø}D \times W$$

where D is the bearing O.D. for pistons or the bearing I.D. for rods, and W is the bearing width.

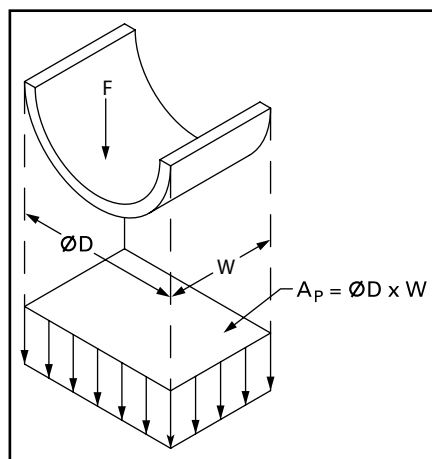


Figure 9-2: Total affected pressure area, A_p

It is important to note that the pressure distribution will not be equally dispersed across this area. Instead, the pressure profile takes the form shown in Figure 9-3. The assumed load-bearing area, A_L , can be calculated as follows:

$$A_L = \frac{A_p}{5} = \frac{\text{Ø}D \times W}{5}$$

To calculate the allowable radial force, F , simply multiply the load-bearing area, A_L , by the permissible compressive load of the material, q , and divide by the desired factor of safety, FS .

To calculate the proper bearing width, W , based on a known radial force:

$$W = \frac{5 \times F}{\text{Ø}D \times q} \times FS$$

Once W is calculated, round up to the next nominal width (1/8" increments).

To calculate the allowable radial force, F , based on a known bearing width:

$$F = \frac{A_L \times q}{FS} = \frac{\text{Ø}D \times W \times q}{5 \times FS}$$

Permissible compressive load, q , can be found in the [material properties tables on page 9-5](#). This value is based upon known material deflection at 73°F and at a specified load. Parker recommends a factor of safety, FS , of at least 3 to account for changes in physical properties due to increases in system temperature.

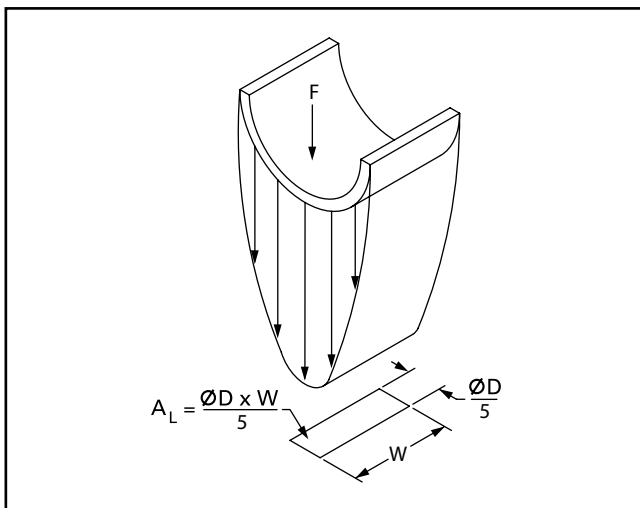


Figure 9-3: Load distribution of radial force, F , and effective load area, A_L

If additional assistance is required, please contact Parker or your authorized distributor.

What fluids are wear rings typically compatible with?

MolyGard and WearGard compounds are compatible with petroleum-based hydraulic fluids, transmission fluids, phosphate esters, and many other fluids. PTFE compounds 0401, 0307, and others have outstanding chemical compatibility with a wide range of fluids. Please contact Parker for specific inquiries.

How does moisture affect wear rings?

Due to nylon's inherent swelling in water, it is recommended that WearGard and MolyGard not be used in applications where water or moisture is present. Filled PTFE compounds or other alternative materials such as polyacetal and composite resins are recommended in such scenarios and are available from Parker.

Where should the wear ring be installed relative to the seals?

Wear rings should always be installed on the lubrication (wet) side of the seal for best performance. For rod glands, the wear ring should be on the pressure side of the rod seal. For pistons, if only one bearing is to be used, it should be on the side of the piston opposite the rod. This arrangement keeps the piston wear ring further away from the rod wear ring. This becomes critical when the rod is at full extension and provides better leveraging of the two bearing surfaces.

Which end cut should be used?

There are three types of end cuts available: butt cut, angle cut and step cut. The butt cut is the most common and most economical cut. Angle cuts and step cuts provide added performance by ensuring bearing area overlap at the wear ring's gap. In certain applications, step cut wear rings can be used as buffer seals, protecting the seal from pressure spikes. Figure 9-4 illustrates these three options.

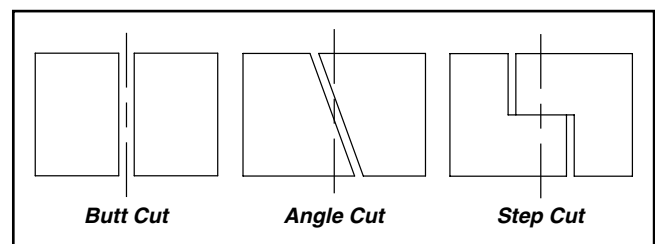


Figure 9-4: End Cuts

Wear Rings / Bearings Materials

Catalog EPS 5370/USA

Parker Bearing Materials

Parker bearing materials are backed by over 30 years of manufacturing expertise both in engineered hard plastics and PTFE. Our WearGard and MolyGard strength characteristics meet or exceed most metals traditionally used in wear rings. While many compounds are available, the most commonly used bearing materials are WearGard, MolyGard and filled PTFE (featured at right).



Parker also offers other engineered bearing materials for specialized applications demanding higher temperatures and sideloads. Parker's UltraComp™ CGT provides high temperature bearing performance up to 500°F. Composite, fabric-reinforced resins are also available to accommodate sideloads far more severe than glass-loaded nylon compounds can withstand. Composite resins also resist moisture swell in water-glycol emulsions and other water-based fluids. Polyacetal, Nylatron® and many different PTFE filler combinations are also available for specialized applications. Please contact Parker or your authorized distributor for assistance in selecting alternative bearing materials.

W4733 — WearGard

Heat stabilized, internally lubricated, 35% glass-reinforced nylon for tight-tolerance wear rings. WearGard is the premium material for the most severe applications due to its dimensional stability, high compressive strength and Parker's proprietary internal lubrication for reduced friction. WearGard is an extremely high endurance compound, retaining its physical properties without degradation. WearGard also features Parker's distinctive green coloring and is available in the WPT and WRT profiles.

W4650 — MolyGard

Heat stabilized, internally lubricated, 30% glass-reinforced nylon for standard-tolerance wear rings. Very similar physical properties to WearGard, but with an economical advantage. MolyGard is for use in light to medium duty hydraulic applications. Available in the WN profile.

0401 — 40% Bronze-Filled PTFE

Primarily used in light duty hydraulic applications, this self-lubricated, long-wearing material offers superior frictional characteristics and high temperature capabilities. Not recommended for use with aluminum bores and soft metal rods or in applications involving moderate to heavy sideloads. Available in the PDT and PDW profiles.

0307 — 23% Carbon, 2% Graphite-Filled PTFE

The most popular material for pneumatic applications, this self-lubricated compound ensures long life, low friction and high temperature capabilities. The carbon-graphite fillers allow for outstanding performance without the risk of scratching or scoring soft metal surfaces. Available in the PDT and PDW profiles.

Nylatron® is a registered trademark of
The Polymer Corporation, Reading, PA.

09/01/07



Table 9-2. Physical and Mechanical Properties of Engineered Plastics

| Property | Unit | W4733 | W4650 | W4738 | 0871 – 0874 | Test Method |
|-----------------------------------|-----------|-------------------------------------|-------------------------------------|---|------------------------------------|------------------------------------|
| | | WearGard 35% Glass-Reinforced Nylon | MolyGard 30% Glass-Reinforced Nylon | UltraCOMP CGT 10% Carbon-, 10% Graphite-, 10% PTFE-filled | Composite Fabric-Reinforced Resins | |
| Permissible Compressive Load, q | psi | 21700 | 21700 | — | 65200 | — |
| Tensile Strength | psi | 18300 | 17500 | 20400 | 9500 | ASTM D638, 73°F |
| Tensile Modulus | Kpsi | 899 | 952 | — | 470 | ASTM D638, 73°F |
| Compressive Strength | psi | 21500 | 21000 | 21700 | 35000 | ASTM D695, 73°F |
| Shear Strength | psi | 9820 | 9390 | — | — | ASTM D732, 73°F |
| Flexural Strength | psi | 25500 | 22600 | 30500 | — | ASTM D790, 73°F |
| Flexural Modulus | Kpsi | 1100 | 860 | 1175 | 280 | ASTM D790, 73°F |
| Notched IZOD Impact Strength | Ft-Lbs/in | 1.15 | 1.37 | 1.69 | 10 | ASTM D256, 73°F |
| Deformation Under Load | % | 0.4 | 0.6 | — | 4.0 | ASTM D621, 24 hrs @ 4000 psi, 73°F |
| Water Absorption | % | 0.5 | 0.8 | 0.06 | 0.1 | 24 hour immersion, ASTM D570, 73°F |
| Temperature Range | °F | -65 to +275 | -65 to +275 | -65 to +500 | -40 to +250 | — |
| Rockwell Hardness | M Scale | 87 | 77 | 100 | 100 | ASTM D785 |
| | R Scale | 117 | 114 | — | — | ASTM D785 |

Table 9-3. Physical and Mechanical Properties of PTFE Compounds

| Property | Unit | 0401 | 0307 | Test Method |
|-----------------------------------|------|------------------------|--------------------------------------|------------------------------------|
| | | 40% Bronze-Filled PTFE | 23% Carbon-, 2% Graphite-Filled PTFE | |
| Permissible Compressive Load, q | psi | 9400 | 3600 | — |
| Tensile Strength | psi | 3200 | 2250 | ASTM D1457-81A |
| Elongation | % | 250 | 100 | ASTM D4894 |
| Deformation Under Load | % | 3.1 | 2.5 | ASTM D621, 24 hrs @ 2000 psi, 70°F |
| Coefficient of Friction | — | 0.18 to 0.22 | 0.08 to 0.11 | ASTM D3702 |
| Temperature Range | °F | -200 to +575 | -360 to +575 | — |
| Shore D Hardness | — | 63 | 64 | ASTM D2240-75 |

Wear Rings / Bearings Product Offering


















Catalog EPS 5370/USA

Product Line

No matter what the application demands, Parker's diverse bearing product line ensures that performance requirements are met with maximized value. When pressure and temperature reach their extremes, WPT and WRT profiles help reduce the seal extrusion gap, assuring the utmost seal performance and leakage control. Conversely, in high volume, light-duty hydraulic cylinders, where pressure and temperature are not excessive, Parker's WN profile stands out as the most economical choice for long-lasting piston and rod bearings. When frictional forces must be kept to a minimum in pneumatic applications, PTFE bearing profiles PDT and PDW provide precision fitting and minimal frictional losses.

Profiles

Table 9-4: Product Profiles

| Series | Description | Application (Duty) | | | | Page |
|--|---|---|---|---|---|------|
| | | Light | Medium | Heavy | Pneumatic | |
| WPT  | Tight-Tolerance Piston Wear Rings |  |  |  | | 9-7 |
| WRT  | Tight-Tolerance Rod Wear Rings |  |  |  | | 9-11 |
| WN  | Commercial Wear Rings for Rod and Piston |  |  | | | 9-14 |
| PDT  | PTFE Wear Strip for Rod and Piston |  | | |  | 9-18 |
| PDW  | PTFE Machined Wear Rings for Rod and Piston |  | | |  | 9-27 |

Wear Ring / Bearing

WPT Profile

Catalog EPS 5370/USA



WPT Profile, Tight-Tolerance Piston Wear Ring

WPT tight-tolerance piston wear rings are the premier bearings for light- to heavy-duty hydraulic applications. WPTs are available in standard sizes from 1" up to 12" bore diameters (larger sizes upon request). WPT wear rings feature chamfered corners on the I.D. and are designed to snap closed during assembly to hold tight against the piston, eliminating bore interference and simplifying installation.

Technical Data

Standard Material


W4733 WearGard

Radial Tolerance

+0.000"/-.002" (up to 6" O.D.); +0.000/-.003" (6" to 12" O.D.)

End Cuts


Butt Cut, Angle Cut, Step Cut

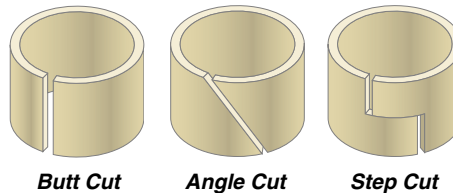

Butt Cut


Angle Cut

Step Cut



Options

Virtually any width can be produced without assessing a setup charge. Additionally, other cross-sections not shown are available when required.

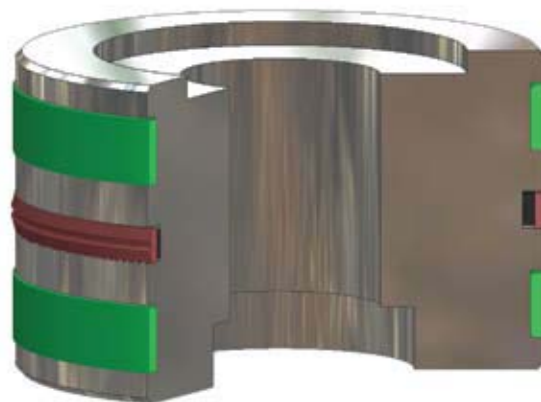


*Piston sealing system
comprised of WPT wear rings and
BP bi-directional piston seal*


WPT Profile

Part Number Nomenclature — WPT Profile

Table 9-5. WPT Profile

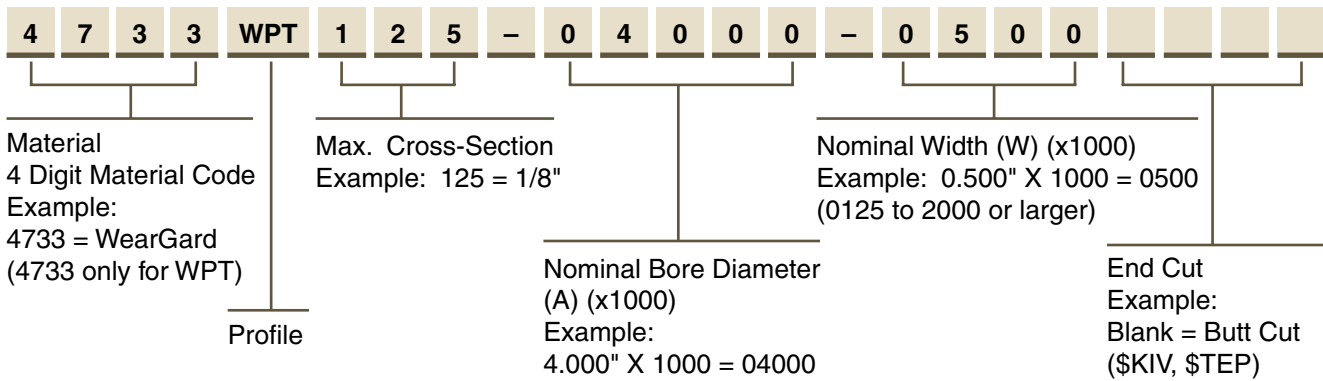

Gland Dimensions — WPT Profile

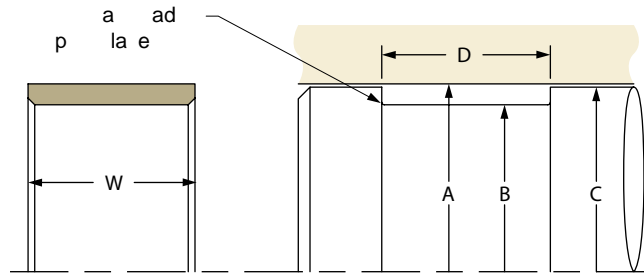

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 9-6. WPT Gland Dimensions — Inch

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|-----------------------|
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | |
| 1.000 | 0.875 | 0.983 | D = W + 0.010" | 4733WPT062-01000-XXXX |
| 1.125 | 1.000 | 1.108 | D = W + 0.010" | 4733WPT062-01125-XXXX |
| 1.250 | 1.125 | 1.233 | D = W + 0.010" | 4733WPT062-01250-XXXX |
| 1.375 | 1.250 | 1.358 | D = W + 0.010" | 4733WPT062-01375-XXXX |
| 1.500 | 1.375 | 1.483 | D = W + 0.010" | 4733WPT062-01500-XXXX |
| 1.625 | 1.500 | 1.608 | D = W + 0.010" | 4733WPT062-01625-XXXX |
| 1.750 | 1.625 | 1.733 | D = W + 0.010" | 4733WPT062-01750-XXXX |
| 1.875 | 1.750 | 1.858 | D = W + 0.010" | 4733WPT062-01875-XXXX |
| 2.375 | 2.250 | 2.358 | D = W + 0.010" | 4733WPT062-02375-XXXX |
| 2.625 | 2.500 | 2.608 | D = W + 0.010" | 4733WPT062-02625-XXXX |
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | |
| 1.000 | 0.749 | 0.983 | D = W + 0.010" | 4733WPT125-01000-XXXX |
| 1.125 | 0.874 | 1.108 | D = W + 0.010" | 4733WPT125-01125-XXXX |
| 1.250 | 0.999 | 1.233 | D = W + 0.010" | 4733WPT125-01250-XXXX |
| 1.375 | 1.124 | 1.358 | D = W + 0.010" | 4733WPT125-01375-XXXX |
| 1.500 | 1.249 | 1.483 | D = W + 0.010" | 4733WPT125-01500-XXXX |
| 1.625 | 1.374 | 1.608 | D = W + 0.010" | 4733WPT125-01625-XXXX |
| 1.750 | 1.499 | 1.733 | D = W + 0.010" | 4733WPT125-01750-XXXX |
| 1.875 | 1.624 | 1.858 | D = W + 0.010" | 4733WPT125-01875-XXXX |

For custom groove calculations, see Appendix C.

09/01/07



Table 9-6. WPT Gland Dimensions — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|-------------------|-----------------------|
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | |
| 2.000 | 1.749 | 1.983 | D = W + 0.010" | 4733WPT125-02000-XXXX |
| 2.125 | 1.874 | 2.108 | D = W + 0.010" | 4733WPT125-02125-XXXX |
| 2.250 | 1.999 | 2.233 | D = W + 0.010" | 4733WPT125-02250-XXXX |
| 2.375 | 2.124 | 2.358 | D = W + 0.010" | 4733WPT125-02375-XXXX |
| 2.500 | 2.249 | 2.483 | D = W + 0.010" | 4733WPT125-02500-XXXX |
| 2.625 | 2.374 | 2.608 | D = W + 0.010" | 4733WPT125-02625-XXXX |
| 2.750 | 2.499 | 2.733 | D = W + 0.010" | 4733WPT125-02750-XXXX |
| 2.875 | 2.624 | 2.858 | D = W + 0.010" | 4733WPT125-02875-XXXX |
| 3.000 | 2.749 | 2.983 | D = W + 0.010" | 4733WPT125-03000-XXXX |
| 3.125 | 2.874 | 3.108 | D = W + 0.010" | 4733WPT125-03125-XXXX |
| 3.250 | 2.999 | 3.233 | D = W + 0.010" | 4733WPT125-03250-XXXX |
| 3.375 | 3.124 | 3.358 | D = W + 0.010" | 4733WPT125-03375-XXXX |
| 3.500 | 3.249 | 3.483 | D = W + 0.010" | 4733WPT125-03500-XXXX |
| 3.625 | 3.374 | 3.608 | D = W + 0.010" | 4733WPT125-03625-XXXX |
| 3.750 | 3.499 | 3.733 | D = W + 0.010" | 4733WPT125-03750-XXXX |
| 3.875 | 3.624 | 3.858 | D = W + 0.010" | 4733WPT125-03875-XXXX |
| 3.937 | 3.687 | 3.920 | D = W + 0.010" | 4733WPT125-03937-XXXX |
| 4.000 | 3.749 | 3.983 | D = W + 0.010" | 4733WPT125-04000-XXXX |
| 4.125 | 3.874 | 4.108 | D = W + 0.010" | 4733WPT125-04125-XXXX |
| 4.250 | 3.999 | 4.233 | D = W + 0.010" | 4733WPT125-04250-XXXX |
| 4.375 | 4.124 | 4.358 | D = W + 0.010" | 4733WPT125-04375-XXXX |
| 4.500 | 4.249 | 4.483 | D = W + 0.010" | 4733WPT125-04500-XXXX |
| 4.625 | 4.374 | 4.608 | D = W + 0.010" | 4733WPT125-04625-XXXX |
| 4.750 | 4.499 | 4.733 | D = W + 0.010" | 4733WPT125-04750-XXXX |
| 4.875 | 4.624 | 4.858 | D = W + 0.010" | 4733WPT125-04875-XXXX |
| + .004/- .000 | + .000/- .003 | + .000/- .003 | + .010/- .000 | |
| 5.000 | 4.749 | 4.982 | D = W + 0.010" | 4733WPT125-05000-XXXX |
| 5.125 | 4.874 | 5.107 | D = W + 0.010" | 4733WPT125-05125-XXXX |
| 5.250 | 4.999 | 5.232 | D = W + 0.010" | 4733WPT125-05250-XXXX |
| 5.375 | 5.124 | 5.357 | D = W + 0.010" | 4733WPT125-05375-XXXX |
| 5.500 | 5.249 | 5.482 | D = W + 0.010" | 4733WPT125-05500-XXXX |
| 5.625 | 5.374 | 5.607 | D = W + 0.010" | 4733WPT125-05625-XXXX |
| 5.750 | 5.499 | 5.732 | D = W + 0.010" | 4733WPT125-05750-XXXX |
| 6.000 | 5.749 | 5.980 | D = W + 0.010" | 4733WPT125-06000-XXXX |
| 6.250 | 5.999 | 6.230 | D = W + 0.010" | 4733WPT125-06250-XXXX |
| 6.500 | 6.249 | 6.480 | D = W + 0.010" | 4733WPT125-06500-XXXX |
| 6.750 | 6.499 | 6.730 | D = W + 0.010" | 4733WPT125-06750-XXXX |
| 7.000 | 6.749 | 6.980 | D = W + 0.010" | 4733WPT125-07000-XXXX |
| 7.500 | 7.249 | 7.480 | D = W + 0.010" | 4733WPT125-07500-XXXX |

For custom groove calculations, see Appendix C.

WPT Profile

Table 9-6. WPT Gland Dimensions Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------------------------|
| + .006/- .000 | + .000/- .004 | + .000/- .004 | + .010/- .000 | |
| 8.000 | 7.749 | 7.979 | D = W + 0.010" | 4733WPT125-08000-XXXX |
| 8.500 | 8.249 | 8.479 | D = W + 0.010" | 4733WPT125-08500-XXXX |
| + .006/- .000 | + .000/- .004 | + .000/- .004 | + .010/- .000 | |
| 9.000 | 8.749 | 8.979 | D = W + 0.010" | 4733WPT125-09000-XXXX |
| 9.500 | 9.249 | 9.479 | D = W + 0.010" | 4733WPT125-09500-XXXX |
| 10.000 | 9.749 | 9.979 | D = W + 0.010" | 4733WPT125-10000-XXXX |
| 10.500 | 10.249 | 10.479 | D = W + 0.010" | 4733WPT125-10500-XXXX |
| + .006/- .000 | + .000/- .004 | + .000/- .004 | + .010/- .000 | |
| 11.000 | 10.749 | 10.979 | D = W + 0.010" | 4733WPT125-11000-XXXX |
| 11.500 | 11.249 | 11.479 | D = W + 0.010" | 4733WPT125-11500-XXXX |
| 12.000 | 11.749 | 11.979 | D = W + 0.010" | 4733WPT125-12000-XXXX |

For custom groove calculations, [see Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

WPT Groove Calculation

See Piston Wear Ring Groove Calculation in [Appendix C](#).

Wear Ring / Bearing

WRT Profile

Catalog EPS 5370/USA



WRT Profile, Tight-Tolerance Rod Wear Ring

WRT tight-tolerance rod wear rings, when combined with the WPT profile, complete the premier cylinder bearing system. Recommended for light- to heavy-duty hydraulic applications, they are available in standard sizes from 7/8" up to 7" rod diameters (larger sizes upon request). WRTs feature chamfered corners on the O.D. and are designed to snap open during assembly to hold tight against the head gland, eliminating rod interference and simplifying installation.

Technical Data

Standard Material


W4733 WearGard

Radial Tolerance

+0.000"/-0.002" (up to 5-3/4" I.D.); +0.000"/-0.003" (5-3/4" to 7" I.D.)

End Cuts


Butt Cut, Angle Cut, Step Cut

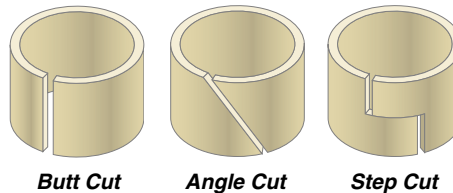

Butt Cut

Angle Cut


Step Cut



WRT Cross-Section

Options

Virtually any width can be produced without assessing a setup charge. Additionally, other cross-sections not shown are available when required.

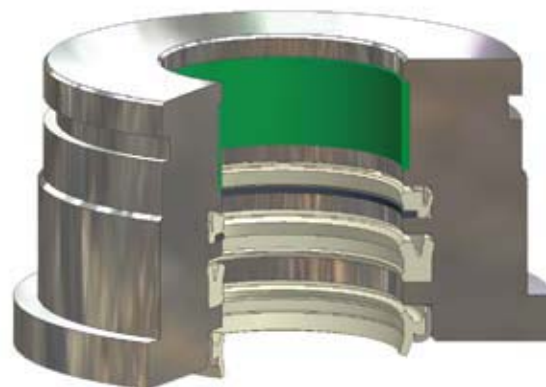


Rod sealing system comprised of WRT wear ring, BR buffer ring assembly, BT u-cup and AH canned wiper

09/01/07


WRT Profile

Part Number Nomenclature — WRT Profile

Table 9-7. WRT Profile

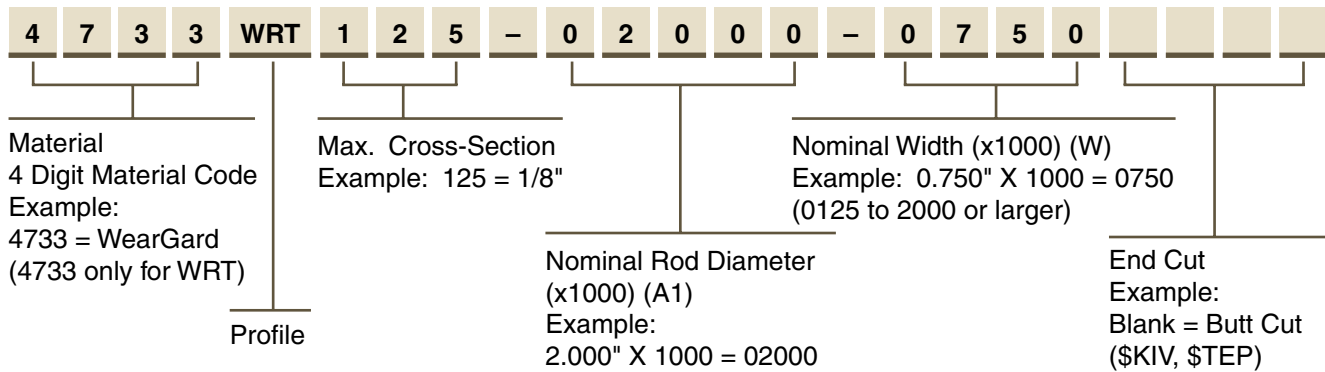

Gland Dimensions — WRT Profile

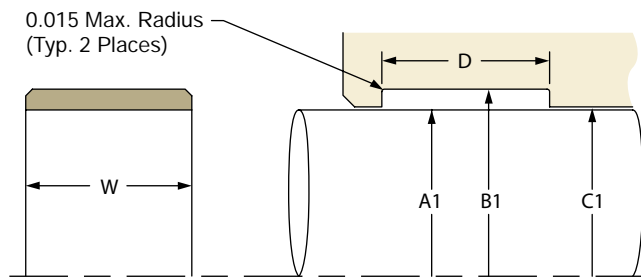

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 9-8. WRT Gland Dimensions — Inch

| A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|-----------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | |
| 0.875 | 1.000 | 0.892 | D = W + 0.010" | 4733WRT062-00875-XXXX |
| 1.000 | 1.125 | 1.017 | D = W + 0.010" | 4733WRT062-01000-XXXX |
| 1.125 | 1.250 | 1.142 | D = W + 0.010" | 4733WRT062-01125-XXXX |
| 1.250 | 1.375 | 1.267 | D = W + 0.010" | 4733WRT062-01250-XXXX |
| 1.375 | 1.500 | 1.392 | D = W + 0.010" | 4733WRT062-01375-XXXX |
| 1.500 | 1.625 | 1.517 | D = W + 0.010" | 4733WRT062-01500-XXXX |
| 1.625 | 1.750 | 1.642 | D = W + 0.010" | 4733WRT062-01625-XXXX |
| 1.750 | 1.875 | 1.767 | D = W + 0.010" | 4733WRT062-01750-XXXX |
| 2.250 | 2.375 | 2.267 | D = W + 0.010" | 4733WRT062-02250-XXXX |
| 2.500 | 2.625 | 2.517 | D = W + 0.010" | 4733WRT062-02250-XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | |
| 0.750 | 1.001 | 0.767 | D = W + 0.010" | 4733WRT125-00750-XXXX |
| 0.875 | 1.126 | 0.892 | D = W + 0.010" | 4733WRT125-00875-XXXX |
| 1.000 | 1.251 | 1.017 | D = W + 0.010" | 4733WRT125-01000-XXXX |
| 1.125 | 1.376 | 1.142 | D = W + 0.010" | 4733WRT125-01125-XXXX |
| 1.250 | 1.501 | 1.267 | D = W + 0.010" | 4733WRT125-01250-XXXX |
| 1.375 | 1.626 | 1.392 | D = W + 0.010" | 4733WRT125-01375-XXXX |
| 1.500 | 1.751 | 1.517 | D = W + 0.010" | 4733WRT125-01500-XXXX |
| 1.625 | 1.876 | 1.642 | D = W + 0.010" | 4733WRT125-01625-XXXX |
| 1.750 | 2.001 | 1.767 | D = W + 0.010" | 4733WRT125-01750-XXXX |
| 1.875 | 2.126 | 1.892 | D = W + 0.010" | 4733WRT125-01875-XXXX |

For custom groove calculations, see Appendix C.

Table 9-8. WRT Gland Dimensions — Inch (Continued)

| A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | D Groove Width | Part Number |
|--------------------|-----------------------|-----------------------|-------------------|-----------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | |
| 2.000 | 2.251 | 2.017 | D = W + 0.010" | 4733WRT125-02000-XXXX |
| 2.125 | 2.376 | 2.142 | D = W + 0.010" | 4733WRT125-02125-XXXX |
| 2.250 | 2.501 | 2.267 | D = W + 0.010" | 4733WRT125-02250-XXXX |
| 2.375 | 2.626 | 2.392 | D = W + 0.010" | 4733WRT125-02375-XXXX |
| 2.500 | 2.751 | 2.517 | D = W + 0.010" | 4733WRT125-02500-XXXX |
| 2.625 | 2.876 | 2.642 | D = W + 0.010" | 4733WRT125-02625-XXXX |
| 2.750 | 3.001 | 2.767 | D = W + 0.010" | 4733WRT125-02750-XXXX |
| 2.875 | 3.126 | 2.892 | D = W + 0.010" | 4733WRT125-02875-XXXX |
| 3.000 | 3.251 | 3.017 | D = W + 0.010" | 4733WRT125-03000-XXXX |
| 3.125 | 3.376 | 3.142 | D = W + 0.010" | 4733WRT125-03125-XXXX |
| 3.250 | 3.501 | 3.267 | D = W + 0.010" | 4733WRT125-03250-XXXX |
| 3.375 | 3.626 | 3.392 | D = W + 0.010" | 4733WRT125-03375-XXXX |
| 3.500 | 3.751 | 3.517 | D = W + 0.010" | 4733WRT125-03500-XXXX |
| 3.625 | 3.876 | 3.642 | D = W + 0.010" | 4733WRT125-03625-XXXX |
| 3.750 | 4.001 | 3.767 | D = W + 0.010" | 4733WRT125-03750-XXXX |
| 3.875 | 4.126 | 3.892 | D = W + 0.010" | 4733WRT125-03875-XXXX |
| 3.937 | 4.188 | 3.954 | D = W + 0.010" | 4733WRT125-03937-XXXX |
| 4.000 | 4.251 | 4.017 | D = W + 0.010" | 4733WRT125-04000-XXXX |
| 4.125 | 4.376 | 4.142 | D = W + 0.010" | 4733WRT125-04125-XXXX |
| 4.250 | 4.501 | 4.267 | D = W + 0.010" | 4733WRT125-04250-XXXX |
| 4.375 | 4.626 | 4.392 | D = W + 0.010" | 4733WRT125-04375-XXXX |
| 4.500 | 4.751 | 4.517 | D = W + 0.010" | 4733WRT125-04500-XXXX |
| 4.625 | 4.876 | 4.642 | D = W + 0.010" | 4733WRT125-04625-XXXX |
| 4.750 | 5.001 | 4.767 | D = W + 0.010" | 4733WRT125-04750-XXXX |
| 4.875 | 5.126 | 4.892 | D = W + 0.010" | 4733WRT125-04875-XXXX |
| 5.000 | 5.251 | 5.017 | D = W + 0.010" | 4733WRT125-05000-XXXX |
| 5.125 | 5.376 | 5.142 | D = W + 0.010" | 4733WRT125-05125-XXXX |
| 5.250 | 5.501 | 5.267 | D = W + 0.010" | 4733WRT125-05250-XXXX |
| 5.375 | 5.626 | 5.392 | D = W + 0.010" | 4733WRT125-05375-XXXX |
| 5.500 | 5.751 | 5.517 | D = W + 0.010" | 4733WRT125-05500-XXXX |
| 5.625 | 5.876 | 5.642 | D = W + 0.010" | 4733WRT125-05625-XXXX |
| + .000/- .004 | + .003/- .000 | + .003/- .000 | + .010/- .000 | |
| 5.750 | 6.001 | 5.770 | D = W + 0.010" | 4733WRT125-05750-XXXX |
| 6.000 | 6.251 | 6.020 | D = W + 0.010" | 4733WRT125-06000-XXXX |
| 6.250 | 6.501 | 6.270 | D = W + 0.010" | 4733WRT125-06250-XXXX |
| 6.500 | 6.751 | 6.520 | D = W + 0.010" | 4733WRT125-06500-XXXX |
| 6.750 | 7.001 | 6.770 | D = W + 0.010" | 4733WRT125-06750-XXXX |
| 7.000 | 7.251 | 7.020 | D = W + 0.010" | 4733WRT125-07000-XXXX |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker representative.

WRT Groove Calculation

See Rod Wear-Ring Groove Calculation in [Appendix C](#).

Wear Ring / Bearing WN Profile

Catalog EPS 5370/USA

WN Profile, Commercial Wear Ring




WN commercial wear rings can be used for either pistons or rods and are the most economical bearing solution for light- to medium-duty hydraulic applications. MolyGard bearing material offers the combination of long life and high strength. WNs are available in standard sizes (1/8" cross-section) from 3/4" up to 11-3/4" rod diameters and 1" to 12" bore diameters (larger sizes upon request).

Technical Data


Standard Material
W4650 MolyGard

Radial Tolerance
+.000"/-.005"

End Cuts
Butt Cut only




WN Cross-Section




Butt Cut

Options

Virtually any width can be produced without assessing a setup charge. Additionally, other cross-sections not shown are available when required.

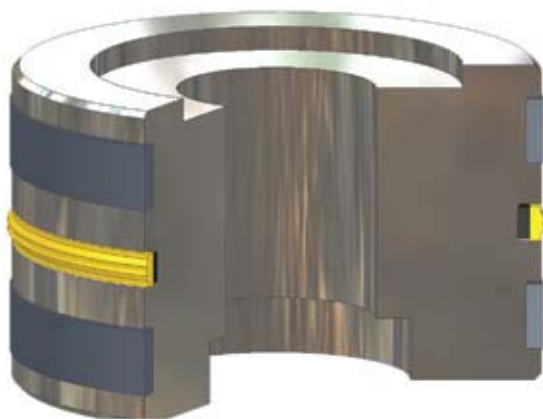

Piston sealing system comprised of WN wear rings and PSP bi-directional piston seal

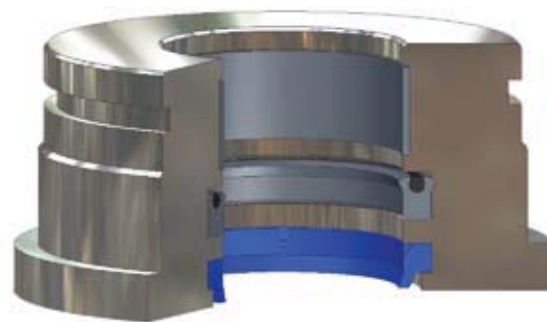


Rod sealing system comprised of WN wear ring, Type B PolyPak and SHD wiper


09/01/07

Part Number Nomenclature — WN Profile

Table 9-9. WN Profile

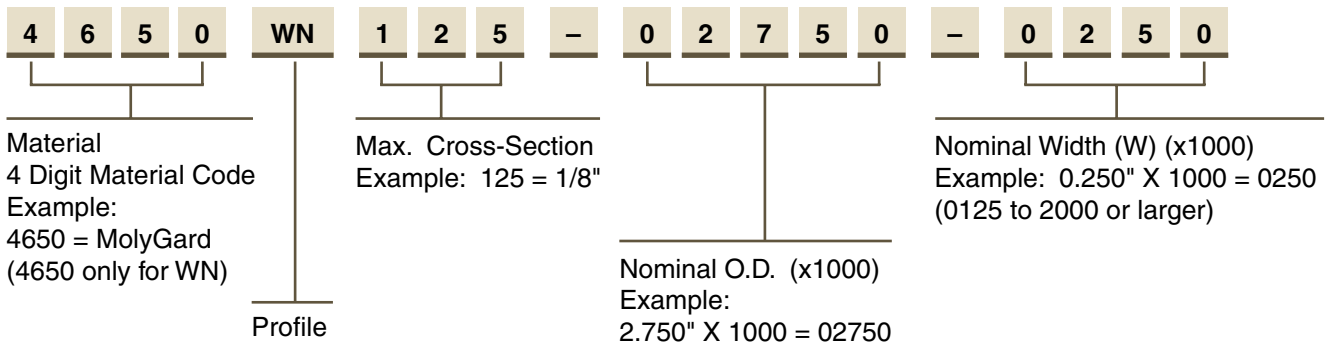

Gland Dimensions — WN Profile

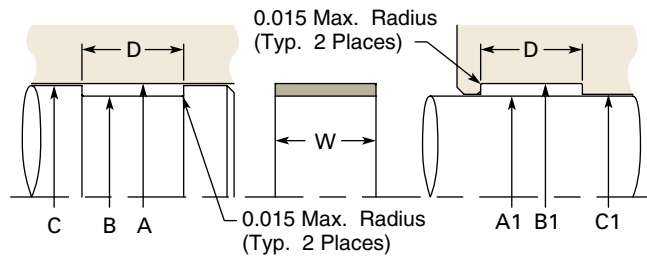

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 9-10. WN Gland Dimensions — Inch

| Piston | | | Rod | | | D Groove Width | Part Number |
|-----------------|-------------------|-------------------|-----------------|--------------------|--------------------|----------------|----------------------|
| A Bore Diameter | B Groove Diameter | C Piston Diameter | A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | | |
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.000/-0.002 | +0.002/-0.000 | +0.002/-0.000 | +0.010/-0.000 | |
| 1.000 | 0.875 | 0.977 | 0.875 | 1.000 | 0.898 | D = W + 0.010" | 4650WN062-01000-XXXX |
| 1.125 | 1.000 | 1.102 | 1.000 | 1.125 | 1.023 | D = W + 0.010" | 4650WN062-01125-XXXX |
| 1.250 | 1.125 | 1.227 | 1.125 | 1.250 | 1.148 | D = W + 0.010" | 4650WN062-01250-XXXX |
| 1.375 | 1.250 | 1.352 | 1.250 | 1.375 | 1.273 | D = W + 0.010" | 4650WN062-01375-XXXX |
| 1.500 | 1.375 | 1.477 | 1.375 | 1.500 | 1.398 | D = W + 0.010" | 4650WN062-01500-XXXX |
| 1.625 | 1.500 | 1.602 | 1.500 | 1.625 | 1.523 | D = W + 0.010" | 4650WN062-01625-XXXX |
| 1.750 | 1.625 | 1.727 | 1.625 | 1.750 | 1.648 | D = W + 0.010" | 4650WN062-01750-XXXX |
| 1.875 | 1.750 | 1.852 | 1.750 | 1.875 | 1.773 | D = W + 0.010" | 4650WN062-01875-XXXX |
| 2.375 | 2.250 | 2.352 | 2.250 | 2.375 | 2.273 | D = W + 0.010" | 4650WN062-02375-XXXX |
| 2.625 | 2.500 | 2.602 | 2.500 | 2.625 | 2.523 | D = W + 0.010" | 4650WN062-02625-XXXX |
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.000/-0.002 | +0.002/-0.000 | +0.002/-0.000 | +0.010/-0.000 | |
| 1.000 | 0.749 | 0.977 | 0.750 | 1.001 | 0.773 | D = W + 0.010" | 4650WN125-01000-XXXX |
| 1.125 | 0.874 | 1.102 | 0.875 | 1.126 | 0.898 | D = W + 0.010" | 4650WN125-01125-XXXX |
| 1.250 | 0.999 | 1.227 | 1.000 | 1.251 | 1.023 | D = W + 0.010" | 4650WN125-01250-XXXX |
| 1.375 | 1.124 | 1.352 | 1.125 | 1.376 | 1.148 | D = W + 0.010" | 4650WN125-01375-XXXX |
| 1.500 | 1.249 | 1.477 | 1.250 | 1.501 | 1.273 | D = W + 0.010" | 4650WN125-01500-XXXX |
| 1.625 | 1.374 | 1.602 | 1.375 | 1.626 | 1.398 | D = W + 0.010" | 4650WN125-01625-XXXX |
| 1.750 | 1.499 | 1.727 | 1.500 | 1.751 | 1.523 | D = W + 0.010" | 4650WN125-01750-XXXX |
| 1.875 | 1.624 | 1.852 | 1.625 | 1.876 | 1.648 | D = W + 0.010" | 4650WN125-01875-XXXX |

For custom groove calculations, see Appendix C.

09/01/07



WN Profile

Table 9-10. WN Gland Dimensions — Inch (Continued)

| Piston | | | Rod | | | D Groove Width | Part Number |
|-----------------------|-------------------------|-------------------------|-----------------------|--------------------------|--------------------------|----------------------|----------------------|
| A Bore Diameter | B Groove Diameter | C Piston Diameter | A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | | |
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.000/-0.002 | +0.002/-0.000 | +0.002/-0.000 | +0.010/-0.000 | |
| 2.000 | 1.749 | 1.977 | 1.750 | 2.001 | 1.773 | D = W + 0.010" | 4650WN125-02000-XXXX |
| 2.125 | 1.874 | 2.102 | 1.875 | 2.126 | 1.898 | D = W + 0.010" | 4650WN125-02125-XXXX |
| 2.250 | 1.999 | 2.227 | 2.000 | 2.251 | 2.023 | D = W + 0.010" | 4650WN125-02250-XXXX |
| 2.375 | 2.124 | 2.352 | 2.125 | 2.376 | 2.148 | D = W + 0.010" | 4650WN125-02375-XXXX |
| 2.500 | 2.249 | 2.477 | 2.250 | 2.501 | 2.273 | D = W + 0.010" | 4650WN125-02500-XXXX |
| 2.625 | 2.374 | 2.602 | 2.375 | 2.626 | 2.398 | D = W + 0.010" | 4650WN125-02625-XXXX |
| 2.750 | 2.499 | 2.727 | 2.500 | 2.751 | 2.523 | D = W + 0.010" | 4650WN125-02750-XXXX |
| 2.875 | 2.624 | 2.852 | 2.625 | 2.876 | 2.648 | D = W + 0.010" | 4650WN125-02875-XXXX |
| 3.000 | 2.749 | 2.977 | 2.750 | 3.001 | 2.773 | D = W + 0.010" | 4650WN125-03000-XXXX |
| 3.125 | 2.874 | 3.102 | 2.875 | 3.126 | 2.898 | D = W + 0.010" | 4650WN125-03125-XXXX |
| 3.250 | 2.999 | 3.227 | 3.000 | 3.251 | 3.023 | D = W + 0.010" | 4650WN125-03250-XXXX |
| 3.375 | 3.124 | 3.352 | 3.125 | 3.376 | 3.148 | D = W + 0.010" | 4650WN125-03375-XXXX |
| 3.500 | 3.249 | 3.477 | 3.250 | 3.501 | 3.273 | D = W + 0.010" | 4650WN125-03500-XXXX |
| 3.625 | 3.374 | 3.602 | 3.375 | 3.626 | 3.398 | D = W + 0.010" | 4650WN125-03625-XXXX |
| 3.750 | 3.499 | 3.727 | 3.500 | 3.751 | 3.523 | D = W + 0.010" | 4650WN125-03750-XXXX |
| 3.875 | 3.624 | 3.852 | 3.625 | 3.876 | 3.648 | D = W + 0.010" | 4650WN125-03875-XXXX |
| 3.937 | 3.687 | 3.914 | 3.687 | 3.939 | 3.711 | D = W + 0.010" | 4650WN125-03937-XXXX |
| 4.000 | 3.749 | 3.977 | 3.750 | 4.001 | 3.773 | D = W + 0.010" | 4650WN125-04000-XXXX |
| 4.125 | 3.874 | 4.102 | 3.875 | 4.126 | 3.898 | D = W + 0.010" | 4650WN125-04125-XXXX |
| 4.250 | 3.999 | 4.227 | 4.000 | 4.251 | 4.023 | D = W + 0.010" | 4650WN125-04250-XXXX |
| 4.375 | 4.124 | 4.352 | 4.125 | 4.376 | 4.148 | D = W + 0.010" | 4650WN125-04375-XXXX |
| 4.500 | 4.249 | 4.477 | 4.250 | 4.501 | 4.273 | D = W + 0.010" | 4650WN125-04500-XXXX |
| 4.625 | 4.374 | 4.602 | 4.375 | 4.626 | 4.398 | D = W + 0.010" | 4650WN125-04625-XXXX |
| 4.750 | 4.499 | 4.727 | 4.500 | 4.751 | 4.523 | D = W + 0.010" | 4650WN125-04750-XXXX |
| 4.875 | 4.624 | 4.852 | 4.625 | 4.876 | 4.648 | D = W + 0.010" | 4650WN125-04875-XXXX |
| +0.004/-0.000 | +0.000/-0.003 | +0.000/-0.003 | +0.000/-0.004 | +0.003/-0.000 | +0.003/-0.000 | +0.010/-0.000 | |
| 5.000 | 4.749 | 4.976 | 4.750 | 5.001 | 4.774 | D = W + 0.010" | 4650WN125-05000-XXXX |
| 5.125 | 4.874 | 5.101 | 4.875 | 5.126 | 4.899 | D = W + 0.010" | 4650WN125-05125-XXXX |
| 5.250 | 4.999 | 5.226 | 5.000 | 5.251 | 5.024 | D = W + 0.010" | 4650WN125-05250-XXXX |
| 5.375 | 5.124 | 5.351 | 5.125 | 5.376 | 5.149 | D = W + 0.010" | 4650WN125-05375-XXXX |
| 5.500 | 5.249 | 5.476 | 5.250 | 5.501 | 5.274 | D = W + 0.010" | 4650WN125-05500-XXXX |
| 5.625 | 5.374 | 5.601 | 5.375 | 5.626 | 5.399 | D = W + 0.010" | 4650WN125-05625-XXXX |
| 5.750 | 5.499 | 5.726 | 5.500 | 5.751 | 5.524 | D = W + 0.010" | 4650WN125-05750-XXXX |
| 6.000 | 5.749 | 5.976 | 5.750 | 6.001 | 5.774 | D = W + 0.010" | 4650WN125-06000-XXXX |
| 6.250 | 5.999 | 6.226 | 6.000 | 6.251 | 6.024 | D = W + 0.010" | 4650WN125-06250-XXXX |
| 6.375 | 6.124 | 6.351 | 6.125 | 6.376 | 6.149 | D = W + 0.010" | 4650WN125-06375-XXXX |
| 6.500 | 6.249 | 6.476 | 6.250 | 6.501 | 6.274 | D = W + 0.010" | 4650WN125-06500-XXXX |
| 6.750 | 6.499 | 6.726 | 6.500 | 6.751 | 6.524 | D = W + 0.010" | 4650WN125-06750-XXXX |
| 6.875 | 6.624 | 6.851 | 6.625 | 6.876 | 6.649 | D = W + 0.010" | 4650WN125-06875-XXXX |
| 7.000 | 6.749 | 6.976 | 6.750 | 7.001 | 6.774 | D = W + 0.010" | 4650WN125-07000-XXXX |
| 7.250 | 6.999 | 7.226 | 7.000 | 7.251 | 7.024 | D = W + 0.010" | 4650WN125-07250-XXXX |

For custom groove calculations, see Appendix C.

09/01/07



Table 9-10. WN Gland Dimensions — Inch (Continued)

| Piston | | | Rod | | | D Groove Width | Part Number |
|-----------------------|-------------------------|-------------------------|-----------------------|--------------------------|--------------------------|----------------------|----------------------|
| A Bore Diameter | B Groove Diameter | C Piston Diameter | A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | | |
| +0.004/-0.000 | +0.000/-0.003 | +0.000/-0.003 | +0.000/-0.004 | +0.003/-0.000 | +0.003/-0.000 | +0.010/-0.000 | |
| 7.313 | 7.062 | 7.289 | 7.063 | 7.314 | 7.087 | D = W + 0.010" | 4650WN125-07312-XXXX |
| 7.500 | 7.249 | 7.476 | 7.250 | 7.501 | 7.274 | D = W + 0.010" | 4650WN125-07500-XXXX |
| 7.750 | 7.499 | 7.726 | 7.500 | 7.751 | 7.524 | D = W + 0.010" | 4650WN125-07750-XXXX |
| +0.006/-0.000 | +0.000/-0.004 | +0.000/-0.004 | +0.000/-0.006 | +0.004/-0.000 | +0.004/-0.000 | +0.010/-0.000 | |
| 8.000 | 7.749 | 7.975 | 7.750 | 8.001 | 7.775 | D = W + 0.010" | 4650WN125-08000-XXXX |
| 8.250 | 7.999 | 8.225 | 8.000 | 8.251 | 8.025 | D = W + 0.010" | 4650WN125-08250-XXXX |
| 8.500 | 8.249 | 8.475 | 8.250 | 8.501 | 8.275 | D = W + 0.010" | 4650WN125-08500-XXXX |
| 8.750 | 8.499 | 8.725 | 8.500 | 8.751 | 8.525 | D = W + 0.010" | 4650WN125-08750-XXXX |
| 9.000 | 8.749 | 8.975 | 8.750 | 9.001 | 8.775 | D = W + 0.010" | 4650WN125-09000-XXXX |
| 9.250 | 8.999 | 9.225 | 9.000 | 9.251 | 9.025 | D = W + 0.010" | 4650WN125-09250-XXXX |
| 9.500 | 9.249 | 9.475 | 9.250 | 9.501 | 9.275 | D = W + 0.010" | 4650WN125-09500-XXXX |
| 10.000 | 9.749 | 9.975 | 9.750 | 10.001 | 9.775 | D = W + 0.010" | 4650WN125-10000-XXXX |
| 10.500 | 10.249 | 10.475 | 10.250 | 10.501 | 10.275 | D = W + 0.010" | 4650WN125-10500-XXXX |
| 10.625 | 10.374 | 10.600 | 10.375 | 10.626 | 10.400 | D = W + 0.010" | 4650WN125-10625-XXXX |
| 11.000 | 10.749 | 10.975 | 10.750 | 11.001 | 10.775 | D = W + 0.010" | 4650WN125-11000-XXXX |
| 11.500 | 11.249 | 11.475 | 11.250 | 11.501 | 11.275 | D = W + 0.010" | 4650WN125-11500-XXXX |
| 12.000 | 11.749 | 11.975 | 11.750 | 12.001 | 11.775 | D = W + 0.010" | 4650WN125-12000-XXXX |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

WN Groove Calculation

See Piston and Rod Wear Ring Groove Calculations in [Appendix C](#).

Wear Ring / Bearing PDT Profile

Catalog EPS 5370/USA



PDT Profile, PTFE Wear Strip for Rod and Piston

PDT wear strip is available in a variety of PTFE blends and provides excellent low-friction performance in pneumatics and light-duty hydraulics. PDTs are available in cut-to-length versions as well as bulk strip. Cut-to-length part numbers reduce prep time by providing precision end cuts and ready-to-install diameters. Bulk strip PDTs offer versatility and reduce part number inventory by providing universal sizing in one part number.

Technical Data

Standard Material


0401 – 40% Bronze-Filled PTFE
0307 – 23% Carbon, 2% Graphite-Filled PTFE
Others available upon request

Radial Tolerance


+.000"/-.004"

End Cuts

Butt Cut, Angle Cut, Step Cut



PDT Cross-Section

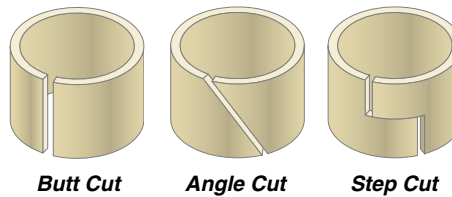


Butt Cut

Angle Cut


Step Cut

Options

Virtually any width, diameter and cross-section can be produced without assessing a setup charge.

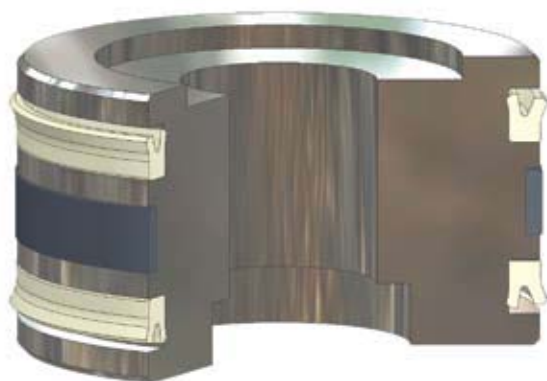

Piston sealing system comprised of PDT wear strip and B7 piston u-cups

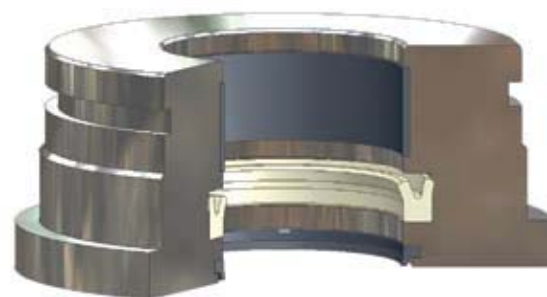

Rod sealing system comprised of PDT wear strip, B3 rod u-cup and SH959 wiper

09/01/07

Part Number Nomenclature — PDT Profile

Table 9-11. PDT Profile — Cut-to-Length



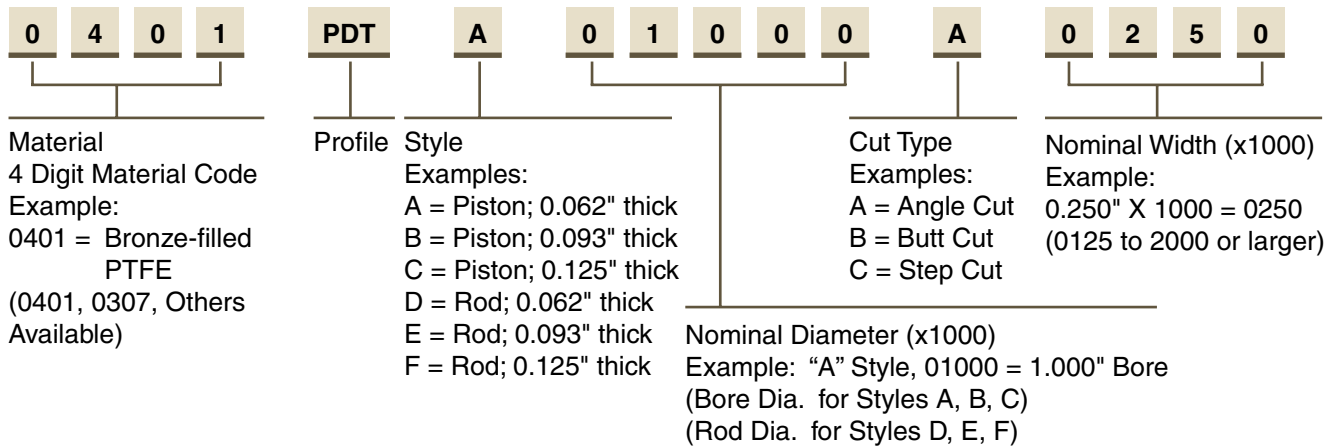


Table 9-12. PDT Profile — Bulk Strip

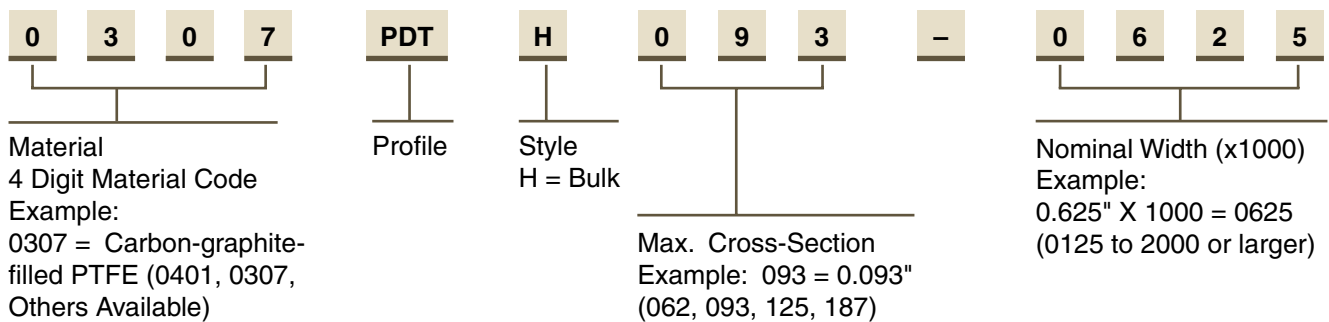

Gland Dimensions — PDT Profile, Piston (Cut-To-Length)

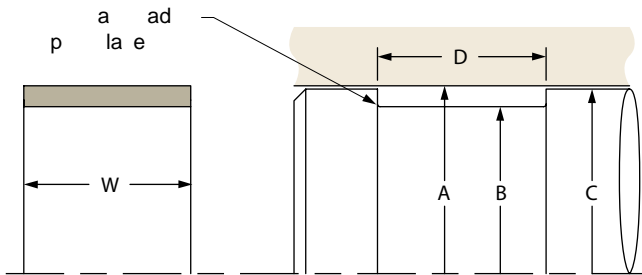

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.



Table 9-13. PDT Gland Dimensions (Piston, Cut-To-Length) — Inch

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|-------------------|------------------------|
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.010/-0.000 | PDTA |
| 1.000 | 0.875 | 0.979 | D = W + 0.010" | XXXX PDTA 01000 X XXXX |
| 1.062 | 0.937 | 1.041 | D = W + 0.010" | XXXX PDTA 01062 X XXXX |
| 1.125 | 1.000 | 1.104 | D = W + 0.010" | XXXX PDTA 01125 X XXXX |
| 1.187 | 1.062 | 1.166 | D = W + 0.010" | XXXX PDTA 01187 X XXXX |
| 1.250 | 1.125 | 1.229 | D = W + 0.010" | XXXX PDTA 01250 X XXXX |

For custom groove calculations, see Appendix C.

PDT Profile

Table 9-13. PDT Gland Dimensions (Piston, Cut-To-Length) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------------------|
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | PDTA |
| 1.312 | 1.187 | 1.291 | D = W + 0.010" | XXXX PDTA 01312 X XXXX |
| 1.375 | 1.250 | 1.354 | D = W + 0.010" | XXXX PDTA 01375 X XXXX |
| 1.437 | 1.312 | 1.416 | D = W + 0.010" | XXXX PDTA 01437 X XXXX |
| 1.500 | 1.375 | 1.479 | D = W + 0.010" | XXXX PDTA 01500 X XXXX |
| 1.562 | 1.437 | 1.541 | D = W + 0.010" | XXXX PDTA 01562 X XXXX |
| 1.625 | 1.500 | 1.604 | D = W + 0.010" | XXXX PDTA 01625 X XXXX |
| 1.687 | 1.562 | 1.666 | D = W + 0.010" | XXXX PDTA 01687 X XXXX |
| 1.750 | 1.625 | 1.729 | D = W + 0.010" | XXXX PDTA 01750 X XXXX |
| 1.875 | 1.750 | 1.854 | D = W + 0.010" | XXXX PDTA 01875 X XXXX |
| 2.000 | 1.875 | 1.979 | D = W + 0.010" | XXXX PDTA 02000 X XXXX |
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | PDTB |
| 1.500 | 1.313 | 1.479 | D = W + 0.010" | XXXX PDTB 01500 X XXXX |
| 1.562 | 1.375 | 1.541 | D = W + 0.010" | XXXX PDTB 01562 X XXXX |
| 1.625 | 1.438 | 1.604 | D = W + 0.010" | XXXX PDTB 01625 X XXXX |
| 1.687 | 1.500 | 1.666 | D = W + 0.010" | XXXX PDTB 01687 X XXXX |
| 1.750 | 1.563 | 1.729 | D = W + 0.010" | XXXX PDTB 01750 X XXXX |
| 1.875 | 1.688 | 1.854 | D = W + 0.010" | XXXX PDTB 01875 X XXXX |
| 2.000 | 1.813 | 1.979 | D = W + 0.010" | XXXX PDTB 02000 X XXXX |
| 2.125 | 1.938 | 2.104 | D = W + 0.010" | XXXX PDTB 02125 X XXXX |
| 2.250 | 2.063 | 2.229 | D = W + 0.010" | XXXX PDTB 02250 X XXXX |
| 2.375 | 2.188 | 2.354 | D = W + 0.010" | XXXX PDTB 02375 X XXXX |
| 2.500 | 2.313 | 2.479 | D = W + 0.010" | XXXX PDTB 02500 X XXXX |
| 2.625 | 2.438 | 2.604 | D = W + 0.010" | XXXX PDTB 02625 X XXXX |
| 2.750 | 2.563 | 2.729 | D = W + 0.010" | XXXX PDTB 02750 X XXXX |
| 2.875 | 2.688 | 2.854 | D = W + 0.010" | XXXX PDTB 02875 X XXXX |
| 3.000 | 2.813 | 2.979 | D = W + 0.010" | XXXX PDTB 03000 X XXXX |
| 3.125 | 2.938 | 3.104 | D = W + 0.010" | XXXX PDTB 03125 X XXXX |
| 3.250 | 3.063 | 3.229 | D = W + 0.010" | XXXX PDTB 03250 X XXXX |
| 3.375 | 3.188 | 3.354 | D = W + 0.010" | XXXX PDTB 03375 X XXXX |
| 3.500 | 3.313 | 3.479 | D = W + 0.010" | XXXX PDTB 03500 X XXXX |
| 3.625 | 3.438 | 3.604 | D = W + 0.010" | XXXX PDTB 03625 X XXXX |
| 3.750 | 3.563 | 3.729 | D = W + 0.010" | XXXX PDTB 03750 X XXXX |
| 3.875 | 3.688 | 3.854 | D = W + 0.010" | XXXX PDTB 03875 X XXXX |
| 4.000 | 3.813 | 3.979 | D = W + 0.010" | XXXX PDTB 04000 X XXXX |
| 4.125 | 3.938 | 4.104 | D = W + 0.010" | XXXX PDTB 04125 X XXXX |
| 4.250 | 4.063 | 4.229 | D = W + 0.010" | XXXX PDTB 04250 X XXXX |
| 4.375 | 4.188 | 4.354 | D = W + 0.010" | XXXX PDTB 04375 X XXXX |
| 4.500 | 4.313 | 4.479 | D = W + 0.010" | XXXX PDTB 04500 X XXXX |
| 4.625 | 4.438 | 4.604 | D = W + 0.010" | XXXX PDTB 04625 X XXXX |
| 4.750 | 4.563 | 4.729 | D = W + 0.010" | XXXX PDTB 04750 X XXXX |
| 4.875 | 4.688 | 4.854 | D = W + 0.010" | XXXX PDTB 04875 X XXXX |
| + .004/- .000 | + .000/- .003 | + .000/- .003 | + .010/- .000 | PDTB |
| 5.000 | 4.813 | 4.978 | D = W + 0.010" | XXXX PDTB 05000 X XXXX |
| 5.125 | 4.938 | 5.103 | D = W + 0.010" | XXXX PDTB 05125 X XXXX |

For custom groove calculations, see Appendix C.



Table 9-13. PDT Gland Dimensions (Piston, Cut-To-Length) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|--------------------|------------------------|
| +.004/-.000 | +.000/-.003 | +.000/-.003 | +.010/-.000 | PDTB |
| 5.250 | 5.063 | 5.228 | D = W + 0.010" | XXXX PDTB 05250 X XXXX |
| 5.375 | 5.188 | 5.353 | D = W + 0.010" | XXXX PDTB 05375 X XXXX |
| 5.500 | 5.313 | 5.478 | D = W + 0.010" | XXXX PDTB 05500 X XXXX |
| 5.625 | 5.438 | 5.603 | D = W + 0.010" | XXXX PDTB 05625 X XXXX |
| 5.750 | 5.563 | 5.728 | D = W + 0.010" | XXXX PDTB 05750 X XXXX |
| 5.875 | 5.688 | 5.853 | D = W + 0.010" | XXXX PDTB 05875 X XXXX |
| 6.000 | 5.813 | 5.978 | D = W + 0.010" | XXXX PDTB 06000 X XXXX |
| 6.125 | 5.938 | 6.103 | D = W + 0.010" | XXXX PDTB 06125 X XXXX |
| 6.250 | 6.063 | 6.228 | D = W + 0.010" | XXXX PDTB 06250 X XXXX |
| 6.375 | 6.188 | 6.353 | D = W + 0.010" | XXXX PDTB 06375 X XXXX |
| 6.500 | 6.313 | 6.478 | D = W + 0.010" | XXXX PDTB 06500 X XXXX |
| 6.750 | 6.563 | 6.728 | D = W + 0.010" | XXXX PDTB 06750 X XXXX |
| 7.000 | 6.813 | 6.978 | D = W + 0.010" | XXXX PDTB 07000 X XXXX |
| 7.250 | 7.063 | 7.228 | D = W + 0.010" | XXXX PDTB 07250 X XXXX |
| 7.500 | 7.313 | 7.478 | D = W + 0.010" | XXXX PDTB 07500 X XXXX |
| 7.750 | 7.563 | 7.728 | D = W + 0.010" | XXXX PDTB 07750 X XXXX |
| +.006/-.000 | +.000/-.004 | +.000/-.004 | +.010/-.000 | PDTB |
| 8.000 | 7.813 | 7.977 | D = W + 0.010" | XXXX PDTB 08000 X XXXX |
| 8.250 | 8.063 | 8.227 | D = W + 0.010" | XXXX PDTB 08250 X XXXX |
| 8.500 | 8.313 | 8.477 | D = W + 0.010" | XXXX PDTB 08500 X XXXX |
| 9.000 | 8.813 | 8.977 | D = W + 0.010" | XXXX PDTB 09000 X XXXX |
| 9.500 | 9.313 | 9.477 | D = W + 0.010" | XXXX PDTB 09500 X XXXX |
| 10.000 | 9.813 | 9.977 | D = W + 0.010" | XXXX PDTB 10000 X XXXX |
| +.002/-.000 | +.000/-.002 | +.000/-.002 | +.010/-.000 | PDTC |
| 2.000 | 1.749 | 1.979 | D = W + 0.010" | XXXX PDTC 02000 X XXXX |
| 2.125 | 1.874 | 2.104 | D = W + 0.010" | XXXX PDTC 02125 X XXXX |
| 2.250 | 1.999 | 2.229 | D = W + 0.010" | XXXX PDTC 02250 X XXXX |
| 2.375 | 2.124 | 2.354 | D = W + 0.010" | XXXX PDTC 02375 X XXXX |
| 2.500 | 2.249 | 2.479 | D = W + 0.010" | XXXX PDTC 02500 X XXXX |
| 2.625 | 2.374 | 2.604 | D = W + 0.010" | XXXX PDTC 02625 X XXXX |
| 2.750 | 2.499 | 2.729 | D = W + 0.010" | XXXX PDTC 02750 X XXXX |
| 2.875 | 2.624 | 2.854 | D = W + 0.010" | XXXX PDTC 02875 X XXXX |
| 3.000 | 2.749 | 2.979 | D = W + 0.010" | XXXX PDTC 03000 X XXXX |
| 3.125 | 2.874 | 3.104 | D = W + 0.010" | XXXX PDTC 03125 X XXXX |
| 3.250 | 2.999 | 3.229 | D = W + 0.010" | XXXX PDTC 03250 X XXXX |
| 3.375 | 3.124 | 3.354 | D = W + 0.010" | XXXX PDTC 03375 X XXXX |
| 3.500 | 3.249 | 3.479 | D = W + 0.010" | XXXX PDTC 03500 X XXXX |
| 3.625 | 3.374 | 3.604 | D = W + 0.010" | XXXX PDTC 03625 X XXXX |
| 3.750 | 3.499 | 3.729 | D = W + 0.010" | XXXX PDTC 03750 X XXXX |
| 3.875 | 3.624 | 3.854 | D = W + 0.010" | XXXX PDTC 03875 X XXXX |
| 4.000 | 3.749 | 3.979 | D = W + 0.010" | XXXX PDTC 04000 X XXXX |
| 4.125 | 3.874 | 4.104 | D = W + 0.010" | XXXX PDTC 04125 X XXXX |
| 4.250 | 3.999 | 4.229 | D = W + 0.010" | XXXX PDTC 04250 X XXXX |
| 4.375 | 4.124 | 4.354 | D = W + 0.010" | XXXX PDTC 04375 X XXXX |

For custom groove calculations, see Appendix C.

PDT Profile

Table 9-13. PDT Gland Dimensions (Piston, Cut-To-Length) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------------------|
| + .002/- .000 | + .000/- .002 | + .000/- .002 | + .010/- .000 | PDTC |
| 4.500 | 4.249 | 4.479 | D = W + 0.010" | XXXX PDTC 04500 X XXXX |
| 4.625 | 4.374 | 4.604 | D = W + 0.010" | XXXX PDTC 04625 X XXXX |
| 4.750 | 4.499 | 4.729 | D = W + 0.010" | XXXX PDTC 04750 X XXXX |
| 4.875 | 4.624 | 4.854 | D = W + 0.010" | XXXX PDTC 04875 X XXXX |
| + .004/- .000 | + .000/- .003 | + .000/- .003 | + .010/- .000 | PDTC |
| 5.000 | 4.749 | 4.978 | D = W + 0.010" | XXXX PDTC 05000 X XXXX |
| 5.125 | 4.874 | 5.103 | D = W + 0.010" | XXXX PDTC 05125 X XXXX |
| 5.250 | 4.999 | 5.228 | D = W + 0.010" | XXXX PDTC 05250 X XXXX |
| 5.375 | 5.124 | 5.353 | D = W + 0.010" | XXXX PDTC 05375 X XXXX |
| 5.500 | 5.249 | 5.478 | D = W + 0.010" | XXXX PDTC 05500 X XXXX |
| 5.625 | 5.374 | 5.603 | D = W + 0.010" | XXXX PDTC 05625 X XXXX |
| 5.750 | 5.499 | 5.728 | D = W + 0.010" | XXXX PDTC 05750 X XXXX |
| 5.875 | 5.624 | 5.853 | D = W + 0.010" | XXXX PDTC 05875 X XXXX |
| 6.000 | 5.749 | 5.978 | D = W + 0.010" | XXXX PDTC 06000 X XXXX |
| 6.125 | 5.874 | 6.103 | D = W + 0.010" | XXXX PDTC 06125 X XXXX |
| 6.250 | 5.999 | 6.228 | D = W + 0.010" | XXXX PDTC 06250 X XXXX |
| 6.375 | 6.124 | 6.353 | D = W + 0.010" | XXXX PDTC 06375 X XXXX |
| 6.500 | 6.249 | 6.478 | D = W + 0.010" | XXXX PDTC 06500 X XXXX |
| 6.750 | 6.499 | 6.728 | D = W + 0.010" | XXXX PDTC 06750 X XXXX |
| 7.000 | 6.749 | 6.978 | D = W + 0.010" | XXXX PDTC 07000 X XXXX |
| 7.250 | 6.999 | 7.228 | D = W + 0.010" | XXXX PDTC 07250 X XXXX |
| 7.500 | 7.249 | 7.478 | D = W + 0.010" | XXXX PDTC 07500 X XXXX |
| 7.750 | 7.499 | 7.728 | D = W + 0.010" | XXXX PDTC 07750 X XXXX |
| + .006/- .000 | + .000/- .004 | + .000/- .004 | + .010/- .000 | PDTC |
| 8.000 | 7.749 | 7.977 | D = W + 0.010" | XXXX PDTC 08000 X XXXX |
| 8.250 | 7.999 | 8.227 | D = W + 0.010" | XXXX PDTC 08250 X XXXX |
| 8.500 | 8.249 | 8.477 | D = W + 0.010" | XXXX PDTC 08500 X XXXX |
| 9.000 | 8.749 | 8.977 | D = W + 0.010" | XXXX PDTC 09000 X XXXX |
| 9.500 | 9.249 | 9.477 | D = W + 0.010" | XXXX PDTC 09500 X XXXX |
| 10.000 | 9.749 | 9.977 | D = W + 0.010" | XXXX PDTC 10000 X XXXX |
| 10.500 | 10.249 | 10.477 | D = W + 0.010" | XXXX PDTC 10500 X XXXX |
| 11.000 | 10.749 | 10.977 | D = W + 0.010" | XXXX PDTC 11000 X XXXX |
| 11.500 | 11.249 | 11.477 | D = W + 0.010" | XXXX PDTC 11500 X XXXX |
| 12.000 | 11.749 | 11.977 | D = W + 0.010" | XXXX PDTC 12000 X XXXX |
| 12.500 | 12.249 | 12.477 | D = W + 0.010" | XXXX PDTC 12500 X XXXX |
| 13.000 | 12.749 | 12.977 | D = W + 0.010" | XXXX PDTC 13000 X XXXX |
| 13.500 | 13.249 | 13.477 | D = W + 0.010" | XXXX PDTC 13500 X XXXX |
| 14.000 | 13.749 | 13.977 | D = W + 0.010" | XXXX PDTC 14000 X XXXX |
| 14.500 | 14.249 | 14.477 | D = W + 0.010" | XXXX PDTC 14500 X XXXX |
| 15.000 | 14.749 | 14.977 | D = W + 0.010" | XXXX PDTC 15000 X XXXX |
| 15.500 | 15.249 | 15.477 | D = W + 0.010" | XXXX PDTC 15500 X XXXX |
| 16.000 | 15.749 | 15.977 | D = W + 0.010" | XXXX PDTC 16000 X XXXX |


For custom groove calculations, see Appendix C.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

PDT Groove Calculation

See Piston and Rod Wear Ring Groove Calculations in [Appendix C](#).

Gland Dimensions — PDT Profile, Rod (Cut-To-Length)

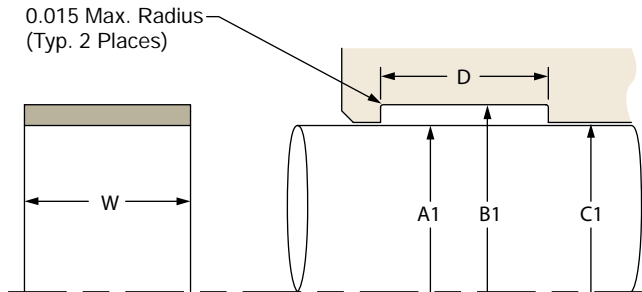

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 9-14. PDT Gland Dimensions (Rod, Cut-To-Length) — Inch

| A1 Rod Diameter | B1 Groove Diameter | C1 Piston Diameter | D Groove Width | Part Number |
|----------------------|-----------------------|-----------------------|----------------------|------------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDTD |
| 0.875 | 1.000 | 0.896 | $D = W + 0.010''$ | XXXX PDTD 00875 X XXXX |
| 0.937 | 1.062 | 0.958 | $D = W + 0.010''$ | XXXX PDTD 00937 X XXXX |
| 1.000 | 1.125 | 1.021 | $D = W + 0.010''$ | XXXX PDTD 01000 X XXXX |
| 1.062 | 1.187 | 1.083 | $D = W + 0.010''$ | XXXX PDTD 01062 X XXXX |
| 1.125 | 1.250 | 1.146 | $D = W + 0.010''$ | XXXX PDTD 01125 X XXXX |
| 1.187 | 1.312 | 1.208 | $D = W + 0.010''$ | XXXX PDTD 01187 X XXXX |
| 1.250 | 1.375 | 1.271 | $D = W + 0.010''$ | XXXX PDTD 01250 X XXXX |
| 1.312 | 1.437 | 1.333 | $D = W + 0.010''$ | XXXX PDTD 01312 X XXXX |
| 1.375 | 1.500 | 1.396 | $D = W + 0.010''$ | XXXX PDTD 01375 X XXXX |
| 1.437 | 1.562 | 1.458 | $D = W + 0.010''$ | XXXX PDTD 01437 X XXXX |
| 1.500 | 1.625 | 1.521 | $D = W + 0.010''$ | XXXX PDTD 01500 X XXXX |
| 1.625 | 1.750 | 1.646 | $D = W + 0.010''$ | XXXX PDTD 01625 X XXXX |
| 1.750 | 1.875 | 1.771 | $D = W + 0.010''$ | XXXX PDTD 01750 X XXXX |
| 1.875 | 2.000 | 1.896 | $D = W + 0.010''$ | XXXX PDTD 01875 X XXXX |
| 2.000 | 2.125 | 2.021 | $D = W + 0.010''$ | XXXX PDTD 02000 X XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDTE |
| 1.500 | 1.687 | 1.521 | $D = W + 0.010''$ | XXXX PDTE 01500 X XXXX |
| 1.625 | 1.812 | 1.646 | $D = W + 0.010''$ | XXXX PDTE 01625 X XXXX |
| 1.750 | 1.937 | 1.771 | $D = W + 0.010''$ | XXXX PDTE 01750 X XXXX |
| 1.875 | 2.062 | 1.896 | $D = W + 0.010''$ | XXXX PDTE 01875 X XXXX |
| 2.000 | 2.187 | 2.021 | $D = W + 0.010''$ | XXXX PDTE 02000 X XXXX |
| 2.125 | 2.312 | 2.146 | $D = W + 0.010''$ | XXXX PDTE 02125 X XXXX |
| 2.250 | 2.437 | 2.271 | $D = W + 0.010''$ | XXXX PDTE 02250 X XXXX |
| 2.375 | 2.562 | 2.396 | $D = W + 0.010''$ | XXXX PDTE 02375 X XXXX |
| 2.500 | 2.687 | 2.521 | $D = W + 0.010''$ | XXXX PDTE 02500 X XXXX |
| 2.625 | 2.812 | 2.646 | $D = W + 0.010''$ | XXXX PDTE 02625 X XXXX |
| 2.750 | 2.937 | 2.771 | $D = W + 0.010''$ | XXXX PDTE 02750 X XXXX |
| 2.875 | 3.062 | 2.896 | $D = W + 0.010''$ | XXXX PDTE 02875 X XXXX |
| 3.000 | 3.187 | 3.021 | $D = W + 0.010''$ | XXXX PDTE 03000 X XXXX |

For custom groove calculations, see [Appendix C](#).

PDT Profile

Table 9-14. PDT Gland Dimensions (Rod, Cut-To-Length) — Inch (Continued)

| A1 Rod Diameter | B1 Groove Diameter | C1 Piston Diameter | D Groove Width | Part Number |
|----------------------|-----------------------|-----------------------|----------------------|------------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDTE |
| 3.125 | 3.312 | 3.146 | D = W + 0.010" | XXXX PDTE 03125 X XXXX |
| 3.250 | 3.437 | 3.271 | D = W + 0.010" | XXXX PDTE 03250 X XXXX |
| 3.375 | 3.562 | 3.396 | D = W + 0.010" | XXXX PDTE 03375 X XXXX |
| 3.500 | 3.687 | 3.521 | D = W + 0.010" | XXXX PDTE 03500 X XXXX |
| 3.625 | 3.812 | 3.646 | D = W + 0.010" | XXXX PDTE 03625 X XXXX |
| 3.750 | 3.937 | 3.771 | D = W + 0.010" | XXXX PDTE 03750 X XXXX |
| 3.875 | 4.062 | 3.896 | D = W + 0.010" | XXXX PDTE 03875 X XXXX |
| 4.000 | 4.187 | 4.021 | D = W + 0.010" | XXXX PDTE 04000 X XXXX |
| 4.125 | 4.312 | 4.146 | D = W + 0.010" | XXXX PDTE 04125 X XXXX |
| 4.250 | 4.437 | 4.271 | D = W + 0.010" | XXXX PDTE 04250 X XXXX |
| 4.375 | 4.562 | 4.396 | D = W + 0.010" | XXXX PDTE 04375 X XXXX |
| 4.500 | 4.687 | 4.521 | D = W + 0.010" | XXXX PDTE 04500 X XXXX |
| 4.625 | 4.812 | 4.646 | D = W + 0.010" | XXXX PDTE 04625 X XXXX |
| 4.750 | 4.937 | 4.771 | D = W + 0.010" | XXXX PDTE 04750 X XXXX |
| 4.875 | 5.062 | 4.896 | D = W + 0.010" | XXXX PDTE 04875 X XXXX |
| 5.000 | 5.187 | 5.021 | D = W + 0.010" | XXXX PDTE 05000 X XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDTF |
| 1.500 | 1.751 | 1.521 | D = W + 0.010" | XXXX PDTF 01500 X XXXX |
| 1.625 | 1.876 | 1.646 | D = W + 0.010" | XXXX PDTF 01625 X XXXX |
| 1.750 | 2.001 | 1.771 | D = W + 0.010" | XXXX PDTF 01750 X XXXX |
| 1.875 | 2.126 | 1.896 | D = W + 0.010" | XXXX PDTF 01875 X XXXX |
| 2.000 | 2.251 | 2.021 | D = W + 0.010" | XXXX PDTF 02000 X XXXX |
| 2.125 | 2.376 | 2.146 | D = W + 0.010" | XXXX PDTF 02125 X XXXX |
| 2.250 | 2.501 | 2.271 | D = W + 0.010" | XXXX PDTF 02250 X XXXX |
| 2.375 | 2.626 | 2.396 | D = W + 0.010" | XXXX PDTF 02375 X XXXX |
| 2.500 | 2.751 | 2.521 | D = W + 0.010" | XXXX PDTF 02500 X XXXX |
| 2.625 | 2.876 | 2.646 | D = W + 0.010" | XXXX PDTF 02625 X XXXX |
| 2.750 | 3.001 | 2.771 | D = W + 0.010" | XXXX PDTF 02750 X XXXX |
| 2.875 | 3.126 | 2.896 | D = W + 0.010" | XXXX PDTF 02875 X XXXX |
| 3.000 | 3.251 | 3.021 | D = W + 0.010" | XXXX PDTF 03000 X XXXX |
| 3.125 | 3.376 | 3.146 | D = W + 0.010" | XXXX PDTF 03125 X XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDTF |
| 3.250 | 3.501 | 3.271 | D = W + 0.010" | XXXX PDTF 03250 X XXXX |
| 3.375 | 3.626 | 3.396 | D = W + 0.010" | XXXX PDTF 03375 X XXXX |
| 3.500 | 3.751 | 3.521 | D = W + 0.010" | XXXX PDTF 03500 X XXXX |
| 3.625 | 3.876 | 3.646 | D = W + 0.010" | XXXX PDTF 03625 X XXXX |
| 3.750 | 4.001 | 3.771 | D = W + 0.010" | XXXX PDTF 03750 X XXXX |
| 3.875 | 4.126 | 3.896 | D = W + 0.010" | XXXX PDTF 03875 X XXXX |
| 4.000 | 4.251 | 4.021 | D = W + 0.010" | XXXX PDTF 04000 X XXXX |
| 4.125 | 4.376 | 4.146 | D = W + 0.010" | XXXX PDTF 04125 X XXXX |
| 4.250 | 4.501 | 4.271 | D = W + 0.010" | XXXX PDTF 04250 X XXXX |
| 4.375 | 4.626 | 4.396 | D = W + 0.010" | XXXX PDTF 04375 X XXXX |
| 4.500 | 4.751 | 4.521 | D = W + 0.010" | XXXX PDTF 04500 X XXXX |
| 4.625 | 4.876 | 4.646 | D = W + 0.010" | XXXX PDTF 04625 X XXXX |

For custom groove calculations, see Appendix C.



Table 9-14. PDT Gland Dimensions (Rod, Cut-To-Length) — Inch (Continued)

| A1 Rod Diameter | B1 Groove Diameter | C1 Piston Diameter | D Groove Width | Part Number |
|---------------------|-----------------------|-----------------------|---------------------|------------------------|
| +.000/-0.004 | +.003/-0.000 | +.003/-0.000 | +.010/-0.000 | PDTF |
| 4.750 | 5.001 | 4.772 | $D = W + 0.010''$ | XXXX PDTF 04750 X XXXX |
| 4.875 | 5.126 | 4.897 | $D = W + 0.010''$ | XXXX PDTF 04875 X XXXX |
| 5.000 | 5.251 | 5.022 | $D = W + 0.010''$ | XXXX PDTF 05000 X XXXX |
| 5.125 | 5.376 | 5.147 | $D = W + 0.010''$ | XXXX PDTF 05125 X XXXX |
| 5.250 | 5.501 | 5.272 | $D = W + 0.010''$ | XXXX PDTF 05250 X XXXX |
| 5.375 | 5.626 | 5.397 | $D = W + 0.010''$ | XXXX PDTF 05375 X XXXX |
| 5.500 | 5.751 | 5.522 | $D = W + 0.010''$ | XXXX PDTF 05500 X XXXX |
| 5.625 | 5.876 | 5.647 | $D = W + 0.010''$ | XXXX PDTF 05625 X XXXX |
| 5.750 | 6.001 | 5.772 | $D = W + 0.010''$ | XXXX PDTF 05750 X XXXX |
| 5.875 | 6.126 | 5.897 | $D = W + 0.010''$ | XXXX PDTF 05875 X XXXX |
| 6.000 | 6.251 | 6.022 | $D = W + 0.010''$ | XXXX PDTF 06000 X XXXX |
| 6.250 | 6.501 | 6.272 | $D = W + 0.010''$ | XXXX PDTF 06250 X XXXX |
| 6.500 | 6.751 | 6.522 | $D = W + 0.010''$ | XXXX PDTF 06500 X XXXX |
| 6.750 | 7.001 | 6.772 | $D = W + 0.010''$ | XXXX PDTF 06750 X XXXX |
| 7.000 | 7.251 | 7.022 | $D = W + 0.010''$ | XXXX PDTF 07000 X XXXX |
| 7.250 | 7.501 | 7.272 | $D = W + 0.010''$ | XXXX PDTF 07250 X XXXX |
| 7.500 | 7.751 | 7.522 | $D = W + 0.010''$ | XXXX PDTF 07500 X XXXX |
| +.000/-0.006 | +.004/-0.000 | +.004/-0.000 | +.010/-0.000 | PDTF |
| 7.750 | 8.001 | 7.773 | $D = W + 0.010''$ | XXXX PDTF 07750 X XXXX |
| 8.000 | 8.251 | 8.023 | $D = W + 0.010''$ | XXXX PDTF 08000 X XXXX |
| 8.500 | 8.751 | 8.523 | $D = W + 0.010''$ | XXXX PDTF 08500 X XXXX |
| 9.000 | 9.251 | 9.023 | $D = W + 0.010''$ | XXXX PDTF 09000 X XXXX |
| 9.500 | 9.751 | 9.523 | $D = W + 0.010''$ | XXXX PDTF 09500 X XXXX |
| 10.000 | 10.251 | 10.023 | $D = W + 0.010''$ | XXXX PDTF 10000 X XXXX |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

PDT Rod Groove Calculation


See Rod Wear Ring Groove Calculation in [Appendix C](#).

PDT Profile

PDT Bulk Strip

Table 9-15. PDT Bulk Strip Standard Sizes

| T Radial Cross-Section | W Width | Part Number |
|------------------------------|------------|--------------------|
| 062 | | |
| 0.062 | 0.250 | XXXX PDTH 062-0250 |
| 0.062 | 0.375 | XXXX PDTH 062-0375 |
| 0.062 | 0.500 | XXXX PDTH 062-0500 |
| 0.062 | 0.625 | XXXX PDTH 062-0625 |
| 093 | | |
| 0.093 | 0.250 | XXXX PDTH 093-0250 |
| 0.093 | 0.375 | XXXX PDTH 093-0375 |
| 0.093 | 0.500 | XXXX PDTH 093-0500 |
| 0.093 | 0.625 | XXXX PDTH 093-0625 |
| 125 | | |
| 0.125 | 0.250 | XXXX PDTH 125-0250 |
| 0.125 | 0.375 | XXXX PDTH 125-0375 |
| 0.125 | 0.500 | XXXX PDTH 125-0500 |
| 0.125 | 0.625 | XXXX PDTH 125-0625 |
| 0.125 | 0.750 | XXXX PDTH 125-0750 |
| 0.125 | 1.000 | XXXX PDTH 125-1000 |

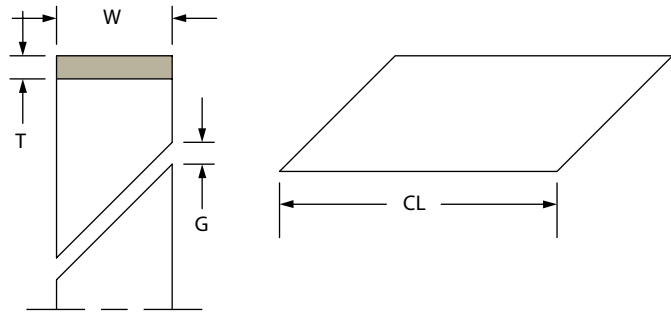

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Cutting Instructions

Table 9-16. Recommended Cutting Instructions

| Rod or Bore Diameter | G Minimum Gap | CL ± Tolerance for Cut Length |
|----------------------|------------------|----------------------------------|
| 0.500" - 1.750" | 0.075 | ± .010 |
| 1.751" - 3.125" | 0.140 | ± .016 |
| 3.126" - 4.000" | 0.175 | ± .024 |
| 4.001" - 5.000" | 0.230 | ± .032 |
| 5.001" - 6.000" | 0.260 | ± .040 |
| 6.001" - 7.000" | 0.320 | ± .047 |
| 7.001" - 8.500" | 0.380 | ± .055 |
| 8.501" - 10.500" | 0.480 | ± .063 |
| 10.501" - 13.000" | 0.620 | ± .071 |
| 13.001" - 16.000" | 0.750 | ± .079 |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Formula for Calculating Cut Length, CL

For Pistons:

$$CL = [(Bore\ Diameter - T) \times \pi] - G$$

For Rods:

$$CL = [(Rod\ Diameter + T) \times \pi] - G$$

To calculate groove dimensions, use either the pre-established values or the formulas for cut-to-length PDT strip found on [Pages 9-23](#) and [9-26](#).



09/01/07

Wear Ring / Bearing PDW Profile

Catalog EPS 5370/USA



PDW Profile, Machined Wear Ring for Rod and Piston

PDW wear rings are precision machined PTFE bearings, lathe cut to exact size and shape. PDWs offer precise fitting and easy installation. The wide range of available PTFE blends gives these machined wear rings versatility to accommodate any pneumatic or light-duty hydraulic application requiring low friction and high temperature capabilities.

Technical Data

Standard Material

0401 – 40% Bronze-Filled PTFE

0307 – 23% Carbon, 2% Graphite-Filled PTFE


Others available upon request

Radial Tolerance


+ .000" / - .004"

End Cuts

Butt Cut, Angle Cut, Step Cut



PDW Cross-Section

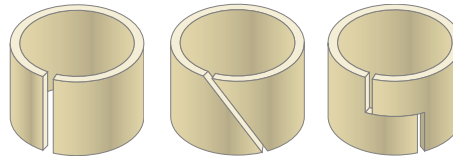


Butt Cut

Angle Cut


Step Cut

Options

Virtually any width, diameter and cross-section can be produced without assessing a setup charge.

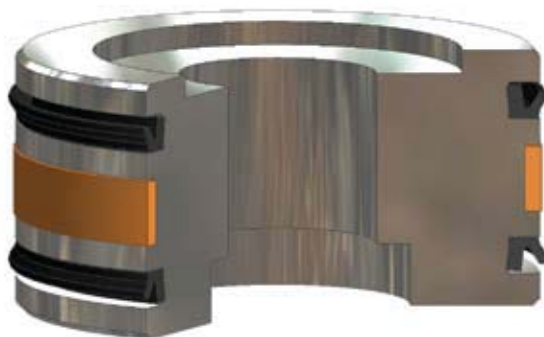

Piston sealing system comprised of PDW machined wear rings and E4 piston u-cups

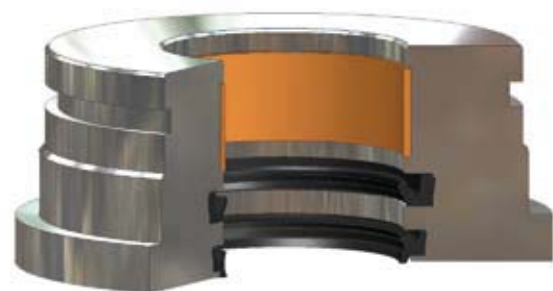


Rod sealing system comprised of PDW machined wear ring, E5 u-cup and 8600 wiper

09/01/07


PDW Profile

Part Number Nomenclature — PDW Profile

Table 9-17. PDW Profile

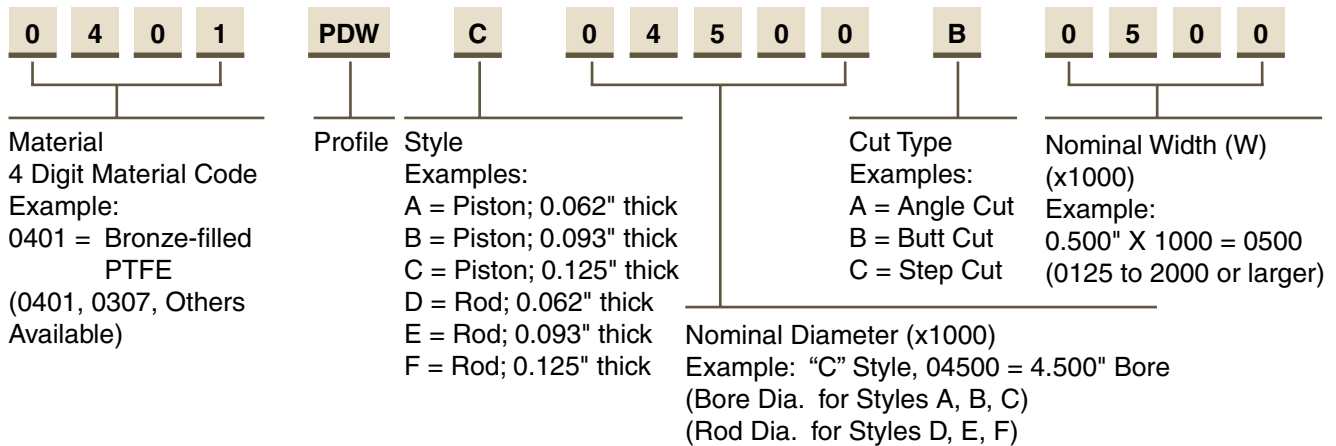

Gland Dimensions — PDW Profile, Piston

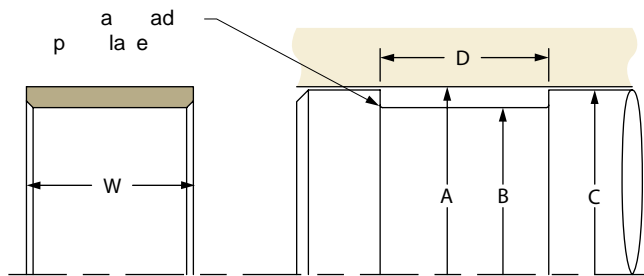

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 9-18. PDW Gland Dimensions (Piston) — Inch

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|-------------------|------------------------|
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.010/-0.000 | PDWA |
| 0.687 | 0.562 | 0.666 | D = W + 0.010" | XXXX PDWA 00687 X XXXX |
| 0.750 | 0.625 | 0.729 | D = W + 0.010" | XXXX PDWA 00750 X XXXX |
| 0.812 | 0.687 | 0.791 | D = W + 0.010" | XXXX PDWA 00812 X XXXX |
| 0.875 | 0.750 | 0.854 | D = W + 0.010" | XXXX PDWA 00875 X XXXX |
| 0.937 | 0.812 | 0.916 | D = W + 0.010" | XXXX PDWA 00937 X XXXX |
| 1.000 | 0.875 | 0.979 | D = W + 0.010" | XXXX PDWA 01000 X XXXX |
| 1.062 | 0.937 | 1.041 | D = W + 0.010" | XXXX PDWA 01062 X XXXX |
| 1.125 | 1.000 | 1.104 | D = W + 0.010" | XXXX PDWA 01125 X XXXX |
| 1.187 | 1.062 | 1.166 | D = W + 0.010" | XXXX PDWA 01187 X XXXX |
| 1.250 | 1.125 | 1.229 | D = W + 0.010" | XXXX PDWA 01250 X XXXX |
| 1.312 | 1.187 | 1.291 | D = W + 0.010" | XXXX PDWA 01312 X XXXX |
| 1.375 | 1.250 | 1.354 | D = W + 0.010" | XXXX PDWA 01375 X XXXX |
| 1.437 | 1.312 | 1.416 | D = W + 0.010" | XXXX PDWA 01437 X XXXX |
| 1.500 | 1.375 | 1.479 | D = W + 0.010" | XXXX PDWA 01500 X XXXX |
| 1.562 | 1.437 | 1.541 | D = W + 0.010" | XXXX PDWA 01562 X XXXX |
| 1.625 | 1.500 | 1.604 | D = W + 0.010" | XXXX PDWA 01625 X XXXX |
| 1.687 | 1.562 | 1.666 | D = W + 0.010" | XXXX PDWA 01687 X XXXX |

For custom groove calculations, see Appendix C.

Table 9-18. PDW Gland Dimensions (Piston) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|--------------------|------------------------|
| +.002/-.000 | +.000/-.002 | +.000/-.002 | +.010/-.000 | PDWA |
| 1.750 | 1.625 | 1.729 | D = W + 0.010" | XXXX PDWA 01750 X XXXX |
| 1.875 | 1.750 | 1.854 | D = W + 0.010" | XXXX PDWA 01875 X XXXX |
| 2.000 | 1.875 | 1.979 | D = W + 0.010" | XXXX PDWA 02000 X XXXX |
| +.002/-.000 | +.000/-.002 | +.000/-.002 | +.010/-.000 | PDWB |
| 1.500 | 1.313 | 1.479 | D = W + 0.010" | XXXX PDWB 01500 X XXXX |
| 1.562 | 1.375 | 1.541 | D = W + 0.010" | XXXX PDWB 01562 X XXXX |
| 1.625 | 1.438 | 1.604 | D = W + 0.010" | XXXX PDWB 01625 X XXXX |
| 1.687 | 1.500 | 1.666 | D = W + 0.010" | XXXX PDWB 01687 X XXXX |
| 1.750 | 1.563 | 1.729 | D = W + 0.010" | XXXX PDWB 01750 X XXXX |
| 1.875 | 1.688 | 1.854 | D = W + 0.010" | XXXX PDWB 01875 X XXXX |
| 2.000 | 1.813 | 1.979 | D = W + 0.010" | XXXX PDWB 02000 X XXXX |
| 2.125 | 1.938 | 2.104 | D = W + 0.010" | XXXX PDWB 02125 X XXXX |
| 2.250 | 2.063 | 2.229 | D = W + 0.010" | XXXX PDWB 02250 X XXXX |
| 2.375 | 2.188 | 2.354 | D = W + 0.010" | XXXX PDWB 02375 X XXXX |
| 2.500 | 2.313 | 2.479 | D = W + 0.010" | XXXX PDWB 02500 X XXXX |
| 2.625 | 2.438 | 2.604 | D = W + 0.010" | XXXX PDWB 02625 X XXXX |
| 2.750 | 2.563 | 2.729 | D = W + 0.010" | XXXX PDWB 02750 X XXXX |
| 2.875 | 2.688 | 2.854 | D = W + 0.010" | XXXX PDWB 02875 X XXXX |
| 3.000 | 2.813 | 2.979 | D = W + 0.010" | XXXX PDWB 03000 X XXXX |
| 3.125 | 2.938 | 3.104 | D = W + 0.010" | XXXX PDWB 03125 X XXXX |
| 3.250 | 3.063 | 3.229 | D = W + 0.010" | XXXX PDWB 03250 X XXXX |
| 3.375 | 3.188 | 3.354 | D = W + 0.010" | XXXX PDWB 03375 X XXXX |
| 3.500 | 3.313 | 3.479 | D = W + 0.010" | XXXX PDWB 03500 X XXXX |
| 3.625 | 3.438 | 3.604 | D = W + 0.010" | XXXX PDWB 03625 X XXXX |
| 3.750 | 3.563 | 3.729 | D = W + 0.010" | XXXX PDWB 03750 X XXXX |
| 3.875 | 3.688 | 3.854 | D = W + 0.010" | XXXX PDWB 03875 X XXXX |
| 4.000 | 3.813 | 3.979 | D = W + 0.010" | XXXX PDWB 04000 X XXXX |
| 4.125 | 3.938 | 4.104 | D = W + 0.010" | XXXX PDWB 04125 X XXXX |
| 4.250 | 4.063 | 4.229 | D = W + 0.010" | XXXX PDWB 04250 X XXXX |
| 4.375 | 4.188 | 4.354 | D = W + 0.010" | XXXX PDWB 04375 X XXXX |
| 4.500 | 4.313 | 4.479 | D = W + 0.010" | XXXX PDWB 04500 X XXXX |
| 4.625 | 4.438 | 4.604 | D = W + 0.010" | XXXX PDWB 04625 X XXXX |
| 4.750 | 4.563 | 4.729 | D = W + 0.010" | XXXX PDWB 04750 X XXXX |
| 4.875 | 4.688 | 4.854 | D = W + 0.010" | XXXX PDWB 04875 X XXXX |
| 5.000 | 4.813 | 4.978 | D = W + 0.010" | XXXX PDWB 05000 X XXXX |
| 5.125 | 4.938 | 5.103 | D = W + 0.010" | XXXX PDWB 05125 X XXXX |
| 5.250 | 5.063 | 5.228 | D = W + 0.010" | XXXX PDWB 05250 X XXXX |
| 5.375 | 5.188 | 5.353 | D = W + 0.010" | XXXX PDWB 05375 X XXXX |
| 5.500 | 5.313 | 5.478 | D = W + 0.010" | XXXX PDWB 05500 X XXXX |
| 5.625 | 5.438 | 5.603 | D = W + 0.010" | XXXX PDWB 05625 X XXXX |
| 5.750 | 5.563 | 5.728 | D = W + 0.010" | XXXX PDWB 05750 X XXXX |
| 5.875 | 5.688 | 5.853 | D = W + 0.010" | XXXX PDWB 05875 X XXXX |
| 6.000 | 5.813 | 5.978 | D = W + 0.010" | XXXX PDWB 06000 X XXXX |

For custom groove calculations, see [Appendix C](#).

PDW Profile

Table 9-18. PDW Gland Dimensions (Piston) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|----------------------|----------------------|----------------------|----------------------|------------------------|
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.010/-0.000 | PDWB |
| 6.125 | 5.938 | 6.103 | D = W + 0.010" | XXXX PDWB 06125 X XXXX |
| 6.250 | 6.063 | 6.228 | D = W + 0.010" | XXXX PDWB 06250 X XXXX |
| 6.375 | 6.188 | 6.353 | D = W + 0.010" | XXXX PDWB 06375 X XXXX |
| 6.500 | 6.313 | 6.478 | D = W + 0.010" | XXXX PDWB 06500 X XXXX |
| 6.750 | 6.563 | 6.728 | D = W + 0.010" | XXXX PDWB 06750 X XXXX |
| 7.000 | 6.813 | 6.978 | D = W + 0.010" | XXXX PDWB 07000 X XXXX |
| 7.250 | 7.063 | 7.228 | D = W + 0.010" | XXXX PDWB 07250 X XXXX |
| 7.500 | 7.313 | 7.478 | D = W + 0.010" | XXXX PDWB 07500 X XXXX |
| 7.750 | 7.563 | 7.728 | D = W + 0.010" | XXXX PDWB 07750 X XXXX |
| +0.006/-0.000 | +0.000/-0.004 | +0.000/-0.004 | +0.010/-0.000 | PDWB |
| 8.000 | 7.813 | 7.977 | D = W + 0.010" | XXXX PDWB 08000 X XXXX |
| 8.250 | 8.063 | 8.227 | D = W + 0.010" | XXXX PDWB 08250 X XXXX |
| 8.500 | 8.313 | 8.477 | D = W + 0.010" | XXXX PDWB 08500 X XXXX |
| 9.000 | 8.813 | 8.977 | D = W + 0.010" | XXXX PDWB 09000 X XXXX |
| 9.500 | 9.313 | 9.477 | D = W + 0.010" | XXXX PDWB 09500 X XXXX |
| 10.000 | 9.813 | 9.977 | D = W + 0.010" | XXXX PDWB 10000 X XXXX |
| +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.010/-0.000 | PDWC |
| 2.000 | 1.749 | 1.979 | D = W + 0.010" | XXXX PDWC 02000 X XXXX |
| 2.125 | 1.874 | 2.104 | D = W + 0.010" | XXXX PDWC 02125 X XXXX |
| 2.250 | 1.999 | 2.229 | D = W + 0.010" | XXXX PDWC 02250 X XXXX |
| 2.375 | 2.124 | 2.354 | D = W + 0.010" | XXXX PDWC 02375 X XXXX |
| 2.500 | 2.249 | 2.479 | D = W + 0.010" | XXXX PDWC 02500 X XXXX |
| 2.625 | 2.374 | 2.604 | D = W + 0.010" | XXXX PDWC 02625 X XXXX |
| 2.750 | 2.499 | 2.729 | D = W + 0.010" | XXXX PDWC 02750 X XXXX |
| 2.875 | 2.624 | 2.854 | D = W + 0.010" | XXXX PDWC 02875 X XXXX |
| 3.000 | 2.749 | 2.979 | D = W + 0.010" | XXXX PDWC 03000 X XXXX |
| 3.125 | 2.874 | 3.104 | D = W + 0.010" | XXXX PDWC 03125 X XXXX |
| 3.250 | 2.999 | 3.229 | D = W + 0.010" | XXXX PDWC 03250 X XXXX |
| 3.375 | 3.124 | 3.354 | D = W + 0.010" | XXXX PDWC 03375 X XXXX |
| 3.500 | 3.249 | 3.479 | D = W + 0.010" | XXXX PDWC 03500 X XXXX |
| 3.625 | 3.374 | 3.604 | D = W + 0.010" | XXXX PDWC 03625 X XXXX |
| 3.750 | 3.499 | 3.729 | D = W + 0.010" | XXXX PDWC 03750 X XXXX |
| 3.875 | 3.624 | 3.854 | D = W + 0.010" | XXXX PDWC 03875 X XXXX |
| 4.000 | 3.749 | 3.979 | D = W + 0.010" | XXXX PDWC 04000 X XXXX |
| 4.125 | 3.874 | 4.104 | D = W + 0.010" | XXXX PDWC 04125 X XXXX |
| 4.250 | 3.999 | 4.229 | D = W + 0.010" | XXXX PDWC 04250 X XXXX |
| 4.375 | 4.124 | 4.354 | D = W + 0.010" | XXXX PDWC 04375 X XXXX |
| 4.500 | 4.249 | 4.479 | D = W + 0.010" | XXXX PDWC 04500 X XXXX |
| 4.625 | 4.374 | 4.604 | D = W + 0.010" | XXXX PDWC 04625 X XXXX |
| 4.750 | 4.499 | 4.729 | D = W + 0.010" | XXXX PDWC 04750 X XXXX |
| 4.875 | 4.624 | 4.854 | D = W + 0.010" | XXXX PDWC 04875 X XXXX |
| 5.000 | 4.749 | 4.978 | D = W + 0.010" | XXXX PDWC 05000 X XXXX |
| 5.125 | 4.874 | 5.103 | D = W + 0.010" | XXXX PDWC 05125 X XXXX |

For custom groove calculations, see Appendix C.

Table 9-18. PDW Gland Dimensions (Piston) — Inch (Continued)

| A Bore Diameter | B Groove Diameter | C Piston Diameter | D Groove Width | Part Number |
|--------------------|----------------------|----------------------|-------------------|------------------------|
| +0.004/-.000 | +0.000/-.003 | +0.000/-.003 | +0.010/-.000 | PDWC |
| 5.250 | 4.999 | 5.228 | D = W + 0.010" | XXXX PDWC 05250 X XXXX |
| 5.375 | 5.124 | 5.353 | D = W + 0.010" | XXXX PDWC 05375 X XXXX |
| 5.500 | 5.249 | 5.478 | D = W + 0.010" | XXXX PDWC 05500 X XXXX |
| 5.625 | 5.374 | 5.603 | D = W + 0.010" | XXXX PDWC 05625 X XXXX |
| 5.750 | 5.499 | 5.728 | D = W + 0.010" | XXXX PDWC 05750 X XXXX |
| 5.875 | 5.624 | 5.853 | D = W + 0.010" | XXXX PDWC 05875 X XXXX |
| 6.000 | 5.749 | 5.978 | D = W + 0.010" | XXXX PDWC 06000 X XXXX |
| 6.125 | 5.874 | 6.103 | D = W + 0.010" | XXXX PDWC 06125 X XXXX |
| 6.250 | 5.999 | 6.228 | D = W + 0.010" | XXXX PDWC 06250 X XXXX |
| 6.375 | 6.124 | 6.353 | D = W + 0.010" | XXXX PDWC 06375 X XXXX |
| 6.500 | 6.249 | 6.478 | D = W + 0.010" | XXXX PDWC 06500 X XXXX |
| 6.750 | 6.499 | 6.728 | D = W + 0.010" | XXXX PDWC 06750 X XXXX |
| 7.000 | 6.749 | 6.978 | D = W + 0.010" | XXXX PDWC 07000 X XXXX |
| 7.250 | 6.999 | 7.228 | D = W + 0.010" | XXXX PDWC 07250 X XXXX |
| 7.500 | 7.249 | 7.478 | D = W + 0.010" | XXXX PDWC 07500 X XXXX |
| 7.750 | 7.499 | 7.728 | D = W + 0.010" | XXXX PDWC 07750 X XXXX |
| 8.000 | 7.749 | 7.977 | D = W + 0.010" | XXXX PDWC 08000 X XXXX |
| 8.250 | 7.999 | 8.227 | D = W + 0.010" | XXXX PDWC 08250 X XXXX |
| 8.500 | 8.249 | 8.477 | D = W + 0.010" | XXXX PDWC 08500 X XXXX |
| 9.000 | 8.749 | 8.977 | D = W + 0.010" | XXXX PDWC 09000 X XXXX |
| 9.500 | 9.249 | 9.477 | D = W + 0.010" | XXXX PDWC 09500 X XXXX |
| 10.000 | 9.749 | 9.977 | D = W + 0.010" | XXXX PDWC 10000 X XXXX |
| 10.500 | 10.249 | 10.477 | D = W + 0.010" | XXXX PDWC 10500 X XXXX |
| 11.000 | 10.749 | 10.977 | D = W + 0.010" | XXXX PDWC 11000 X XXXX |
| 11.500 | 11.249 | 11.477 | D = W + 0.010" | XXXX PDWC 11500 X XXXX |
| 12.000 | 11.749 | 11.977 | D = W + 0.010" | XXXX PDWC 12000 X XXXX |
| 12.500 | 12.249 | 12.477 | D = W + 0.010" | XXXX PDWC 12500 X XXXX |
| 13.000 | 12.749 | 12.977 | D = W + 0.010" | XXXX PDWC 13000 X XXXX |
| 13.500 | 13.249 | 13.477 | D = W + 0.010" | XXXX PDWC 13500 X XXXX |
| 14.000 | 13.749 | 13.977 | D = W + 0.010" | XXXX PDWC 14000 X XXXX |
| 14.500 | 14.249 | 14.477 | D = W + 0.010" | XXXX PDWC 14500 X XXXX |
| 15.000 | 14.749 | 14.977 | D = W + 0.010" | XXXX PDWC 15000 X XXXX |
| 15.500 | 15.249 | 15.477 | D = W + 0.010" | XXXX PDWC 15500 X XXXX |
| 16.000 | 15.749 | 15.977 | D = W + 0.010" | XXXX PDWC 16000 X XXXX |

For custom groove calculations, see [Appendix C](#).


NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

PDW Piston Groove Calculation

See Piston Wear Ring Groove Calculation in [Appendix C](#).

PDW Profile

Gland Dimensions — PDW Profile, Rod

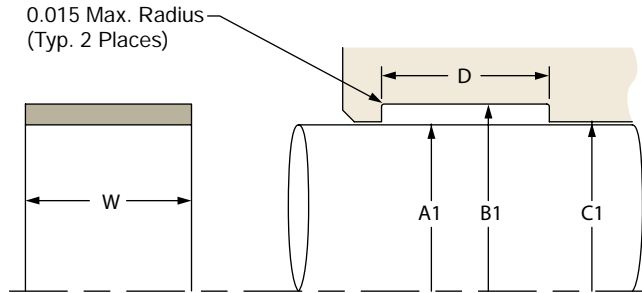

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 9-19. PDW Gland Dimensions (Rod) — Inch

| A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | D Groove Width | Part Number |
|----------------------|-----------------------|-----------------------|----------------------|------------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDWD |
| 0.312 | 0.437 | 0.333 | D = W + 0.010" | XXXX PDWD 00875 X XXXX |
| 0.375 | 0.500 | 0.396 | D = W + 0.010" | XXXX PDWD 00375 X XXXX |
| 0.437 | 0.562 | 0.458 | D = W + 0.010" | XXXX PDWD 00437 X XXXX |
| 0.500 | 0.625 | 0.521 | D = W + 0.010" | XXXX PDWD 00500 X XXXX |
| 0.562 | 0.687 | 0.583 | D = W + 0.010" | XXXX PDWD 00562 X XXXX |
| 0.625 | 0.750 | 0.646 | D = W + 0.010" | XXXX PDWD 00625 X XXXX |
| 0.687 | 0.812 | 0.708 | D = W + 0.010" | XXXX PDWD 00687 X XXXX |
| 0.750 | 0.875 | 0.771 | D = W + 0.010" | XXXX PDWD 00750 X XXXX |
| 0.812 | 0.937 | 0.833 | D = W + 0.010" | XXXX PDWD 00812 X XXXX |
| 0.875 | 1.000 | 0.896 | D = W + 0.010" | XXXX PDWD 00875 X XXXX |
| 0.937 | 1.062 | 0.958 | D = W + 0.010" | XXXX PDWD 00937 X XXXX |
| 1.000 | 1.125 | 1.021 | D = W + 0.010" | XXXX PDWD 01000 X XXXX |
| 1.062 | 1.187 | 1.083 | D = W + 0.010" | XXXX PDWD 01062 X XXXX |
| 1.125 | 1.250 | 1.146 | D = W + 0.010" | XXXX PDWD 01125 X XXXX |
| 1.187 | 1.312 | 1.208 | D = W + 0.010" | XXXX PDWD 01187 X XXXX |
| 1.250 | 1.375 | 1.271 | D = W + 0.010" | XXXX PDWD 01250 X XXXX |
| 1.312 | 1.437 | 1.333 | D = W + 0.010" | XXXX PDWD 01312 X XXXX |
| 1.375 | 1.500 | 1.396 | D = W + 0.010" | XXXX PDWD 01375 X XXXX |
| 1.437 | 1.562 | 1.458 | D = W + 0.010" | XXXX PDWD 01437 X XXXX |
| 1.500 | 1.625 | 1.521 | D = W + 0.010" | XXXX PDWD 01500 X XXXX |
| 1.625 | 1.750 | 1.646 | D = W + 0.010" | XXXX PDWD 01625 X XXXX |
| 1.750 | 1.875 | 1.771 | D = W + 0.010" | XXXX PDWD 01750 X XXXX |
| 1.875 | 2.000 | 1.896 | D = W + 0.010" | XXXX PDWD 01875 X XXXX |
| 2.000 | 2.125 | 2.021 | D = W + 0.010" | XXXX PDWD 02000 X XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDWE |
| 1.500 | 1.687 | 1.521 | D = W + 0.010" | XXXX PDWE 01500 X XXXX |
| 1.625 | 1.812 | 1.646 | D = W + 0.010" | XXXX PDWE 01625 X XXXX |
| 1.750 | 1.937 | 1.771 | D = W + 0.010" | XXXX PDWE 01750 X XXXX |
| 1.875 | 2.062 | 1.896 | D = W + 0.010" | XXXX PDWE 01875 X XXXX |
| 2.000 | 2.187 | 2.021 | D = W + 0.010" | XXXX PDWE 02000 X XXXX |
| 2.125 | 2.312 | 2.146 | D = W + 0.010" | XXXX PDWE 02125 X XXXX |
| 2.250 | 2.437 | 2.271 | D = W + 0.010" | XXXX PDWE 02250 X XXXX |
| 2.375 | 2.562 | 2.396 | D = W + 0.010" | XXXX PDWE 02375 X XXXX |

For custom groove calculations, see Appendix C.

Table 9-19. PDW Gland Dimensions (Rod) — Inch (Continued)

| A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | D Groove Width | Part Number |
|----------------------|-----------------------|-----------------------|----------------------|------------------------|
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDWE |
| 2.500 | 2.687 | 2.521 | D = W + 0.010" | XXXX PDWE 02500 X XXXX |
| 2.625 | 2.812 | 2.646 | D = W + 0.010" | XXXX PDWE 02625 X XXXX |
| 2.750 | 2.937 | 2.771 | D = W + 0.010" | XXXX PDWE 02750 X XXXX |
| 2.875 | 3.062 | 2.896 | D = W + 0.010" | XXXX PDWE 02875 X XXXX |
| 3.000 | 3.187 | 3.021 | D = W + 0.010" | XXXX PDWE 03000 X XXXX |
| 3.125 | 3.312 | 3.146 | D = W + 0.010" | XXXX PDWE 03125 X XXXX |
| 3.250 | 3.437 | 3.271 | D = W + 0.010" | XXXX PDWE 03250 X XXXX |
| 3.375 | 3.562 | 3.396 | D = W + 0.010" | XXXX PDWE 03375 X XXXX |
| 3.500 | 3.687 | 3.521 | D = W + 0.010" | XXXX PDWE 03500 X XXXX |
| 3.625 | 3.812 | 3.646 | D = W + 0.010" | XXXX PDWE 03625 X XXXX |
| 3.750 | 3.937 | 3.771 | D = W + 0.010" | XXXX PDWE 03750 X XXXX |
| 3.875 | 4.062 | 3.896 | D = W + 0.010" | XXXX PDWE 03875 X XXXX |
| 4.000 | 4.187 | 4.021 | D = W + 0.010" | XXXX PDWE 04000 X XXXX |
| 4.125 | 4.312 | 4.146 | D = W + 0.010" | XXXX PDWE 04125 X XXXX |
| 4.250 | 4.437 | 4.271 | D = W + 0.010" | XXXX PDWE 04250 X XXXX |
| 4.375 | 4.562 | 4.396 | D = W + 0.010" | XXXX PDWE 04375 X XXXX |
| 4.500 | 4.687 | 4.521 | D = W + 0.010" | XXXX PDWE 04500 X XXXX |
| 4.625 | 4.812 | 4.646 | D = W + 0.010" | XXXX PDWE 04625 X XXXX |
| 4.750 | 4.937 | 4.771 | D = W + 0.010" | XXXX PDWE 04750 X XXXX |
| 4.875 | 5.062 | 4.896 | D = W + 0.010" | XXXX PDWE 04875 X XXXX |
| 5.000 | 5.187 | 5.021 | D = W + 0.010" | XXXX PDWE 05000 X XXXX |
| + .000/- .002 | + .002/- .000 | + .002/- .000 | + .010/- .000 | PDWF |
| 1.500 | 1.751 | 1.521 | D = W + 0.010" | XXXX PDWF 01500 X XXXX |
| 1.625 | 1.876 | 1.646 | D = W + 0.010" | XXXX PDWF 01625 X XXXX |
| 1.750 | 2.001 | 1.771 | D = W + 0.010" | XXXX PDWF 01750 X XXXX |
| 1.875 | 2.126 | 1.896 | D = W + 0.010" | XXXX PDWF 01875 X XXXX |
| 2.000 | 2.251 | 2.021 | D = W + 0.010" | XXXX PDWF 02000 X XXXX |
| 2.125 | 2.376 | 2.146 | D = W + 0.010" | XXXX PDWF 02125 X XXXX |
| 2.250 | 2.501 | 2.271 | D = W + 0.010" | XXXX PDWF 02250 X XXXX |
| 2.375 | 2.626 | 2.396 | D = W + 0.010" | XXXX PDWF 02375 X XXXX |
| 2.500 | 2.751 | 2.521 | D = W + 0.010" | XXXX PDWF 02500 X XXXX |
| 2.625 | 2.876 | 2.646 | D = W + 0.010" | XXXX PDWF 02625 X XXXX |
| 2.750 | 3.001 | 2.771 | D = W + 0.010" | XXXX PDWF 02750 X XXXX |
| 2.875 | 3.126 | 2.896 | D = W + 0.010" | XXXX PDWF 02875 X XXXX |
| 3.000 | 3.251 | 3.021 | D = W + 0.010" | XXXX PDWF 03000 X XXXX |
| 3.125 | 3.376 | 3.146 | D = W + 0.010" | XXXX PDWF 03125 X XXXX |
| 3.250 | 3.501 | 3.271 | D = W + 0.010" | XXXX PDWF 03250 X XXXX |
| 3.375 | 3.626 | 3.396 | D = W + 0.010" | XXXX PDWF 03375 X XXXX |
| 3.500 | 3.751 | 3.521 | D = W + 0.010" | XXXX PDWF 03500 X XXXX |
| 3.625 | 3.876 | 3.646 | D = W + 0.010" | XXXX PDWF 03625 X XXXX |
| 3.750 | 4.001 | 3.771 | D = W + 0.010" | XXXX PDWF 03750 X XXXX |
| 3.875 | 4.126 | 3.896 | D = W + 0.010" | XXXX PDWF 03875 X XXXX |
| 4.000 | 4.251 | 4.021 | D = W + 0.010" | XXXX PDWF 04000 X XXXX |
| 4.125 | 4.376 | 4.146 | D = W + 0.010" | XXXX PDWF 04125 X XXXX |

For custom groove calculations, see Appendix C.

PDW Profile

Table 9-19. PDW Gland Dimensions (Rod) — Inch (Continued)

| A1 Rod Diameter | B1 Groove Diameter | C1 Throat Diameter | D Groove Width | Part Number |
|---------------------|-----------------------|-----------------------|---------------------|------------------------|
| 4.250 | 4.501 | 4.271 | D = W + 0.010" | XXXX PDWF 04250 X XXXX |
| 4.375 | 4.626 | 4.396 | D = W + 0.010" | XXXX PDWF 04375 X XXXX |
| 4.500 | 4.751 | 4.521 | D = W + 0.010" | XXXX PDWF 04500 X XXXX |
| 4.625 | 4.876 | 4.646 | D = W + 0.010" | XXXX PDWF 04625 X XXXX |
| +.000/-0.004 | +.003/-0.000 | +.003/-0.000 | +.010/-0.000 | PDWF |
| 4.750 | 5.001 | 4.772 | D = W + 0.010" | XXXX PDWF 04750 X XXXX |
| 4.875 | 5.126 | 4.897 | D = W + 0.010" | XXXX PDWF 04875 X XXXX |
| 5.000 | 5.251 | 5.022 | D = W + 0.010" | XXXX PDWF 05000 X XXXX |
| 5.125 | 5.376 | 5.147 | D = W + 0.010" | XXXX PDWF 05125 X XXXX |
| 5.250 | 5.501 | 5.272 | D = W + 0.010" | XXXX PDWF 05250 X XXXX |
| 5.375 | 5.626 | 5.397 | D = W + 0.010" | XXXX PDWF 05375 X XXXX |
| 5.500 | 5.751 | 5.522 | D = W + 0.010" | XXXX PDWF 05500 X XXXX |
| 5.625 | 5.876 | 5.647 | D = W + 0.010" | XXXX PDWF 05625 X XXXX |
| 5.750 | 6.001 | 5.772 | D = W + 0.010" | XXXX PDWF 05750 X XXXX |
| 5.875 | 6.126 | 5.897 | D = W + 0.010" | XXXX PDWF 05875 X XXXX |
| 6.000 | 6.251 | 6.022 | D = W + 0.010" | XXXX PDWF 06000 X XXXX |
| 6.250 | 6.501 | 6.272 | D = W + 0.010" | XXXX PDWF 06250 X XXXX |
| 6.500 | 6.751 | 6.522 | D = W + 0.010" | XXXX PDWF 06500 X XXXX |
| 6.750 | 7.001 | 6.772 | D = W + 0.010" | XXXX PDWF 06750 X XXXX |
| 7.000 | 7.251 | 7.022 | D = W + 0.010" | XXXX PDWF 07000 X XXXX |
| 7.250 | 7.501 | 7.272 | D = W + 0.010" | XXXX PDWF 07250 X XXXX |
| 7.500 | 7.751 | 7.522 | D = W + 0.010" | XXXX PDWF 07500 X XXXX |

For custom groove calculations, see [Appendix C](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

PDW Rod Groove Calculation

See Rod Wear Ring Groove Calculations in [Appendix C](#).

Contents

Product Offering 10-3
Decision Tree 10-3
Product Profiles
MB 10-4
8700 10-10
5100 10-13
Positively-Actuated 10-21
PDB 10-22

Back-up Rings

Back-up rings are the most common anti-extrusion devices in dynamic sealing. They provide simple solutions to safely increase system pressure or solve an existing seal extrusion problem. Back-up rings function by positioning a more robust material adjacent to the extrusion gap, taking the seal's place and providing a barrier against high pressures. Back-ups can be used to offset the reduced pressure rating effects of wear rings or to improve seal life at increased pressures. They can also be used to protect seals against pressure spikes, or to ensure seal performance at higher temperatures.

Parker offers a wide range of back-up ring profiles and materials to complement each seal type and to suit every application. Modular back-up rings disperse pressure from the seal throughout the gland to fill the extrusion gap and protect the seal (see Figure 10-1). The use of Profile MB can increase a PolyPak's pressure rating to 10,000 psi, while 8700 back-ups provide added extrusion resistance to u-cups with only a minimal increase in gland width.

Positively-actuated back-ups are actuated both axially and radially into the extrusion gap, guarding the seal against extrusion (see Figure 10-2). For many profiles, positively-actuated back-ups can provide the ultimate extrusion resistance while retaining the seal's original gland dimensions.

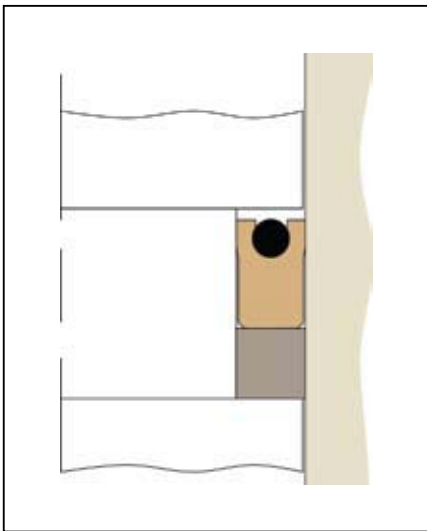


Figure 10-1. Modular Back-up Ring

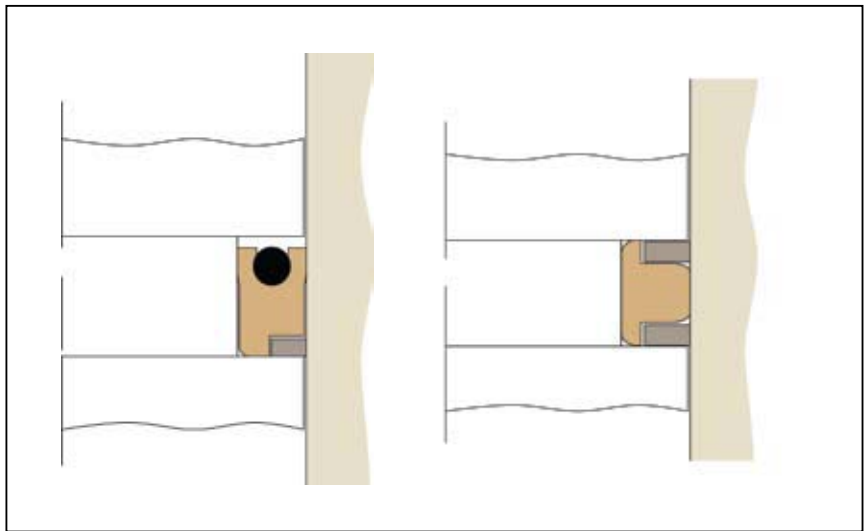


Figure 10-2. Positively-Actuated Back-up

Back-up Rings Introduction (Continued)

For extreme pressures, Parker can design custom back-up ring systems utilizing metal or engineered plastics technology and highly advanced geometries. In Figure 10-3 (angled back-ups), a single modular back-up is replaced with dual wedge-shaped back-ups, composed of UltraCOMP or bronze. As pressure increases, the angled back-ups are forced to bridge the clearance gap, eliminating extrusion. This method has been used successfully at pressures as high as 100,000 psi. Please contact Parker or your authorized distributor for engineering assistance in designing custom back-up configurations.

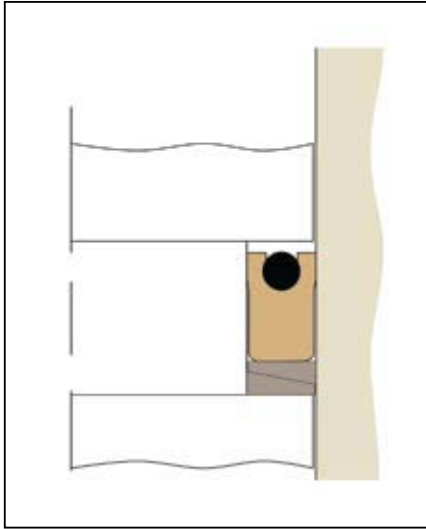


Figure 10-3. Angled Back-up

When to Use Back-up Rings

- System operating pressure exceeds the limitations of the seal's extrusion resistance.
- Pressure spikes in the system exceed normal operating conditions, risking damage to the seal.
- The use of wear rings has increased the extrusion gap, reducing the seal's pressure rating to an unacceptable level.
- The system temperature is high enough to lower the seal's extrusion resistance to an unacceptable level.

Back-up Rings Product Offering


Profiles

Table 10-1: Product Profiles

| Series | Description | Application (Duty) | | | | Page |
|--------|---|--------------------|--------|-------|-----------|-------|
| | | Light | Medium | Heavy | Pneumatic | |
| MB | Modular Back-up for PolyPaks & U-cups | | | | | 10-4 |
| 8700 | Low Profile Back-up for PolyPaks & U-cups | | | | | 10-10 |
| 5100 | O-ring Groove Back-up | | | | | 10-13 |

| Series | Description | Application (Duty) | | | | Page |
|--------|------------------------------|--------------------|--------|-------|-----------|-------|
| | | Light | Medium | Heavy | Pneumatic | |
| PAB | Positively-Activated Back-up | | | | | 10-21 |
| PDB | PTFE Back-up | | | | | 10-22 |

Back-up Rings Decision Tree

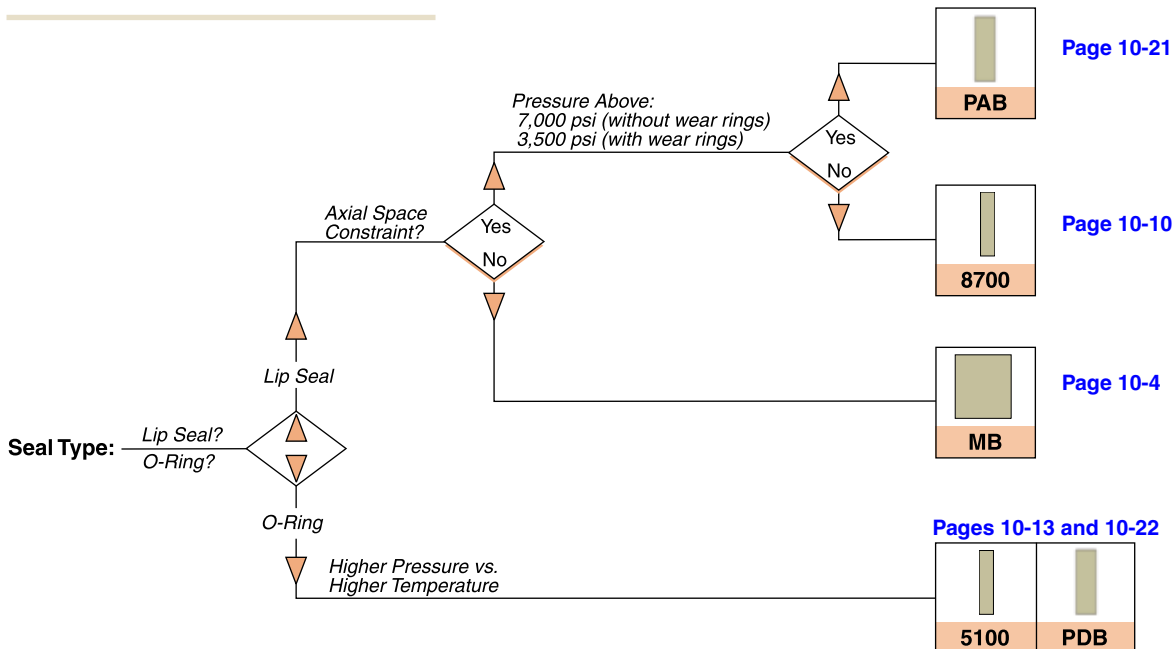

Back-up Ring MB Profile

Catalog EPS 5370/USA



MB Profile, Modular Back-up for PolyPaks and U-cups


Modular back-ups, MB profile, are specifically designed to complement the PolyPak profiles. To help make the selection and ordering of the correct part number for the MB profile easy and efficient, the part numbering system used is very similar to that of the PolyPak. By formulating high modulus blends of Molythane (4617) and PolyMyte (4652), Parker has ensured that MB back-ups can be used with either type of base sealing material while maintaining the expected temperature range and fluid compatibility. The robust design ensures pressure ratings up to 10,000 psi are met.

Technical Data


| Standard Materials* | Temperature | Max. Pressure Range** |
|---------------------|------------------------------------|-------------------------|
| P4617D65 | -65°F to 250°F (-54°C to 121°C) | 10,000 psi (689 bar) |
| Z4652D65 | -65°F to 275°F (-54°C to 135°C) | 10,000 psi (689 bar) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


** 7,000 psi (482 bar) with tight-tolerance wear rings.
5,000 psi (344 bar) with standard-tolerance wear rings.



MB Cross-Section

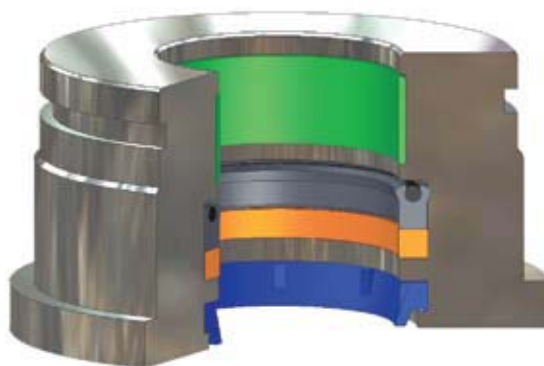

MB installed in Rod Gland

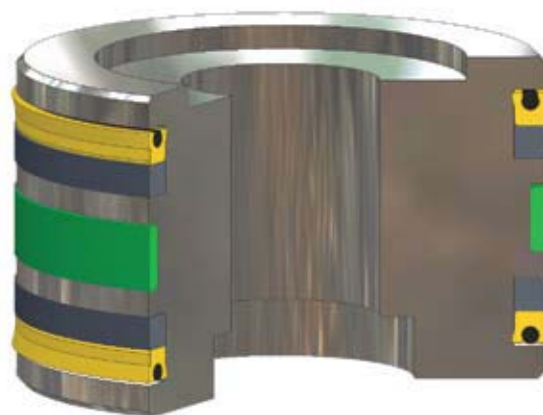


MB installed in Piston Gland

10


09/01/07

Part Number Nomenclature — MB Profile

Table 10-2. MB Profile — Inch

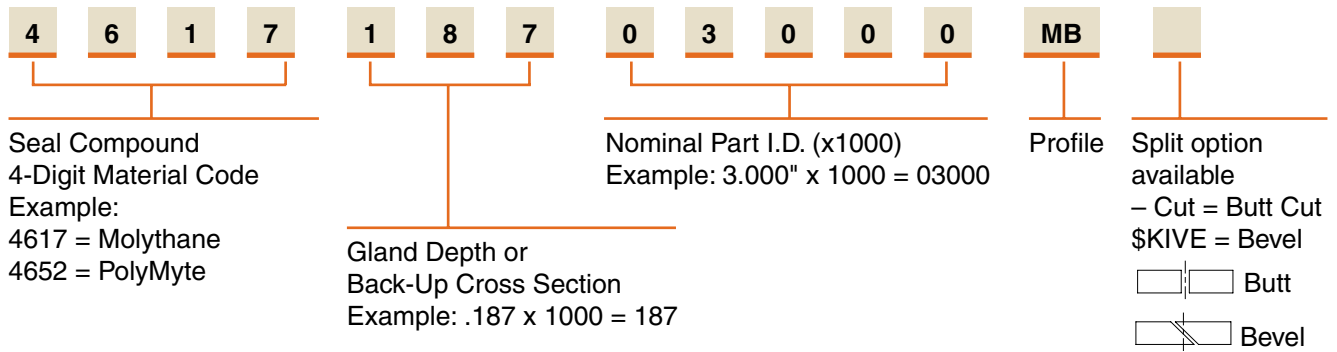

Gland Dimensions — MB Profile

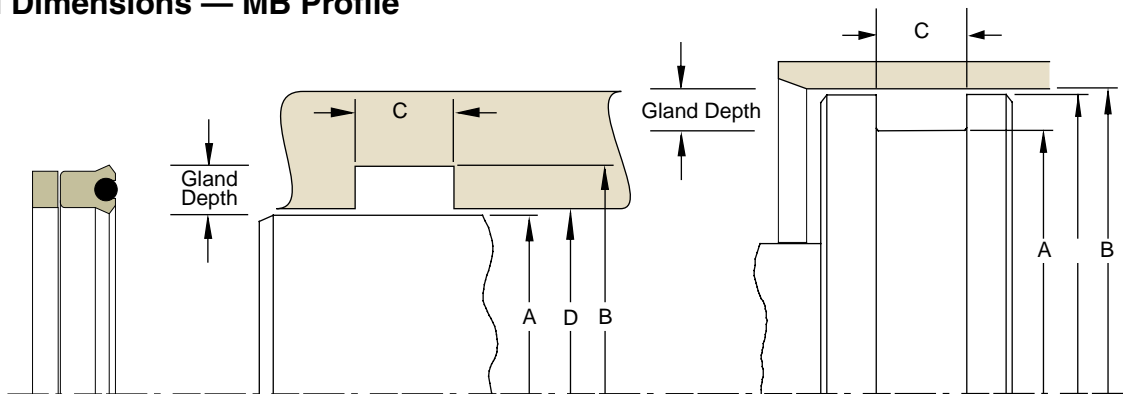

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

How to Determine the Gland Width when Using Modular Back-up Rings

The Modular Back-up ring allows you to extend the pressure rating of a seal that fits into the common gland used by such seals as the PolyPaks and the BS, BT, BD, B3, B7, UP, UR and US Profiles. In order to use the MB Back-up ring the width of the seal gland must be extended to account for the height of the Modular Back-up ring. Add the following width to the gland of the seal only as shown in this catalog.

Table 10-3. Added Gland Width Values

| Seal Cross Section | Added Gland Width |
|--------------------|-------------------|
| 1/8 | 0.138 |
| 3/16 | 0.206 |
| 1/4 | 0.275 |
| 5/16 | 0.343 |
| 3/8 | 0.413 |
| 7/16 | 0.481 |
| 1/2 | 0.550 |
| 5/8 | 0.688 |
| 3/4 | 0.825 |
| 1 | 1.100 |

For non-standard cross sections the added gland width can be determined by multiplying the cross section by (1.1). The tolerance on the extended gland remains the same as it is for the seal gland width, which is usually +.015.

Table 10-4. MB Gland Dimensions — Inch (All dimensions are reference)

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E Piston Diameter** | Material | | Part Number |
|-------------------|----------------------------|--|-----------------------|------------------------|----------|----------------|----------------|
| | | | | | 4617 | 4652 | |
| 0.125 | 0.375 | Add to gland width the corresponding value from Table 10-3 on page 10-5. | 0.126 | 0.374 | X | X | xxxx12500125MB |
| 0.250 | 0.500 | | 0.251 | 0.499 | X | X | xxxx12500250MB |
| 0.312 | 0.562 | | 0.313 | 0.561 | X | | xxxx12500312MB |
| 0.375 | 0.625 | | 0.376 | 0.624 | X | X | xxxx12500375MB |
| 0.500 | 0.750 | | 0.501 | 0.749 | X | X | xxxx12500500MB |
| 0.500 | 0.875 | | 0.501 | 0.874 | X | | xxxx18700500MB |
| 0.500 | 1.000 | | 0.501 | 0.999 | X | X | xxxx25000500MB |
| 0.625 | 0.875 | | 0.626 | 0.874 | X | X | xxxx12500625MB |
| 0.625 | 1.000 | | 0.626 | 0.999 | X | X | xxxx18700625MB |
| 0.625 | 1.125 | | 0.626 | 1.124 | X | | xxxx25000625MB |
| 0.625 | 1.375 | | 0.627 | 1.373 | | X | xxxx37501000MB |
| 0.687 | 0.937 | | 0.688 | 0.936 | X | | xxxx12500687MB |
| 0.750 | 1.000 | | 0.751 | 0.999 | X | X | xxxx12500750MB |
| 0.750 | 1.250 | | 0.751 | 1.249 | X | X | xxxx25000750MB |
| 0.875 | 1.375 | | 0.876 | 1.374 | X | | xxxx25000875MB |
| 0.937 | 1.187 | | 0.938 | 1.186 | X | | xxxx12500937MB |
| 1.000 | 1.250 | | 1.001 | 1.249 | X | X | xxxx12501000MB |
| 1.000 | 1.375 | | 1.001 | 1.374 | X | | xxxx18701000MB |
| 1.000 | 1.500 | | 1.001 | 1.499 | X | X | xxxx25001000MB |
| 1.125 | 1.500 | | 1.126 | 1.499 | | | xxxx18701125MB |
| 1.250 | 1.500 | | 1.251 | 1.499 | X | X | xxxx12501250MB |
| 1.250 | 1.625 | | 1.251 | 1.624 | X | X | xxxx18701250MB |
| 1.250 | 1.750 | | 1.251 | 1.749 | X | X | xxxx25001250MB |
| 1.250 | 1.875 | | 1.252 | 1.873 | X | X | xxxx31201250MB |
| 1.250 | 2.000 | | 1.252 | 1.998 | X | | xxxx37501250MB |
| 1.312 | 1.812 | | 1.313 | 1.811 | X | | xxxx25001312MB |
| 1.375 | 1.625 | | 1.376 | 1.624 | X | | xxxx12501375MB |
| 1.375 | 1.750 | | 1.376 | 1.749 | X | X | xxxx18701375MB |
| 1.375 | 1.875 | | 1.376 | 1.874 | X | X | xxxx25001375MB |
| 1.375 | 2.000 | | 1.377 | 1.998 | X | | xxxx31201375MB |
| 1.500 | 1.750 | | 1.501 | 1.749 | X | | xxxx12501500MB |
| 1.500 | 1.875 | | 1.501 | 1.874 | X | X | xxxx18701500MB |
| 1.500 | 2.000 | | 1.501 | 1.999 | X | | xxxx25001500MB |
| 1.500 | 2.125 | | 1.502 | 2.123 | X | | xxxx31201500MB |
| 1.500 | 2.250 | | 1.502 | 2.248 | X | X | xxxx37501500MB |
| 1.625 | 2.000 | | 1.626 | 1.999 | X | X | xxxx18701625MB |
| 1.625 | 2.250 | | 1.627 | 2.248 | X | | xxxx31201625MB |
| 1.625 | 2.375 | | 1.627 | 2.373 | X | X | xxxx37501625MB |
| 1.750 | 2.250 | | 1.751 | 2.249 | X | X | xxxx25001750MB |
| 1.750 | 2.375 | | 1.752 | 2.373 | X | X | xxxx31201750MB |
| 1.750 | 2.500 | 1.752 | 2.498 | X | | xxxx37501750MB | |
| 1.875 | 2.250 | 1.876 | 2.249 | X | X | xxxx18701875MB | |
| 1.875 | 2.500 | 1.877 | 2.498 | X | | xxxx31201875MB | |
| 1.875 | 2.625 | 1.877 | 2.623 | X | X | xxxx37501875MB | |
| 2.000 | 2.500 | 2.001 | 2.499 | X | X | xxxx25002000MB | |
| 2.000 | 2.625 | 2.002 | 2.623 | X | | xxxx31202000MB | |

* If used with wear rings, refer to wear ring throat diameter, see Section 9.

** If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 10-4. MB Gland Dimensions — Inch (Continued) (All dimensions are reference)

| A Rod Diameter | B (Rod) Groove Diameter | C (Rod) Groove Width | D Throat Diameter* | E Piston Diameter** | Material | | Part Number |
|--------------------------|----------------------------|--|-----------------------|------------------------|----------|----------------|----------------|
| | | | | | 4617 | 4652 | |
| (Piston) Groove Diameter | Bore Diameter | Groove Width | | | | | |
| 2.000 | 2.750 | Add to gland width the corresponding value from Table 10-3 on page 10-5. | 2.002 | 2.748 | X | X | xxxx37502000MB |
| 2.000 | 3.000 | | 2.002 | 2.998 | X | | xxxx50002000MB |
| 2.125 | 2.500 | | 2.126 | 2.499 | X | X | xxxx18702125MB |
| 2.250 | 2.750 | | 2.251 | 2.749 | X | X | xxxx25002250MB |
| 2.250 | 2.875 | | 2.252 | 2.873 | X | | xxxx31202250MB |
| 2.250 | 3.000 | | 2.252 | 2.998 | X | | xxxx37502250MB |
| 2.250 | 3.250 | | 2.252 | 3.248 | X | | xxxx50002250MB |
| 2.375 | 3.000 | | 2.377 | 2.998 | X | | xxxx31202375MB |
| 2.375 | 3.125 | | 2.377 | 3.123 | X | | xxxx37502375MB |
| 2.500 | 2.875 | | 2.501 | 2.874 | X | | xxxx18702500MB |
| 2.500 | 3.000 | | 2.501 | 2.999 | X | X | xxxx25002500MB |
| 2.500 | 3.125 | | 2.502 | 3.123 | X | | xxxx31202500MB |
| 2.500 | 3.250 | | 2.502 | 3.248 | X | | xxxx37502500MB |
| 2.500 | 3.500 | | 2.502 | 3.498 | X | | xxxx50002500MB |
| 2.500 | 3.750 | | 2.503 | 3.747 | X | | xxxx62502500MB |
| 2.625 | 3.000 | | 2.626 | 2.999 | X | | xxxx18702625MB |
| 2.625 | 3.125 | | 2.626 | 3.124 | X | | xxxx25002625MB |
| 2.625 | 3.375 | | 2.627 | 3.373 | X | | xxxx37502625MB |
| 2.750 | 3.125 | | 2.751 | 3.124 | X | | xxxx18702750MB |
| 2.750 | 3.250 | | 2.751 | 3.249 | X | X | xxxx25002750MB |
| 2.750 | 3.500 | | 2.752 | 3.498 | X | X | xxxx37502750MB |
| 2.750 | 4.000 | | 2.753 | 3.997 | X | | xxxx62502750MB |
| 2.875 | 3.375 | | 2.876 | 3.374 | X | | xxxx25002875MB |
| 3.000 | 3.375 | | 3.001 | 3.374 | X | X | xxxx18703000MB |
| 3.000 | 3.500 | | 3.001 | 3.499 | X | X | xxxx25003000MB |
| 3.000 | 3.625 | | 3.002 | 3.623 | X | | xxxx31203000MB |
| 3.000 | 3.750 | | 3.002 | 3.748 | X | X | xxxx37503000MB |
| 3.000 | 4.000 | | 3.002 | 3.998 | X | | xxxx50003000MB |
| 3.000 | 4.250 | | 3.003 | 4.247 | X | | xxxx62503000MB |
| 3.125 | 3.500 | | 3.126 | 3.499 | X | X | xxxx18703125MB |
| 3.125 | 3.625 | | 3.126 | 3.624 | | X | xxxx25003125MB |
| 3.125 | 3.875 | | 3.127 | 3.873 | X | | xxxx37503125MB |
| 3.250 | 3.625 | | 3.251 | 3.624 | X | | xxxx18703250MB |
| 3.250 | 3.750 | | 3.251 | 3.749 | X | X | xxxx25003250MB |
| 3.250 | 4.000 | | 3.252 | 3.998 | X | | xxxx37503250MB |
| 3.250 | 4.500 | | 3.253 | 4.497 | X | | xxxx62503250MB |
| 3.375 | 4.125 | | 3.377 | 4.123 | X | | xxxx37503375MB |
| 3.500 | 3.875 | | 3.501 | 3.874 | X | X | xxxx18703500MB |
| 3.500 | 4.000 | | 3.501 | 3.999 | X | X | xxxx25003500MB |
| 3.500 | 4.125 | | 3.502 | 4.123 | X | X | xxxx31203500MB |
| 3.500 | 4.250 | 3.502 | 4.248 | X | X | xxxx37503500MB | |
| 3.500 | 4.500 | 3.502 | 4.498 | X | | xxxx50003500MB | |
| 3.625 | 4.000 | 3.626 | 3.999 | X | X | xxxx18703625MB | |
| 3.750 | 4.250 | 3.751 | 4.249 | X | X | xxxx25003750MB | |
| 3.750 | 4.375 | 3.752 | 4.373 | X | | xxxx31203750MB | |
| 3.750 | 4.500 | 3.752 | 4.498 | X | X | xxxx37503750MB | |

* If used with wear rings, refer to wear ring throat diameter, see Section 9.

** If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 10-4. MB Gland Dimensions — Inch (Continued) (All dimensions are reference)

| A | B | C | D | E | Material | | Part Number |
|--------------------------|-----------------------|--|------------------|-------------------|----------|----------------|----------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | 4617 | 4652 | |
| (Piston) Groove Diameter | Bore Diameter | Groove Width | | Piston Diameter** | | | |
| 4.000 | 4.375 | Add to gland width the corresponding value from Table 10-3 on page 10-5. | 4.001 | 4.374 | | X | xxxx18704000MB |
| 4.000 | 4.500 | | 4.001 | 4.499 | X | X | xxxx25004000MB |
| 4.000 | 4.750 | | 4.002 | 4.748 | X | | xxxx37504000MB |
| 4.000 | 5.000 | | 4.002 | 4.998 | X | | xxxx50004000MB |
| 4.250 | 4.750 | | 4.251 | 4.749 | X | | xxxx25004250MB |
| 4.250 | 5.000 | | 4.252 | 4.998 | X | X | xxxx37504250MB |
| 4.375 | 4.750 | | 4.376 | 4.749 | X | | xxxx18704375MB |
| 4.375 | 5.000 | | 4.377 | 4.998 | X | | xxxx31204375MB |
| 4.375 | 5.125 | | 4.377 | 5.123 | X | | xxxx37504375MB |
| 4.500 | 5.000 | | 4.501 | 4.999 | X | X | xxxx25004500MB |
| 4.500 | 5.125 | | 4.502 | 5.123 | X | X | xxxx31204500MB |
| 4.500 | 5.500 | | 4.502 | 5.498 | X | | xxxx50004500MB |
| 4.750 | 5.500 | | 4.752 | 5.498 | X | X | xxxx37504750MB |
| 4.875 | 5.625 | | 4.877 | 5.623 | X | | xxxx37504875MB |
| 5.000 | 5.500 | | 5.001 | 5.499 | X | X | xxxx25005000MB |
| 5.000 | 5.750 | | 5.002 | 5.748 | X | X | xxxx37505000MB |
| 5.000 | 6.000 | | 5.002 | 5.998 | X | X | xxxx50005000MB |
| 5.250 | 5.750 | | 5.251 | 5.749 | X | | xxxx25005250MB |
| 5.250 | 6.000 | | 5.252 | 5.998 | X | X | xxxx37505250MB |
| 5.250 | 6.250 | | 5.252 | 6.248 | X | X | xxxx50005250MB |
| 5.375 | 6.000 | | 5.377 | 5.998 | X | | xxxx31205375MB |
| 5.375 | 6.125 | | 5.377 | 6.123 | X | | xxxx37505375MB |
| 5.500 | 6.000 | | 5.501 | 5.999 | X | X | xxxx25005500MB |
| 5.500 | 6.250 | | 5.502 | 6.248 | X | X | xxxx37505500MB |
| 5.500 | 6.500 | | 5.502 | 6.498 | X | X | xxxx50005500MB |
| 5.750 | 6.250 | | 5.751 | 6.249 | | X | xxxx25005750MB |
| 5.875 | 6.625 | | 5.877 | 6.623 | X | X | xxxx37505875MB |
| 6.000 | 6.500 | | 6.001 | 6.499 | X | X | xxxx25006000MB |
| 6.000 | 6.750 | | 6.002 | 6.748 | X | X | xxxx37506000MB |
| 6.000 | 7.000 | | 6.002 | 6.998 | X | | xxxx50006000MB |
| 6.250 | 7.000 | | 6.252 | 6.998 | X | X | xxxx37506250MB |
| 6.500 | 7.250 | | 6.502 | 7.248 | X | X | xxxx37506500MB |
| 6.500 | 7.500 | | 6.502 | 7.498 | X | X | xxxx50006500MB |
| 6.500 | 8.000 | | 6.503 | 7.997 | X | | xxxx75006500MB |
| 6.750 | 7.750 | | 6.752 | 7.748 | X | | xxxx50006750MB |
| 7.000 | 7.750 | | 7.002 | 7.748 | X | X | xxxx37507000MB |
| 7.000 | 8.000 | | 7.002 | 7.998 | X | X | xxxx50007000MB |
| 7.000 | 8.250 | | 7.003 | 8.247 | X | | xxxx62507000MB |
| 7.250 | 8.000 | | 7.252 | 7.998 | X | X | xxxx37507250MB |
| 7.500 | 8.000 | | 7.501 | 7.999 | X | X | xxxx25007500MB |
| 7.500 | 8.250 | 7.502 | 8.248 | X | | xxxx37507500MB | |
| 7.500 | 9.000 | 7.503 | 8.997 | X | | xxxx75007500MB | |
| 7.750 | 8.250 | 7.751 | 8.249 | X | | xxxx25007750MB | |
| 7.750 | 8.500 | 7.752 | 8.498 | X | | xxxx37507750MB | |
| 8.000 | 8.625 | 8.002 | 8.623 | X | | xxxx31208000MB | |
| 8.000 | 9.000 | 8.002 | 8.998 | X | | xxxx50008000MB | |

* If used with wear rings, refer to wear ring throat diameter, see Section 9.

** If used with wear rings, refer to wear ring piston diameter, see Section 9.

Table 10-4. MB Gland Dimensions — Inch (Continued) (All dimensions are reference)

| A | B | C | D | E | Material | | Part Number |
|--------------------------|-----------------------|--|------------------|-------------------|----------|------|----------------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | Throat Diameter* | | 4617 | 4652 | |
| (Piston) Groove Diameter | Bore Diameter | Groove Width | | Piston Diameter** | | | |
| 8.500 | 9.500 | Add to gland width the corresponding value from Table 10-3 on page 10-5. | 8.502 | 9.498 | X | X | xxxx50008500MB |
| 9.000 | 9.750 | | 9.002 | 9.748 | X | X | xxxx37509000MB |
| 9.000 | 10.000 | | 9.002 | 9.998 | X | X | xxxx50009000MB |
| 9.250 | 10.000 | | 9.252 | 9.998 | X | X | xxxx37509250MB |
| 9.500 | 10.500 | | 9.502 | 10.498 | X | | xxxx50009500MB |
| 9.750 | 10.500 | | 9.752 | 10.498 | X | | xxxx37509750MB |
| 9.875 | 10.875 | | 9.877 | 10.873 | X | | xxxx50009875MB |
| 10.000 | 10.500 | | 10.001 | 10.499 | X | | xxxx25010000MB |
| 10.000 | 10.750 | | 10.002 | 10.748 | X | | xxxx37510000MB |
| 10.000 | 11.000 | | 10.002 | 10.998 | X | | xxxx50010000MB |
| 10.500 | 11.250 | | 10.502 | 11.248 | X | | xxxx37510500MB |
| 10.500 | 11.500 | | 10.502 | 11.498 | X | X | xxxx50010500MB |
| 11.000 | 11.750 | | 11.002 | 11.748 | X | | xxxx37511000MB |
| 11.000 | 12.000 | | 11.002 | 11.998 | | X | xxxx50011000MB |
| 11.250 | 12.000 | | 11.252 | 11.998 | X | | xxxx37511250MB |
| 11.500 | 12.500 | | 11.502 | 12.498 | X | X | xxxx50011500MB |
| 12.000 | 13.000 | | 12.002 | 12.998 | X | X | xxxx50012000MB |
| 12.750 | 14.000 | | 12.753 | 13.997 | X | | xxxx62512750MB |
| 13.000 | 13.500 | | 13.001 | 13.499 | X | X | xxxx25011750MB |
| 13.500 | 14.500 | | 13.502 | 14.498 | X | X | xxxx50013500MB |
| 14.000 | 14.500 | | 14.001 | 14.499 | | X | xxxx25012000MB |
| 15.000 | 16.000 | | 15.002 | 15.998 | X | X | xxxx50015000MB |
| 17.000 | 18.000 | | 17.002 | 17.998 | X | | xxxx50017000MB |
| 17.750 | 19.000 | | 17.753 | 18.997 | | X | xxxx62517750MB |
| 19.000 | 20.000 | | 19.002 | 19.998 | X | | xxxx50019000MB |
| 21.000 | 22.000 | | 21.002 | 21.998 | X | X | xxxx50021000MB |
| 29.000 | 30.000 | | 29.002 | 29.998 | X | | xxxx50029000MB |

* If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

** If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Back-up Ring 8700 Profile

Catalog EPS 5370/USA



8700 Profile, Low Profile Modular Back-up for PolyPaks and U-cups

8700 back-ups provide added extrusion resistance to u-cups and PolyPaks with only minimal increase in gland width. This profile of back-ups was originally designed to dramatically increase the pressure rating of rubber u-cups in situations where temperature or fluid compatibility prevent the use of urethane seals. As such, 8700 back-ups share a part numbering system very similar to many of our rubber u-cup profiles for easy matching of components. Additionally, they are perfect for adding heavy duty pressure capabilities to medium duty urethane sealing systems.

Technical Data


| Standard Materials* | Temperature | Max. Pressure Range** |
|---------------------|------------------------------------|------------------------|
| Z4651D60 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) |
| Z4729D65 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.


****** 4,900 psi (337 bar) with tight-tolerance wear rings.
3,500 psi (241 bar) with standard-tolerance wear rings.



8700 Cross-Section

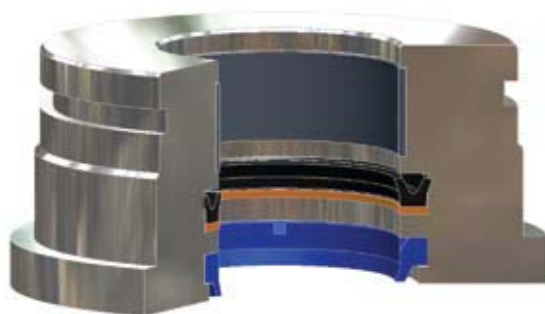


8700 installed in Rod Gland

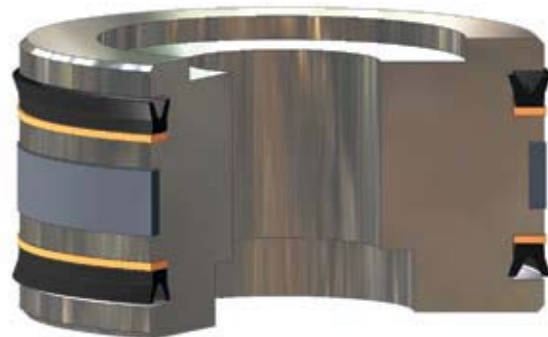


8700 installed in Piston Gland

Part Number Nomenclature — 8700 Profile

Table 10-5. 8700 Profile — Inch

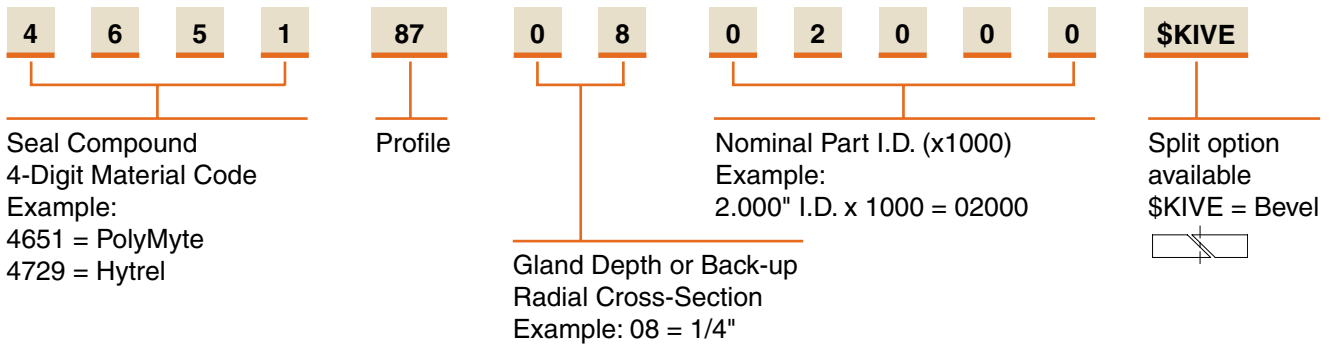

Gland Dimensions — 8700 Profile

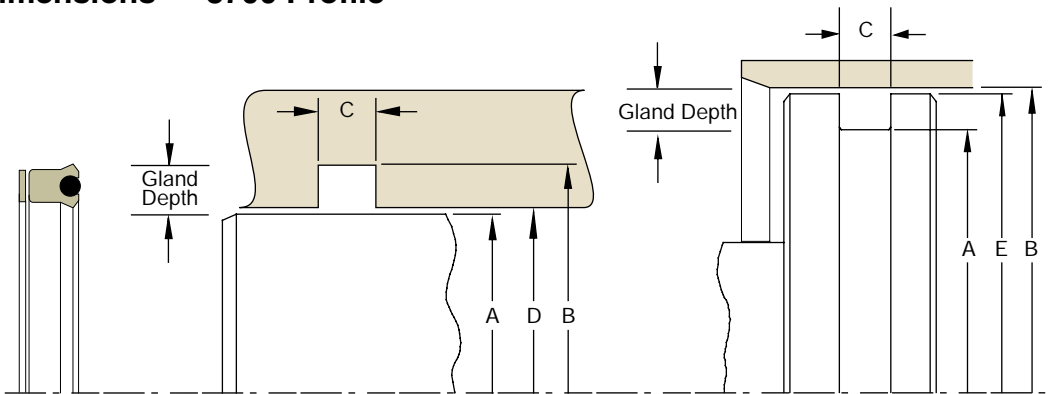

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 10-6. 8700 Gland Dimensions (Standard) — Inch⁶

| A | B | C | D | E | Part Number | | | |
|------------------------|-----------------------|--------------------------------|------------------------|--------------------------|-------------------------------------|---------------|--------------|---------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | (Rod) Throat Diameter* | | | | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | Gland Depth or Radial Cross Section | Compound Code | Profile Code | |
| 0.375 | 0.625 | Add .062" to seal groove width | 0.376 | 0.624 | 0.1250 | XXXX | 87 | 0400375 |
| 0.500 | 0.750 | | 0.501 | 0.749 | 0.1250 | XXXX | 87 | 0400500 |
| 0.625 | 0.875 | | 0.626 | 0.874 | 0.1250 | XXXX | 87 | 0400625 |
| 0.750 | 1.000 | | 0.751 | 0.999 | 0.1250 | XXXX | 87 | 0400750 |
| 1.000 | 1.250 | | 1.001 | 1.249 | 0.1250 | XXXX | 87 | 0401000 |
| 1.000 | 1.312 | | 1.001 | 1.311 | 0.1560 | XXXX | 87 | 0501000 |
| 1.187 | 1.500 | | 1.188 | 1.499 | 0.1565 | XXXX | 87 | 0501187 |
| 1.250 | 1.625 | | 1.251 | 1.624 | 0.1875 | XXXX | 87 | 0601250 |
| 1.250 | 1.750 | | 1.251 | 1.749 | 0.2500 | XXXX | 87 | 0801250 |
| 1.375 | 1.687 | | 1.376 | 1.686 | 0.1560 | XXXX | 87 | 0501375 |
| 1.375 | 1.750 | | 1.377 | 1.749 | 0.1875 | XXXX | 87 | 0601375 |
| 1.500 | 1.812 | | 1.501 | 1.811 | 0.1560 | XXXX | 87 | 0501500 |
| 1.500 | 1.875 | | 1.502 | 1.874 | 0.1875 | XXXX | 87 | 0601500 |
| 1.500 | 2.250 | | 1.501 | 2.249 | 0.2500 | XXXX | 87 | 0801500 |
| 1.625 | 2.000 | | 1.627 | 1.999 | 0.1875 | XXXX | 87 | 0601625 |
| 1.750 | 2.125 | | 1.752 | 2.124 | 0.1875 | XXXX | 87 | 0601750 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
**If used with wear rings, refer to wear ring piston diameter, see Section 9.

8700 Profile

Table 10-6. 8700 Gland Dimensions — Inch (Continued)

| A | B | C | D | E | | Part Number | | |
|------------------------|-----------------------|--------------------------------|------------------------|--------------------------|-------------------------------------|---------------|--------------|---------|
| Rod Diameter | (Rod) Groove Diameter | (Rod) Groove Width | (Rod) Throat Diameter* | | | | | |
| (Bore) Groove Diameter | Bore Diameter | (Bore) Groove Width | | (Bore) Piston Diameter** | Gland Depth or Radial Cross Section | Compound Code | Profile Code | |
| 2.000 | 2.375 | Add .062" to seal groove width | 2.002 | 2.374 | 0.1875 | XXXX | 87 | 0602000 |
| 2.000 | 2.500 | | 2.001 | 2.499 | 0.2500 | XXXX | 87 | 0802000 |
| 2.125 | 2.500 | | 2.127 | 2.499 | 0.1875 | XXXX | 87 | 0602125 |
| 2.500 | 2.937 | | 2.501 | 2.936 | 0.2185 | XXXX | 87 | 0702500 |
| 2.812 | 3.250 | | 2.813 | 3.249 | 0.2190 | XXXX | 87 | 0702812 |
| 3.000 | 3.437 | | 3.001 | 3.436 | 0.2185 | XXXX | 87 | 0703000 |
| 3.062 | 3.500 | | 3.063 | 3.499 | 0.2190 | XXXX | 87 | 0703062 |
| 3.250 | 3.750 | | 3.251 | 3.749 | 0.2500 | XXXX | 87 | 0803250 |
| 3.500 | 4.000 | | 3.501 | 3.999 | 0.2500 | XXXX | 87 | 0803500 |
| 3.750 | 4.250 | | 3.751 | 4.249 | 0.2500 | XXXX | 87 | 0803750 |
| 4.000 | 4.500 | | 4.001 | 4.499 | 0.2500 | XXXX | 87 | 0804000 |
| 4.500 | 5.000 | | 4.501 | 4.999 | 0.2500 | XXXX | 87 | 0804500 |
| 5.000 | 5.562 | | 5.001 | 5.561 | 0.2810 | XXXX | 87 | 0905000 |
| 5.375 | 6.000 | | 5.377 | 5.998 | 0.3125 | XXXX | 87 | 1005375 |
| 5.375 | 6.125 | | 5.377 | 6.123 | 0.3750 | XXXX | 87 | 1205375 |
| 5.437 | 6.000 | | 5.438 | 5.999 | 0.2815 | XXXX | 87 | 0905437 |
| 5.500 | 6.125 | | 5.502 | 6.123 | 0.3125 | XXXX | 87 | 1005500 |
| 6.375 | 7.000 | | 6.377 | 6.998 | 0.3125 | XXXX | 87 | 1006375 |
| 6.437 | 7.000 | | 6.438 | 6.999 | 0.2815 | XXXX | 87 | 0906437 |
| 7.000 | 7.625 | | 7.002 | 7.623 | 0.3125 | XXXX | 87 | 1007000 |
| 7.375 | 8.000 | | 7.377 | 7.998 | 0.3125 | XXXX | 87 | 1007375 |
| 8.500 | 9.125 | 8.502 | 9.123 | 0.3125 | XXXX | 87 | 1008500 | |
| 10.000 | 10.750 | 10.002 | 10.748 | 0.3750 | XXXX | 87 | 1210000 | |
| 11.000 | 12.000 | 11.002 | 11.998 | 0.5000 | XXXX | 87 | 1611000 | |
| 11.250 | 12.000 | 11.252 | 11.998 | 0.3750 | XXXX | 87 | 1211250 | |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Back-up Ring 5100 Profile

Catalog EPS 5370/USA



5100 Profile (5100 Series), O-ring Groove Back-up

Parker's 5100 Series back-up rings offer extrusion resistance up to 7,000 psi for dynamic applications and up to 20,000 psi for static applications. They are physically interchangeable with most existing o-ring back-ups. Our easy to identify orange colored 4651 PolyMyte material used with this profile, provides outstanding extrusion resistance when compared to hard nitrile back-ups plus offers extended fluid compatibility. 5100 Series back-ups are designed to meet standard industrial o-ring groove dimensions for single or dual back-up groove designs and will always install in the proper direction.

Note: For custom tolerances for rod or piston application, please contact your Parker Seal representative.

Technical Data


| Standard Materials* | Temperature | Max. Pressure Range | |
|---------------------|------------------------------------|------------------------|---------------------------|
| | | Dynamic** | Static |
| Z4651D60 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) | 20,000 psi (1,379 bar) |
| Z4729D65 | -65°F to 275°F (-54°C to 135°C) | 7,000 psi (482 bar) | 20,000 psi (1,379 bar) |

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.

** 4,900 psi (337 bar) with tight-tolerance wear rings.
3,500 psi (241 bar) with standard-tolerance wear rings.



5100 Cross-Section

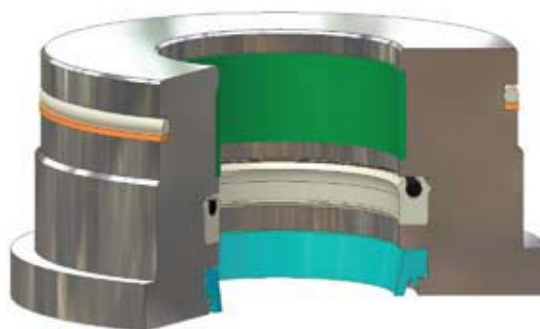


5100 installed in Rod Gland


5100 Profile

Part Number Nomenclature — 5100 Profile

Table 10-7. 5100 Profile — Inch

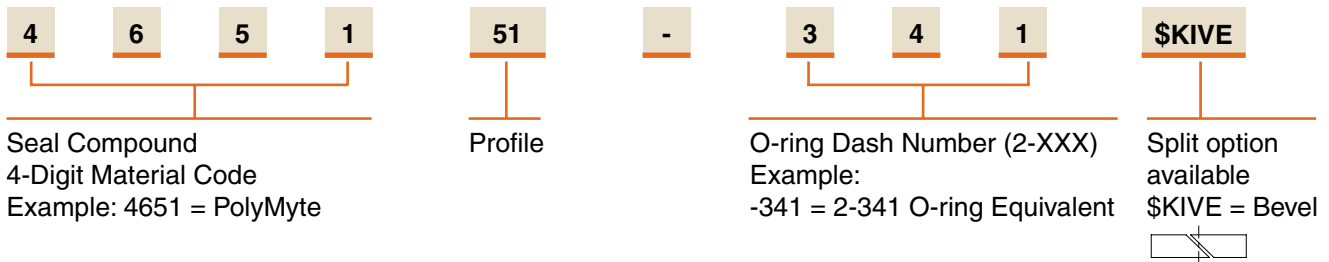

Gland Dimensions — 5100 Profile

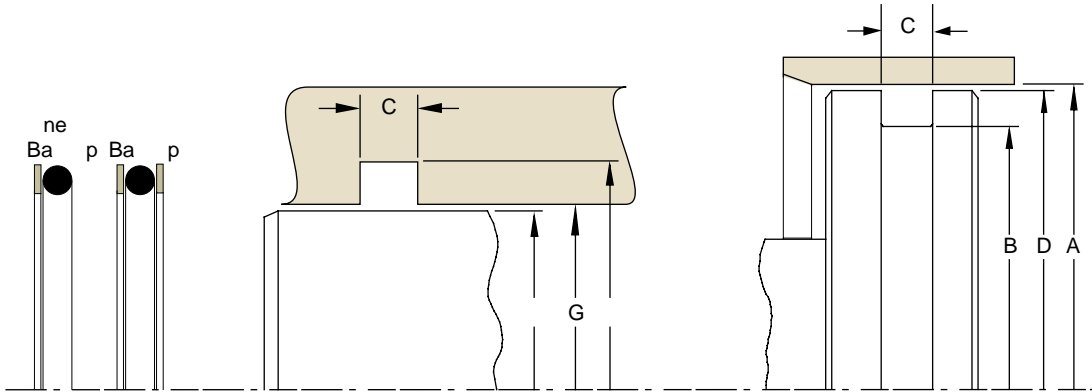

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 10-8. 5100 Gland Dimensions (Standard) — Inch

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|-----------------------------|-----------------------|--------|---------------------------------|-----------------------------------|-------------------------------------|------------------------------|---------------------------------|------------------------------------|------------------------------|--------------------------------|
| | | | A Bore Diameter +.002/-0.000 | B Groove Diameter +.000/-0.002 | D Piston Diameter** +.000/-0.001 | E Rod Diameter +.002/.000 | F Groove Diameter +.002/.000 | G Throat Diameter* +.001/-0.000 | C1 One Back-up +.005/.000 | C2 Two Back-up +.005/-0.000 |
| Recommended for Dynamic | 006 | X | 0.249 | 0.139 | 0.247 | 0.124 | 0.234 | 0.126 | 0.138 | 0.205 |
| | 007 | | 0.280 | 0.170 | 0.278 | 0.155 | 0.265 | 0.157 | 0.138 | 0.205 |
| | 008 | X | 0.311 | 0.201 | 0.309 | 0.186 | 0.296 | 0.188 | 0.138 | 0.205 |
| | 009 | X | 0.343 | 0.233 | 0.341 | 0.218 | 0.328 | 0.220 | 0.138 | 0.205 |
| | 010 | X | 0.374 | 0.264 | 0.372 | 0.249 | 0.359 | 0.251 | 0.138 | 0.205 |
| | 011 | X | 0.436 | 0.326 | 0.434 | 0.311 | 0.421 | 0.313 | 0.138 | 0.205 |
| Not Recommended for Dynamic | 012 | X | 0.499 | 0.389 | 0.497 | 0.374 | 0.484 | 0.376 | 0.138 | 0.205 |
| | 013 | X | 0.561 | 0.451 | 0.559 | 0.436 | 0.546 | 0.439 | 0.138 | 0.205 |
| | 014 | X | 0.624 | 0.514 | 0.622 | 0.499 | 0.609 | 0.501 | 0.138 | 0.205 |
| | 015 | X | 0.686 | 0.576 | 0.684 | 0.561 | 0.671 | 0.564 | 0.138 | 0.205 |
| | 016 | X | 0.749 | 0.639 | 0.747 | 0.624 | 0.734 | 0.626 | 0.138 | 0.205 |
| | 017 | X | 0.811 | 0.701 | 0.809 | 0.686 | 0.796 | 0.689 | 0.138 | 0.205 |
| | 018 | X | 0.874 | 0.764 | 0.872 | 0.749 | 0.856 | 0.751 | 0.138 | 0.205 |
| | 019 | X | 0.936 | 0.826 | 0.934 | 0.811 | 0.921 | 0.814 | 0.138 | 0.205 |
| | 020 | X | 0.999 | 0.889 | 0.997 | 0.874 | 0.984 | 0.876 | 0.138 | 0.205 |
| | 021 | X | 1.061 | 0.951 | 1.059 | 0.936 | 1.046 | 0.939 | 0.138 | 0.205 |
| | 022 | X | 1.124 | 1.014 | 1.122 | 0.999 | 1.109 | 1.001 | 0.138 | 0.205 |
| | 023 | X | 1.186 | 1.076 | 1.184 | 1.061 | 1.171 | 1.064 | 0.138 | 0.205 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|-----------------------------|-----------------------------|--------|---------------------------------------|---|---|--------------------------------------|---|--|--------------------------------------|--------------------------------------|
| | | | A Bore Diameter +.002/- .000 | B Groove Diameter +.000/- .002 | D Piston Diameter** +.000/- .001 | E Rod Diameter +.002/- .000 | F Groove Diameter +.002/- .000 | G Throat Diameter* +.001/- .000 | C1 One Back-up +.005/- .000 | C2 Two Back-up +.005/- .000 |
| Not Recommended for Dynamic | 024 | X | 1.249 | 1.139 | 1.247 | 1.124 | 1.234 | 1.126 | 0.138 | 0.205 |
| | 025 | X | 1.311 | 1.201 | 1.309 | 1.186 | 1.296 | 1.189 | 0.138 | 0.205 |
| | 026 | X | 1.374 | 1.264 | 1.372 | 1.249 | 1.359 | 1.251 | 0.138 | 0.205 |
| | 027 | X | 1.436 | 1.326 | 1.434 | 1.311 | 1.421 | 1.313 | 0.138 | 0.205 |
| | 028 | X | 1.499 | 1.389 | 1.497 | 1.374 | 1.484 | 1.376 | 0.138 | 0.205 |
| | 029 | | 1.624 | 1.514 | 1.622 | 1.499 | 1.609 | 1.501 | 0.138 | 0.205 |
| | 030 | | 1.749 | 1.639 | 1.747 | 1.624 | 1.734 | 1.626 | 0.138 | 0.205 |
| | 031 | X | 1.874 | 1.764 | 1.872 | 1.749 | 1.859 | 1.751 | 0.138 | 0.205 |
| | 032 | | 1.999 | 1.889 | 1.997 | 1.874 | 1.984 | 1.876 | 0.138 | 0.205 |
| | 033 | X | 2.124 | 2.014 | 2.122 | 1.999 | 2.109 | 2.001 | 0.138 | 0.205 |
| | 034 | | 2.249 | 2.139 | 2.247 | 2.124 | 2.234 | 2.126 | 0.138 | 0.205 |
| | 035 | | 2.374 | 2.264 | 2.372 | 2.249 | 2.359 | 2.251 | 0.138 | 0.205 |
| | 036 | X | 2.499 | 2.389 | 2.497 | 2.374 | 2.484 | 2.376 | 0.138 | 0.205 |
| | 037 | | 2.624 | 2.514 | 2.622 | 2.499 | 2.609 | 2.501 | 0.138 | 0.205 |
| | 038 | | 2.749 | 2.639 | 2.747 | 2.624 | 2.734 | 2.626 | 0.138 | 0.205 |
| 039 | | 2.874 | 2.764 | 2.872 | 2.749 | 2.859 | 2.751 | 0.138 | 0.205 | |
| 040 | X | 2.999 | 2.889 | 2.997 | 2.874 | 2.984 | 2.876 | 0.138 | 0.205 | |
| 041 | | 3.124 | 3.014 | 3.122 | 2.999 | 3.109 | 3.001 | 0.138 | 0.205 | |
| 042 | | 3.374 | 3.264 | 3.372 | 3.249 | 3.359 | 3.251 | 0.138 | 0.205 | |
| 043 | X | 3.874 | 3.764 | 3.872 | 3.749 | 3.859 | 3.751 | 0.138 | 0.205 | |
| Recommended for Dynamic | 104 | | 0.312 | 0.136 | 0.310 | 0.124 | 0.300 | 0.126 | 0.171 | 0.238 |
| | 105 | | 0.343 | 0.167 | 0.341 | 0.155 | 0.331 | 0.157 | 0.171 | 0.238 |
| | 106 | | 0.374 | 0.198 | 0.372 | 0.186 | 0.362 | 0.188 | 0.171 | 0.238 |
| | 107 | | 0.406 | 0.230 | 0.404 | 0.218 | 0.394 | 0.220 | 0.171 | 0.238 |
| | 108 | | 0.437 | 0.261 | 0.435 | 0.249 | 0.425 | 0.251 | 0.171 | 0.238 |
| | 109 | | 0.499 | 0.323 | 0.497 | 0.311 | 0.487 | 0.313 | 0.171 | 0.238 |
| | 110 | X | 0.562 | 0.386 | 0.560 | 0.374 | 0.550 | 0.376 | 0.171 | 0.238 |
| | 111 | X | 0.624 | 0.448 | 0.622 | 0.436 | 0.612 | 0.438 | 0.171 | 0.238 |
| | 112 | X | 0.687 | 0.511 | 0.685 | 0.499 | 0.675 | 0.501 | 0.171 | 0.238 |
| | 113 | X | 0.749 | 0.573 | 0.747 | 0.561 | 0.737 | 0.563 | 0.171 | 0.238 |
| | 114 | X | 0.812 | 0.636 | 0.810 | 0.624 | 0.800 | 0.626 | 0.171 | 0.238 |
| 115 | X | 0.874 | 0.698 | 0.872 | 0.686 | 0.862 | 0.688 | 0.171 | 0.238 | |
| 116 | X | 0.937 | 0.761 | 0.935 | 0.749 | 0.925 | 0.751 | 0.171 | 0.238 | |
| 117 | X | 0.999 | 0.823 | 0.997 | 0.811 | 0.987 | 0.814 | 0.171 | 0.238 | |
| Not Recommended for Dynamic | 118 | X | 1.062 | 0.886 | 1.060 | 0.874 | 1.050 | 0.876 | 0.171 | 0.238 |
| | 119 | X | 1.124 | 0.948 | 1.122 | 0.936 | 1.112 | 0.939 | 0.171 | 0.238 |
| | 120 | X | 1.187 | 1.011 | 1.185 | 0.999 | 1.175 | 1.001 | 0.171 | 0.238 |
| | 121 | X | 1.249 | 1.073 | 1.247 | 1.061 | 1.237 | 1.063 | 0.171 | 0.238 |
| | 122 | X | 1.312 | 1.136 | 1.310 | 1.124 | 1.300 | 1.126 | 0.171 | 0.238 |
| | 123 | X | 1.374 | 1.198 | 1.372 | 1.186 | 1.362 | 1.188 | 0.171 | 0.238 |
| | 124 | X | 1.437 | 1.261 | 1.435 | 1.249 | 1.425 | 1.251 | 0.171 | 0.238 |
| | 125 | X | 1.499 | 1.323 | 1.497 | 1.311 | 1.487 | 1.313 | 0.171 | 0.238 |
| | 126 | X | 1.562 | 1.386 | 1.560 | 1.374 | 1.550 | 1.376 | 0.171 | 0.238 |
| | 127 | X | 1.624 | 1.448 | 1.622 | 1.436 | 1.612 | 1.438 | 0.171 | 0.238 |
| | 128 | X | 1.687 | 1.511 | 1.685 | 1.499 | 1.675 | 1.501 | 0.171 | 0.238 |
| | 129 | X | 1.749 | 1.573 | 1.747 | 1.561 | 1.737 | 1.563 | 0.171 | 0.238 |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.
 **If used with wear rings, refer to wear ring piston diameter, see Section 9.

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.



Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|-----------------------------|-----------------------------|--------|---------------------------------------|---|---|-------------------------------------|--|--|-------------------------------------|--------------------------------------|
| | | | A Bore Diameter +.002/-0.000 | B Groove Diameter +.000/-0.002 | D Piston Diameter** +.000/-0.001 | E Rod Diameter +.002/0.000 | F Groove Diameter +.002/0.000 | G Throat Diameter* +.001/-0.000 | C1 One Back-up +.005/0.000 | C2 Two Back-up +.005/-0.000 |
| Not Recommended for Dynamic | 130 | | 1.812 | 1.636 | 1.810 | 1.624 | 1.800 | 1.626 | 0.171 | 0.238 |
| | 131 | X | 1.874 | 1.698 | 1.872 | 1.686 | 1.862 | 1.688 | 0.171 | 0.238 |
| | 132 | X | 1.937 | 1.761 | 1.935 | 1.749 | 1.925 | 1.751 | 0.171 | 0.238 |
| | 133 | X | 1.999 | 1.823 | 1.997 | 1.811 | 1.987 | 1.813 | 0.171 | 0.238 |
| | 134 | | 2.062 | 1.886 | 2.060 | 1.874 | 2.050 | 1.876 | 0.171 | 0.238 |
| | 135 | | 2.124 | 1.948 | 2.122 | 1.936 | 2.112 | 1.938 | 0.171 | 0.238 |
| | 136 | | 2.187 | 2.011 | 2.185 | 1.999 | 2.175 | 2.001 | 0.171 | 0.238 |
| | 137 | X | 2.249 | 2.073 | 2.247 | 2.061 | 2.237 | 2.063 | 0.171 | 0.238 |
| | 138 | | 2.312 | 2.136 | 2.310 | 2.124 | 2.300 | 2.126 | 0.171 | 0.238 |
| | 139 | | 2.374 | 2.198 | 2.372 | 2.186 | 2.362 | 2.188 | 0.171 | 0.238 |
| | 140 | | 2.437 | 2.261 | 2.435 | 2.249 | 2.425 | 2.251 | 0.171 | 0.238 |
| | 141 | X | 2.499 | 2.323 | 2.497 | 2.311 | 2.487 | 2.313 | 0.171 | 0.238 |
| | 142 | X | 2.562 | 2.386 | 2.560 | 2.374 | 2.550 | 2.376 | 0.171 | 0.238 |
| | 143 | X | 2.624 | 2.448 | 2.622 | 2.436 | 2.612 | 2.438 | 0.171 | 0.238 |
| | 144 | X | 2.687 | 2.511 | 2.685 | 2.499 | 2.675 | 2.501 | 0.171 | 0.238 |
| | 145 | | 2.749 | 2.573 | 2.747 | 2.561 | 2.737 | 2.563 | 0.171 | 0.238 |
| | 146 | | 2.812 | 2.636 | 2.810 | 2.624 | 2.800 | 2.626 | 0.171 | 0.238 |
| | 147 | | 2.874 | 2.698 | 2.872 | 2.686 | 2.862 | 2.688 | 0.171 | 0.238 |
| | 148 | | 2.937 | 2.761 | 2.935 | 2.749 | 2.925 | 2.751 | 0.171 | 0.238 |
| 149 | X | 2.999 | 2.823 | 2.997 | 2.811 | 2.987 | 2.813 | 0.171 | 0.238 | |
| Recommended for Dynamic | 201 | | 0.437 | 0.195 | 0.434 | 0.185 | 0.427 | 0.188 | 0.208 | 0.275 |
| | 202 | | 0.500 | 0.258 | 0.497 | 0.248 | 0.490 | 0.251 | 0.208 | 0.275 |
| | 203 | | 0.562 | 0.320 | 0.559 | 0.310 | 0.552 | 0.313 | 0.208 | 0.275 |
| | 204 | | 0.625 | 0.383 | 0.622 | 0.373 | 0.615 | 0.376 | 0.208 | 0.275 |
| | 205 | | 0.687 | 0.445 | 0.684 | 0.435 | 0.677 | 0.438 | 0.208 | 0.275 |
| | 206 | X | 0.750 | 0.508 | 0.747 | 0.498 | 0.740 | 0.501 | 0.208 | 0.275 |
| | 207 | | 0.812 | 0.570 | 0.809 | 0.560 | 0.802 | 0.563 | 0.208 | 0.275 |
| | 208 | | 0.875 | 0.633 | 0.872 | 0.623 | 0.865 | 0.626 | 0.208 | 0.275 |
| | 209 | X | 0.937 | 0.695 | 0.934 | 0.685 | 0.927 | 0.688 | 0.208 | 0.275 |
| | 210 | X | 1.000 | 0.758 | 0.997 | 0.748 | 0.990 | 0.751 | 0.208 | 0.275 |
| | 211 | X | 1.062 | 0.820 | 1.059 | 0.810 | 1.052 | 0.813 | 0.208 | 0.275 |
| | 212 | X | 1.125 | 0.883 | 1.122 | 0.873 | 1.115 | 0.876 | 0.208 | 0.275 |
| | 213 | X | 1.187 | 0.945 | 1.184 | 0.935 | 1.177 | 0.938 | 0.208 | 0.275 |
| | 214 | X | 1.250 | 1.008 | 1.247 | 0.998 | 1.240 | 1.001 | 0.208 | 0.275 |
| 215 | X | 1.312 | 1.070 | 1.309 | 1.060 | 1.302 | 1.063 | 0.208 | 0.275 | |
| 216 | X | 1.375 | 1.133 | 1.372 | 1.123 | 1.365 | 1.126 | 0.208 | 0.275 | |
| 217 | X | 1.437 | 1.195 | 1.434 | 1.185 | 1.427 | 1.188 | 0.208 | 0.275 | |
| 218 | X | 1.500 | 1.258 | 1.497 | 1.248 | 1.490 | 1.251 | 0.208 | 0.275 | |
| 219 | | 1.562 | 1.320 | 1.559 | 1.310 | 1.552 | 1.313 | 0.208 | 0.275 | |
| 220 | X | 1.625 | 1.383 | 1.622 | 1.373 | 1.615 | 1.376 | 0.208 | 0.275 | |
| 221 | X | 1.687 | 1.445 | 1.684 | 1.435 | 1.677 | 1.438 | 0.208 | 0.275 | |
| 222 | X | 1.750 | 1.508 | 1.747 | 1.498 | 1.740 | 1.501 | 0.208 | 0.275 | |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|-----------------------------|-----------------------------|--------|--------------------------------------|--|--|-------------------------------------|--|---|-------------------------------------|-------------------------------------|
| | | | A Bore Diameter +.002/-.000 | B Groove Diameter +.000/-.002 | D Piston Diameter** +.000/-.001 | E Rod Diameter +.002/-.000 | F Groove Diameter +.002/-.000 | G Throat Diameter* +.001/-.000 | C1 One Back-up +.005/-.000 | C2 Two Back-up +.005/-.000 |
| Not Recommended for Dynamic | 223 | X | 1.875 | 1.633 | 1.872 | 1.623 | 1.865 | 1.626 | 0.208 | 0.275 |
| | 224 | X | 2.000 | 1.758 | 1.997 | 1.748 | 1.990 | 1.751 | 0.208 | 0.275 |
| | 225 | X | 2.125 | 1.883 | 2.122 | 1.873 | 2.115 | 2.876 | 0.208 | 0.275 |
| | 226 | X | 2.250 | 2.008 | 2.247 | 1.998 | 2.240 | 2.001 | 0.208 | 0.275 |
| | 227 | X | 2.375 | 2.133 | 2.372 | 2.123 | 2.365 | 2.126 | 0.208 | 0.275 |
| | 228 | X | 2.500 | 2.258 | 2.497 | 2.248 | 2.490 | 2.501 | 0.208 | 0.275 |
| | 229 | X | 2.625 | 2.383 | 2.622 | 2.373 | 2.615 | 2.376 | 0.208 | 0.275 |
| | 230 | X | 2.750 | 2.508 | 2.747 | 2.498 | 2.740 | 2.501 | 0.208 | 0.275 |
| | 231 | X | 2.875 | 2.633 | 2.872 | 2.623 | 2.865 | 2.626 | 0.208 | 0.275 |
| | 232 | X | 3.000 | 2.758 | 2.997 | 2.748 | 2.990 | 2.751 | 0.208 | 0.275 |
| | 233 | X | 3.125 | 2.883 | 3.122 | 2.873 | 3.115 | 2.876 | 0.208 | 0.275 |
| | 234 | X | 3.250 | 3.008 | 3.247 | 2.998 | 3.240 | 3.001 | 0.208 | 0.275 |
| | 235 | | 3.375 | 3.133 | 3.372 | 3.123 | 3.365 | 3.126 | 0.208 | 0.275 |
| | 236 | X | 3.500 | 3.258 | 3.497 | 3.248 | 3.490 | 3.251 | 0.208 | 0.275 |
| | 237 | X | 3.625 | 3.383 | 3.622 | 3.373 | 3.615 | 3.376 | 0.208 | 0.275 |
| | 238 | X | 3.750 | 3.508 | 3.747 | 3.498 | 3.740 | 3.501 | 0.208 | 0.275 |
| | 239 | | 3.875 | 3.633 | 3.872 | 3.623 | 3.865 | 3.626 | 0.208 | 0.275 |
| | 240 | X | 4.000 | 3.758 | 3.997 | 3.748 | 3.990 | 3.751 | 0.208 | 0.275 |
| | 241 | | 4.125 | 3.883 | 4.122 | 3.873 | 4.115 | 3.876 | 0.208 | 0.275 |
| | 242 | X | 4.250 | 4.008 | 4.247 | 3.998 | 4.240 | 4.001 | 0.208 | 0.275 |
| | 243 | | 4.375 | 4.133 | 4.372 | 4.123 | 4.365 | 4.126 | 0.208 | 0.275 |
| | 244 | X | 4.500 | 4.258 | 4.497 | 4.248 | 4.490 | 4.251 | 0.208 | 0.275 |
| | 245 | X | 4.625 | 4.383 | 4.622 | 4.373 | 4.615 | 4.376 | 0.208 | 0.275 |
| | 246 | X | 4.750 | 4.508 | 4.747 | 4.498 | 4.740 | 4.501 | 0.208 | 0.275 |
| | 247 | X | 4.875 | 4.633 | 4.872 | 4.623 | 4.865 | 4.626 | 0.208 | 0.275 |
| | 248 | X | 5.000 | 4.758 | 4.997 | 4.748 | 4.990 | 4.751 | 0.208 | 0.275 |
| | 249 | | 5.125 | 4.883 | 5.122 | 4.873 | 5.115 | 4.876 | 0.208 | 0.275 |
| 250 | X | 5.250 | 5.008 | 5.247 | 4.998 | 5.240 | 5.001 | 0.208 | 0.275 | |
| 251 | | 5.375 | 5.133 | 5.372 | 5.123 | 5.365 | 5.126 | 0.208 | 0.275 | |
| 252 | X | 5.500 | 5.258 | 5.497 | 5.248 | 5.490 | 5.251 | 0.208 | 0.275 | |
| 253 | | 5.625 | 5.383 | 5.622 | 5.373 | 5.615 | 5.376 | 0.208 | 0.275 | |
| 254 | | 5.750 | 5.508 | 5.747 | 5.498 | 5.740 | 5.501 | 0.208 | 0.275 | |
| 255 | | 5.875 | 5.633 | 5.872 | 5.623 | 5.865 | 5.626 | 0.208 | 0.275 | |
| 256 | X | 6.000 | 5.758 | 5.997 | 5.748 | 5.990 | 5.751 | 0.208 | 0.275 | |
| 257 | | 6.125 | 5.883 | 6.122 | 5.873 | 6.115 | 5.876 | 0.208 | 0.275 | |
| 258 | X | 6.250 | 6.008 | 6.247 | 5.998 | 6.240 | 6.001 | 0.208 | 0.275 | |
| 259 | | 6.500 | 6.258 | 6.497 | 6.248 | 6.490 | 6.251 | 0.208 | 0.275 | |
| 260 | | 6.750 | 6.508 | 6.747 | 6.498 | 6.740 | 6.501 | 0.208 | 0.275 | |
| 261 | | 7.000 | 6.758 | 6.997 | 6.748 | 6.990 | 6.751 | 0.208 | 0.275 | |
| 262 | | 7.250 | 7.008 | 7.247 | 6.998 | 7.240 | 7.001 | 0.208 | 0.275 | |
| 263 | | 7.500 | 7.258 | 7.497 | 7.248 | 7.490 | 7.251 | 0.208 | 0.275 | |
| 264 | X | 7.750 | 7.508 | 7.747 | 7.498 | 7.740 | 7.501 | 0.208 | 0.275 | |
| 265 | X | 8.000 | 7.758 | 7.997 | 7.748 | 7.990 | 7.751 | 0.208 | 0.275 | |
| 277 | X | 11.750 | 11.508 | 11.747 | 11.498 | 11.740 | 11.501 | 0.208 | 0.275 | |

*If used with wear rings, refer to wear ring throat diameter, see Section 9.

**If used with wear rings, refer to wear ring piston diameter, see Section 9.

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|----------------------------|-----------------------------|--------|---------------------------------------|---|---|------------------------------------|---------------------------------------|--|------------------------------------|--------------------------------------|
| | | | A Bore Diameter +.002/-0.000 | B Groove Diameter +.000/-0.002 | D Piston Diameter** +.000/-0.001 | E Rod Diameter +.002/.000 | F Groove Diameter +.002/.000 | G Throat Diameter* +.001/-0.000 | C1 One Back-up +.005/.000 | C2 Two Back-up +.005/-0.000 |
| Recommended for Dynamic | 309 | X | 0.812 | 0.442 | 0.809 | 0.435 | 0.805 | 0.438 | 0.311 | 0.410 |
| | 310 | X | 0.875 | 0.505 | 0.872 | 0.498 | 0.868 | 0.501 | 0.311 | 0.410 |
| | 311 | | 0.937 | 0.567 | 0.934 | 0.560 | 0.930 | 0.563 | 0.311 | 0.410 |
| | 312 | | 1.000 | 0.630 | 0.997 | 0.623 | 0.993 | 0.626 | 0.311 | 0.410 |
| | 313 | | 1.062 | 0.692 | 1.059 | 0.685 | 1.055 | 0.688 | 0.311 | 0.410 |
| | 314 | X | 1.125 | 0.755 | 1.122 | 0.748 | 1.118 | 0.751 | 0.311 | 0.410 |
| | 315 | | 1.187 | 0.817 | 1.184 | 0.810 | 1.180 | 0.813 | 0.311 | 0.410 |
| Recommended for Dynamic | 316 | X | 1.250 | 0.880 | 1.247 | 0.873 | 1.243 | 0.876 | 0.311 | 0.410 |
| | 317 | | 1.312 | 0.942 | 1.309 | 0.935 | 1.305 | 0.938 | 0.311 | 0.410 |
| | 318 | X | 1.375 | 1.005 | 1.372 | 0.998 | 1.368 | 1.001 | 0.311 | 0.410 |
| | 319 | | 1.437 | 1.067 | 1.434 | 1.060 | 1.430 | 1.063 | 0.311 | 0.410 |
| | 320 | | 1.500 | 1.130 | 1.497 | 1.123 | 1.493 | 1.126 | 0.311 | 0.410 |
| | 321 | | 1.562 | 1.192 | 1.559 | 1.185 | 1.555 | 1.188 | 0.311 | 0.410 |
| | 322 | X | 1.625 | 1.255 | 1.622 | 1.248 | 1.618 | 1.251 | 0.311 | 0.410 |
| | 323 | | 1.687 | 1.317 | 1.684 | 1.310 | 1.680 | 1.313 | 0.311 | 0.410 |
| | 324 | | 1.750 | 1.380 | 1.747 | 1.373 | 1.743 | 1.376 | 0.311 | 0.410 |
| | 325 | X | 1.875 | 1.505 | 1.872 | 1.498 | 1.868 | 1.501 | 0.311 | 0.410 |
| | 326 | X | 2.000 | 1.630 | 1.997 | 1.623 | 1.993 | 1.626 | 0.311 | 0.410 |
| | 327 | X | 2.125 | 1.755 | 2.122 | 1.748 | 2.118 | 1.751 | 0.311 | 0.410 |
| | 328 | X | 2.250 | 1.880 | 2.247 | 1.873 | 2.243 | 1.876 | 0.311 | 0.410 |
| | 329 | X | 2.375 | 2.005 | 2.372 | 1.998 | 2.368 | 2.001 | 0.311 | 0.410 |
| | 330 | X | 2.500 | 2.130 | 2.497 | 2.123 | 2.493 | 2.126 | 0.311 | 0.410 |
| | 331 | X | 2.625 | 2.255 | 2.622 | 2.248 | 2.618 | 2.251 | 0.311 | 0.410 |
| | 332 | X | 2.750 | 2.380 | 2.747 | 2.373 | 2.743 | 2.376 | 0.311 | 0.410 |
| | 333 | X | 2.875 | 2.505 | 2.872 | 2.498 | 2.868 | 2.501 | 0.311 | 0.410 |
| | 334 | X | 3.000 | 2.630 | 2.997 | 2.623 | 2.993 | 2.626 | 0.311 | 0.410 |
| | 335 | X | 3.125 | 2.755 | 3.122 | 2.748 | 3.118 | 2.751 | 0.311 | 0.410 |
| | 336 | X | 3.250 | 2.880 | 3.247 | 2.873 | 3.243 | 2.876 | 0.311 | 0.410 |
| | 337 | X | 3.375 | 3.005 | 3.372 | 2.998 | 3.368 | 3.001 | 0.311 | 0.410 |
| | 338 | X | 3.500 | 3.130 | 3.497 | 3.123 | 3.493 | 3.126 | 0.311 | 0.410 |
| | 339 | X | 3.625 | 3.255 | 3.622 | 3.248 | 3.618 | 3.251 | 0.311 | 0.410 |
| | 340 | X | 3.750 | 3.380 | 3.747 | 3.373 | 3.743 | 3.376 | 0.311 | 0.410 |
| | 341 | X | 3.875 | 3.505 | 3.872 | 3.498 | 3.868 | 3.501 | 0.311 | 0.410 |
| | 342 | X | 4.000 | 3.630 | 3.997 | 3.623 | 3.993 | 3.626 | 0.311 | 0.410 |
| | 343 | X | 4.125 | 3.755 | 4.122 | 3.748 | 4.118 | 3.751 | 0.311 | 0.410 |
| | 344 | X | 4.250 | 3.880 | 4.247 | 3.873 | 4.243 | 3.876 | 0.311 | 0.410 |
| | 345 | X | 4.375 | 4.005 | 4.372 | 3.998 | 4.368 | 4.001 | 0.311 | 0.410 |
| | 346 | X | 4.500 | 4.130 | 4.497 | 4.123 | 4.493 | 4.126 | 0.311 | 0.410 |
| | 347 | X | 4.625 | 4.255 | 4.622 | 4.248 | 4.618 | 4.251 | 0.311 | 0.410 |
| 348 | X | 4.750 | 4.380 | 4.747 | 4.373 | 4.743 | 4.376 | 0.311 | 0.410 | |
| 349 | X | 4.875 | 4.505 | 4.872 | 4.498 | 4.868 | 4.501 | 0.311 | 0.410 | |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|-----------------------------|-----------------------------|--------|--------------------------------------|--|--|-------------------------------------|--|---|-------------------------------------|-------------------------------------|
| | | | A Bore Diameter +.002/-.000 | B Groove Diameter +.000/-.002 | D Piston Diameter** +.000/-.001 | E Rod Diameter +.002/-.000 | F Groove Diameter +.002/-.000 | G Throat Diameter* +.001/-.000 | C1 One Back-up +.005/-.000 | C2 Two Back-up +.005/-.000 |
| Not Recommended for Dynamic | 350 | | 5.000 | 4.630 | 4.997 | 4.623 | 4.993 | 4.626 | 0.311 | 0.410 |
| | 351 | | 5.125 | 4.755 | 5.122 | 4.748 | 5.118 | 4.751 | 0.311 | 0.410 |
| | 352 | X | 5.250 | 4.880 | 5.247 | 4.873 | 5.243 | 4.876 | 0.311 | 0.410 |
| | 353 | | 5.375 | 5.005 | 5.372 | 4.998 | 5.368 | 5.001 | 0.311 | 0.410 |
| | 354 | X | 5.500 | 5.130 | 5.497 | 5.123 | 5.493 | 5.126 | 0.311 | 0.410 |
| | 355 | | 5.625 | 5.255 | 5.622 | 5.248 | 5.618 | 5.251 | 0.311 | 0.410 |
| | 356 | | 5.750 | 5.380 | 5.747 | 5.373 | 5.743 | 5.376 | 0.311 | 0.410 |
| | 357 | | 5.875 | 5.505 | 5.872 | 5.498 | 5.868 | 5.501 | 0.311 | 0.410 |
| | 358 | X | 6.000 | 5.630 | 5.997 | 5.623 | 5.993 | 5.626 | 0.311 | 0.410 |
| | 359 | | 6.125 | 5.755 | 6.122 | 5.748 | 6.118 | 5.751 | 0.311 | 0.410 |
| | 360 | | 6.250 | 5.880 | 6.247 | 5.873 | 6.243 | 5.876 | 0.311 | 0.410 |
| 361 | X | 6.375 | 6.005 | 6.372 | 5.998 | 6.368 | 6.001 | 0.311 | 0.410 | |
| Recommended for Dynamic | 425 | X | 5.002 | 4.528 | 4.998 | 4.497 | 4.971 | 4.501 | 0.408 | 0.538 |
| | 426 | | 5.127 | 4.653 | 5.123 | 4.622 | 5.096 | 4.626 | 0.408 | 0.538 |
| | 427 | | 5.252 | 4.778 | 5.248 | 4.747 | 5.221 | 4.751 | 0.408 | 0.538 |
| | 428 | | 5.377 | 4.903 | 5.373 | 4.872 | 5.346 | 4.876 | 0.408 | 0.538 |
| | 429 | X | 5.502 | 5.028 | 5.498 | 4.997 | 5.471 | 5.001 | 0.408 | 0.538 |
| | 430 | | 5.627 | 5.153 | 5.623 | 5.122 | 5.596 | 5.126 | 0.408 | 0.538 |
| | 431 | | 5.752 | 5.278 | 5.748 | 5.247 | 5.721 | 5.251 | 0.408 | 0.538 |
| | 432 | X | 5.877 | 5.403 | 5.873 | 5.372 | 5.846 | 5.376 | 0.408 | 0.538 |
| | 433 | X | 6.002 | 5.528 | 5.998 | 5.497 | 5.971 | 5.501 | 0.408 | 0.538 |
| | 434 | | 6.127 | 5.653 | 6.123 | 5.622 | 6.096 | 5.626 | 0.408 | 0.538 |
| | 435 | | 6.252 | 5.778 | 6.248 | 5.747 | 6.221 | 5.751 | 0.408 | 0.538 |
| | 436 | | 6.377 | 5.903 | 6.373 | 5.872 | 6.346 | 5.876 | 0.408 | 0.538 |
| | 437 | X | 6.502 | 6.028 | 6.498 | 5.997 | 6.471 | 6.001 | 0.408 | 0.538 |
| | 438 | | 6.752 | 6.278 | 6.748 | 6.247 | 6.721 | 6.251 | 0.408 | 0.538 |
| | 439 | X | 7.002 | 6.528 | 6.998 | 6.497 | 6.971 | 6.501 | 0.408 | 0.538 |
| | 440 | | 7.252 | 6.778 | 7.248 | 6.747 | 7.221 | 6.751 | 0.408 | 0.538 |
| | 441 | | 7.502 | 7.028 | 7.498 | 6.997 | 7.471 | 7.001 | 0.408 | 0.538 |
| | 442 | | 7.752 | 7.278 | 7.748 | 7.247 | 7.721 | 7.251 | 0.408 | 0.538 |
| | 443 | X | 8.002 | 7.528 | 7.998 | 7.497 | 7.971 | 7.501 | 0.408 | 0.538 |
| | 444 | | 8.252 | 7.778 | 8.248 | 7.747 | 8.221 | 7.751 | 0.408 | 0.538 |
| | 445 | | 8.502 | 8.028 | 8.498 | 7.997 | 8.471 | 8.001 | 0.408 | 0.538 |
| | 446 | X | 9.002 | 8.528 | 8.998 | 8.497 | 8.971 | 8.501 | 0.408 | 0.538 |
| | 447 | | 9.502 | 9.028 | 9.498 | 8.997 | 9.471 | 9.001 | 0.408 | 0.538 |
| 448 | | 10.002 | 9.528 | 9.998 | 9.497 | 9.971 | 9.501 | 0.408 | 0.538 | |
| 449 | | 10.502 | 10.028 | 10.498 | 9.997 | 10.471 | 10.001 | 0.408 | 0.538 | |
| 450 | | 11.002 | 10.528 | 10.998 | 10.497 | 10.971 | 10.501 | 0.408 | 0.538 | |
| 451 | X | 11.502 | 11.028 | 11.498 | 10.997 | 11.471 | 11.001 | 0.408 | 0.538 | |
| 452 | | 12.002 | 11.528 | 11.998 | 11.497 | 11.971 | 11.501 | 0.408 | 0.538 | |
| 453 | X | 12.502 | 12.028 | 12.498 | 11.997 | 12.471 | 12.001 | 0.408 | 0.538 | |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

Table 10-8. 5100 Gland Dimensions — Inch (Continued)

| | O-ring 2-Size AS568A- | Tooled | Piston | | | Rod | | | Groove Width | |
|--------------------------------|-----------------------------|--------|---------------------------------------|---|---|-------------------------------------|--|--|-------------------------------------|--------------------------------------|
| | | | A Bore Diameter +.002/-0.000 | B Groove Diameter +.000/-0.002 | D Piston Diameter** +.000/-0.001 | E Rod Diameter +.002/0.000 | F Groove Diameter +.002/0.000 | G Throat Diameter* +.001/-0.000 | C1 One Back-up +.005/0.000 | C2 Two Back-up +.005/-0.000 |
| Recommended for Dynamic | 454 | | 13.002 | 12.528 | 12.998 | 12.497 | 12.971 | 12.501 | 0.408 | 0.538 |
| | 455 | | 13.502 | 13.028 | 13.498 | 12.997 | 13.471 | 13.001 | 0.408 | 0.538 |
| | 456 | | 14.002 | 13.528 | 13.998 | 13.497 | 13.971 | 13.501 | 0.408 | 0.538 |
| | 457 | | 14.502 | 14.028 | 14.498 | 13.997 | 14.471 | 14.001 | 0.408 | 0.538 |
| | 458 | | 15.002 | 14.528 | 14.998 | 14.497 | 14.971 | 14.501 | 0.408 | 0.538 |
| | 459 | | 15.502 | 15.028 | 15.498 | 14.997 | 15.471 | 15.001 | 0.408 | 0.538 |
| | 460 | | 16.002 | 15.528 | 15.998 | 15.497 | 15.971 | 15.501 | 0.408 | 0.538 |
| Not Recommended for Dynamic | 461 | | 16.502 | 16.028 | 16.498 | 15.997 | 16.471 | 16.001 | 0.408 | 0.538 |
| | 462 | | 17.002 | 16.528 | 16.998 | 16.497 | 16.971 | 16.501 | 0.408 | 0.538 |
| | 463 | | 17.502 | 17.028 | 17.498 | 16.997 | 17.471 | 17.001 | 0.408 | 0.538 |
| | 464 | | 18.002 | 17.528 | 17.998 | 17.497 | 17.971 | 17.501 | 0.408 | 0.538 |
| | 465 | | 18.502 | 18.028 | 18.498 | 17.997 | 18.471 | 18.001 | 0.408 | 0.538 |
| | 466 | X | 19.002 | 18.528 | 18.998 | 18.497 | 18.971 | 18.501 | 0.408 | 0.538 |
| | 467 | | 19.502 | 19.028 | 19.498 | 18.997 | 19.471 | 19.001 | 0.408 | 0.538 |
| | 468 | | 20.002 | 19.528 | 19.998 | 19.497 | 19.971 | 19.501 | 0.408 | 0.538 |
| | 469 | | 20.502 | 20.028 | 20.498 | 19.997 | 20.471 | 20.001 | 0.408 | 0.538 |
| | 470 | | 21.502 | 21.028 | 21.498 | 20.997 | 21.471 | 21.001 | 0.408 | 0.538 |
| | 471 | | 22.502 | 22.028 | 22.498 | 21.997 | 22.471 | 22.001 | 0.408 | 0.538 |
| | 472 | X | 23.502 | 23.028 | 23.498 | 22.997 | 23.471 | 23.001 | 0.408 | 0.538 |
| | 473 | | 24.502 | 24.028 | 24.498 | 23.997 | 24.471 | 24.001 | 0.408 | 0.538 |
| | 474 | | 25.502 | 25.028 | 25.498 | 24.997 | 25.471 | 25.001 | 0.408 | 0.538 |
| | 475 | X | 26.502 | 26.028 | 26.498 | 25.997 | 26.471 | 26.001 | 0.408 | 0.538 |

*If used with wear rings, refer to wear ring throat diameter, [see Section 9](#).

**If used with wear rings, refer to wear ring piston diameter, [see Section 9](#).

Those Piston O.D.'s shown in shaded area may cause the back-up to exceed its ability to recover from stretching. If so, select a skived back-up or use a two-piece piston.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Back-up Ring PAB Profile



PAB Profile, Positively-Actuated Back-up

While modular back-ups require an increase in groove width to be incorporated into the sealing system, because they are integrated with the seal positively-actuated back-ups do not change the required axial groove width. For many profiles, these back-ups can provide the ultimate extrusion resistance while retaining the seal's original groove dimensions. While the most common material used to manufacture positively-actuated back-ups is nylon, it is not uncommon to see applications that require materials such as UltraCOMP, PTFE or polyacetal.

Due to the nature of this product line and the design relationship between the back-up and the seal, parts are sold only as part of an assembly that includes the seal design best suited to the application.


Positively-actuated back-ups can be incorporated into profiles such as the BPP and BD. Tooling may be required.

Technical Data


| Standard Materials* | Temperature | Max. Pressure Range** | |
|---------------------|------------------------------------|-------------------------|--|
| Rod | | | * Alternate Materials: For applications that may require an alternate material, please contact your local Parker Seal representative. |
| R0 (Virgin PTFE) | -65°F to 250°F (-54°C to 121°C) | 5,000 psi (344 bar) | |
| R1 (Nylatron) | -20°F to 250°F (-29°C to 121°C) | 3,000 psi (206 bar) | |
| R12 (PEEK) | -65°F to 500°F (-54°C to 260°C) | 10,000 psi (689 bar) | |
| Piston | | | ** 7,000 psi (482 bar) with tight-tolerance wear rings. 5,000 psi (344 bar) with standard-tolerance wear rings. |
| P0 (Virgin PTFE) | -65°F to 250°F (-54°C to 121°C) | 5,000 psi (344 bar) | |
| P1 (Nylatron) | -20°F to 250°F (-29°C to 121°C) | 3,000 psi (206 bar) | |
| P12 (PEEK) | -65°F to 500°F (-54°C to 260°C) | 10,000 psi (689 bar) | |



Positively-Actuated Cross-Section

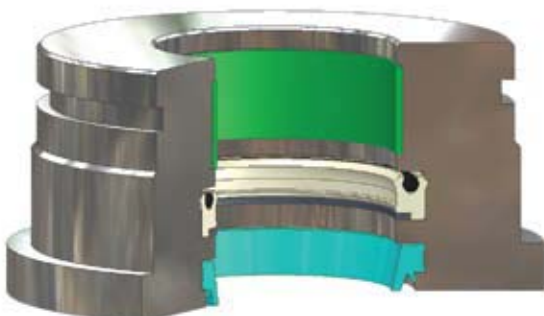

Positively-Actuated installed in Rod Gland

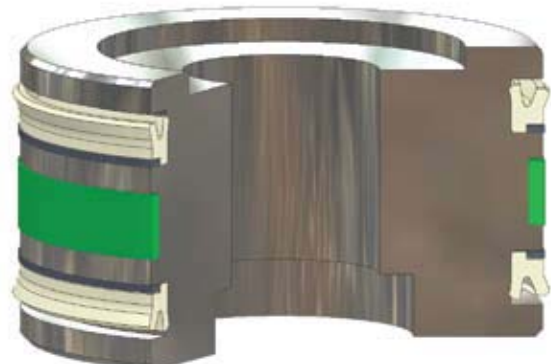

Positively-Actuated installed in Piston Gland

Back-up Ring PDB Profile

Catalog EPS 5370/USA

PDB Profile, PTFE Back-up



PDB back-ups are PTFE anti-extrusion rings. The PDBA and PDBB profiles are designed to retrofit MIL Spec grooves used in commercial applications. PDBA styles are split rings retrofitting MS28774 designs, while PDBB styles are solid rings retrofitting MS27595 designs. Due to the fact that these profiles are designed to commercial grooves, MIL Spec certifications are not available. Although the standard material is virgin PTFE, any of Parker's available PTFE blends can be used.

Technical Data

Standard

Materials*

0100 Virgin PTFE

Temperature

-425°F to 450°F
(-254°C to 232°C)


Max. Pressure Range

1,500 psi (103 bar) dynamic
4,500 psi (310 bar) static


***Alternate Materials:** For applications that may require an alternate material, please see [Section 3 \(Table 3-7\)](#) for alternate PTFE materials.



PDB Cross-Section

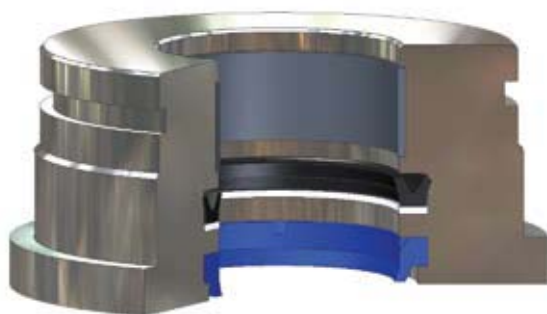


PDB installed in Rod Gland

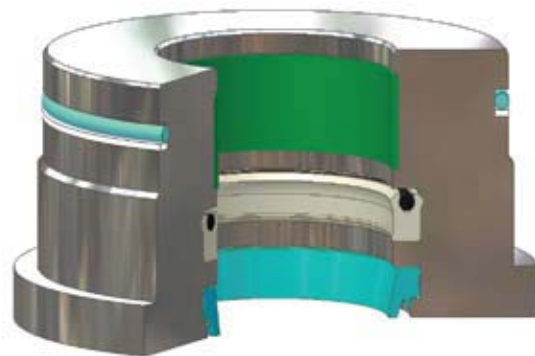


PDB installed in Piston Gland

Part Number Nomenclature — PDBA Profile

Table 10-9. PDBA Profile — Inch

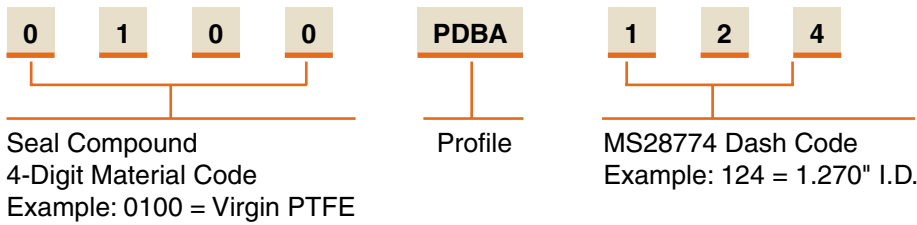

Gland Dimensions — PDBA Profile

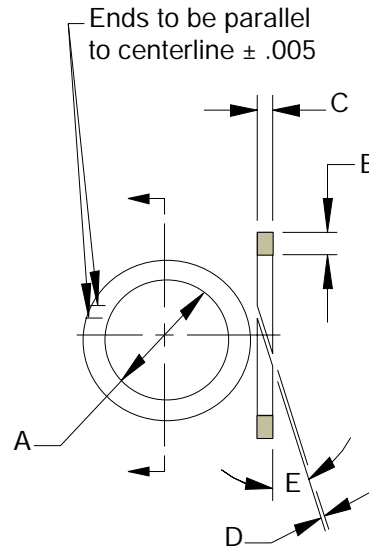

Please refer to Engineering [Section 2, page 2-8](#) for surface finish and additional hardware considerations.

Table 10-10. PDBA Gland Dimensions — Inch

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +.001/ -.001 | | | | |
| 004 | 0.109 | .052/.054 | .045/.052 | .000/.005 | 39 |
| 005 | 0.124 | .052/.054 | .045/.052 | .000/.005 | 33 |
| 006 | 0.140 | .052/.054 | .045/.052 | .000/.005 | 30 |
| 007 | 0.171 | .052/.054 | .045/.052 | .000/.005 | 26 |
| 008 | 0.202 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 009 | 0.234 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 010 | 0.265 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 011 | 0.327 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 012 | 0.390 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 013 | 0.455 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 014 | 0.518 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 015 | 0.580 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 016 | 0.643 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 017 | 0.705 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 018 | 0.768 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 019 | 0.830 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 020 | 0.898 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 021 | 0.960 | .052/.054 | .045/.052 | .000/.005 | 22 |

NOTE: Measure Split Gap using a Mandrel with “A” Diameter.

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +.001/ -.001 | | | | |
| 022 | 1.023 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 023 | 1.085 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 024 | 1.148 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 025 | 1.210 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 026 | 1.273 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 027 | 1.335 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 028 | 1.398 | .052/.054 | .045/.052 | .000/.005 | 22 |
| 110 | 0.390 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 111 | 0.452 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 112 | 0.515 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 113 | 0.577 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 114 | 0.640 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 115 | 0.702 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 116 | 0.765 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 117 | 0.832 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 118 | 0.895 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 119 | 0.957 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 120 | 1.020 | .085/.087 | .045/.052 | .000/.006 | 22 |

NOTE: Measure Split Gap using a Mandrel with “A” Diameter.

Table 10-10. PDBA Gland Dimensions — Inch (Continued)

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +.001/ -.001 | | | | |
| 121 | 1.082 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 122 | 1.145 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 123 | 1.207 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 124 | 1.270 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 125 | 1.332 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 126 | 1.397 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 127 | 1.459 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 128 | 1.522 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 129 | 1.584 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 130 | 1.647 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 131 | 1.709 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 132 | 1.772 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 133 | 1.934 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 134 | 1.897 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 135 | 1.959 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 136 | 2.022 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 137 | 2.084 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 138 | 2.147 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 139 | 2.209 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 140 | 2.258 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 141 | 2.320 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 142 | 2.383 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 143 | 2.445 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 144 | 2.508 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 145 | 2.570 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 146 | 2.633 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 147 | 2.695 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 148 | 2.758 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 149 | 2.820 | .085/.087 | .045/.052 | .000/.006 | 22 |
| 210 | 0.766 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 211 | 0.828 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 212 | 0.891 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 213 | 0.953 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 214 | 1.016 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 215 | 1.078 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 216 | 1.141 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 217 | 1.203 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 218 | 1.266 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 219 | 1.344 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 220 | 1.397 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 221 | 1.459 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 222 | 1.522 | .118/.120 | .045/.052 | .000/.006 | 22 |
| 223 | 1.647 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 224 | 1.772 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 225 | 1.897 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 226 | 2.022 | .118/.120 | .045/.052 | .000/.007 | 22 |

NOTE: Measure Split Gap using a Mandrel with "A" Diameter.

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +.001/ -.001 | | | | |
| 227 | 2.147 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 228 | 2.272 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 229 | 2.397 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 230 | 2.522 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 231 | 2.631 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 232 | 2.756 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 233 | 2.881 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 234 | 3.006 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 235 | 3.131 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 236 | 3.256 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 237 | 3.381 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 238 | 3.506 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 239 | 3.631 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 240 | 3.756 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 241 | 3.881 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 242 | 4.006 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 243 | 4.131 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 244 | 4.256 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 245 | 4.381 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 246 | 4.506 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 247 | 4.631 | .118/.120 | .045/.052 | .000/.007 | 22 |
| 325 | 1.513 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 326 | 1.638 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 327 | 1.763 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 328 | 1.888 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 329 | 2.013 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 330 | 2.138 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 331 | 2.268 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 332 | 2.393 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 333 | 2.518 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 334 | 2.643 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 335 | 2.768 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 336 | 2.893 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 337 | 3.018 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 338 | 3.143 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 339 | 3.273 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 340 | 3.398 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 341 | 3.523 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 342 | 3.648 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 343 | 3.773 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 344 | 3.898 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 345 | 4.028 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 346 | 4.153 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 347 | 4.278 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 348 | 4.403 | .182/.184 | .065/.075 | .000/.007 | 22 |
| 349 | 4.528 | .182/.184 | .065/.075 | .000/.007 | 22 |

NOTE: Measure Split Gap using a Mandrel with "A" Diameter.

Table 10-10. PDBA Gland Dimensions — Inch (Continued)

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +0.001/ -.001 | | | | |
| 425 | 4.551 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 426 | 4.676 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 427 | 4.801 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 428 | 4.926 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 429 | 5.051 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 430 | 5.176 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 431 | 5.301 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 432 | 5.426 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 433 | 5.551 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 434 | 5.676 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 435 | 5.801 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 436 | 5.926 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 437 | 6.051 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 438 | 6.274 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 439 | 6.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 440 | 6.774 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 441 | 7.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 442 | 7.274 | .235/.237 | .106/.110 | .000/.008 | 22 |

NOTE: Measure Split Gap using a Mandrel with "A" Diameter.

| Dash Number MS28774 | Seal Dimensions | | | | |
|------------------------|-------------------------|----------------------------------|------------|----------------|-------------------------------|
| | A Inside Diameter | B Radial Cross- Section | C Width | D Split Gap | E Split Angle Degree |
| | +0.001/ -.001 | | | | |
| 443 | 7.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 444 | 7.774 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 445 | 8.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 446 | 8.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 447 | 9.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 448 | 9.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 449 | 10.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 450 | 10.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 451 | 11.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 452 | 11.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 453 | 12.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 454 | 12.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 455 | 13.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 456 | 13.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 457 | 14.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 458 | 14.524 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 459 | 15.024 | .235/.237 | .106/.110 | .000/.008 | 22 |
| 460 | 15.524 | .235/.237 | .106/.110 | .000/.008 | 22 |


NOTE: Measure Split Gap using a Mandrel with "A" Diameter.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

PDB Profile

Part Number Nomenclature — PDBB Profile

Table 10-11. PDBB Profile — Inch

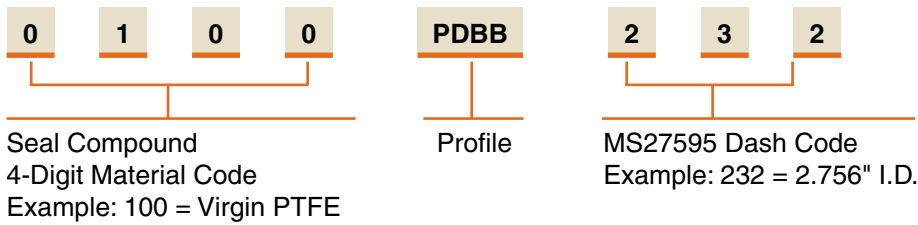

Gland Dimensions — PDBB Profile

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

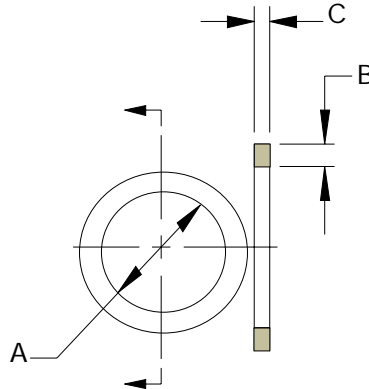


Table 10-12. PDBB Gland Dimensions — Inch

| Dash Number MS27595 | Seal Dimensions | | |
|------------------------|-----------------|----------------------------------|------------|
| | A I.D. | B Radial Cross- Section | C Width |
| | +.001/ -.000 | | |
| 004 | 0.080 | .048/.052 | .054/.056 |
| 005 | 0.111 | .048/.052 | .054/.056 |
| 006 | 0.125 | .048/.052 | .054/.056 |
| 007 | 0.156 | .048/.052 | .054/.056 |
| 008 | 0.187 | .048/.052 | .054/.056 |
| 009 | 0.219 | .048/.052 | .054/.056 |
| 010 | 0.250 | .048/.052 | .054/.056 |
| 011 | 0.312 | .048/.052 | .054/.056 |
| 012 | 0.375 | .048/.052 | .054/.056 |
| 013 | 0.440 | .048/.052 | .054/.056 |
| 014 | 0.503 | .048/.052 | .054/.056 |
| 015 | 0.565 | .048/.052 | .054/.056 |
| 016 | 0.628 | .048/.052 | .054/.056 |
| 017 | 0.690 | .048/.052 | .054/.056 |
| 018 | 0.753 | .048/.052 | .054/.056 |
| 019 | 0.815 | .048/.052 | .054/.056 |
| 020 | 0.881 | .048/.052 | .054/.056 |
| | +.002/ -.002 | | |
| 021 | 0.943 | .048/.052 | .054/.056 |
| 022 | 1.006 | .048/.052 | .054/.056 |
| 023 | 1.068 | .048/.052 | .054/.056 |
| 024 | 1.131 | .048/.052 | .054/.056 |
| 025 | 1.193 | .048/.052 | .054/.056 |

| Dash Number MS27595 | Seal Dimensions | | |
|------------------------|-----------------|----------------------------------|------------|
| | A I.D. | B Radial Cross- Section | C Width |
| | +.002/ -.002 | | |
| 026 | 1.256 | .048/.052 | .054/.056 |
| 027 | 1.318 | .048/.052 | .054/.056 |
| 028 | 1.381 | .048/.052 | .054/.056 |
| | +.001/ -.002 | | |
| 110 | 0.374 | .048/.052 | .087/.089 |
| 111 | 0.437 | .048/.052 | .087/.089 |
| 112 | 0.499 | .048/.052 | .087/.089 |
| 113 | 0.562 | .048/.052 | .087/.089 |
| 114 | 0.624 | .048/.052 | .087/.089 |
| 115 | 0.687 | .048/.052 | .087/.089 |
| 116 | 0.749 | .048/.052 | .087/.089 |
| 117 | 0.815 | .048/.052 | .087/.089 |
| 118 | 0.877 | .048/.052 | .087/.089 |
| 119 | 0.940 | .048/.052 | .087/.089 |
| 120 | 1.002 | .048/.052 | .087/.089 |
| | +.002/ -.002 | | |
| 121 | 1.065 | .048/.052 | .087/.089 |
| 122 | 1.127 | .048/.052 | .087/.089 |
| 123 | 1.190 | .048/.052 | .087/.089 |
| 124 | 1.252 | .048/.052 | .087/.089 |
| 125 | 1.315 | .048/.052 | .087/.089 |
| 126 | 1.377 | .048/.052 | .087/.089 |

| Dash Number MS27595 | Seal Dimensions | | |
|------------------------|-----------------|----------------------------------|------------|
| | A I.D. | B Radial Cross- Section | C Width |
| | +.002/ -.002 | | |
| 127 | 1.440 | .048/.052 | .087/.089 |
| 128 | 1.502 | .048/.052 | .087/.089 |
| 129 | 1.565 | .048/.052 | .087/.089 |
| 130 | 1.629 | .048/.052 | .087/.089 |
| 131 | 1.691 | .048/.052 | .087/.089 |
| 132 | 1.754 | .048/.052 | .087/.089 |
| 133 | 1.816 | .048/.052 | .087/.089 |
| 134 | 1.879 | .048/.052 | .087/.089 |
| 135 | 1.942 | .048/.052 | .087/.089 |
| 136 | 2.004 | .048/.052 | .087/.089 |
| 137 | 2.067 | .048/.052 | .087/.089 |
| 138 | 2.129 | .048/.052 | .087/.089 |
| 139 | 2.192 | .048/.052 | .087/.089 |
| 140 | 2.254 | .048/.052 | .087/.089 |
| 141 | 2.317 | .048/.052 | .087/.089 |
| 142 | 2.379 | .048/.052 | .087/.089 |
| 143 | 2.442 | .048/.052 | .087/.089 |
| 144 | 2.504 | .048/.052 | .087/.089 |
| 145 | 2.567 | .048/.052 | .087/.089 |
| 146 | 2.629 | .048/.052 | .087/.089 |
| 147 | 2.692 | .048/.052 | .087/.089 |
| 148 | 2.754 | .048/.052 | .087/.089 |
| 149 | 2.817 | .048/.052 | .087/.089 |

Table 10-12. PDBB Gland Dimensions — Inch (Continued)

| Dash Number MS27595 | Seal Dimensions | | | Dash Number MS27595 | Seal Dimensions | | | Dash Number MS27595 | Seal Dimensions | | |
|------------------------|-------------------|----------------------------------|------------|------------------------|-------------------|----------------------------------|------------|------------------------|-------------------|----------------------------------|------------|
| | A I.D. | B Radial Cross- Section | C Width | | A I.D. | B Radial Cross- Section | C Width | | A I.D. | B Radial Cross- Section | C Width |
| | +0.001/ -0.002 | | | | +0.001/ -0.002 | | | | +0.002/ -0.000 | | |
| 210 | 0.753 | .048/.052 | .118/.120 | 246 | 4.505 | .048/.052 | .118/.120 | 432 | 5.377 | .106/.110 | .235/.237 |
| 211 | 0.815 | .048/.052 | .118/.120 | 247 | 4.630 | .048/.052 | .118/.120 | 433 | 5.502 | .106/.110 | .235/.237 |
| 212 | 0.878 | .048/.052 | .118/.120 | 325 | 1.497 | .071/.075 | .184/.186 | 434 | 5.627 | .106/.110 | .235/.237 |
| 213 | 0.940 | .048/.052 | .118/.120 | 326 | 1.622 | .071/.075 | .184/.186 | 435 | 5.752 | .106/.110 | .235/.237 |
| 214 | 1.003 | .048/.052 | .118/.120 | 327 | 1.748 | .071/.075 | .184/.186 | 436 | 5.877 | .106/.110 | .235/.237 |
| 215 | 1.065 | .048/.052 | .118/.120 | 328 | 1.873 | .071/.075 | .184/.186 | 437 | 6.002 | .106/.110 | .235/.237 |
| 216 | 1.128 | .048/.052 | .118/.120 | 329 | 1.998 | .071/.075 | .184/.186 | 438 | 6.252 | .106/.110 | .235/.237 |
| 217 | 1.190 | .048/.052 | .118/.120 | 330 | 2.123 | .071/.075 | .184/.186 | 439 | 6.502 | .106/.110 | .235/.237 |
| 218 | 1.253 | .048/.052 | .118/.120 | 331 | 2.248 | .071/.075 | .184/.186 | 440 | 6.752 | .106/.110 | .235/.237 |
| 219 | 1.315 | .048/.052 | .118/.120 | 332 | 2.373 | .071/.075 | .184/.186 | 441 | 7.002 | .106/.110 | .235/.237 |
| 220 | 1.378 | .048/.052 | .118/.120 | 333 | 2.498 | .071/.075 | .184/.186 | 442 | 7.252 | .106/.110 | .235/.237 |
| 221 | 1.440 | .048/.052 | .118/.120 | 334 | 2.623 | .071/.075 | .184/.186 | 443 | 7.502 | .106/.110 | .235/.237 |
| 222 | 1.503 | .048/.052 | .118/.120 | 335 | 2.748 | .071/.075 | .184/.186 | 444 | 7.752 | .106/.110 | .235/.237 |
| 223 | 1.629 | .048/.052 | .118/.120 | 336 | 2.873 | .071/.075 | .184/.186 | 445 | 8.002 | .106/.110 | .235/.237 |
| 224 | 1.754 | .048/.052 | .118/.120 | 337 | 2.998 | .071/.075 | .184/.186 | | +0.003/ -0.003 | | |
| 225 | 1.880 | .048/.052 | .118/.120 | 338 | 3.123 | .071/.075 | .184/.186 | 446 | 8.502 | .106/.110 | .235/.237 |
| 226 | 2.005 | .048/.052 | .118/.120 | 339 | 3.248 | .071/.075 | .184/.186 | 447 | 9.002 | .106/.110 | .235/.237 |
| 227 | 2.130 | .048/.052 | .118/.120 | 340 | 3.373 | .071/.075 | .184/.186 | 448 | 9.502 | .106/.110 | .235/.237 |
| 228 | 2.255 | .048/.052 | .118/.120 | 341 | 3.498 | .071/.075 | .184/.186 | 449 | 10.002 | .106/.110 | .235/.237 |
| 229 | 2.380 | .048/.052 | .118/.120 | 342 | 3.623 | .071/.075 | .184/.186 | 450 | 10.502 | .106/.110 | .235/.237 |
| 230 | 2.505 | .048/.052 | .118/.120 | 343 | 3.748 | .071/.075 | .184/.186 | | +0.004/ -0.004 | | |
| 231 | 2.630 | .048/.052 | .118/.120 | 344 | 3.873 | .071/.075 | .184/.186 | 451 | 11.002 | .106/.110 | .235/.237 |
| 232 | 2.755 | .048/.052 | .118/.120 | 345 | 3.998 | .071/.075 | .184/.186 | 452 | 11.502 | .106/.110 | .235/.237 |
| 233 | 2.880 | .048/.052 | .118/.120 | 346 | 4.123 | .071/.075 | .184/.186 | 453 | 12.002 | .106/.110 | .235/.237 |
| 234 | 3.005 | .048/.052 | .118/.120 | 347 | 4.248 | .071/.075 | .184/.186 | 454 | 12.502 | .106/.110 | .235/.237 |
| 235 | 3.130 | .048/.052 | .118/.120 | 348 | 4.373 | .071/.075 | .184/.186 | 455 | 13.002 | .106/.110 | .235/.237 |
| 236 | 3.255 | .048/.052 | .118/.120 | 349 | 4.498 | .071/.075 | .184/.186 | | +0.005/ -0.005 | | |
| 237 | 3.380 | .048/.052 | .118/.120 | | +0.002/ -0.000 | | | 456 | 13.502 | .106/.110 | .235/.237 |
| 238 | 3.505 | .048/.052 | .118/.120 | 425 | 4.502 | .106/.110 | .235/.237 | 457 | 14.002 | .106/.110 | .235/.237 |
| 239 | 3.630 | .048/.052 | .118/.120 | 426 | 4.627 | .106/.110 | .235/.237 | 458 | 14.502 | .106/.110 | .235/.237 |
| 240 | 3.755 | .048/.052 | .118/.120 | 427 | 4.752 | .106/.110 | .235/.237 | 459 | 15.002 | .106/.110 | .235/.237 |
| 241 | 3.880 | .048/.052 | .118/.120 | 428 | 4.877 | .106/.110 | .235/.237 | 460 | 15.502 | .106/.110 | .235/.237 |
| 242 | 4.005 | .048/.052 | .118/.120 | 429 | 5.002 | .106/.110 | .235/.237 | | | | |
| 243 | 4.130 | .048/.052 | .118/.120 | 430 | 5.127 | .106/.110 | .235/.237 | | | | |
| 244 | 4.255 | .048/.052 | .118/.120 | 431 | 5.252 | .106/.110 | .235/.237 | | | | |
| 245 | 4.380 | .048/.052 | .118/.120 | | | | | | | | |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Contents

Product Profiles

568 Resilon O-ring 11-2
 HS Head Seal..... 11-15

Urethane O-rings & Head Seals

Parker offers many materials for fluid power applications that have unique advantages in comparison to traditional materials (see Section 3, Materials). Urethane based compounds such as Resilon used in AS568 style o-rings and P4700 used in urethane head seals exhibit these unique advantages including low compression set and excellent extrusion resistance.

Urethane O-rings











Parker urethane o-rings offer the material advantages exclusive to the Resilon family of compounds in standard and custom o-ring sizes. High temperature Resilon o-rings eliminates the need for back-ups, simplifying installation and reducing damage due to spiral failure.

Urethane Head Seals

The HS profile static head seals are ideal for replacing o-rings and back-ups in hydraulic cylinder heads. Installation can be simplified and failures due to pinching and blow-out eliminated. The characteristics offered by P4700 urethane provide the performance advantages for this profile.

Profiles

Table 11-1: Product Profiles

| Series | Description | Application (Duty) | | | | Page |
|--|-----------------------------------|---|---|---|---|-------|
| | | Light | Medium | Heavy | Pneumatic | |
| 568  | High Performance Urethane O-rings |  |  |  |  | 11-2 |
| HS  | Static Head Seals |  |  |  |  | 11-15 |

Urethane O-ring 568 Profile

Catalog EPS 5370/USA

568 Profile, Resilon O-ring

Parker is pleased to offer the material advantages of the Resilon family of urethanes in standard o-ring sizes. The high extrusion resistance of 4300 and related compounds eliminates the need for a back-up in many hydraulic applications, thereby simplifying installation and reducing groove width. Resilon's unmatched temperature rating makes it suitable in applications where other urethanes fail. In addition, Resilon WR (4301) provides superior water resistance and compression set resistance in water-based fluids. Premium urethane o-rings are much less prone to spiral failure and installation damage compared with rubber o-rings. Dimensions and tolerances of Parker Resilon o-rings match up with AS568B specifications for diameter and cross-section and are used in the same grooves.



568 Cross Section

Technical Data

Standard Materials*

P4300A90

Temperature

-65°F to 275°F
(-54°C to 135°C)

Pressure

5,000 psi (344 bar) dynamic
10,000 psi (688 bar) static

P4301A90


-65°F to 275°F
(-54°C to 135°C)

5,000 psi (344 bar) dynamic
10,000 psi (688 bar) static

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.




568 installed on
Cartridge Valve

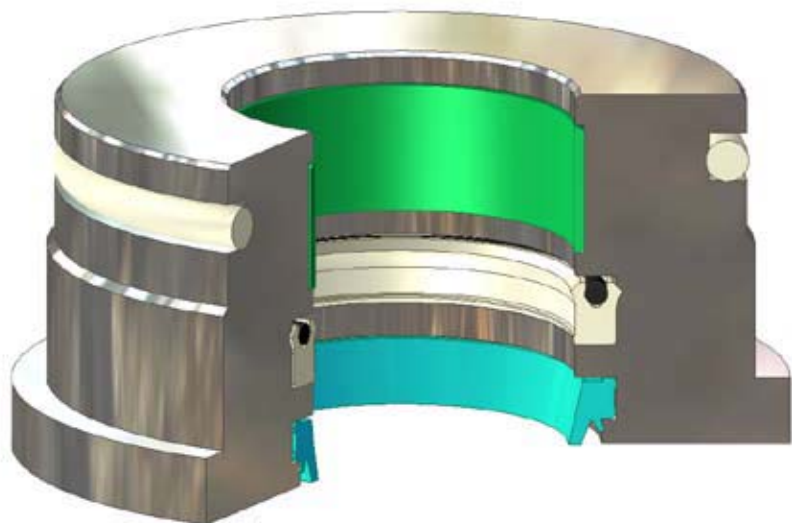



568 installed in Static Head Gland

Part Number Nomenclature — 568 Profile

Table 11-2. 568 Profile — Inch

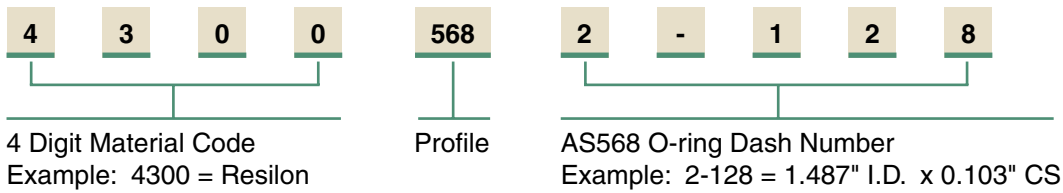

Gland Dimensions — 568 Profile — Dynamic

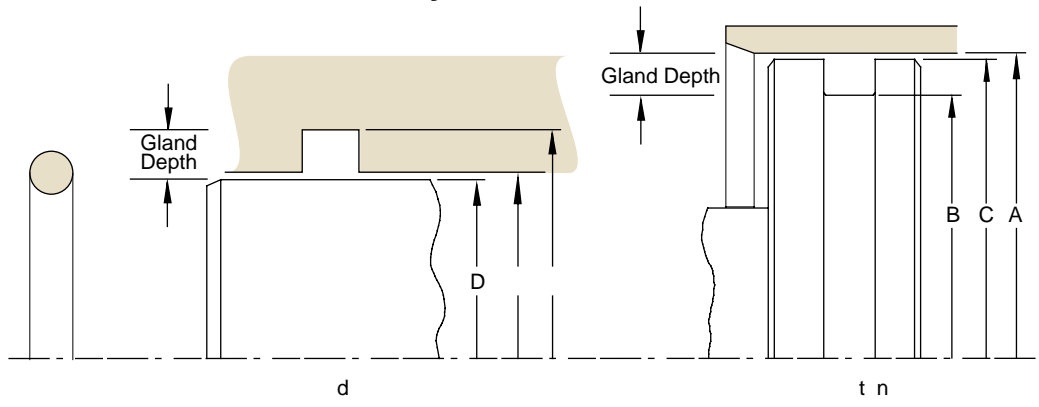

Dynamic Gland

Table 11-3. General O-ring Dimensional Data

| O-ring 2-Size AS568 | Cross Section | | Dynamic | | | E Diametral Clearance (a) | G-Groove Width | | | R Groove Radius | Max. Eccentricity (b) |
|---------------------------|---------------|---------------|---------------------|--------------------|----------------|------------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------|-----------------------------|
| | Nominal | Actual | L Gland Depth | Actual | % | | 0 Back-up Ring (G) | 1 Back-up Ring (G) | 2 Back-up Ring (G) | | |
| 004 to 050 | 1/16 | .070 ±.003 | .055 to .057 | .010 to .018 | 15 to 25 | .002 to .005 | .093 to .098 | .138 to .143 | .205 to .210 | .005 to .015 | .002 |
| 102 through 178 | 3/32 | .103 ±.003 | .088 to .090 | .01 to .018 | 10 to 17 | .002 to .005 | .140 to .145 | .171 to .176 | .238 to .243 | .005 to .015 | .002 |
| 201 through 284 | 1/8 | .139 ±.004 | .121 to .123 | .012 to .022 | 9 to 16 | .003 to .006 | .187 to .192 | .208 to .213 | .275 to .280 | .010 to .025 | .003 |
| 309 through 395 | 3/16 | .210 ±.005 | .185 to .188 | .017 to .030 | 8 to 14 | .003 to .006 | .281 to .286 | .311 to .316 | .410 to .415 | .020 to .035 | .004 |
| 425 through 475 | 1/4 | .275 ±.006 | .237 to .240 | .029 to .044 | 11 to 16 | .004 to .007 | .375 to .380 | .408 to .413 | .538 to .543 | .020 to .035 | .005 |

(a) Clearance (extrusion gap) must be held to a minimum consistent with design requirements for temperature range variation.

(b) Total indicator reading between groove and adjacent bearing surface.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07



Table 11-4. 568 Dynamic O-ring Gland Dimensions — Inch

| O-ring 2-Size AS568 | Standard Offering | Seal Dimensions | | | | | Hardware Dimensions | | | | | |
|---------------------------|----------------------|-------------------------|-------|-------|-------|-----------------------|-----------------------|-------------------------|-------------------------|----------------------|-------------------------|-------------------------|
| | | Inside Dia- meter | ± | Width | ± | Mean O.D. (Ref) | Piston | | | Rod | | |
| | | | | | | | A Bore Diameter | B Groove Diameter | C Piston Diameter | D Rod Diameter | E Groove Diameter | F Throat Diameter |
| | | | | | | | +.002/ -.000 | +.000/ -.002 | +.000/ -.001 | +.000/ -.002 | +.002/ -.000 | +.001/ -.000 |
| 006 | X | 0.114 | 0.005 | 0.070 | 0.003 | 0.254 | 0.249 | 0.139 | 0.247 | 0.124 | 0.234 | 0.126 |
| 007 | X | 0.145 | 0.005 | 0.070 | 0.003 | 0.285 | 0.280 | 0.170 | 0.278 | 0.155 | 0.265 | 0.157 |
| 008 | X | 0.176 | 0.005 | 0.070 | 0.003 | 0.316 | 0.311 | 0.201 | 0.309 | 0.186 | 0.296 | 0.188 |
| 009 | X | 0.208 | 0.005 | 0.070 | 0.003 | 0.348 | 0.343 | 0.233 | 0.341 | 0.218 | 0.328 | 0.220 |
| 010 | X | 0.239 | 0.005 | 0.070 | 0.003 | 0.379 | 0.374 | 0.264 | 0.372 | 0.249 | 0.359 | 0.251 |
| 011 | X | 0.301 | 0.005 | 0.070 | 0.003 | 0.441 | 0.436 | 0.326 | 0.434 | 0.311 | 0.421 | 0.313 |
| 012 | X | 0.364 | 0.005 | 0.070 | 0.003 | 0.504 | 0.499 | 0.389 | 0.497 | 0.374 | 0.484 | 0.376 |
| 104 | X | 0.112 | 0.005 | 0.103 | 0.003 | 0.318 | 0.312 | 0.136 | 0.310 | 0.124 | 0.300 | 0.126 |
| 105 | | 0.143 | 0.005 | 0.103 | 0.003 | 0.349 | 0.343 | 0.167 | 0.341 | 0.155 | 0.331 | 0.157 |
| 106 | | 0.174 | 0.005 | 0.103 | 0.003 | 0.380 | 0.374 | 0.198 | 0.372 | 0.186 | 0.362 | 0.188 |
| 107 | | 0.206 | 0.005 | 0.103 | 0.003 | 0.412 | 0.406 | 0.230 | 0.404 | 0.218 | 0.394 | 0.220 |
| 108 | | 0.237 | 0.005 | 0.103 | 0.003 | 0.443 | 0.437 | 0.261 | 0.435 | 0.249 | 0.425 | 0.313 |
| 110 | X | 0.362 | 0.005 | 0.103 | 0.003 | 0.568 | 0.562 | 0.386 | 0.560 | 0.374 | 0.550 | 0.376 |
| 111 | X | 0.424 | 0.005 | 0.103 | 0.003 | 0.630 | 0.624 | 0.448 | 0.622 | 0.436 | 0.612 | 0.438 |
| 112 | X | 0.487 | 0.005 | 0.103 | 0.003 | 0.693 | 0.687 | 0.511 | 0.685 | 0.499 | 0.675 | 0.501 |
| 113 | X | 0.549 | 0.007 | 0.103 | 0.003 | 0.755 | 0.749 | 0.573 | 0.747 | 0.561 | 0.737 | 0.563 |
| 114 | X | 0.612 | 0.009 | 0.103 | 0.003 | 0.818 | 0.812 | 0.636 | 0.810 | 0.624 | 0.800 | 0.626 |
| 115 | X | 0.674 | 0.009 | 0.103 | 0.003 | 0.880 | 0.874 | 0.698 | 0.872 | 0.686 | 0.862 | 0.688 |
| 116 | X | 0.737 | 0.009 | 0.103 | 0.003 | 0.943 | 0.937 | 0.761 | 0.935 | 0.749 | 0.925 | 0.751 |
| 201 | | 0.171 | 0.005 | 0.139 | 0.004 | 0.449 | 0.437 | 0.195 | 0.434 | 0.185 | 0.427 | 0.188 |
| 202 | | 0.234 | 0.005 | 0.139 | 0.004 | 0.512 | 0.500 | 0.258 | 0.497 | 0.248 | 0.490 | 0.251 |
| 203 | | 0.296 | 0.005 | 0.139 | 0.004 | 0.574 | 0.562 | 0.320 | 0.559 | 0.310 | 0.552 | 0.313 |
| 204 | | 0.359 | 0.005 | 0.139 | 0.004 | 0.637 | 0.625 | 0.383 | 0.622 | 0.373 | 0.615 | 0.376 |
| 205 | | 0.421 | 0.005 | 0.139 | 0.004 | 0.699 | 0.687 | 0.445 | 0.684 | 0.435 | 0.677 | 0.438 |
| 206 | X | 0.484 | 0.005 | 0.139 | 0.004 | 0.762 | 0.750 | 0.508 | 0.747 | 0.498 | 0.740 | 0.501 |
| 207 | | 0.546 | 0.007 | 0.139 | 0.004 | 0.824 | 0.812 | 0.570 | 0.809 | 0.560 | 0.802 | 0.563 |
| 208 | X | 0.609 | 0.009 | 0.139 | 0.004 | 0.887 | 0.875 | 0.633 | 0.872 | 0.623 | 0.865 | 0.626 |
| 209 | X | 0.671 | 0.009 | 0.139 | 0.004 | 0.949 | 0.937 | 0.695 | 0.934 | 0.685 | 0.927 | 0.688 |
| 210 | X | 0.734 | 0.010 | 0.139 | 0.004 | 1.012 | 1.000 | 0.758 | 0.997 | 0.748 | 0.990 | 0.751 |
| 211 | X | 0.796 | 0.010 | 0.139 | 0.004 | 1.074 | 1.062 | 0.820 | 1.059 | 0.810 | 1.052 | 0.813 |
| 212 | X | 0.859 | 0.010 | 0.139 | 0.004 | 1.137 | 1.125 | 0.883 | 1.122 | 0.873 | 1.115 | 0.876 |
| 213 | X | 0.921 | 0.010 | 0.139 | 0.004 | 1.199 | 1.187 | 0.945 | 1.184 | 0.935 | 1.177 | 0.938 |
| 214 | X | 0.984 | 0.010 | 0.139 | 0.004 | 1.262 | 1.250 | 1.008 | 1.247 | 0.998 | 1.240 | 1.001 |
| 215 | | 1.046 | 0.010 | 0.139 | 0.004 | 1.324 | 1.312 | 1.070 | 1.309 | 1.060 | 1.302 | 1.063 |
| 216 | X | 1.109 | 0.012 | 0.139 | 0.004 | 1.387 | 1.375 | 1.133 | 1.372 | 1.123 | 1.365 | 1.126 |
| 217 | X | 1.171 | 0.012 | 0.139 | 0.004 | 1.449 | 1.437 | 1.195 | 1.434 | 1.185 | 1.427 | 1.188 |
| 218 | X | 1.234 | 0.012 | 0.139 | 0.004 | 1.512 | 1.500 | 1.258 | 1.497 | 1.248 | 1.490 | 1.251 |
| 219 | X | 1.296 | 0.012 | 0.139 | 0.004 | 1.574 | 1.562 | 1.320 | 1.559 | 1.310 | 1.552 | 1.313 |

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-4. 568 Dynamic O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | Standard Offering | Seal Dimensions | | | | | Hardware Dimensions | | | | | |
|---------------------------|----------------------|-------------------------|-------|-------|-------|-----------------------|-----------------------|-------------------------|-------------------------|----------------------|-------------------------|-------------------------|
| | | Inside Dia- meter | ± | Width | ± | Mean O.D. (Ref) | Piston | | | Rod | | |
| | | | | | | | A Bore Diameter | B Groove Diameter | C Piston Diameter | D Rod Diameter | E Groove Diameter | F Throat Diameter |
| | | | | | | | +0.002/ -0.000 | +0.000/ -0.002 | +0.000/ -0.001 | +0.000/ -0.002 | +0.002/ -0.000 | +0.001/ -0.000 |
| 220 | X | 1.359 | 0.012 | 0.139 | 0.004 | 1.637 | 1.625 | 1.383 | 1.622 | 1.373 | 1.615 | 1.376 |
| 221 | | 1.421 | 0.012 | 0.139 | 0.004 | 1.699 | 1.687 | 1.445 | 1.684 | 1.435 | 1.677 | 1.438 |
| 222 | X | 1.484 | 0.015 | 0.139 | 0.004 | 1.762 | 1.750 | 1.508 | 1.747 | 1.498 | 1.740 | 1.501 |
| 309 | | 0.412 | 0.005 | 0.210 | 0.005 | 0.832 | 0.812 | 0.442 | 0.809 | 0.435 | 0.805 | 0.438 |
| 310 | | 0.475 | 0.005 | 0.210 | 0.005 | 0.895 | 0.875 | 0.505 | 0.872 | 0.498 | 0.868 | 0.501 |
| 311 | X | 0.537 | 0.007 | 0.210 | 0.005 | 0.957 | 0.937 | 0.567 | 0.934 | 0.560 | 0.930 | 0.563 |
| 312 | | 0.600 | 0.009 | 0.210 | 0.005 | 1.020 | 1.000 | 0.630 | 0.997 | 0.623 | 0.993 | 0.626 |
| 313 | | 0.662 | 0.009 | 0.210 | 0.005 | 1.082 | 1.062 | 0.692 | 1.059 | 0.685 | 1.055 | 0.688 |
| 314 | | 0.725 | 0.010 | 0.210 | 0.005 | 1.145 | 1.125 | 0.755 | 1.122 | 0.748 | 1.118 | 0.751 |
| 315 | | 0.787 | 0.010 | 0.210 | 0.005 | 1.207 | 1.187 | 0.817 | 1.184 | 0.810 | 1.180 | 0.813 |
| 316 | | 0.850 | 0.010 | 0.210 | 0.005 | 1.270 | 1.250 | 0.880 | 1.247 | 0.873 | 1.243 | 0.876 |
| 317 | | 0.912 | 0.010 | 0.210 | 0.005 | 1.332 | 1.312 | 0.942 | 1.309 | 0.935 | 1.305 | 0.938 |
| 318 | | 0.975 | 0.010 | 0.210 | 0.005 | 1.395 | 1.375 | 1.005 | 1.372 | 0.998 | 1.368 | 1.001 |
| 319 | X | 1.037 | 0.010 | 0.210 | 0.005 | 1.457 | 1.437 | 1.067 | 1.434 | 1.060 | 1.430 | 1.063 |
| 320 | | 1.100 | 0.012 | 0.210 | 0.005 | 1.520 | 1.500 | 1.130 | 1.497 | 1.123 | 1.493 | 1.126 |
| 321 | X | 1.162 | 0.012 | 0.210 | 0.005 | 1.582 | 1.562 | 1.192 | 1.559 | 1.185 | 1.555 | 1.188 |
| 322 | | 1.225 | 0.012 | 0.210 | 0.005 | 1.645 | 1.625 | 1.255 | 1.622 | 1.248 | 1.618 | 1.251 |
| 323 | | 1.287 | 0.012 | 0.210 | 0.005 | 1.707 | 1.687 | 1.317 | 1.684 | 1.310 | 1.680 | 1.313 |
| 324 | X | 1.350 | 0.012 | 0.210 | 0.005 | 1.770 | 1.750 | 1.380 | 1.747 | 1.373 | 1.743 | 1.376 |
| 325 | X | 1.475 | 0.015 | 0.210 | 0.005 | 1.895 | 1.875 | 1.505 | 1.872 | 1.498 | 1.868 | 1.501 |
| 326 | | 1.600 | 0.015 | 0.210 | 0.005 | 2.020 | 2.000 | 1.630 | 1.997 | 1.623 | 1.993 | 1.626 |
| 327 | X | 1.725 | 0.015 | 0.210 | 0.005 | 2.145 | 2.125 | 1.755 | 2.122 | 1.748 | 2.118 | 1.751 |
| 328 | X | 1.850 | 0.015 | 0.210 | 0.005 | 2.270 | 2.250 | 1.880 | 2.247 | 1.873 | 2.243 | 1.876 |
| 329 | X | 1.975 | 0.018 | 0.210 | 0.005 | 2.395 | 2.375 | 2.005 | 2.372 | 1.998 | 2.368 | 2.001 |
| 330 | | 2.100 | 0.018 | 0.210 | 0.005 | 2.520 | 2.500 | 2.130 | 2.497 | 2.123 | 2.493 | 2.126 |
| 331 | | 2.225 | 0.018 | 0.210 | 0.005 | 2.645 | 2.625 | 2.255 | 2.622 | 2.248 | 2.618 | 2.251 |
| 332 | X | 2.350 | 0.018 | 0.210 | 0.005 | 2.770 | 2.750 | 2.380 | 2.747 | 2.373 | 2.743 | 2.376 |
| 333 | | 2.475 | 0.020 | 0.210 | 0.005 | 2.895 | 2.875 | 2.505 | 2.872 | 2.498 | 2.868 | 2.501 |
| 334 | | 2.600 | 0.020 | 0.210 | 0.005 | 3.020 | 3.000 | 2.630 | 2.997 | 2.623 | 2.993 | 2.626 |
| 335 | | 2.725 | 0.020 | 0.210 | 0.005 | 3.145 | 3.125 | 2.755 | 3.122 | 2.748 | 3.118 | 2.751 |
| 336 | | 2.850 | 0.020 | 0.210 | 0.005 | 3.270 | 3.250 | 2.880 | 3.247 | 2.873 | 3.243 | 2.876 |
| 337 | X | 2.975 | 0.024 | 0.210 | 0.005 | 3.395 | 3.375 | 3.005 | 3.372 | 2.998 | 3.368 | 3.001 |
| 338 | | 3.100 | 0.024 | 0.210 | 0.005 | 3.520 | 3.500 | 3.130 | 3.497 | 3.123 | 3.493 | 3.126 |
| 339 | | 3.225 | 0.024 | 0.210 | 0.005 | 3.645 | 3.625 | 3.255 | 3.622 | 3.248 | 3.618 | 3.251 |
| 340 | | 3.350 | 0.024 | 0.210 | 0.005 | 3.770 | 3.750 | 3.380 | 3.747 | 3.373 | 3.743 | 3.376 |
| 341 | X | 3.475 | 0.024 | 0.210 | 0.005 | 3.895 | 3.875 | 3.505 | 3.872 | 3.498 | 3.868 | 3.501 |
| 342 | | 3.600 | 0.028 | 0.210 | 0.005 | 4.020 | 4.000 | 3.630 | 3.997 | 3.623 | 3.993 | 3.626 |
| 343 | | 3.725 | 0.028 | 0.210 | 0.005 | 4.145 | 4.125 | 3.755 | 4.122 | 3.748 | 4.118 | 3.751 |

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-4. 568 Dynamic O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | Standard Offering | Seal Dimensions | | | | | Hardware Dimensions | | | | | |
|---------------------------|----------------------|-------------------------|-------|-------|-------|-----------------------|-----------------------|-------------------------|-------------------------|----------------------|-------------------------|-------------------------|
| | | Inside Dia- meter | ± | Width | ± | Mean O.D. (Ref) | Piston | | | Rod | | |
| | | | | | | | A Bore Diameter | B Groove Diameter | C Piston Diameter | D Rod Diameter | E Groove Diameter | F Throat Diameter |
| | | | | | | | +.002/ -.000 | +.000/ -.002 | +.000/ -.001 | +.000/ -.002 | +.002/ -.000 | +.001/ -.000 |
| 344 | | 3.850 | 0.028 | 0.210 | 0.005 | 4.270 | 4.250 | 3.880 | 4.247 | 3.873 | 4.243 | 3.876 |
| 345 | | 3.975 | 0.028 | 0.210 | 0.005 | 4.395 | 4.375 | 4.005 | 4.372 | 3.998 | 4.368 | 4.001 |
| 346 | | 4.100 | 0.028 | 0.210 | 0.005 | 4.520 | 4.500 | 4.130 | 4.497 | 4.123 | 4.493 | 4.126 |
| 347 | | 4.225 | 0.030 | 0.210 | 0.005 | 4.645 | 4.625 | 4.255 | 4.622 | 4.248 | 4.618 | 4.251 |
| 348 | X | 4.350 | 0.030 | 0.210 | 0.005 | 4.770 | 4.750 | 4.380 | 4.747 | 4.373 | 4.743 | 4.376 |
| 349 | | 4.475 | 0.030 | 0.210 | 0.005 | 4.895 | 4.875 | 4.505 | 4.872 | 4.498 | 4.868 | 4.501 |
| 425 | | 4.475 | 0.033 | 0.275 | 0.006 | 5.025 | 5.002 | 4.528 | 4.998 | 4.497 | 4.971 | 4.501 |
| 426 | | 4.600 | 0.033 | 0.275 | 0.006 | 5.150 | 5.127 | 4.653 | 5.123 | 4.622 | 5.096 | 4.626 |
| 427 | | 4.725 | 0.033 | 0.275 | 0.006 | 5.275 | 5.252 | 4.778 | 5.248 | 4.747 | 5.221 | 4.751 |
| 428 | | 4.850 | 0.033 | 0.275 | 0.006 | 5.400 | 5.377 | 4.903 | 5.373 | 4.872 | 5.346 | 4.876 |
| 429 | | 4.975 | 0.037 | 0.275 | 0.006 | 5.525 | 5.502 | 5.028 | 5.498 | 4.997 | 5.471 | 5.001 |
| 430 | | 5.100 | 0.037 | 0.275 | 0.006 | 5.650 | 5.627 | 5.153 | 5.623 | 5.122 | 5.596 | 5.126 |
| 431 | | 5.225 | 0.037 | 0.275 | 0.006 | 5.775 | 5.752 | 5.278 | 5.748 | 5.247 | 5.721 | 5.251 |
| 432 | X | 5.350 | 0.037 | 0.275 | 0.006 | 5.900 | 5.877 | 5.403 | 5.873 | 5.372 | 5.846 | 5.376 |
| 433 | | 5.475 | 0.037 | 0.275 | 0.006 | 6.025 | 6.002 | 5.528 | 5.998 | 5.497 | 5.971 | 5.501 |
| 434 | | 5.600 | 0.037 | 0.275 | 0.006 | 6.150 | 6.127 | 5.653 | 6.123 | 5.622 | 6.096 | 5.626 |
| 435 | | 5.725 | 0.037 | 0.275 | 0.006 | 6.275 | 6.252 | 5.778 | 6.248 | 5.747 | 6.221 | 5.751 |
| 436 | | 5.850 | 0.037 | 0.275 | 0.006 | 6.400 | 6.377 | 5.903 | 6.373 | 5.872 | 6.346 | 5.876 |
| 437 | | 5.975 | 0.037 | 0.275 | 0.006 | 6.525 | 6.502 | 6.028 | 6.498 | 5.997 | 6.471 | 6.001 |
| 438 | | 6.225 | 0.040 | 0.275 | 0.006 | 6.775 | 6.752 | 6.278 | 6.748 | 6.247 | 6.721 | 6.251 |
| 439 | | 6.475 | 0.040 | 0.275 | 0.006 | 7.025 | 7.002 | 6.528 | 6.998 | 6.497 | 6.971 | 6.501 |
| 440 | | 6.725 | 0.040 | 0.275 | 0.006 | 7.275 | 7.252 | 6.778 | 7.248 | 6.747 | 7.221 | 6.751 |
| 441 | | 6.975 | 0.040 | 0.275 | 0.006 | 7.525 | 7.502 | 7.028 | 7.498 | 6.997 | 7.471 | 7.001 |
| 442 | | 7.225 | 0.045 | 0.275 | 0.006 | 7.775 | 7.752 | 7.278 | 7.748 | 7.247 | 7.721 | 7.251 |
| 443 | | 7.475 | 0.045 | 0.275 | 0.006 | 8.025 | 8.002 | 7.528 | 7.998 | 7.497 | 7.971 | 7.501 |
| 444 | | 7.725 | 0.045 | 0.275 | 0.006 | 8.275 | 8.252 | 7.778 | 8.248 | 7.747 | 8.221 | 7.751 |
| 445 | | 7.975 | 0.045 | 0.275 | 0.006 | 8.525 | 8.502 | 8.028 | 8.498 | 7.997 | 8.471 | 8.001 |
| 446 | | 8.475 | 0.055 | 0.275 | 0.006 | 9.025 | 9.002 | 8.528 | 8.998 | 8.497 | 8.971 | 8.501 |
| 447 | | 8.975 | 0.055 | 0.275 | 0.006 | 9.525 | 9.502 | 9.028 | 9.498 | 8.997 | 9.471 | 9.001 |
| 448 | | 9.475 | 0.055 | 0.275 | 0.006 | 10.025 | 10.002 | 9.528 | 9.998 | 9.497 | 9.971 | 9.501 |
| 449 | | 9.975 | 0.055 | 0.275 | 0.006 | 10.525 | 10.502 | 10.028 | 10.498 | 9.997 | 10.471 | 10.001 |
| 450 | | 10.475 | 0.060 | 0.275 | 0.006 | 11.025 | 11.002 | 10.528 | 10.998 | 10.497 | 10.971 | 10.501 |
| 451 | | 10.975 | 0.060 | 0.275 | 0.006 | 11.525 | 11.502 | 11.028 | 11.498 | 10.997 | 11.471 | 11.001 |
| 452 | | 11.475 | 0.060 | 0.275 | 0.006 | 12.025 | 12.002 | 11.528 | 11.998 | 11.497 | 11.971 | 11.501 |
| 453 | | 11.975 | 0.060 | 0.275 | 0.006 | 12.525 | 12.502 | 12.028 | 12.498 | 11.997 | 12.471 | 12.001 |
| 454 | | 12.475 | 0.060 | 0.275 | 0.006 | 13.025 | 13.002 | 12.528 | 12.998 | 12.497 | 12.971 | 12.501 |
| 455 | | 12.975 | 0.060 | 0.275 | 0.006 | 13.525 | 13.502 | 13.028 | 13.498 | 12.997 | 13.471 | 13.001 |
| 456 | | 13.475 | 0.070 | 0.275 | 0.006 | 14.025 | 14.002 | 13.528 | 13.998 | 13.497 | 13.971 | 13.501 |

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.


Table 11-4. 568 Dynamic O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | Standard Offering | Seal Dimensions | | | | | Hardware Dimensions | | | | | |
|---------------------|-------------------|------------------|-------|-------|-------|-----------------|---------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | | Inside Dia-meter | ± | Width | ± | Mean O.D. (Ref) | Piston | | | Rod | | |
| | | | | | | | A Bore Diameter | B Groove Diameter | C Piston Diameter | D Rod Diameter | E Groove Diameter | F Throat Diameter |
| | | | | | | | +0.002/ -0.000 | +0.000/ -0.002 | +0.000/ -0.001 | +0.000/ -0.002 | +0.002/ -0.000 | +0.001/ -0.000 |
| 457 | | 13.975 | 0.070 | 0.275 | 0.006 | 14.525 | 14.502 | 14.028 | 14.498 | 13.997 | 14.471 | 14.001 |
| 458 | | 14.475 | 0.070 | 0.275 | 0.006 | 15.025 | 15.002 | 14.528 | 14.998 | 14.497 | 14.971 | 14.501 |
| 459 | | 14.975 | 0.070 | 0.275 | 0.006 | 15.525 | 15.502 | 15.028 | 15.498 | 14.997 | 15.471 | 15.001 |
| 460 | | 15.475 | 0.070 | 0.275 | 0.006 | 16.025 | 16.002 | 15.528 | 15.998 | 15.497 | 15.971 | 15.501 |

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Gland Dimensions — 568 Profile — Static

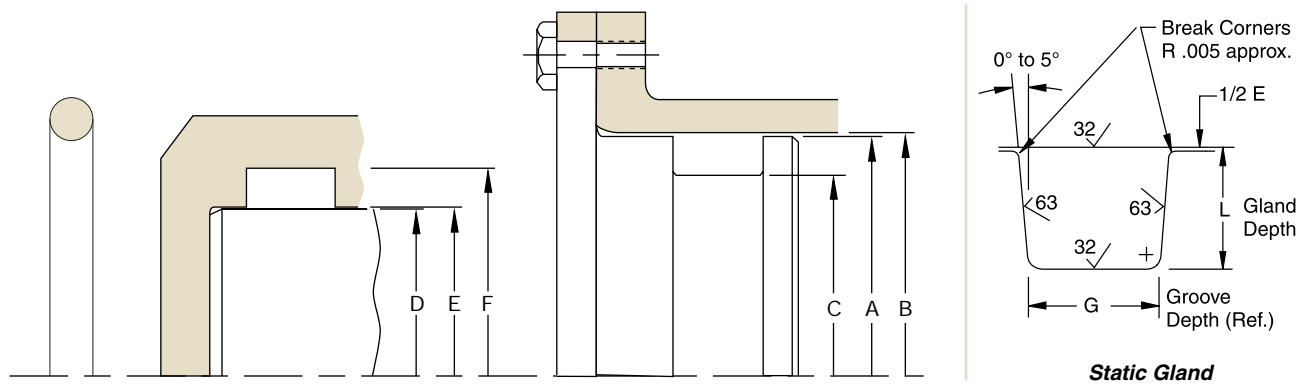

Please refer to Engineering Section 2, page 2-8 for surface finish and additional hardware considerations.

Table 11-5. General O-ring Dimensional Data

| O-ring 2-Size AS568 | Cross Section | | Static | | | E Diametral Clearance (a) | G-Groove Width | | | R Groove Radius | Max. Eccentricity (b) |
|---------------------|---------------|--------------|----------------|----------------|----------|---------------------------|--------------------|--------------------|--------------------|-----------------|-----------------------|
| | Nominal | Actual | L Gland Depth | Squeeze | | | 0 Back-up Ring (G) | 1 Back-up Ring (G) | 2 Back-up Ring (G) | | |
| | | | | Actual | % | | | | | | |
| 004 to 050 | 1/16 | 0.070 ±0.003 | 0.050 to 0.052 | 0.015 to 0.023 | 22 to 32 | 0.002 to 0.005 | 0.093 to 0.098 | 0.138 to 0.143 | 0.205 to 0.210 | 0.005 to 0.015 | 0.002 |
| 102 through 178 | 3/32 | .103 ±0.003 | 0.081 to 0.083 | 0.017 to 0.025 | 17 to 24 | 0.002 to 0.005 | 0.140 to 0.145 | 0.171 to 0.176 | 0.238 to 0.243 | 0.005 to 0.015 | 0.002 |
| 201 through 284 | 1/8 | .139 ±0.004 | 0.111 to 0.113 | 0.022 to 0.032 | 16 to 23 | 0.003 to 0.006 | 0.187 to 0.192 | 0.208 to 0.213 | 0.275 to 0.280 | 0.010 to 0.025 | 0.003 |
| 309 through 395 | 3/16 | .210 ±0.005 | 0.170 to 0.173 | 0.032 to 0.045 | 15 to 21 | 0.003 to 0.006 | 0.281 to 0.286 | 0.311 to 0.316 | 0.410 to 0.415 | 0.020 to 0.035 | 0.004 |
| 425 through 475 | 1/4 | .275 ±0.006 | 0.226 to 0.229 | 0.040 to 0.055 | 15 to 20 | 0.004 to 0.007 | 0.375 to 0.380 | 0.408 to 0.413 | 0.538 to 0.543 | 0.020 to 0.035 | 0.005 |

(a) Clearance (extrusion gap) must be held to a minimum consistent with design requirements for temperature range variation.
 (b) Total indicator reading between groove and adjacent bearing surface.

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

09/01/07

Table 11-6. 568 Static O-ring Gland Dimensions — Inch

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|--------------------|------------------|--------------------|-----------------|--------------------|--------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.001/-0.000 | +0.002/-0.000 |
| 001 | | 0.029 | 0.004 | 0.040 | 0.003 | 0.109 | 0.103 | 0.105 | 0.044 | 0.040 | 0.042 | 0.101 |
| 002 | | 0.042 | 0.004 | 0.050 | 0.003 | 0.142 | 0.136 | 0.138 | 0.059 | 0.053 | 0.055 | 0.132 |
| 003 | | 0.056 | 0.004 | 0.060 | 0.003 | 0.176 | 0.170 | 0.173 | 0.077 | 0.067 | 0.069 | 0.162 |
| 004 | | 0.070 | 0.005 | 0.070 | 0.003 | 0.210 | 0.204 | 0.206 | 0.106 | 0.081 | 0.083 | 0.181 |
| 005 | X | 0.101 | 0.005 | 0.070 | 0.003 | 0.241 | 0.235 | 0.237 | 0.137 | 0.112 | 0.114 | 0.212 |
| 006 | X | 0.114 | 0.005 | 0.070 | 0.003 | 0.254 | 0.248 | 0.250 | 0.150 | 0.125 | 0.127 | 0.225 |
| 007 | X | 0.145 | 0.005 | 0.070 | 0.003 | 0.285 | 0.279 | 0.281 | 0.181 | 0.156 | 0.158 | 0.256 |
| 008 | X | 0.176 | 0.005 | 0.070 | 0.003 | 0.316 | 0.310 | 0.312 | 0.212 | 0.187 | 0.189 | 0.287 |
| 009 | X | 0.208 | 0.005 | 0.070 | 0.003 | 0.348 | 0.341 | 0.343 | 0.243 | 0.218 | 0.220 | 0.318 |
| 010 | X | 0.239 | 0.005 | 0.070 | 0.003 | 0.379 | 0.373 | 0.375 | 0.275 | 0.250 | 0.252 | 0.350 |
| 011 | X | 0.301 | 0.005 | 0.070 | 0.003 | 0.441 | 0.435 | 0.437 | 0.337 | 0.312 | 0.314 | 0.412 |
| 012 | X | 0.364 | 0.005 | 0.070 | 0.003 | 0.504 | 0.498 | 0.500 | 0.400 | 0.375 | 0.377 | 0.475 |
| 013 | X | 0.426 | 0.005 | 0.070 | 0.003 | 0.566 | 0.560 | 0.562 | 0.462 | 0.437 | 0.439 | 0.537 |
| 014 | X | 0.489 | 0.005 | 0.070 | 0.003 | 0.629 | 0.623 | 0.625 | 0.525 | 0.500 | 0.502 | 0.600 |
| 015 | X | 0.551 | 0.007 | 0.070 | 0.003 | 0.691 | 0.685 | 0.687 | 0.587 | 0.562 | 0.564 | 0.662 |
| 016 | X | 0.614 | 0.009 | 0.070 | 0.003 | 0.754 | 0.748 | 0.750 | 0.650 | 0.625 | 0.627 | 0.725 |
| 017 | X | 0.676 | 0.009 | 0.070 | 0.003 | 0.816 | 0.810 | 0.812 | 0.712 | 0.687 | 0.689 | 0.787 |
| 018 | X | 0.739 | 0.009 | 0.070 | 0.003 | 0.879 | 0.873 | 0.875 | 0.775 | 0.750 | 0.752 | 0.850 |
| 019 | X | 0.801 | 0.009 | 0.070 | 0.003 | 0.941 | 0.935 | 0.937 | 0.837 | 0.812 | 0.814 | 0.912 |
| 020 | X | 0.864 | 0.009 | 0.070 | 0.003 | 1.004 | 0.998 | 1.000 | 0.900 | 0.875 | 0.877 | 0.975 |
| 021 | X | 0.926 | 0.009 | 0.070 | 0.003 | 1.066 | 1.060 | 1.062 | 0.962 | 0.937 | 0.939 | 1.037 |
| 022 | X | 0.989 | 0.010 | 0.070 | 0.003 | 1.129 | 1.123 | 1.125 | 1.025 | 1.000 | 1.002 | 1.100 |
| 023 | X | 1.051 | 0.010 | 0.070 | 0.003 | 1.191 | 1.185 | 1.187 | 1.087 | 1.062 | 1.064 | 1.162 |
| 024 | X | 1.114 | 0.010 | 0.070 | 0.003 | 1.254 | 1.248 | 1.250 | 1.150 | 1.125 | 1.127 | 1.225 |
| 025 | | 1.176 | 0.011 | 0.070 | 0.003 | 1.316 | 1.310 | 1.312 | 1.212 | 1.187 | 1.189 | 1.287 |
| 026 | X | 1.239 | 0.011 | 0.070 | 0.003 | 1.379 | 1.373 | 1.375 | 1.275 | 1.250 | 1.252 | 1.350 |
| 027 | X | 1.301 | 0.011 | 0.070 | 0.003 | 1.441 | 1.435 | 1.437 | 1.337 | 1.312 | 1.314 | 1.412 |
| 028 | X | 1.364 | 0.013 | 0.070 | 0.003 | 1.504 | 1.498 | 1.500 | 1.400 | 1.375 | 1.377 | 1.475 |
| 029 | X | 1.489 | 0.013 | 0.070 | 0.003 | 1.629 | 1.623 | 1.625 | 1.525 | 1.500 | 1.502 | 1.600 |
| 030 | X | 1.614 | 0.013 | 0.070 | 0.003 | 1.754 | 1.748 | 1.750 | 1.650 | 1.625 | 1.627 | 1.725 |
| 031 | | 1.739 | 0.015 | 0.070 | 0.003 | 1.879 | 1.873 | 1.875 | 1.775 | 1.750 | 1.752 | 1.850 |
| 032 | | 1.864 | 0.015 | 0.070 | 0.003 | 2.004 | 1.998 | 2.000 | 1.900 | 1.875 | 1.877 | 1.975 |
| 033 | | 1.989 | 0.018 | 0.070 | 0.003 | 2.129 | 2.123 | 2.125 | 2.025 | 2.000 | 2.002 | 2.100 |
| 034 | | 2.114 | 0.018 | 0.070 | 0.003 | 2.254 | 2.248 | 2.250 | 2.150 | 2.125 | 2.127 | 2.225 |
| 035 | | 2.239 | 0.018 | 0.070 | 0.003 | 2.379 | 2.373 | 2.375 | 2.275 | 2.250 | 2.252 | 2.350 |
| 036 | | 2.364 | 0.018 | 0.070 | 0.003 | 2.504 | 2.498 | 2.500 | 2.400 | 2.375 | 2.377 | 2.475 |
| 037 | X | 2.489 | 0.018 | 0.070 | 0.003 | 2.629 | 2.623 | 2.625 | 2.525 | 2.500 | 2.502 | 2.600 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | + .000/- .001 | + .002/- .000 | + .000/- .002 | + .000/- .002 | + .001/- .000 | + .002/- .000 |
| 038 | | 2.614 | 0.020 | 0.070 | 0.003 | 2.754 | 2.748 | 2.750 | 2.650 | 2.625 | 2.627 | 2.725 |
| 039 | | 2.739 | 0.020 | 0.070 | 0.003 | 2.879 | 2.873 | 2.875 | 2.775 | 2.750 | 2.752 | 2.850 |
| 040 | | 2.864 | 0.020 | 0.070 | 0.003 | 3.004 | 2.998 | 3.000 | 2.900 | 2.875 | 2.877 | 2.975 |
| 041 | | 2.989 | 0.024 | 0.070 | 0.003 | 3.129 | 3.123 | 3.125 | 3.025 | 3.000 | 3.002 | 3.100 |
| 042 | | 3.239 | 0.024 | 0.070 | 0.003 | 3.379 | 3.373 | 3.375 | 3.275 | 3.250 | 3.252 | 3.350 |
| 043 | | 3.489 | 0.024 | 0.070 | 0.003 | 3.629 | 3.623 | 3.625 | 3.525 | 3.500 | 3.502 | 3.600 |
| 044 | | 3.739 | 0.027 | 0.070 | 0.003 | 3.879 | 3.873 | 3.875 | 3.775 | 3.750 | 3.752 | 3.850 |
| 045 | | 3.989 | 0.027 | 0.070 | 0.003 | 4.129 | 4.123 | 4.125 | 4.025 | 4.000 | 4.002 | 4.100 |
| 046 | | 4.239 | 0.030 | 0.070 | 0.003 | 4.379 | 4.373 | 4.375 | 4.275 | 4.250 | 4.252 | 4.350 |
| 047 | | 4.489 | 0.030 | 0.070 | 0.003 | 4.629 | 4.623 | 4.625 | 4.525 | 4.500 | 4.502 | 4.600 |
| 048 | | 4.739 | 0.030 | 0.070 | 0.003 | 4.879 | 4.873 | 4.875 | 4.775 | 4.750 | 4.752 | 4.850 |
| 049 | | 4.989 | 0.037 | 0.070 | 0.003 | 5.129 | 5.123 | 5.125 | 5.025 | 5.000 | 5.002 | 5.100 |
| 050 | | 5.239 | 0.037 | 0.070 | 0.003 | 5.379 | 5.373 | 5.375 | 5.275 | 5.250 | 5.252 | 5.350 |
| 102 | | 0.049 | 0.005 | 0.103 | 0.003 | 0.255 | 0.245 | 0.247 | 0.085 | 0.062 | 0.064 | 0.224 |
| 103 | | 0.081 | 0.005 | 0.103 | 0.003 | 0.287 | 0.276 | 0.278 | 0.116 | 0.094 | 0.095 | 0.256 |
| 104 | | 0.112 | 0.005 | 0.103 | 0.003 | 0.318 | 0.308 | 0.310 | 0.148 | 0.125 | 0.127 | 0.287 |
| 105 | | 0.143 | 0.005 | 0.103 | 0.003 | 0.349 | 0.340 | 0.342 | 0.180 | 0.156 | 0.158 | 0.318 |
| 106 | | 0.174 | 0.005 | 0.103 | 0.003 | 0.380 | 0.372 | 0.374 | 0.212 | 0.187 | 0.189 | 0.349 |
| 107 | | 0.206 | 0.005 | 0.103 | 0.003 | 0.412 | 0.403 | 0.405 | 0.243 | 0.219 | 0.221 | 0.381 |
| 108 | | 0.237 | 0.005 | 0.103 | 0.003 | 0.443 | 0.435 | 0.437 | 0.275 | 0.250 | 0.252 | 0.412 |
| 109 | X | 0.299 | 0.005 | 0.103 | 0.003 | 0.505 | 0.498 | 0.500 | 0.338 | 0.312 | 0.314 | 0.474 |
| 110 | X | 0.362 | 0.005 | 0.103 | 0.003 | 0.568 | 0.560 | 0.562 | 0.400 | 0.375 | 0.377 | 0.537 |
| 111 | X | 0.424 | 0.005 | 0.103 | 0.003 | 0.630 | 0.623 | 0.625 | 0.463 | 0.437 | 0.439 | 0.599 |
| 112 | X | 0.487 | 0.005 | 0.103 | 0.003 | 0.693 | 0.685 | 0.687 | 0.525 | 0.500 | 0.502 | 0.662 |
| 113 | X | 0.549 | 0.007 | 0.103 | 0.003 | 0.755 | 0.748 | 0.750 | 0.588 | 0.562 | 0.564 | 0.724 |
| 114 | X | 0.612 | 0.009 | 0.103 | 0.003 | 0.818 | 0.810 | 0.812 | 0.650 | 0.625 | 0.627 | 0.787 |
| 115 | X | 0.674 | 0.009 | 0.103 | 0.003 | 0.880 | 0.873 | 0.875 | 0.713 | 0.687 | 0.689 | 0.849 |
| 116 | X | 0.737 | 0.009 | 0.103 | 0.003 | 0.943 | 0.935 | 0.937 | 0.775 | 0.750 | 0.752 | 0.912 |
| 117 | X | 0.799 | 0.010 | 0.103 | 0.003 | 1.005 | 0.998 | 1.000 | 0.838 | 0.812 | 0.814 | 0.974 |
| 118 | X | 0.862 | 0.010 | 0.103 | 0.003 | 1.068 | 1.060 | 1.062 | 0.900 | 0.875 | 0.877 | 1.037 |
| 119 | X | 0.924 | 0.010 | 0.103 | 0.003 | 1.130 | 1.123 | 1.125 | 0.963 | 0.937 | 0.939 | 1.099 |
| 120 | X | 0.987 | 0.010 | 0.103 | 0.003 | 1.193 | 1.185 | 1.187 | 1.025 | 1.000 | 1.002 | 1.162 |
| 121 | X | 1.049 | 0.010 | 0.103 | 0.003 | 1.255 | 1.248 | 1.250 | 1.088 | 1.062 | 1.064 | 1.224 |
| 122 | X | 1.112 | 0.010 | 0.103 | 0.003 | 1.318 | 1.310 | 1.312 | 1.150 | 1.125 | 1.127 | 1.287 |
| 123 | X | 1.174 | 0.012 | 0.103 | 0.003 | 1.380 | 1.373 | 1.375 | 1.213 | 1.187 | 1.189 | 1.349 |
| 124 | X | 1.237 | 0.012 | 0.103 | 0.003 | 1.443 | 1.435 | 1.437 | 1.275 | 1.250 | 1.252 | 1.412 |
| 125 | X | 1.299 | 0.012 | 0.103 | 0.003 | 1.505 | 1.498 | 1.500 | 1.338 | 1.312 | 1.314 | 1.474 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|--------------------|------------------|--------------------|-----------------|--------------------|--------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.001/-0.000 | +0.002/-0.000 |
| 126 | X | 1.362 | 0.012 | 0.103 | 0.003 | 1.568 | 1.560 | 1.562 | 1.400 | 1.375 | 1.377 | 1.537 |
| 127 | X | 1.424 | 0.012 | 0.103 | 0.003 | 1.630 | 1.623 | 1.625 | 1.463 | 1.437 | 1.439 | 1.599 |
| 128 | X | 1.487 | 0.012 | 0.103 | 0.003 | 1.693 | 1.685 | 1.687 | 1.525 | 1.500 | 1.502 | 1.662 |
| 129 | X | 1.549 | 0.015 | 0.103 | 0.003 | 1.755 | 1.748 | 1.750 | 1.588 | 1.562 | 1.564 | 1.724 |
| 130 | X | 1.612 | 0.015 | 0.103 | 0.003 | 1.818 | 1.810 | 1.812 | 1.650 | 1.625 | 1.627 | 1.787 |
| 131 | X | 1.674 | 0.015 | 0.103 | 0.003 | 1.880 | 1.873 | 1.875 | 1.713 | 1.687 | 1.689 | 1.849 |
| 132 | | 1.737 | 0.015 | 0.103 | 0.003 | 1.943 | 1.935 | 1.937 | 1.775 | 1.750 | 1.752 | 1.912 |
| 133 | X | 1.799 | 0.015 | 0.103 | 0.003 | 2.005 | 1.998 | 2.000 | 1.838 | 1.812 | 1.814 | 1.974 |
| 134 | X | 1.862 | 0.015 | 0.103 | 0.003 | 2.068 | 2.060 | 2.062 | 1.900 | 1.875 | 1.877 | 2.037 |
| 135 | X | 1.925 | 0.017 | 0.103 | 0.003 | 2.131 | 2.123 | 2.125 | 1.963 | 1.997 | 1.939 | 2.099 |
| 136 | X | 1.987 | 0.017 | 0.103 | 0.003 | 2.193 | 2.185 | 2.187 | 2.025 | 2.000 | 2.002 | 2.162 |
| 137 | | 2.050 | 0.017 | 0.103 | 0.003 | 2.256 | 2.248 | 2.250 | 2.088 | 2.062 | 2.064 | 2.224 |
| 138 | | 2.112 | 0.017 | 0.103 | 0.003 | 2.318 | 2.310 | 2.312 | 2.150 | 2.125 | 2.127 | 2.287 |
| 139 | | 2.175 | 0.017 | 0.103 | 0.003 | 2.381 | 2.373 | 2.375 | 2.213 | 2.187 | 2.189 | 2.349 |
| 140 | | 2.237 | 0.017 | 0.103 | 0.003 | 2.443 | 2.435 | 2.437 | 2.275 | 2.250 | 2.252 | 2.412 |
| 141 | | 2.300 | 0.020 | 0.103 | 0.003 | 2.506 | 2.498 | 2.500 | 2.338 | 2.312 | 2.315 | 2.474 |
| 142 | X | 2.362 | 0.020 | 0.103 | 0.003 | 2.568 | 2.560 | 2.562 | 2.400 | 2.375 | 2.377 | 2.537 |
| 143 | X | 2.425 | 0.020 | 0.103 | 0.003 | 2.631 | 2.623 | 2.625 | 2.463 | 2.437 | 2.439 | 2.599 |
| 144 | X | 2.487 | 0.020 | 0.103 | 0.003 | 2.693 | 2.685 | 2.687 | 2.525 | 2.500 | 2.502 | 2.662 |
| 145 | | 2.550 | 0.020 | 0.103 | 0.003 | 2.756 | 2.748 | 2.750 | 2.588 | 2.562 | 2.564 | 2.724 |
| 146 | | 2.612 | 0.020 | 0.103 | 0.003 | 2.818 | 2.810 | 2.812 | 2.650 | 2.625 | 2.627 | 2.787 |
| 147 | | 2.675 | 0.022 | 0.103 | 0.003 | 2.881 | 2.873 | 2.875 | 2.713 | 2.687 | 2.689 | 2.849 |
| 148 | | 2.737 | 0.022 | 0.103 | 0.003 | 2.943 | 2.935 | 2.937 | 2.775 | 2.750 | 2.752 | 2.912 |
| 149 | | 2.800 | 0.022 | 0.103 | 0.003 | 3.006 | 2.998 | 3.000 | 2.838 | 2.812 | 2.814 | 2.974 |
| 150 | | 2.862 | 0.022 | 0.103 | 0.003 | 3.068 | 3.060 | 3.062 | 2.900 | 2.875 | 2.877 | 3.037 |
| 151 | | 2.987 | 0.024 | 0.103 | 0.003 | 3.193 | 3.185 | 3.187 | 3.025 | 3.000 | 3.002 | 3.162 |
| 152 | | 3.237 | 0.024 | 0.103 | 0.003 | 3.443 | 3.435 | 3.437 | 3.275 | 3.250 | 3.252 | 3.412 |
| 153 | | 3.487 | 0.024 | 0.103 | 0.003 | 3.693 | 3.685 | 3.687 | 3.525 | 3.500 | 3.502 | 3.662 |
| 154 | | 3.737 | 0.028 | 0.103 | 0.003 | 3.943 | 3.935 | 3.937 | 3.775 | 3.750 | 3.752 | 3.912 |
| 155 | X | 3.987 | 0.028 | 0.103 | 0.003 | 4.193 | 4.185 | 4.187 | 4.025 | 4.000 | 4.002 | 4.162 |
| 156 | X | 4.237 | 0.030 | 0.103 | 0.003 | 4.443 | 4.435 | 4.437 | 4.275 | 4.250 | 4.252 | 4.412 |
| 157 | | 4.487 | 0.030 | 0.103 | 0.003 | 4.693 | 4.685 | 4.687 | 4.525 | 4.500 | 4.502 | 4.662 |
| 158 | | 4.737 | 0.030 | 0.103 | 0.003 | 4.943 | 4.935 | 4.937 | 4.775 | 4.750 | 4.752 | 4.912 |
| 159 | | 4.987 | 0.035 | 0.103 | 0.003 | 5.193 | 5.185 | 5.187 | 5.025 | 5.000 | 5.002 | 5.162 |
| 160 | | 5.237 | 0.035 | 0.103 | 0.003 | 5.443 | 5.435 | 5.437 | 5.275 | 5.250 | 5.252 | 5.412 |
| 161 | | 5.487 | 0.035 | 0.103 | 0.003 | 5.693 | 5.685 | 5.687 | 5.525 | 5.500 | 5.502 | 5.662 |
| 162 | | 5.737 | 0.035 | 0.103 | 0.003 | 5.943 | 5.935 | 5.937 | 5.775 | 5.750 | 5.752 | 5.912 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|--------------------|------------------|--------------------|-----------------|--------------------|--------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.001/-0.000 | +0.002/-0.000 |
| 163 | | 5.987 | 0.035 | 0.103 | 0.003 | 6.193 | 6.185 | 6.187 | 6.025 | 6.000 | 6.002 | 6.162 |
| 164 | | 6.237 | 0.040 | 0.103 | 0.003 | 6.443 | 6.435 | 6.437 | 6.275 | 6.250 | 6.252 | 6.412 |
| 165 | | 6.487 | 0.040 | 0.103 | 0.003 | 6.693 | 6.685 | 6.687 | 6.525 | 6.500 | 6.502 | 6.662 |
| 166 | | 6.737 | 0.040 | 0.103 | 0.003 | 6.943 | 6.935 | 6.937 | 6.775 | 6.750 | 6.752 | 6.912 |
| 167 | | 6.987 | 0.040 | 0.103 | 0.003 | 7.193 | 7.185 | 7.187 | 7.025 | 7.000 | 7.002 | 7.162 |
| 201 | | 0.171 | 0.005 | 0.139 | 0.004 | 0.449 | 0.434 | 0.437 | 0.215 | 0.187 | 0.190 | 0.409 |
| 202 | | 0.234 | 0.005 | 0.139 | 0.004 | 0.512 | 0.497 | 0.500 | 0.278 | 0.250 | 0.253 | 0.472 |
| 203 | | 0.296 | 0.005 | 0.139 | 0.004 | 0.574 | 0.559 | 0.562 | 0.340 | 0.312 | 0.315 | 0.534 |
| 204 | | 0.359 | 0.005 | 0.139 | 0.004 | 0.637 | 0.622 | 0.625 | 0.403 | 0.375 | 0.378 | 0.597 |
| 205 | | 0.421 | 0.005 | 0.139 | 0.004 | 0.699 | 0.684 | 0.687 | 0.465 | 0.437 | 0.440 | 0.659 |
| 206 | X | 0.484 | 0.005 | 0.139 | 0.004 | 0.762 | 0.747 | 0.750 | 0.528 | 0.500 | 0.503 | 0.722 |
| 207 | | 0.546 | 0.007 | 0.139 | 0.004 | 0.824 | 0.809 | 0.812 | 0.590 | 0.562 | 0.565 | 0.784 |
| 208 | X | 0.609 | 0.009 | 0.139 | 0.004 | 0.887 | 0.872 | 0.875 | 0.653 | 0.625 | 0.628 | 0.847 |
| 209 | X | 0.671 | 0.009 | 0.139 | 0.004 | 0.949 | 0.934 | 0.937 | 0.715 | 0.687 | 0.690 | 0.909 |
| 210 | X | 0.734 | 0.010 | 0.139 | 0.004 | 1.012 | 0.997 | 1.000 | 0.778 | 0.750 | 0.753 | 0.972 |
| 211 | X | 0.796 | 0.010 | 0.139 | 0.004 | 1.074 | 1.059 | 1.062 | 0.840 | 0.812 | 0.815 | 1.034 |
| 212 | X | 0.859 | 0.010 | 0.139 | 0.004 | 1.137 | 1.122 | 1.125 | 0.903 | 0.875 | 0.878 | 1.097 |
| 213 | X | 0.921 | 0.010 | 0.139 | 0.004 | 1.199 | 1.184 | 1.187 | 0.965 | 0.937 | 0.940 | 1.159 |
| 214 | X | 0.984 | 0.010 | 0.139 | 0.004 | 1.262 | 1.247 | 1.250 | 1.028 | 1.000 | 1.003 | 1.222 |
| 215 | | 1.046 | 0.010 | 0.139 | 0.004 | 1.324 | 1.309 | 1.312 | 1.090 | 1.062 | 1.065 | 1.284 |
| 216 | X | 1.109 | 0.012 | 0.139 | 0.004 | 1.387 | 1.372 | 1.375 | 1.153 | 1.125 | 1.128 | 1.347 |
| 217 | X | 1.171 | 0.012 | 0.139 | 0.004 | 1.449 | 1.434 | 1.437 | 1.215 | 1.187 | 1.190 | 1.409 |
| 218 | X | 1.234 | 0.012 | 0.139 | 0.004 | 1.512 | 1.497 | 1.500 | 1.278 | 1.250 | 1.253 | 1.472 |
| 219 | X | 1.296 | 0.012 | 0.139 | 0.004 | 1.574 | 1.559 | 1.562 | 1.340 | 1.312 | 1.315 | 1.534 |
| 220 | X | 1.359 | 0.012 | 0.139 | 0.004 | 1.637 | 1.622 | 1.625 | 1.403 | 1.375 | 1.378 | 1.597 |
| 221 | | 1.421 | 0.012 | 0.139 | 0.004 | 1.699 | 1.684 | 1.687 | 1.465 | 1.437 | 1.440 | 1.659 |
| 222 | X | 1.484 | 0.015 | 0.139 | 0.004 | 1.762 | 1.747 | 1.750 | 1.528 | 1.500 | 1.503 | 1.722 |
| 223 | X | 1.609 | 0.015 | 0.139 | 0.004 | 1.887 | 1.872 | 1.875 | 1.653 | 1.625 | 1.628 | 1.847 |
| 224 | X | 1.734 | 0.015 | 0.139 | 0.004 | 2.012 | 1.997 | 2.000 | 1.778 | 1.750 | 1.753 | 1.972 |
| 225 | X | 1.859 | 0.015 | 0.139 | 0.004 | 2.137 | 2.122 | 2.125 | 1.903 | 1.875 | 1.878 | 2.097 |
| 226 | | 1.984 | 0.018 | 0.139 | 0.004 | 2.262 | 2.247 | 2.250 | 2.028 | 2.000 | 2.003 | 2.222 |
| 227 | | 2.109 | 0.018 | 0.139 | 0.004 | 2.387 | 2.372 | 2.375 | 2.153 | 2.125 | 2.128 | 2.347 |
| 228 | X | 2.234 | 0.020 | 0.139 | 0.004 | 2.512 | 2.497 | 2.500 | 2.278 | 2.250 | 2.253 | 2.472 |
| 229 | | 2.359 | 0.020 | 0.139 | 0.004 | 2.637 | 2.622 | 2.625 | 2.403 | 2.375 | 2.378 | 2.597 |
| 230 | | 2.484 | 0.020 | 0.139 | 0.004 | 2.762 | 2.747 | 2.750 | 2.528 | 2.500 | 2.503 | 2.722 |
| 231 | X | 2.609 | 0.020 | 0.139 | 0.004 | 2.887 | 2.872 | 2.875 | 2.653 | 2.625 | 2.628 | 2.847 |
| 232 | X | 2.734 | 0.024 | 0.139 | 0.004 | 3.012 | 2.997 | 3.000 | 2.778 | 2.750 | 2.753 | 2.972 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.002 | +0.000/-0.002 | +0.001/-0.000 | +0.002/-0.000 |
| 233 | X | 2.859 | 0.024 | 0.139 | 0.004 | 3.137 | 3.122 | 3.125 | 2.903 | 2.875 | 2.878 | 3.097 |
| 234 | X | 2.984 | 0.024 | 0.139 | 0.004 | 3.262 | 3.247 | 3.250 | 3.028 | 3.000 | 3.003 | 3.222 |
| 235 | X | 3.109 | 0.024 | 0.139 | 0.004 | 3.387 | 3.372 | 3.375 | 3.153 | 3.125 | 3.128 | 3.347 |
| 236 | X | 3.234 | 0.024 | 0.139 | 0.004 | 3.512 | 3.497 | 3.500 | 3.278 | 3.250 | 3.253 | 3.472 |
| 237 | X | 3.359 | 0.024 | 0.139 | 0.004 | 3.637 | 3.622 | 3.625 | 3.403 | 3.375 | 3.378 | 3.597 |
| 238 | | 3.484 | 0.024 | 0.139 | 0.004 | 3.762 | 3.747 | 3.750 | 3.528 | 3.500 | 3.503 | 3.722 |
| 239 | | 3.609 | 0.028 | 0.139 | 0.004 | 3.887 | 3.872 | 3.875 | 3.653 | 3.625 | 3.628 | 3.847 |
| 240 | X | 3.734 | 0.028 | 0.139 | 0.004 | 4.012 | 3.997 | 4.000 | 3.778 | 3.750 | 3.753 | 3.972 |
| 241 | | 3.859 | 0.028 | 0.139 | 0.004 | 4.137 | 4.122 | 4.125 | 3.903 | 3.875 | 3.878 | 4.097 |
| 242 | X | 3.984 | 0.028 | 0.139 | 0.004 | 4.262 | 4.247 | 4.250 | 4.028 | 4.000 | 4.003 | 4.222 |
| 243 | | 4.109 | 0.028 | 0.139 | 0.004 | 4.387 | 4.372 | 4.375 | 4.153 | 4.125 | 4.128 | 4.347 |
| 244 | | 4.234 | 0.030 | 0.139 | 0.004 | 4.512 | 4.497 | 4.500 | 4.278 | 4.250 | 4.253 | 4.472 |
| 245 | | 4.359 | 0.030 | 0.139 | 0.004 | 4.637 | 4.622 | 4.625 | 4.403 | 4.375 | 4.378 | 4.597 |
| 246 | | 4.484 | 0.030 | 0.139 | 0.004 | 4.762 | 4.747 | 4.750 | 4.528 | 4.500 | 4.503 | 4.722 |
| 247 | | 4.609 | 0.030 | 0.139 | 0.004 | 4.887 | 4.872 | 4.875 | 4.653 | 4.625 | 4.628 | 4.847 |
| 248 | | 4.734 | 0.030 | 0.139 | 0.004 | 5.012 | 4.997 | 5.000 | 4.778 | 4.750 | 4.753 | 4.972 |
| | | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.004 | +0.000/-0.002 | +0.001/-0.000 | +0.004/-0.000 |
| 249 | | 4.859 | 0.035 | 0.139 | 0.004 | 5.137 | 5.122 | 5.125 | 4.903 | 4.875 | 4.878 | 5.097 |
| 250 | | 4.984 | 0.035 | 0.139 | 0.004 | 5.262 | 5.247 | 5.250 | 5.028 | 5.000 | 5.003 | 5.222 |
| 251 | | 5.109 | 0.035 | 0.139 | 0.004 | 5.387 | 5.372 | 5.375 | 5.153 | 5.125 | 5.128 | 5.347 |
| 252 | | 5.234 | 0.035 | 0.139 | 0.004 | 5.512 | 5.497 | 5.500 | 5.278 | 5.250 | 5.253 | 5.472 |
| 253 | | 5.359 | 0.035 | 0.139 | 0.004 | 5.637 | 5.622 | 5.625 | 5.403 | 5.375 | 5.378 | 5.597 |
| 254 | | 5.484 | 0.035 | 0.139 | 0.004 | 5.762 | 5.747 | 5.750 | 5.528 | 5.500 | 5.503 | 5.722 |
| 255 | | 5.609 | 0.035 | 0.139 | 0.004 | 5.887 | 5.872 | 5.875 | 5.653 | 5.625 | 5.628 | 5.847 |
| 256 | | 5.734 | 0.035 | 0.139 | 0.004 | 6.012 | 5.997 | 6.000 | 5.778 | 5.750 | 5.753 | 5.972 |
| 257 | | 5.859 | 0.035 | 0.139 | 0.004 | 6.137 | 6.122 | 6.125 | 5.903 | 5.875 | 5.878 | 6.097 |
| 258 | | 5.984 | 0.035 | 0.139 | 0.004 | 6.262 | 6.247 | 6.250 | 6.028 | 6.000 | 6.003 | 6.222 |
| 259 | | 6.234 | 0.040 | 0.139 | 0.004 | 6.512 | 6.497 | 6.500 | 6.278 | 6.250 | 6.253 | 6.472 |
| 260 | | 6.484 | 0.040 | 0.139 | 0.004 | 6.762 | 6.747 | 6.750 | 6.528 | 6.500 | 6.503 | 6.722 |
| 261 | | 6.734 | 0.040 | 0.139 | 0.004 | 7.012 | 6.997 | 7.000 | 6.778 | 6.750 | 6.753 | 6.972 |
| 262 | | 6.984 | 0.040 | 0.139 | 0.004 | 7.262 | 7.247 | 7.250 | 7.028 | 7.000 | 7.003 | 7.222 |
| 309 | | 0.412 | 0.005 | 0.210 | 0.005 | 0.832 | 0.809 | 0.812 | 0.472 | 0.437 | 0.440 | 0.777 |
| 310 | | 0.475 | 0.005 | 0.210 | 0.005 | 0.895 | 0.872 | 0.875 | 0.535 | 0.500 | 0.503 | 0.840 |
| 311 | X | 0.537 | 0.007 | 0.210 | 0.005 | 0.957 | 0.934 | 0.937 | 0.597 | 0.562 | 0.565 | 0.902 |
| 312 | | 0.600 | 0.009 | 0.210 | 0.005 | 1.020 | 0.997 | 1.000 | 0.660 | 0.625 | 0.628 | 0.965 |
| 313 | | 0.662 | 0.009 | 0.210 | 0.005 | 1.082 | 1.059 | 1.062 | 0.722 | 0.687 | 0.690 | 1.027 |
| 314 | | 0.725 | 0.010 | 0.210 | 0.005 | 1.145 | 1.122 | 1.125 | 0.785 | 0.750 | 0.753 | 1.090 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|--------------------|------------------|--------------------|-----------------|--------------------|--------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | + .000/- .001 | + .002/- .000 | + .000/- .004 | + .000/- .002 | + .001/- .000 | + .004/- .000 |
| 315 | | 0.787 | 0.010 | 0.210 | 0.005 | 1.207 | 1.184 | 1.187 | 0.847 | 0.812 | 0.815 | 1.152 |
| 316 | | 0.850 | 0.010 | 0.210 | 0.005 | 1.270 | 1.247 | 1.250 | 0.910 | 0.875 | 0.878 | 1.215 |
| 317 | | 0.912 | 0.010 | 0.210 | 0.005 | 1.332 | 1.309 | 1.312 | 0.972 | 0.937 | 0.940 | 1.277 |
| 318 | | 0.975 | 0.010 | 0.210 | 0.005 | 1.395 | 1.372 | 1.375 | 1.035 | 1.000 | 1.003 | 1.340 |
| 319 | X | 1.037 | 0.010 | 0.210 | 0.005 | 1.457 | 1.434 | 1.437 | 1.097 | 1.062 | 1.065 | 1.402 |
| 320 | | 1.100 | 0.012 | 0.210 | 0.005 | 1.520 | 1.497 | 1.500 | 1.160 | 1.125 | 1.128 | 1.465 |
| 321 | X | 1.162 | 0.012 | 0.210 | 0.005 | 1.582 | 1.559 | 1.562 | 1.222 | 1.187 | 1.190 | 1.527 |
| 322 | | 1.225 | 0.012 | 0.210 | 0.005 | 1.645 | 1.622 | 1.625 | 1.285 | 1.250 | 1.253 | 1.590 |
| 323 | | 1.287 | 0.012 | 0.210 | 0.005 | 1.707 | 1.684 | 1.687 | 1.347 | 1.312 | 1.315 | 1.652 |
| 324 | X | 1.350 | 0.012 | 0.210 | 0.005 | 1.770 | 1.747 | 1.750 | 1.410 | 1.375 | 1.378 | 1.715 |
| 325 | X | 1.475 | 0.015 | 0.210 | 0.005 | 1.895 | 1.872 | 1.875 | 1.535 | 1.500 | 1.503 | 1.840 |
| 326 | | 1.600 | 0.015 | 0.210 | 0.005 | 2.020 | 1.997 | 2.000 | 1.660 | 1.625 | 1.628 | 1.965 |
| 327 | X | 1.725 | 0.015 | 0.210 | 0.005 | 2.145 | 2.122 | 2.125 | 1.785 | 1.750 | 1.753 | 2.090 |
| 328 | X | 1.850 | 0.015 | 0.210 | 0.005 | 2.270 | 2.247 | 2.250 | 1.910 | 1.875 | 1.878 | 2.215 |
| 329 | X | 1.975 | 0.018 | 0.210 | 0.005 | 2.395 | 2.372 | 2.375 | 2.035 | 2.000 | 2.003 | 2.340 |
| 330 | | 2.100 | 0.018 | 0.210 | 0.005 | 2.520 | 2.497 | 2.500 | 2.160 | 2.125 | 2.128 | 2.465 |
| 331 | | 2.225 | 0.018 | 0.210 | 0.005 | 2.645 | 2.622 | 2.625 | 2.285 | 2.250 | 2.253 | 2.590 |
| 332 | X | 2.350 | 0.018 | 0.210 | 0.005 | 2.770 | 2.747 | 2.750 | 2.410 | 2.375 | 2.378 | 2.715 |
| 333 | | 2.475 | 0.020 | 0.210 | 0.005 | 2.895 | 2.872 | 2.875 | 2.535 | 2.500 | 2.503 | 2.840 |
| 334 | | 2.600 | 0.020 | 0.210 | 0.005 | 3.020 | 2.997 | 3.000 | 2.660 | 2.625 | 2.628 | 2.965 |
| 335 | | 2.725 | 0.020 | 0.210 | 0.005 | 3.145 | 3.122 | 3.125 | 2.785 | 2.750 | 2.753 | 3.090 |
| 336 | | 2.850 | 0.020 | 0.210 | 0.005 | 3.270 | 3.247 | 3.250 | 2.910 | 2.875 | 2.878 | 3.215 |
| 337 | X | 2.975 | 0.024 | 0.210 | 0.005 | 3.395 | 3.372 | 3.375 | 3.035 | 3.000 | 3.003 | 3.340 |
| 338 | | 3.100 | 0.024 | 0.210 | 0.005 | 3.520 | 3.497 | 3.500 | 3.160 | 3.125 | 3.128 | 3.465 |
| 339 | | 3.225 | 0.024 | 0.210 | 0.005 | 3.645 | 3.622 | 3.625 | 3.285 | 3.250 | 3.253 | 3.590 |
| 340 | | 3.350 | 0.024 | 0.210 | 0.005 | 3.770 | 3.747 | 3.750 | 3.410 | 3.375 | 3.378 | 3.715 |
| 341 | X | 3.475 | 0.024 | 0.210 | 0.005 | 3.895 | 3.872 | 3.875 | 3.535 | 3.500 | 3.503 | 3.840 |
| 342 | | 3.600 | 0.028 | 0.210 | 0.005 | 4.020 | 3.997 | 4.000 | 3.660 | 3.625 | 3.628 | 3.965 |
| 343 | | 3.725 | 0.028 | 0.210 | 0.005 | 4.145 | 4.122 | 4.125 | 3.785 | 3.750 | 3.753 | 4.090 |
| 344 | | 3.850 | 0.028 | 0.210 | 0.005 | 4.270 | 4.247 | 4.250 | 3.910 | 3.875 | 3.878 | 4.215 |
| 345 | | 3.975 | 0.028 | 0.210 | 0.005 | 4.395 | 4.372 | 4.375 | 4.035 | 4.000 | 4.003 | 4.340 |
| 346 | | 4.100 | 0.028 | 0.210 | 0.005 | 4.520 | 4.497 | 4.500 | 4.160 | 4.125 | 4.128 | 4.465 |
| 347 | | 4.225 | 0.030 | 0.210 | 0.005 | 4.645 | 4.622 | 4.625 | 4.285 | 4.250 | 4.253 | 4.590 |
| 348 | X | 4.350 | 0.030 | 0.210 | 0.005 | 4.773 | 4.747 | 4.750 | 4.410 | 4.375 | 4.378 | 4.717 |
| 349 | | 4.475 | 0.030 | 0.210 | 0.005 | 4.895 | 4.872 | 4.875 | 4.535 | 4.500 | 4.503 | 4.840 |
| 350 | | 4.600 | 0.030 | 0.210 | 0.005 | 5.020 | 4.997 | 5.000 | 4.660 | 4.625 | 4.628 | 4.965 |
| 351 | | 4.725 | 0.030 | 0.210 | 0.005 | 5.145 | 5.122 | 5.125 | 4.785 | 4.750 | 4.753 | 5.090 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

Table 11-6. 568 Static O-ring Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | X* | Seal Dimensions | | | | | Piston | | | Rod | | |
|---------------------------|----|--------------------|-------|-------|-------|-----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------------|
| | | Inside Diameter | ± | Width | ± | Mean O.D. (Ref) | A | B | C | D | E | F |
| | | | | | | | Piston Diameter | Bore Diameter | Groove Diameter | Rod Diameter | Throat Diameter | Groove Diameter |
| | | | | | | | | | | | | |
| | | | | | | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.004 | +0.000/-0.002 | +0.001/-0.000 | +0.004/-0.000 | |
| 352 | | 4.850 | 0.030 | 0.210 | 0.005 | 5.270 | 5.247 | 5.250 | 4.910 | 4.875 | 4.878 | 5.215 |
| 353 | | 4.975 | 0.037 | 0.210 | 0.005 | 5.395 | 5.372 | 5.375 | 5.035 | 5.000 | 5.003 | 5.340 |
| 354 | | 5.100 | 0.037 | 0.210 | 0.005 | 5.520 | 5.497 | 5.500 | 5.160 | 5.125 | 5.128 | 5.465 |
| 355 | | 5.225 | 0.037 | 0.210 | 0.005 | 5.645 | 5.622 | 5.625 | 5.285 | 5.250 | 5.253 | 5.590 |
| 356 | | 5.350 | 0.037 | 0.210 | 0.005 | 5.770 | 5.747 | 5.750 | 5.410 | 5.375 | 5.378 | 5.715 |
| 357 | | 5.475 | 0.037 | 0.210 | 0.005 | 5.895 | 5.872 | 5.875 | 5.535 | 5.500 | 5.503 | 5.840 |
| 358 | | 5.600 | 0.037 | 0.210 | 0.005 | 6.020 | 5.997 | 6.000 | 5.660 | 5.625 | 5.628 | 5.965 |
| 359 | | 5.725 | 0.037 | 0.210 | 0.005 | 6.145 | 6.122 | 6.125 | 5.785 | 5.750 | 5.753 | 6.090 |
| 360 | | 5.850 | 0.037 | 0.210 | 0.005 | 6.270 | 6.247 | 6.250 | 5.910 | 5.875 | 5.878 | 6.215 |
| 361 | | 5.975 | 0.037 | 0.210 | 0.005 | 6.395 | 6.372 | 6.375 | 6.035 | 6.000 | 6.003 | 6.340 |
| 362 | | 6.225 | 0.040 | 0.210 | 0.005 | 6.645 | 6.622 | 6.625 | 6.285 | 6.250 | 6.253 | 6.590 |
| 363 | | 6.475 | 0.040 | 0.210 | 0.005 | 6.895 | 6.872 | 6.875 | 6.535 | 6.500 | 6.503 | 6.840 |
| 364 | | 6.725 | 0.040 | 0.210 | 0.005 | 7.145 | 7.122 | 7.125 | 6.785 | 6.750 | 6.753 | 7.090 |
| 365 | | 6.975 | 0.040 | 0.210 | 0.005 | 7.395 | 7.372 | 7.375 | 7.035 | 7.000 | 7.003 | 7.340 |
| 425 | | 4.475 | 0.033 | 0.275 | 0.006 | 5.025 | 4.996 | 5.000 | 4.548 | 4.500 | 4.504 | 4.952 |
| 426 | | 4.600 | 0.033 | 0.275 | 0.006 | 5.150 | 5.121 | 5.125 | 4.673 | 4.625 | 4.629 | 5.077 |
| 427 | | 4.725 | 0.033 | 0.275 | 0.006 | 5.275 | 5.246 | 5.250 | 4.798 | 4.750 | 4.754 | 5.202 |
| 428 | | 4.850 | 0.033 | 0.275 | 0.006 | 5.400 | 5.371 | 5.375 | 4.923 | 4.875 | 4.879 | 5.327 |
| 429 | | 4.975 | 0.037 | 0.275 | 0.006 | 5.525 | 5.496 | 5.500 | 5.048 | 5.000 | 5.004 | 5.452 |
| 430 | | 5.100 | 0.037 | 0.275 | 0.006 | 5.650 | 5.621 | 5.625 | 5.173 | 5.125 | 5.129 | 5.577 |
| 431 | | 5.225 | 0.037 | 0.275 | 0.006 | 5.775 | 5.746 | 5.750 | 5.298 | 5.250 | 5.254 | 5.702 |
| 432 | X | 5.350 | 0.037 | 0.275 | 0.006 | 5.900 | 5.871 | 5.875 | 5.423 | 5.375 | 5.379 | 5.827 |
| 433 | | 5.475 | 0.037 | 0.275 | 0.006 | 6.025 | 5.996 | 6.000 | 5.548 | 5.500 | 5.504 | 5.952 |
| 434 | | 5.600 | 0.037 | 0.275 | 0.006 | 6.150 | 6.121 | 6.125 | 5.673 | 5.625 | 5.629 | 6.077 |
| 435 | | 5.725 | 0.037 | 0.275 | 0.006 | 6.275 | 6.246 | 6.250 | 5.798 | 5.750 | 5.754 | 6.202 |
| 436 | | 5.850 | 0.037 | 0.275 | 0.006 | 6.400 | 6.371 | 6.375 | 5.923 | 5.875 | 5.879 | 6.327 |
| 437 | | 5.975 | 0.037 | 0.275 | 0.006 | 6.525 | 6.496 | 6.500 | 6.048 | 6.000 | 6.004 | 6.452 |
| 438 | | 6.225 | 0.040 | 0.275 | 0.006 | 6.775 | 6.746 | 6.750 | 6.298 | 6.250 | 6.254 | 6.702 |
| 439 | | 6.475 | 0.040 | 0.275 | 0.006 | 7.025 | 6.996 | 7.000 | 6.548 | 6.500 | 6.504 | 6.952 |
| 440 | | 6.725 | 0.040 | 0.275 | 0.006 | 7.275 | 7.246 | 7.250 | 6.798 | 6.750 | 6.754 | 7.202 |
| 441 | | 6.975 | 0.040 | 0.275 | 0.006 | 7.525 | 7.496 | 7.500 | 7.048 | 7.000 | 7.004 | 7.452 |

*X = Standard Offering.

Those Piston O.D.'s shown in shaded area may over stretch the o-ring. If so, select a material with greater elongation or use a two-piece piston.

NOTE: For sizes larger than those shown in the table, please contact your local Parker representative.

Urethane Head Seal HS Profile

Catalog EPS 5370/USA

HS Profile, Static Head Seal



As mobile equipment OEM's continue to consider warranty costs, one area of focus has been a review of down time related to cylinder head glands. Two of the most common seal failures on cylinder heads are o-ring back-up blow-out and pinched back-ups. Both failures are common in systems with high eccentricities or large extrusion gaps. To address these situations and to reduce down time HS Profile static head seals are specified to replace the industry-standard o-ring and back-up. Incorporating high performance plastics with a stable, symmetrical geometry, dramatically reduces the risks of installation damage and back-up blow-out. Both problems are eliminated with the HS Profile's one piece urethane design offering improved fit and a stable geometry.


Technical Data

**Standard
Materials***
P4700A90


Temperature
-65°F to 200°F
(-54°C to 93°C)

Pressure
10,000 psi (688 bar) static

***Alternate Materials:** For applications that may require an alternate material, please contact your local Parker Seal representative.



HS Cross Section

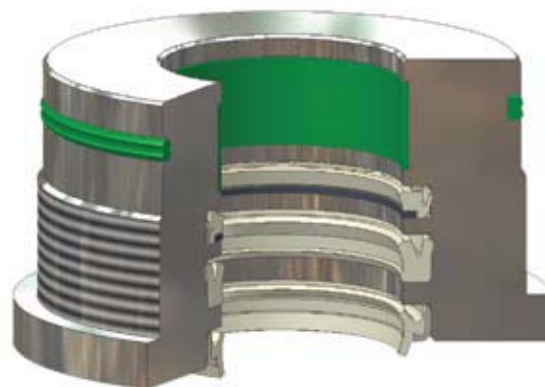


HS installed in Static Head Gland

09/01/07

HS Profile

Part Number Nomenclature —HS Profile

Table 11-7. HS Profile — Inch

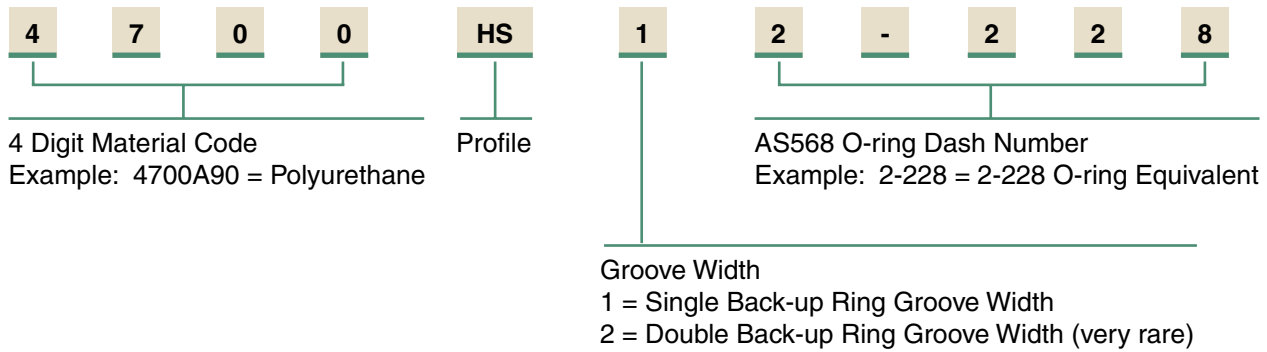

Gland Dimensions — HS Profile

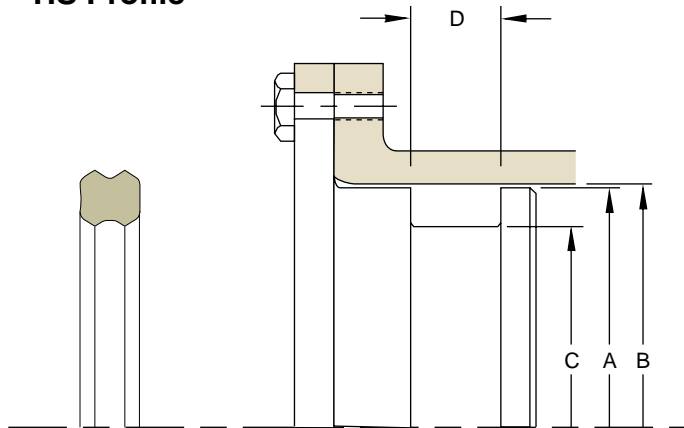


Table 11-8. HS Gland Dimensions — Inch

| O-ring 2-Size AS568 | Gland Dimensions | | | | Part Number |
|---------------------------|-----------------------|-----------------------|-------------------------|----------------------|---------------------|
| | A Head Diameter | B Bore Diameter | C Groove Diameter | D Groove Width | |
| | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.002 | +0.005/-0.000 | |
| 228 | 2.497 | 2.500 | 2.278 | 0.208 | 4700HS12-228 |
| 230 | 2.747 | 2.750 | 2.528 | 0.208 | 4700HS12-230 |
| 232 | 2.997 | 3.000 | 2.778 | 0.208 | 4700HS12-232 |
| 234 | 3.247 | 3.250 | 3.028 | 0.208 | 4700HS12-234 |
| 235 | 3.372 | 3.375 | 3.153 | 0.208 | 4700HS12-235 |
| 236 | 3.497 | 3.500 | 3.278 | 0.208 | 4700HS12-236 |
| 238 | 3.747 | 3.750 | 3.528 | 0.208 | 4700HS12-238 |
| 240 | 3.997 | 4.000 | 3.778 | 0.208 | 4700HS12-240 |
| 242 | 4.247 | 4.250 | 4.028 | 0.208 | 4700HS12-242 |
| 244 | 4.497 | 4.500 | 4.278 | 0.208 | 4700HS12-244 |
| 246 | 4.747 | 4.750 | 4.528 | 0.208 | 4700HS12-246 |
| 248 | 4.997 | 5.000 | 4.778 | 0.208 | 4700HS12-248 |
| | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.004 | +0.005/-0.000 | |
| 250 | 5.247 | 5.250 | 5.028 | 0.208 | 4700HS12-250 |
| 251 | 5.372 | 5.375 | 5.153 | 0.208 | 4700HS12-251 |

Table 11-8. HS Gland Dimensions — Inch (Continued)

| O-ring 2-Size AS568 | Gland Dimensions | | | | Part Number |
|---------------------------|-----------------------|-----------------------|-------------------------|----------------------|---------------------|
| | A Head Diameter | B Bore Diameter | C Groove Diameter | D Groove Width | |
| | +0.000/-0.001 | +0.002/-0.000 | +0.000/-0.004 | +0.005/-0.000 | |
| 252 | 5.497 | 5.500 | 5.278 | 0.208 | 4700HS12-252 |
| 254 | 5.747 | 5.750 | 5.528 | 0.208 | 4700HS12-254 |
| 256 | 5.997 | 6.000 | 5.778 | 0.208 | 4700HS12-256 |
| 342 | 3.997 | 4.000 | 3.660 | 0.311 | 4700HS12-342 |
| 344 | 4.247 | 4.250 | 3.910 | 0.311 | 4700HS12-344 |
| 346 | 4.497 | 4.500 | 4.160 | 0.311 | 4700HS12-346 |
| 348 | 4.747 | 4.750 | 4.410 | 0.311 | 4700HS12-348 |
| 350 | 4.997 | 5.000 | 4.660 | 0.311 | 4700HS12-350 |
| 352 | 5.247 | 5.250 | 4.910 | 0.311 | 4700HS12-352 |
| 353 | 5.372 | 5.375 | 5.035 | 0.311 | 4700HS12-353 |
| 354 | 5.497 | 5.500 | 5.160 | 0.311 | 4700HS12-354 |
| 356 | 5.747 | 5.750 | 5.410 | 0.311 | 4700HS12-356 |
| 358 | 5.997 | 6.000 | 5.660 | 0.311 | 4700HS12-358 |
| 360 | 6.247 | 6.250 | 5.910 | 0.311 | 4700HS12-360 |

NOTE: For sizes larger than those shown in the table, please contact your local Parker Seal representative.

Fluid Power Seal Design Guide Appendix Table of Contents

[Design Action Request Form](#)

A

[English/Metric Conversions](#)

B

[Custom Groove Calculations](#)

C

[Chemical Compatibility](#)

D

[ASTM D2000 Compatibility](#)

E

[ISO Gland Tolerances](#)

F

[Other Parker EPS Products](#)

G



Parker Hannifin Corporation
Engineered Polymer Systems Division
Phone: 801 972 3000
Fax: 801 973 4019

www.parkerseals.com



Design Action Request Form

Catalog EPS 5370/USA

NEED HELP? If you need assistance, please photocopy these pages. Fill out the required information and fax to 801 973 4019. Submit a sketch if necessary. Use the information below and other information in this catalog to determine the dimensions needed. We will contact you to discuss your specific application and make recommendations. If you need help filling out this form, please call Applications Engineering at 801 972 3000.

ENGINEERED POLYMER SYSTEMS DIVISION DESIGN ACTION REQUEST

EPS Division

2220 South 3600 West
Salt Lake City, UT
Tel: 801 972-3000
Fax: 801 973-4019

Applications Engineering Use:

Project # _____
Date Entered _____
Date Required _____
Prepared by _____
Territory Mgr. _____
Distributor _____
Dist. Sales _____

Referred by _____
Lead # _____

COMPANY: _____ FAX NUMBER: _____
ADDRESS: _____ P.O. BOX: _____ MAIL STOP: _____
CITY: _____ STATE: _____ ZIP: _____ COUNTRY: _____
CONTACT: _____ TITLE: _____ PHONE: _____ EXT: _____
ALT. CONTACT: _____ TITLE: _____ PHONE: _____ EXT: _____
E-MAIL: _____

EQUIPMENT/MANUFACTURER: _____ MODEL NO.: _____
EXISTING SEAL MANUFACTURER: _____ PART NO.: _____
REASON FOR CHANGE: PERFORMANCE DELIVERY NEW APPLICATION PRICE
CURRENT PRICE: _____ @ _____ PCS. MONTHLY USAGE: _____ HOURS OPERATION: _____ HOURS SERV. LIFE: _____
TARGET PRICE: _____ @ _____ PCS. QUOTE QTY.: _____ PROTO QTY.: _____ DATE PROTO REQ'D.: _____
SPECIAL INSPECTION REQUIREMENTS: YES NO SPECIAL PACKAGING REQUIREMENTS: YES NO
EXPLAIN: _____

MOTION

STATIC RECIPROCATING OSCILLATORY ROTARY

PRODUCT TYPE

NON-ROTARY — FILL OUT SECOND PAGE

ROD/SHAFT WIPER
 PISTON BEARING
 INTERNAL FACE VANE
 EXTERNAL FACE NON-SEAL

ROTARY — FILL OUT THIRD PAGE

SOLID SEAL PTFE LIP SEAL
 SPLIT SEAL ELASTOMER LIP SEAL
 BEARING ISOLATOR

09/01/07



Design Action Request Form

A

OPERATING PARAMETERS

TEMPERATURE: _____
 PRESSURE: _____
 STROKE LENGTH (RECIPROCATING): _____
 CYCLE RATE: _____
 DEGREE OF ARC (OSCILLATING): _____
 VELOCITY: _____
 VACUUM: _____
 ROTARY SPEED _____
 MEDIA TO BE SEALED: _____

UNIT (CIRCLE ONE)

°K °F °C
 PSI BAR MPA
 INCH MM
 CYCLES/MIN CYCLES/HR HZ
 DEGREES
 FT/MIN. MM/MIN.
 IN HG TORR
 RPM


MINIMUM

OPERATING


MAXIMUM

| | | |
|-------|-------|-------|
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
| _____ | _____ | _____ |


Rod

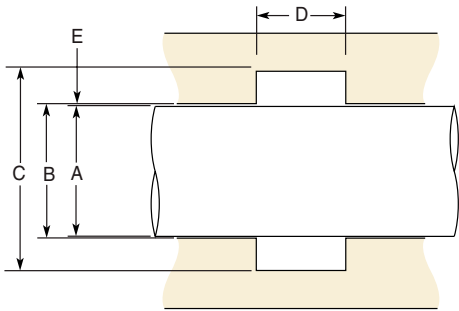


Piston

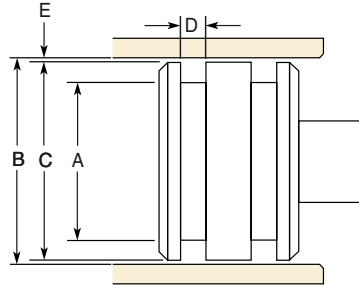


Face Seal

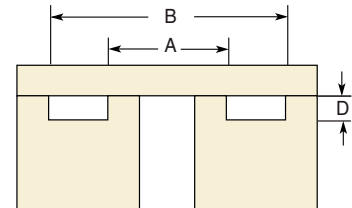

Other Piston



Other Rod

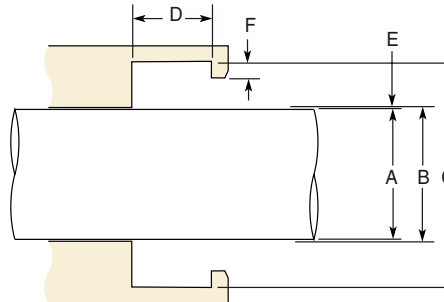

HARDWARE SPECIFICATIONS

A DIAMETER: MIN. _____ MAX. _____
 B DIAMETER: MIN. _____ MAX. _____
 C DIAMETER: MIN. _____ MAX. _____
 D GROOVE WIDTH: MIN. _____ MAX. _____
 E RADIAL CLEARANCE: MIN. _____ MAX. _____
 F ROD / PISTON STEP HEIGHT: MIN. _____ MAX. _____
 SIDE LOAD (LBS. NEWTONS): _____
 MIL-G-5514 O-RING DASH #: _____ BACK-UP WIDTH _____
 AS4716 O-RING DASH #: _____ BACK-UP WIDTH _____
 RUNOUT (TIR) _____
 ECCENTRICITY _____

HARDWARE DRAWINGS INCLUDED WITH DAR: YES NO

HARDNESS _____ FINISH _____ MAT'L _____
 HARDNESS _____ FINISH _____ MAT'L _____
 HARDNESS _____ FINISH _____ MAT'L _____
 CAN HARDWARE BE CHANGED? YES NO
 HOW? _____

PERFORMANCE REQUIREMENTS (CIRCLE ONE)

FRICITION: LBS OZ GMS BREAKOUT _____ DYNAMIC _____
 EXPECTED LIFE: CYC HRS YRS _____
 MAX. LEAKAGE: DROPS CC/MIN _____
 MOST CRITICAL ASPECT: _____
 CONTAMINATION: _____

GLAND TYPE

___ SPLIT ___ OPEN

METRIC

YES

English / Metric Conversions: Fractions

Catalog EPS 5370/USA

B

| Fractional | Decimal | Metric |
|------------|---------|--------|
| — | 0.004 | 0.10 |
| — | 0.010 | 0.25 |
| 1/64 | 0.016 | 0.40 |
| — | 0.020 | 0.50 |
| — | 0.030 | 0.75 |
| 1/32 | 0.031 | 0.79 |
| — | 0.039 | 1.00 |
| 3/64 | 0.047 | 1.19 |
| — | 0.059 | 1.50 |
| 1/16 | 0.063 | 1.59 |
| 5/64 | 0.078 | 1.98 |
| — | 0.079 | 2.00 |
| 3/32 | 0.094 | 2.38 |
| — | 0.098 | 2.50 |
| 7/64 | 0.109 | 2.78 |
| — | 0.118 | 3.00 |
| 1/8 | 0.125 | 3.18 |
| — | 0.138 | 3.50 |
| 9/64 | 0.141 | 3.57 |
| 5/32 | 0.156 | 3.97 |
| — | 0.158 | 4.00 |
| 11/64 | 0.172 | 4.37 |
| — | 0.177 | 4.50 |
| 3/16 | 0.188 | 4.76 |
| — | 0.197 | 5.00 |
| 13/64 | 0.203 | 5.16 |
| — | 0.217 | 5.50 |
| 7/32 | 0.219 | 5.56 |
| 15/64 | 0.234 | 5.95 |
| — | 0.236 | 6.00 |
| 1/4 | 0.250 | 6.35 |
| — | 0.256 | 6.50 |
| 17/64 | 0.266 | 6.75 |
| — | 0.276 | 7.00 |
| 9/32 | 0.281 | 7.14 |
| — | 0.295 | 7.50 |
| 19/64 | 0.297 | 7.54 |
| 5/16 | 0.313 | 7.94 |
| — | 0.315 | 8.00 |
| 21/64 | 0.328 | 8.33 |
| — | 0.335 | 8.50 |
| 11/32 | 0.344 | 8.73 |
| — | 0.354 | 9.00 |
| 23/64 | 0.359 | 9.13 |
| — | 0.374 | 9.50 |
| 3/8 | 0.375 | 9.53 |
| 25/64 | 0.391 | 9.92 |
| — | 0.394 | 10.00 |
| 12/32 | 0.406 | 10.32 |
| — | 0.413 | 10.50 |
| 27/64 | 0.422 | 10.72 |
| — | 0.433 | 11.00 |
| 7/16 | 0.438 | 11.11 |
| 29/64 | 0.453 | 11.51 |
| 15/32 | 0.469 | 11.91 |
| — | 0.472 | 12.00 |
| 31/64 | 0.484 | 12.30 |
| — | 0.492 | 12.50 |
| 1/2 | 0.500 | 12.70 |
| — | 0.512 | 13.00 |
| 33/64 | 0.516 | 13.10 |
| 17/32 | 0.531 | 13.50 |
| 35/64 | 0.547 | 13.90 |
| — | 0.551 | 14.00 |
| 9/16 | 0.563 | 14.29 |
| — | 0.571 | 14.50 |

| Fractional | Decimal | Metric |
|------------|---------|--------|
| 37/64 | 0.578 | 14.68 |
| — | 0.591 | 15.00 |
| 19/32 | 0.594 | 15.08 |
| 39/64 | 0.609 | 15.48 |
| 5/8 | 0.625 | 15.88 |
| — | 0.630 | 16.00 |
| 41/64 | 0.641 | 16.27 |
| — | 0.650 | 16.50 |
| 21/32 | 0.656 | 16.67 |
| — | 0.669 | 17.00 |
| 43/64 | 0.672 | 17.01 |
| 11/16 | 0.688 | 17.46 |
| 45/64 | 0.703 | 17.86 |
| — | 0.709 | 18.00 |
| 23/32 | 0.719 | 18.26 |
| — | 0.728 | 18.49 |
| 47/64 | 0.734 | 18.65 |
| — | 0.748 | 19.00 |
| 3/4 | 0.750 | 19.05 |
| 49/64 | 0.766 | 19.45 |
| 25/32 | 0.781 | 19.84 |
| — | 0.787 | 20.00 |
| 51/64 | 0.797 | 20.24 |
| 13/16 | 0.813 | 20.64 |
| — | 0.827 | 21.00 |
| 53/64 | 0.828 | 21.03 |
| 27/32 | 0.844 | 21.43 |
| 55/64 | 0.859 | 21.83 |
| — | 0.866 | 22.00 |
| 7/8 | 0.875 | 22.23 |
| 57/64 | 0.891 | 22.62 |
| — | 0.906 | 23.00 |
| 29/32 | 0.906 | 23.02 |
| 59/64 | 0.922 | 23.42 |
| 15/16 | 0.938 | 23.81 |
| — | 0.945 | 24.00 |
| 61/64 | 0.953 | 24.21 |
| 31/32 | 0.969 | 24.61 |
| — | 0.984 | 25.00 |
| 1 | 1.000 | 25.40 |
| — | 1.024 | 26.00 |
| 1 1/32 | 1.031 | 26.19 |
| 1 1/16 | 1.062 | 26.99 |
| — | 1.063 | 27.00 |
| 1 3/32 | 1.094 | 27.78 |
| — | 1.102 | 28.00 |
| 1 1/8 | 1.125 | 28.58 |
| — | 1.148 | 29.00 |
| 1 5/32 | 1.156 | 29.37 |
| — | 1.181 | 30.00 |
| 1 3/16 | 1.188 | 30.16 |
| 1 7/32 | 1.219 | 30.96 |
| — | 1.221 | 31.00 |
| 1 1/4 | 1.250 | 31.75 |
| — | 1.260 | 32.00 |
| 1 9/32 | 1.281 | 32.54 |
| — | 1.299 | 33.00 |
| 1 5/16 | 1.312 | 33.34 |
| — | 1.339 | 34.00 |
| 1 11/32 | 1.344 | 34.13 |
| 1 3/8 | 1.375 | 34.93 |
| — | 1.378 | 35.00 |
| 1 13/32 | 1.406 | 35.72 |
| — | 1.417 | 36.00 |
| 1 7/16 | 1.438 | 36.51 |
| — | 1.457 | 37.00 |

| Fractional | Decimal | Metric |
|------------|---------|--------|
| 1 15/32 | 1.469 | 37.31 |
| — | 1.496 | 38.00 |
| 1 1/2 | 1.500 | 38.10 |
| 1 17/32 | 1.531 | 38.89 |
| — | 1.535 | 39.00 |
| 1 9/16 | 1.562 | 39.69 |
| — | 1.575 | 40.00 |
| 1 19/64 | 1.594 | 40.48 |
| — | 1.614 | 41.00 |
| 1 5/8 | 1.625 | 41.28 |
| — | 1.654 | 42.00 |
| 1 21/32 | 1.656 | 42.07 |
| 1 11/16 | 1.688 | 42.86 |
| — | 1.693 | 43.00 |
| 1 23/32 | 1.719 | 43.66 |
| — | 1.732 | 44.00 |
| 1 3/4 | 1.750 | 44.50 |
| — | 1.772 | 45.00 |
| 1 25/32 | 1.781 | 45.24 |
| — | 1.811 | 46.00 |
| 1 13/16 | 1.813 | 46.04 |
| 1 27/32 | 1.844 | 46.83 |
| — | 1.850 | 47.00 |
| 1 7/8 | 1.875 | 47.63 |
| — | 1.890 | 48.00 |
| 1 29/32 | 1.906 | 48.42 |
| — | 1.929 | 49.00 |
| 1 15/16 | 1.938 | 49.21 |
| — | 1.970 | 50.00 |
| 1 31/32 | 1.970 | 50.01 |
| 2 | 2.000 | 50.80 |
| — | 2.008 | 51.00 |
| — | 2.047 | 52.00 |
| 2 1/16 | 2.062 | 52.39 |
| — | 2.087 | 53.00 |
| 2 1/8 | 2.125 | 53.98 |
| — | 2.126 | 54.00 |
| — | 2.165 | 55.00 |
| 2 3/16 | 2.188 | 55.56 |
| — | 2.205 | 56.00 |
| — | 2.244 | 57.00 |
| 2 1/4 | 2.250 | 57.15 |
| — | 2.284 | 58.00 |
| 2 5/16 | 2.312 | 58.74 |
| — | 2.323 | 59.00 |
| — | 2.362 | 60.00 |
| 2 3/8 | 2.375 | 60.33 |
| — | 2.402 | 61.00 |
| 2 7/16 | 2.438 | 61.91 |
| — | 2.441 | 62.00 |
| — | 2.480 | 63.00 |
| 2 1/2 | 2.500 | 63.50 |
| — | 2.520 | 64.00 |
| — | 2.559 | 65.00 |
| 2 9/16 | 2.562 | 65.09 |
| — | 2.598 | 66.00 |
| 2 5/8 | 2.625 | 66.68 |
| — | 2.638 | 67.00 |
| — | 2.677 | 68.00 |
| 2 11/16 | 2.688 | 68.26 |
| — | 2.717 | 69.00 |
| 2 3/4 | 2.750 | 69.85 |
| — | 2.756 | 70.00 |
| — | 2.795 | 71.00 |
| 2 13/16 | 2.813 | 71.44 |
| — | 2.835 | 72.00 |


| Fractional | Decimal | Metric |
|------------|---------|--------|
| — | 2.874 | 73.00 |
| 2 7/8 | 2.875 | 73.03 |
| — | 2.913 | 74.00 |
| 2 15/16 | 2.938 | 74.61 |
| — | 2.953 | 75.00 |
| — | 2.992 | 76.00 |
| 3 | 3.000 | 76.20 |
| — | 3.032 | 77.00 |
| 3 1/16 | 3.062 | 77.79 |
| — | 3.071 | 78.00 |
| — | 3.110 | 79.00 |
| 3 1/8 | 3.125 | 79.38 |
| — | 3.150 | 80.00 |
| 3 3/16 | 3.188 | 80.96 |
| — | 3.189 | 81.00 |
| — | 3.228 | 82.00 |
| 3 1/4 | 3.250 | 82.55 |
| — | 3.268 | 83.00 |
| — | 3.307 | 84.00 |
| 3 5/16 | 3.312 | 84.14 |
| — | 3.346 | 85.00 |
| 3 3/8 | 3.375 | 85.73 |
| — | 3.386 | 86.00 |
| — | 3.425 | 87.00 |
| 3 7/16 | 3.438 | 87.31 |
| — | 3.465 | 88.00 |
| 3 1/2 | 3.500 | 88.90 |
| — | 3.504 | 89.00 |
| — | 3.543 | 90.00 |
| 3 9/16 | 3.562 | 90.49 |
| — | 3.583 | 91.00 |
| — | 3.622 | 92.00 |
| 3 5/8 | 3.625 | 92.08 |
| — | 3.661 | 93.00 |
| 3 11/16 | 3.688 | 93.66 |
| — | 3.701 | 94.00 |
| — | 3.740 | 95.00 |
| — | 3.750 | 95.25 |
| — | 3.780 | 96.00 |
| 3 13/16 | 3.813 | 96.84 |
| — | 3.819 | 97.00 |
| — | 3.858 | 98.00 |
| 3 7/8 | 3.875 | 98.43 |
| — | 3.898 | 99.00 |
| — | 3.937 | 100.00 |
| 3 15/16 | 3.938 | 100.01 |
| — | 3.976 | 101.00 |
| 4 | 4.000 | 101.60 |
| 4 1/16 | 4.062 | 103.19 |
| 4 1/8 | 4.125 | 104.78 |
| — | 4.134 | 105.00 |
| 4 3/16 | 4.188 | 106.36 |
| 4 1/4 | 4.250 | 107.95 |
| 4 5/16 | 4.312 | 109.54 |
| — | 4.331 | 110.00 |
| 4 3/8 | 4.375 | 111.13 |
| 4 7/16 | 4.438 | 112.71 |
| 4 1/2 | 4.500 | 114.30 |
| — | 4.528 | 115.00 |
| 4 9/16 | 4.562 | 115.89 |
| 4 5/8 | 4.625 | 117.48 |
| — | 4.724 | 120.00 |
| 4 3/4 | 4.750 | 120.65 |
| 4 7/8 | 4.875 | 123.83 |
| — | 4.921 | 125.00 |
| 5 | 5.000 | 127.00 |

09/01/07



RPM to FPM Conversion

B

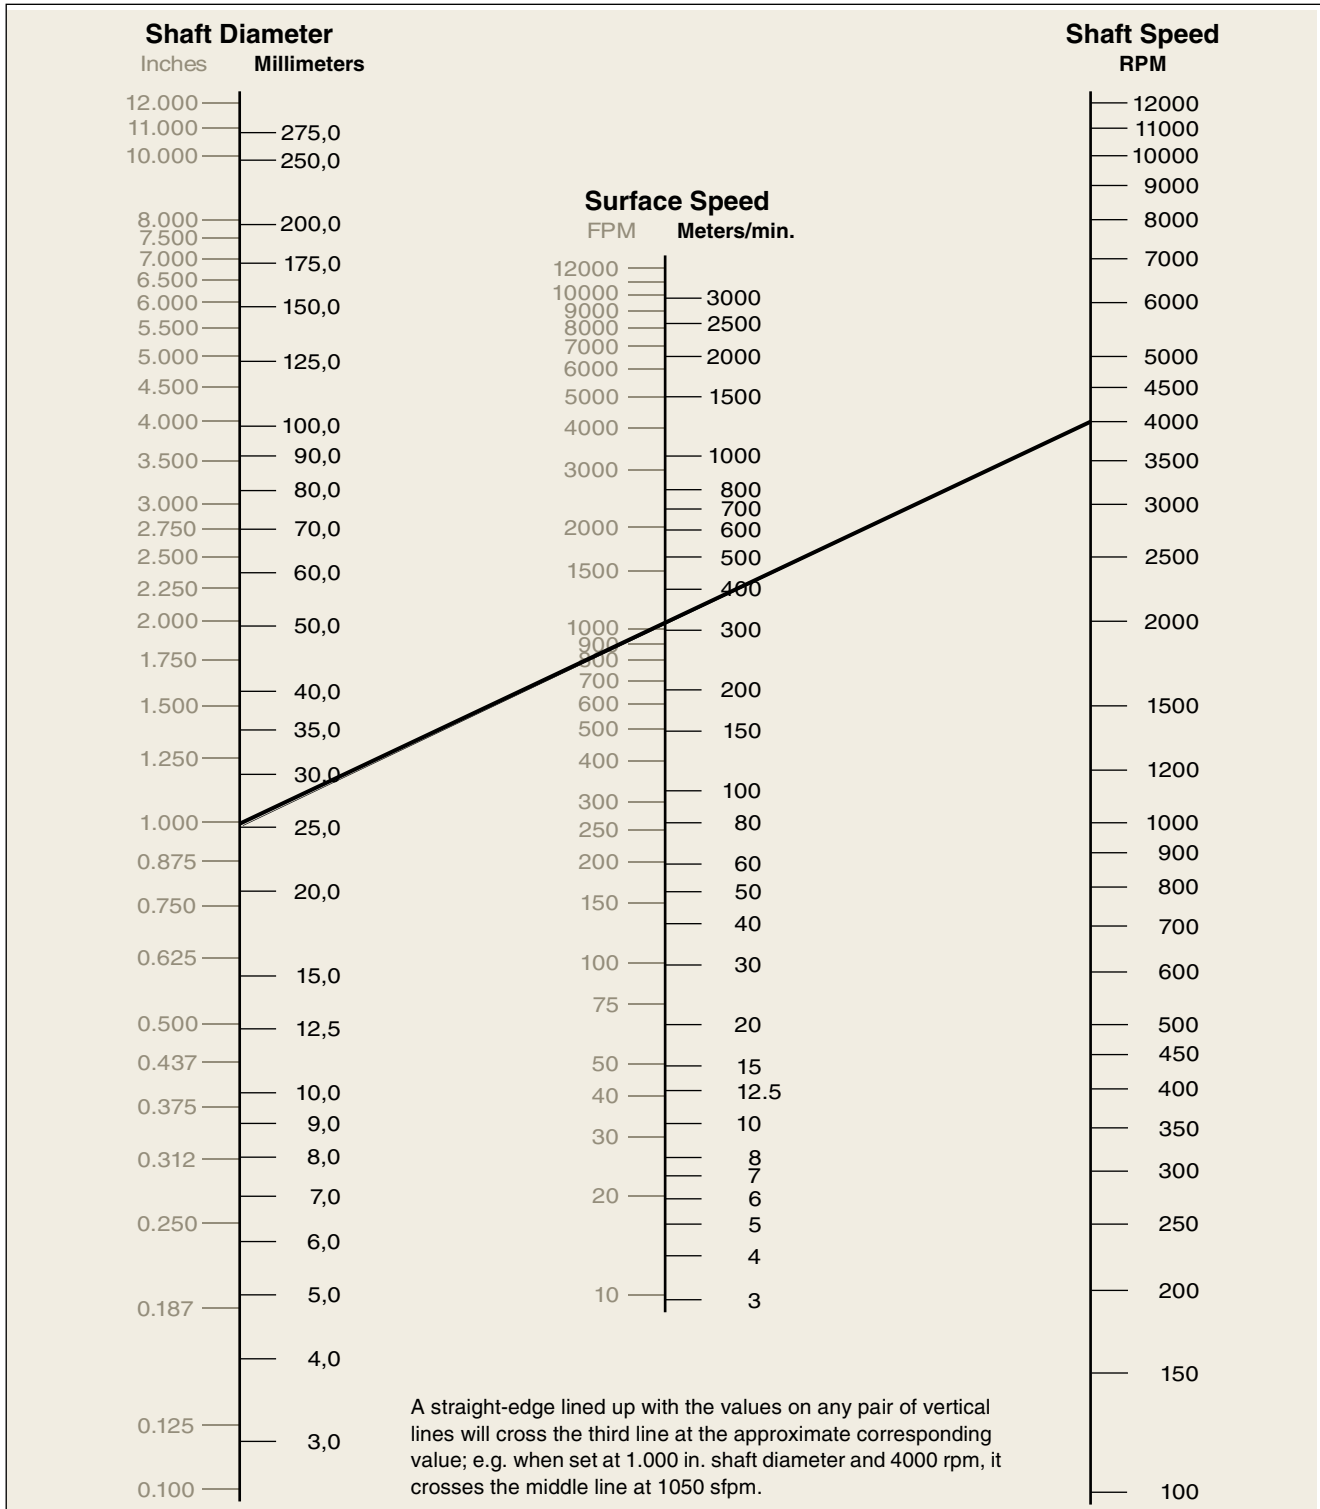



Pressure: PSI / Bar

| 1-40 | | 41-80 | | 81-200 | | 205-500 | | 510-900 | | 910-1500 | |
|------|------|-------|------|--------|-------|---------|-------|---------|-------|----------|--------|
| psi | bar | psi | bar | psi | bar | psi | bar | psi | bar | psi | bar |
| 1 | 0.07 | 41 | 2.83 | 81 | 5.59 | 205 | 14.13 | 510 | 35.17 | 910 | 62.76 |
| 2 | 0.14 | 42 | 2.90 | 82 | 5.65 | 210 | 14.48 | 520 | 35.86 | 920 | 63.45 |
| 3 | 0.21 | 43 | 2.97 | 83 | 5.72 | 215 | 14.82 | 530 | 36.55 | 930 | 64.14 |
| 4 | 0.28 | 44 | 3.03 | 84 | 5.79 | 220 | 15.17 | 540 | 37.24 | 940 | 64.83 |
| 5 | 0.34 | 45 | 3.10 | 85 | 5.86 | 225 | 15.51 | 550 | 37.92 | 950 | 65.52 |
| 6 | 0.41 | 46 | 3.17 | 86 | 5.93 | 230 | 15.86 | 560 | 38.62 | 960 | 66.21 |
| 7 | 0.48 | 47 | 3.24 | 87 | 6.00 | 235 | 16.20 | 570 | 39.31 | 970 | 66.90 |
| 8 | 0.55 | 48 | 3.31 | 88 | 6.07 | 240 | 16.55 | 580 | 40.00 | 980 | 67.59 |
| 9 | 0.62 | 49 | 3.38 | 89 | 6.14 | 245 | 16.89 | 590 | 40.69 | 990 | 68.28 |
| 10 | 0.69 | 50 | 3.45 | 90 | 6.21 | 250 | 17.24 | 600 | 41.37 | 1000 | 68.95 |
| 11 | 0.76 | 51 | 3.52 | 91 | 6.27 | 255 | 17.58 | 610 | 42.07 | 1010 | 69.66 |
| 12 | 0.83 | 52 | 3.59 | 92 | 6.34 | 260 | 17.93 | 620 | 42.76 | 1020 | 70.34 |
| 13 | 0.90 | 53 | 3.65 | 93 | 6.41 | 265 | 18.27 | 630 | 43.45 | 1030 | 71.03 |
| 14 | 0.97 | 54 | 3.72 | 94 | 6.48 | 270 | 18.62 | 640 | 44.14 | 1040 | 71.72 |
| 15 | 1.03 | 55 | 3.79 | 95 | 6.55 | 275 | 18.96 | 650 | 44.82 | 1050 | 72.41 |
| 16 | 1.10 | 56 | 3.86 | 96 | 6.62 | 280 | 19.31 | 660 | 45.52 | 1060 | 73.10 |
| 17 | 1.17 | 57 | 3.93 | 97 | 6.69 | 285 | 19.65 | 670 | 46.21 | 1070 | 73.79 |
| 18 | 1.24 | 58 | 4.00 | 98 | 6.76 | 290 | 20.00 | 680 | 46.90 | 1080 | 74.48 |
| 19 | 1.31 | 59 | 4.07 | 99 | 6.83 | 295 | 20.34 | 690 | 47.59 | 1090 | 75.17 |
| 20 | 1.38 | 60 | 4.14 | 100 | 6.90 | 300 | 20.69 | 700 | 48.27 | 1100 | 75.86 |
| 21 | 1.45 | 61 | 4.21 | 105 | 7.24 | 310 | 21.37 | 710 | 48.97 | 1120 | 77.24 |
| 22 | 1.52 | 62 | 4.28 | 110 | 7.58 | 320 | 22.06 | 720 | 49.66 | 1140 | 78.62 |
| 23 | 1.59 | 63 | 4.34 | 115 | 7.93 | 330 | 22.75 | 730 | 50.34 | 1160 | 80.00 |
| 24 | 1.65 | 64 | 4.41 | 120 | 8.27 | 340 | 23.44 | 740 | 51.03 | 1180 | 81.38 |
| 25 | 1.72 | 65 | 4.48 | 125 | 8.62 | 350 | 24.13 | 750 | 51.71 | 1200 | 82.76 |
| 26 | 1.79 | 66 | 4.55 | 130 | 8.89 | 360 | 24.82 | 760 | 52.41 | 1220 | 84.14 |
| 27 | 1.86 | 67 | 4.62 | 135 | 9.31 | 370 | 25.51 | 770 | 53.10 | 1240 | 85.52 |
| 28 | 1.93 | 68 | 4.69 | 140 | 9.65 | 380 | 26.21 | 780 | 53.79 | 1260 | 86.90 |
| 29 | 2.00 | 69 | 4.76 | 145 | 10.10 | 390 | 26.89 | 790 | 54.48 | 1280 | 88.28 |
| 30 | 2.07 | 70 | 4.83 | 150 | 10.34 | 400 | 27.58 | 800 | 55.16 | 1300 | 89.66 |
| 31 | 2.14 | 71 | 4.90 | 155 | 10.69 | 410 | 28.27 | 810 | 55.86 | 1320 | 91.03 |
| 32 | 2.21 | 72 | 4.97 | 160 | 11.03 | 420 | 28.96 | 820 | 56.55 | 1340 | 92.41 |
| 33 | 2.28 | 73 | 5.03 | 165 | 11.38 | 430 | 29.65 | 830 | 57.24 | 1360 | 93.79 |
| 34 | 2.34 | 74 | 5.10 | 170 | 11.72 | 440 | 30.34 | 840 | 57.93 | 1380 | 95.17 |
| 35 | 2.41 | 75 | 5.17 | 175 | 12.07 | 450 | 31.03 | 850 | 58.61 | 1400 | 96.55 |
| 36 | 2.48 | 76 | 5.24 | 180 | 12.41 | 460 | 31.72 | 860 | 59.31 | 1420 | 97.93 |
| 37 | 2.55 | 77 | 5.31 | 185 | 12.76 | 470 | 32.41 | 870 | 60.00 | 1440 | 99.31 |
| 38 | 2.62 | 78 | 5.38 | 190 | 13.10 | 480 | 33.10 | 880 | 60.69 | 1460 | 100.69 |
| 39 | 2.69 | 79 | 5.45 | 195 | 13.45 | 490 | 33.79 | 890 | 61.38 | 1480 | 102.07 |
| 40 | 2.76 | 80 | 5.52 | 200 | 13.79 | 500 | 34.48 | 900 | 62.06 | 1500 | 103.45 |



Temperature: Celsius / Fahrenheit

B

| Celsius | Fahrenheit |
|---------|------------|
| -169 | -273 |
| -168 | -270 |
| -162 | -260 |
| -157 | -250 |
| -151 | -240 |
| -146 | -230 |
| -140 | -220 |
| -134 | -210 |
| -129 | -200 |
| -123 | -190 |
| -118 | -180 |
| -112 | -170 |
| -107 | -160 |
| -101 | -150 |
| -96 | -140 |
| -90 | -130 |
| -84 | -120 |
| -79 | -110 |
| -73 | -100 |
| -68 | -90 |
| -62 | -80 |
| -57 | -70 |
| -51 | -60 |
| -46 | -50 |
| -40 | -40 |
| -34 | -30 |
| -29 | -20 |
| -23 | -10 |
| -17.8 | 0 |
| -17.2 | 1 |
| -16.7 | 2 |
| -16.1 | 3 |
| -15.6 | 4 |
| -15 | 5 |
| -14.4 | 6 |
| -13.9 | 7 |
| -13.3 | 8 |
| -12.8 | 9 |
| -12.2 | 10 |
| -11.7 | 11 |
| -11.1 | 12 |
| -10.6 | 13 |
| -10 | 14 |
| -9.4 | 15 |
| -8.9 | 16 |
| -8.3 | 17 |

| Celsius | Fahrenheit |
|---------|------------|
| -7.8 | 18 |
| -7.2 | 19 |
| -6.7 | 20 |
| -6.1 | 21 |
| -5.6 | 22 |
| -5 | 23 |
| -4.4 | 24 |
| -3.9 | 25 |
| -3.3 | 26 |
| -2.8 | 27 |
| -2.2 | 28 |
| -1.7 | 29 |
| -1.1 | 30 |
| -0.6 | 31 |
| 0 | 32 |
| 0.6 | 33 |
| 1.1 | 34 |
| 1.7 | 35 |
| 2.2 | 36 |
| 2.8 | 37 |
| 3.3 | 38 |
| 3.9 | 39 |
| 4.4 | 40 |
| 5 | 41 |
| 5.6 | 42 |
| 6.1 | 43 |
| 6.7 | 44 |
| 7.2 | 45 |
| 7.8 | 46 |
| 8.3 | 47 |
| 8.9 | 48 |
| 9.4 | 49 |
| 10 | 50 |
| 10.6 | 51 |
| 11.1 | 52 |
| 11.7 | 53 |
| 12.2 | 54 |
| 12.8 | 55 |
| 13.3 | 56 |
| 13.9 | 57 |
| 14.4 | 58 |
| 15 | 59 |
| 15.6 | 60 |
| 16.1 | 61 |
| 16.7 | 62 |
| 17.2 | 63 |

| Celsius | Fahrenheit |
|---------|------------|
| 17.8 | 64 |
| 18.3 | 65 |
| 18.9 | 66 |
| 19.4 | 67 |
| 20 | 68 |
| 20.6 | 69 |
| 21.1 | 70 |
| 21.7 | 71 |
| 22.2 | 72 |
| 22.8 | 73 |
| 23.3 | 74 |
| 23.9 | 75 |
| 24.4 | 76 |
| 25 | 77 |
| 25.6 | 78 |
| 26.1 | 79 |
| 26.7 | 80 |
| 27.2 | 81 |
| 27.8 | 82 |
| 28.3 | 83 |
| 28.9 | 84 |
| 29.4 | 85 |
| 30 | 86 |
| 30.6 | 87 |
| 31.1 | 88 |
| 31.7 | 89 |
| 32.2 | 90 |
| 32.8 | 91 |
| 33.3 | 92 |
| 33.9 | 93 |
| 34.4 | 94 |
| 35 | 95 |
| 35.6 | 96 |
| 36.1 | 97 |
| 36.7 | 98 |
| 37.2 | 99 |
| 37.8 | 100 |
| 43 | 110 |
| 49 | 120 |
| 54 | 130 |
| 60 | 140 |
| 66 | 150 |
| 71 | 160 |
| 77 | 170 |
| 82 | 180 |
| 88 | 190 |

| Celsius | Fahrenheit |
|---------|------------|
| 93 | 200 |
| 99 | 210 |
| 100 | 212 |
| 104 | 220 |
| 110 | 230 |
| 116 | 240 |
| 121 | 250 |
| 127 | 260 |
| 132 | 270 |
| 138 | 280 |
| 143 | 290 |
| 149 | 300 |
| 154 | 310 |
| 160 | 320 |
| 166 | 330 |
| 171 | 340 |
| 177 | 350 |
| 182 | 360 |
| 188 | 370 |
| 193 | 380 |
| 199 | 390 |
| 204 | 400 |
| 210 | 410 |
| 216 | 420 |
| 221 | 430 |
| 227 | 440 |
| 232 | 450 |
| 238 | 460 |
| 243 | 470 |
| 249 | 480 |
| 254 | 490 |
| 260 | 500 |
| 266 | 510 |
| 271 | 520 |
| 277 | 530 |
| 282 | 540 |
| 288 | 550 |
| 293 | 560 |
| 299 | 570 |
| 304 | 580 |
| 310 | 590 |
| 316 | 600 |
| 321 | 610 |
| 327 | 620 |
| 332 | 630 |
| 338 | 640 |

| Celsius | Fahrenheit |
|---------|------------|
| 343 | 650 |
| 349 | 660 |
| 354 | 670 |
| 360 | 680 |
| 366 | 690 |
| 371 | 700 |
| 377 | 710 |
| 382 | 720 |
| 388 | 730 |
| 393 | 740 |
| 399 | 750 |
| 404 | 760 |
| 410 | 770 |
| 416 | 780 |
| 421 | 790 |
| 427 | 800 |
| 432 | 810 |
| 438 | 820 |
| 443 | 830 |
| 449 | 840 |
| 454 | 850 |
| 460 | 860 |
| 466 | 870 |
| 471 | 880 |
| 477 | 890 |
| 482 | 900 |
| 488 | 910 |
| 493 | 920 |
| 499 | 930 |
| 504 | 940 |
| 510 | 950 |
| 516 | 960 |
| 521 | 970 |
| 527 | 980 |
| 532 | 990 |
| 538 | 1000 |
| 549 | 1020 |
| 560 | 1040 |
| 571 | 1060 |
| 582 | 1080 |
| 593 | 1100 |
| 604 | 1120 |
| 616 | 1140 |
| 627 | 1160 |
| 638 | 1180 |
| 649 | 1200 |

Custom Groove Dimensions

Contents

Piston GlandC-1
Rod GlandC-2
Rod Wiper GlandC-2
Piston Wear Ring / BearingC-2
Rod Wear RingC-3

There are times when using standard seal groove dimensions is not an option. Whether it is for cylinders that have been refinished or off sized metal, there are some simple calculations to use to determine what the appropriate groove dimensions should be. The formulas for calculating custom groove dimensions are included below.



Piston Gland Custom Groove Calculation

Subtract the required bore diameter from the next smallest standard bore diameter to determine the Offset Factor. Apply the Offset Factor to the Groove Diameter, *X*, and the Shoulder Diameter, *Y*, as shown below. Groove Width, *Z*, will remain unchanged.

Offset Factor Diameter:

$$\left(\frac{\text{Offset}}{\text{Factor}} \right) = \left(\frac{\text{Required}}{\text{Bore Diameter}} \right) - \left(\frac{\text{Standard}}{\text{Bore Diameter}} \right)$$

New Groove Diameter, *X*:

$$X = \left(\frac{\text{Standard}}{\text{Groove Diameter}} \right) + \left(\frac{\text{Offset}}{\text{Factor}} \right)$$

New Piston Diameter, *Y*:

$$Y = \left(\frac{\text{Standard}}{\text{Piston Diameter}} \right) + \left(\frac{\text{Offset}}{\text{Factor}} \right)$$

If the required diameter is smaller than the standard diameter, a negative Offset Factor will be calculated, and the piston seal will be compressed. In most circumstances, Parker advises against compressing smaller sizes of piston seals to fit oversized bores. Please contact your local Parker representative for assistance in these cases.

IMPORTANT: It is necessary to calculate the additional stretch that the piston seal will be subjected to. Do this by using the equation below:

$$\left(\frac{\text{Additional}}{\text{Stretch \%}} \right) = \left(\frac{\text{Offset Factor}}{\text{Standard Bore Diameter}} \right) \times 100$$

Parker recommends that the Additional Stretch Percentage not exceed 5%. If this percentage does exceed 5%, please contact your local Parker representative for assistance.

Rod Seal and Rod Wiper Custom Groove Calculation

Catalog EPS 5370/USA

Subtract the required rod diameter from the next largest standard rod diameter to determine the Offset Factor. Apply the Offset Factor to the Groove Diameter, X, and the Throat Diameter, Y, as shown below. Groove Width, Z, will remain unchanged.

Offset Factor Diameter

$$\left(\frac{\text{Offset}}{\text{Factor}} \right) = \left(\frac{\text{Standard}}{\text{Rod Diameter}} \right) - \left(\frac{\text{Required}}{\text{Rod Diameter}} \right)$$

If the required diameter is larger than the standard diameter, a negative Offset Factor will be calculated, and the rod seal will be stretched. In most circumstances, Parker advises against stretching smaller sizes of rod seals to fit oversized rods. Please contact your local Parker representative for assistance in these cases.

New Groove Diameter, X:

$$X = \left(\frac{\text{Standard}}{\text{Groove Diameter}} \right) - \left(\frac{\text{Offset}}{\text{Factor}} \right)$$

IMPORTANT: It is necessary to calculate the additional compression that the rod seal will be subjected to. Do this by using the equation below:

New Shoulder Diameter, Y:

$$Y = \left(\frac{\text{Standard}}{\text{Shoulder Diameter}} \right) - \left(\frac{\text{Offset}}{\text{Factor}} \right)$$

$$\left(\frac{\text{Additional}}{\text{Compression \%}} \right) = \left(\frac{\text{Offset Factor}}{\text{Standard Bore Diameter}} \right) \times 100$$

Parker recommends that the Additional Compression Percentage not exceed 2%. If this percentage does exceed 2%, please contact your local Parker representative for assistance.

Piston Wear Ring / Bearing Groove Calculation

The formula for calculating piston wear ring grooves using alternative extrusion gaps, metal-to-metal clearances and machining tolerances:

1. Maximum Groove Diameter, B:

$$B = \left(\frac{\text{Minimum Bore}}{\text{Diameter}} \right) - .001" - \left[2 \times \left(\frac{\text{Max. Cross}}{\text{Section}} \right) \right]$$

2. Minimum Groove Diameter:

$$\left(\frac{\text{Minimum}}{\text{Groove Diameter}} \right) = B - \left(\frac{\text{Machining}}{\text{Tolerances}} \right)$$

3. Maximum Piston Diameter, C:

$$C = \left(\frac{\text{Min. Groove}}{\text{Diameter}} \right) + \left[2 \times \left(\frac{\text{Min. Cross}}{\text{Section}} \right) \right] - \left[2 \times \left(\frac{\text{Desired Min. Radial}}{\text{Metal-to-Metal Clearance*}} \right) \right]$$

*see Note 3

4. Minimum Groove Width, D:

$$D = \left(\text{Nominal Width, W} \right) + .010"$$

Notes:

1. Tolerance for dimension D is +.010" / -.000"
2. Groove radii must not exceed .015" max.
3. Parker recommends a minimum .005" radial metal-to-metal clearance. Using the above equations may result in metal-to-metal contact if the material's compressive properties are not considered, contact your local Parker representative for assistance.

02/15/08

Rod Wear Ring Groove Calculation

Catalog EPS 5370/USA

The formula for calculating rod wear ring grooves using alternative extrusion gaps metal-to-metal clearances and machining tolerances:

5. Minimum Groove Diameter, *BI*:

$$BI = \left(\begin{array}{c} \text{Maximum Rod} \\ \text{Diameter, AI} \end{array} \right) + 0.001'' + \left[2 \times \left(\begin{array}{c} \text{Max. Cross} \\ \text{Section} \end{array} \right) \right]$$

6. Maximum Groove Diameter:

$$\left(\begin{array}{c} \text{Maximum} \\ \text{Groove Diameter} \end{array} \right) = BI + \left(\begin{array}{c} \text{Machining} \\ \text{Tolerances} \end{array} \right)$$

7. Minimum Throat Diameter, *CI*:

$$CI = \left(\begin{array}{c} \text{Max. Groove} \\ \text{Diameter} \end{array} \right) - \left[2 \times \left(\begin{array}{c} \text{Min. Cross} \\ \text{Section} \end{array} \right) \right] + \left[2 \times \left(\begin{array}{c} \text{Desired Min. Radial} \\ \text{Metal-to-Metal Clearance*} \end{array} \right) \right]$$

8. Minimum Groove Width, *D*:

*see Note 3

$$D = \left(\begin{array}{c} \text{Nominal Width, W} \end{array} \right) + .010''$$

Notes:

1. Tolerance for dimension *D* is +.010" / -.000"
2. Groove radii must not exceed .015" max.
3. Parker recommends a minimum .005" radial metal-to-metal clearance. Using the above equations may result in metal-to-metal contact if the material's compressive properties are not considered, contact your local Parker representative for assistance.

C

02/15/08



Chemical Compatibility Chart

Catalog EPS 5370/USA

| | Points Change Hardness | Percent Change | | | | |
|-------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Reference Fuel A | | | | | | |
| P4300A90 | -1 | -6 | 8 | 1 | 2 | 4 |
| P4301A90 | 0 | -5 | 7 | 7 | 2 | 3 |
| P4304D60 | -1 | -2 | 7 | -1 | 1 | 1 |
| P4311A90 | 0 | 3 | 7 | 5 | 2 | 3 |
| P4500A90 | -1 | -8 | -4 | -3 | 1 | 2 |
| P6000A90 | -1 | 6 | 2 | -1 | 1 | 1 |
| Z4651D60 | 2 | -1 | 22 | -1 | 2 | 4 |
| Z4652D65 | 1 | 3 | -1 | 3 | -2 | -1 |
| Z4653D60 | -2 | -3 | -4 | 25 | 1 | 2 |
| N4115A75 | -3 | 2 | -12 | -18 | 0 | 2 |
| N4180A80 | -1 | -2 | -5 | -12 | 0 | 1 |
| N4181A80 | -6 | 3 | -10 | -12 | 2 | 4 |
| N4121A90 | -1 | -5 | -4 | -12 | 1 | 1 |
| N4008A80 | -5 | 1 | -9 | -9 | 2 | 6 |
| N0304A75 | -5 | -2 | -25 | -20 | -2 | 2 |
| N4257A85 | 2 | 11 | -10 | -23 | 0 | 0 |
| N4274A85 | 0 | 4 | 3 | 5 | 1 | 1 |
| N4263A90 | -2 | -10 | 1 | 18 | 1 | 1 |
| KB162A80 | -2 | 7 | -4 | -9 | 1 | 1 |
| KB163A90 | -3 | -6 | -6 | -1 | 1 | 1 |
| N4007A95 | 0 | -2 | -6 | 8 | 1 | 2 |
| E4183A80 | -21 | - | -61 | -54 | 57 | 93 |
| E4207A90 | -3 | -18 | -15 | 5 | -1 | -1 |
| E4259A80 | -9 | 1 | -31 | -17 | 24 | 37 |
| E4270A90 | -6 | - | -58 | -53 | 43 | 69 |
| V4205A75 | -1 | 6 | 11 | 4 | 0 | 0 |
| V4208A90 | -2 | -2 | -10 | -6 | 1 | 2 |
| V4266A95 | 0 | -5 | -2 | 3 | 1 | 2 |
| V4276A85 | -9 | -59 | -38 | 28 | 10 | 22 |

| | Points Change Hardness | Percent Change | | | | |
|-------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| MIL-H-5606 | | | | | | |
| P4300A90 | 0 | 0 | 35 | -15 | 5 | 7 |
| P4301A90 | -1 | -6 | 0 | 7 | 6 | 8 |
| P4304D60 | -3 | -2 | 14 | 5 | 5 | 7 |
| P4311A90 | -1 | 3 | 8 | 3 | 7 | 9 |
| P4500A90 | -3 | -8 | 10 | -1 | 7 | 9 |
| P6000A90 | -3 | -3 | 33 | 13 | 6 | 8 |
| Z4651D60 | -2 | -1 | 12 | 4 | 7 | 9 |
| Z4652D65 | 0 | 0 | 12 | 4 | 6 | 8 |
| Z4653D60 | -6 | 1 | 8 | 32 | 7 | 10 |
| N4115A75 | -1 | 28 | 10 | -24 | 4 | 7 |
| N4180A80 | -9 | 5 | 11 | -17 | 5 | 8 |
| N4181A80 | -12 | -6 | -16 | -24 | 15 | 21 |
| N4121A90 | -2 | 13 | -3 | -28 | 6 | 11 |
| N4008A80 | -9 | 16 | -18 | -32 | 11 | 18 |
| N0304A75 | -11 | 20 | -20 | -31 | 8 | 15 |
| N4257A85 | 1 | 49 | 9 | -29 | 2 | 4 |
| N4274A85 | -7 | 12 | 17 | 6 | 4 | 6 |
| N4263A90 | 0 | 12 | 17 | -2 | 5 | 7 |
| KB162A80 | -5 | -10 | -14 | -10 | 10 | 13 |
| KB163A90 | -7 | -8 | -8 | -2 | 8 | 11 |
| N4007A95 | -2 | 0 | -4 | -8 | 6 | 9 |
| E4183A80 | -25 | -58 | -67 | -57 | 95 | 133 |
| E4207A90 | -22 | - | -68 | -58 | 71 | 100 |
| E4259A80 | -23 | - | -70 | -66 | 104 | 126 |
| E4270A90 | -18 | - | -53 | -54 | 73 | 94 |
| V4205A75 | -2 | 1 | -11 | -4 | 1 | 2 |
| V4208A90 | -5 | -2 | -15 | -10 | 2 | 4 |
| V4266A95 | -1 | -21 | -21 | -11 | 1 | 3 |
| V4276A85 | -7 | -46 | -13 | 47 | 16 | 25 |



09/01/07



Chemical Compatibility



| | Points Change Hardness | Percent Change | | | | |
|-------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Reference Fuel B | | | | | | |
| P4300A90 | -1 | -4 | -3 | -15 | 13 | 18 |
| P4301A90 | -1 | -12 | -27 | -9 | 17 | 24 |
| P4304D60 | -3 | -10 | -9 | -3 | 8 | 11 |
| P4311A90 | -2 | 0 | -12 | -2 | 13 | 18 |
| P4500A90 | -3 | -16 | -36 | -9 | 12 | 17 |
| P6000A90 | -3 | -13 | -30 | 2 | 10 | 14 |
| Z4651D60 | -3 | -9 | -6 | -7 | 7 | 10 |
| Z4652D65 | -4 | -9 | 6 | 4 | 0 | 2 |
| Z4653D60 | -7 | -5 | -8 | 17 | 7 | 10 |
| N4115A75 | -9 | 1 | -15 | -22 | 7 | 13 |
| N4180A80 | -10 | -12 | -19 | -29 | 10 | 18 |
| N4181A80 | -12 | -9 | -41 | -36 | 20 | 30 |
| N4121A90 | -15 | -14 | -20 | -20 | 10 | 17 |
| N4008A80 | -10 | 7 | -32 | -38 | 22 | 38 |
| N0304A75 | -15 | -10 | -51 | -40 | 5 | 12 |
| N4257A85 | -19 | -28 | -34 | -28 | 13 | 21 |
| N4274A85 | -16 | -43 | -26 | 4 | 17 | 26 |
| N4263A90 | -14 | -52 | -18 | 37 | 15 | 24 |
| KB162A80 | -7 | - | -50 | -43 | 16 | 23 |
| KB163A90 | -17 | - | -34 | -19 | 14 | 22 |
| N4007A95 | -8 | -14 | -24 | -8 | 8 | 10 |
| E4183A80 | -20 | -5 | -56 | -53 | 71 | 108 |
| E4207A90 | -5 | -8 | -13 | -5 | -1 | -1 |
| E4259A80 | -7 | 0 | -4 | -4 | 18 | 28 |
| E4270A90 | -17 | - | -53 | -33 | 24 | 36 |
| V4205A75 | -4 | 9 | 1 | -3 | 0 | 1 |
| V4208A90 | -4 | -6 | -17 | -9 | 1 | 3 |
| V4266A95 | -2 | -5 | -5 | 4 | 1 | 2 |
| V4276A85 | -19 | -57 | -52 | 1 | 15 | 32 |

| | Points Change Hardness | Percent Change | | | | |
|-------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Jet Oil II | | | | | | |
| P4300A90 | -1 | -3 | 18 | -6 | 10 | 12 |
| P4301A90 | -1 | -9 | -2 | 6 | 13 | 15 |
| P4304D60 | 0 | -4 | -1 | 5 | 5 | 6 |
| P4311A90 | -4 | 0 | 16 | 7 | 11 | 13 |
| P4500A90 | -3 | -7 | 24 | 1 | 10 | 12 |
| P6000A90 | -3 | -1 | 46 | 14 | 9 | 10 |
| Z4651D60 | 0 | -5 | -3 | -5 | 7 | 9 |
| Z4652D60 | 1 | 1 | 1 | 6 | 5 | 6 |
| Z4653D60 | -6 | 3 | 6 | 30 | 6 | 7 |
| N4115A75 | -7 | 23 | 12 | -21 | 18 | 24 |
| N4180A80 | -16 | -1 | 10 | -2 | 20 | 26 |
| N4181A80 | -14 | -9 | -16 | -17 | 31 | 37 |
| N4121A90 | -12 | 3 | 2 | -16 | 16 | 22 |
| N4008A80 | -12 | 17 | -15 | -30 | 29 | 38 |
| N0304A75 | -16 | 28 | -31 | -43 | 28 | 36 |
| N4257A85 | -2 | 40 | 12 | -25 | 10 | 11 |
| N4274A85 | -3 | 16 | 17 | 0 | 12 | 13 |
| N4263A90 | -4 | -2 | 9 | -3 | 12 | 15 |
| KB162A80 | -6 | -5 | -11 | -7 | 14 | 17 |
| KB163A90 | -8 | -5 | -9 | -2 | 12 | 15 |
| N4007A95 | -20 | -8 | 0 | -15 | 14 | 18 |
| E4183A80 | -11 | -11 | -5 | -4 | 8 | 9 |
| E4207A90 | -8 | - | -19 | -15 | 8 | 9 |
| E4259A80 | -10 | 3 | -8 | -8 | 11 | 13 |
| E4270A90 | -8 | -2 | 0 | 1 | 10 | 11 |
| V4205A75 | -6 | -2 | -34 | -16 | 6 | 11 |
| V4208A90 | -9 | -2 | -10 | -8 | 5 | 10 |
| V4266A95 | -3 | -9 | -7 | 6 | 4 | 8 |
| V4276A85 | -1 | -34 | -11 | 32 | 5 | 7 |



Chemical Compatibility

| | Points Change Hardness | Percent Change | | | | |
|-------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Reference Fuel C | | | | | | |
| P4300A90 | -2 | -3 | -30 | -35 | 21 | 29 |
| P4301A90 | -2 | -13 | -26 | -6 | 25 | 35 |
| P4304D60 | -6 | -10 | -16 | -11 | 11 | 15 |
| P4311A90 | -2 | -1 | -28 | -6 | 20 | 27 |
| P4500A90 | -5 | -17 | -38 | -11 | 17 | 24 |
| P6000A90 | -4 | -16 | -34 | 1 | 15 | 20 |
| Z4651D60 | -9 | -14 | -12 | -8 | 16 | 22 |
| Z4652D65 | -4 | -13 | 4 | 5 | 1 | 2 |
| Z4653D60 | -11 | -6 | -10 | 11 | 9 | 13 |
| N4115A75 | -12 | -2 | -18 | -27 | 15 | 26 |
| N4180A80 | -10 | -8 | -24 | -34 | 17 | 29 |
| N4181A80 | -17 | -10 | -50 | -44 | 38 | 55 |
| N4121A90 | -18 | -17 | -32 | -32 | 12 | 20 |
| N4008A80 | -15 | - | -35 | -46 | 41 | 68 |
| N0304A75 | -20 | -30 | -70 | -54 | 9 | 18 |
| N4257A85 | -19 | -32 | -39 | -33 | 21 | 31 |
| N4274A85 | -20 | -42 | -37 | -12 | 26 | 39 |
| N4263A90 | -16 | -52 | -21 | 29 | 23 | 36 |
| KB162A80 | -12 | - | -49 | -40 | 20 | 30 |
| KB163A90 | -22 | - | -38 | -22 | 18 | 28 |
| N4007A95 | -18 | - | -17 | -31 | 29 | 44 |
| E4183A80 | -23 | -23 | -64 | -53 | 77 | 112 |
| E4207A90 | -5 | 5 | 0 | -4 | -1 | -1 |
| E4259A80 | -7 | -8 | -15 | -7 | 18 | 26 |
| E4270A90 | -16 | - | -52 | -38 | 26 | 38 |
| V4205A75 | -3 | 12 | -8 | -7 | 1 | 2 |
| V4208A90 | -5 | -3 | -18 | -13 | 2 | 5 |
| V4266A95 | -2 | -6 | -4 | -7 | 2 | 4 |
| V4276A85 | -19 | -58 | -56 | -12 | 16 | 33 |

| | Points Change Hardness | Percent Change | | | | |
|----------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Stauffer 7700 | | | | | | |
| P4300A90 | -1 | -3 | 23 | -10 | 9 | 10 |
| P4301A90 | -2 | -9 | -14 | 0 | 11 | 14 |
| P4304D60 | 2 | -3 | 6 | 8 | 5 | 6 |
| P4311A90 | -2 | -2 | -1 | 0 | 9 | 11 |
| P4500A90 | -3 | -6 | 15 | -4 | 9 | 11 |
| P6000A90 | -3 | 0 | 14 | 9 | 7 | 9 |
| Z4651D60 | -1 | -6 | 6 | -2 | 8 | 9 |
| Z4652D65 | -3 | 1 | 8 | 9 | 5 | 6 |
| Z4653D60 | -5 | 4 | 7 | 31 | 6 | 8 |
| N4115A75 | -9 | 16 | 3 | -24 | 18 | 25 |
| N4180A80 | -17 | -5 | 6 | -14 | 18 | 26 |
| N4181A80 | -16 | -10 | -26 | -24 | 31 | 37 |
| N4121A90 | -14 | 0 | 5 | -13 | 15 | 22 |
| N4008A80 | -13 | 15 | -25 | -36 | 32 | 43 |
| N0304A75 | -18 | 19 | -48 | -45 | 31 | 42 |
| N4257A85 | -1 | 45 | 8 | -36 | 8 | 10 |
| N4274A85 | -5 | 26 | 21 | -4 | 9 | 11 |
| N4263A90 | -3 | -2 | 11 | -3 | 12 | 16 |
| KB162A80 | -6 | -7 | -16 | -13 | 13 | 17 |
| KB163A90 | -9 | -3 | -7 | -2 | 10 | 14 |
| N4007A95 | -21 | 1 | -9 | -15 | 14 | 18 |
| E4183A80 | -17 | -18 | -20 | -19 | 22 | 27 |
| E4207A90 | -14 | - | -40 | -28 | 16 | 20 |
| E4259A80 | -16 | 10 | -35 | -25 | 24 | 28 |
| E4270A90 | -10 | - | -16 | -5 | 17 | 20 |
| V4205A75 | -7 | -7 | -22 | -10 | 6 | 11 |
| V4208A90 | -10 | -11 | -25 | -15 | 6 | 11 |
| V4266A95 | -3 | -10 | -11 | 1 | 4 | 8 |
| V4276A85 | -5 | -41 | -24 | 7 | 7 | 11 |

D

Chemical Compatibility

| | Points Change Hardness | Percent Change | | | | |
|-----------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Methanol | | | | | | |
| P4300A90 | -3 | -25 | -16 | -17 | 12 | 18 |
| P4301A90 | -1 | -35 | -23 | 7 | 10 | 14 |
| P4304D60 | -13 | -32 | -25 | -3 | 11 | 15 |
| P4311A90 | -3 | -20 | -19 | 6 | 12 | 17 |
| P4500A90 | -4 | -29 | -52 | -8 | 9 | 13 |
| P6000A90 | -5 | -28 | -46 | 3 | 8 | 12 |
| Z4651D60 | -5 | -16 | -5 | -4 | 7 | 11 |
| Z4652D65 | -3 | -18 | -7 | 7 | -1 | -1 |
| Z4653D60 | -5 | -4 | -3 | 19 | 4 | 5 |
| N4115A75 | -1 | 2 | -10 | -14 | -2 | -1 |
| N4180A80 | 0 | -12 | -9 | -17 | 2 | 4 |
| N4181A80 | -4 | -12 | -27 | -24 | 7 | 11 |
| N4121A90 | -6 | -16 | -18 | -14 | 2 | 5 |
| N4008A80 | 0 | -1 | -8 | -5 | -3 | -3 |
| N0304A75 | -3 | -9 | -21 | -13 | -3 | -2 |
| N4257A85 | -16 | -37 | -34 | -22 | 6 | 10 |
| N4274A85 | -19 | -57 | -40 | -1 | 8 | 13 |
| N4263A90 | -12 | -52 | -24 | -44 | 15 | 33 |
| KB162A80 | -7 | -12 | -30 | -23 | 6 | 9 |
| KB163A90 | -9 | -21 | -26 | -7 | 5 | 8 |
| N4007A95 | -2 | 0 | -17 | 8 | 5 | 9 |
| E4183A80 | 0 | 0 | -2 | -3 | 0 | 0 |
| E4207A90 | -2 | 3 | 4 | 3 | -1 | -1 |
| E4259A80 | n/a | n/a | n/a | n/a | n/a | n/a |
| E4270A90 | -16 | -8 | -7 | 0 | 1 | 1 |
| V4205A75 | 0 | -17 | -16 | 0 | 6 | 13 |
| V4208A90 | -24 | -26 | -58 | -41 | 23 | 53 |
| V4266A95 | -13 | - | -44 | -32 | 15 | 33 |
| V4276A85 | 4 | -8 | -7 | 15 | 1 | 1 |

| | Points Change Hardness | Percent Change | | | | |
|--------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Rando HD 32 | | | | | | |
| P4300A90 | 0 | 0 | 17 | 3 | 2 | 2 |
| P4301A90 | 0 | -1 | 1 | -4 | 2 | 3 |
| P4304D60 | 2 | -2 | 13 | 9 | 1 | 2 |
| P4311A90 | -1 | 2 | 15 | 7 | 2 | 2 |
| P4500A90 | -2 | 3 | 43 | 4 | 1 | 1 |
| P6000A90 | -2 | 2 | 12 | 10 | 1 | 2 |
| Z4651D60 | 2 | -2 | 12 | 0 | 2 | 3 |
| Z4652D65 | -1 | 4 | 5 | 0 | 1 | 2 |
| Z4653D60 | -3 | 6 | -1 | 21 | 2 | 4 |
| N4115A75 | 9 | 66 | 10 | -30 | -5 | -5 |
| N4180A80 | -3 | 19 | 12 | -19 | 0 | 0 |
| N4181A80 | -3 | 10 | -7 | -17 | 5 | 6 |
| N4121A90 | 0 | 23 | 0 | -27 | 0 | 1 |
| N4008A80 | -1 | 22 | -9 | -28 | 3 | 5 |
| N0304A75 | 7 | 55 | 0 | -34 | -3 | -2 |
| N4257A85 | 3 | 113 | 24 | -33 | -3 | -4 |
| N4274A85 | 2 | 45 | 23 | 5 | -1 | -2 |
| N4263A90 | 3 | 33 | 25 | -19 | -1 | -1 |
| KB162A80 | 1 | 3 | 3 | 1 | 2 | 3 |
| KB163A90 | -2 | 9 | 7 | 4 | 2 | 2 |
| N4007A95 | 1 | 7 | 0 | -8 | 1 | 2 |
| E4183A80 | -25 | 13 | -51 | -49 | 76 | 106 |
| E4207A90 | -22 | - | -60 | -48 | 56 | 79 |
| E4259A80 | -24 | - | -68 | -57 | 86 | 106 |
| E4270A90 | -16 | - | -48 | -40 | 57 | 74 |
| V4205A75 | -1 | 6 | -8 | -10 | 0 | 0 |
| V4208A90 | -3 | -2 | -14 | -12 | 1 | 2 |
| V4266A95 | 0 | -1 | 3 | 4 | 1 | 2 |
| V4276A85 | 2 | -20 | -15 | -15 | 2 | 3 |



| | Points Change Hardness | Percent Change | | | | |
|----------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| JP-4 Jet Fuel | | | | | | |
| P4300A90 | 0 | -3 | 5 | -8 | 8 | 11 |
| P4301A90 | 0 | -13 | -5 | 9 | 9 | 12 |
| P4304D60 | -2 | -7 | 0 | 1 | 4 | 5 |
| P4311A90 | -1 | -4 | -9 | 4 | 7 | 10 |
| P4500A90 | -2 | -91 | -92 | -7 | 6 | 9 |
| P6000A90 | -3 | -6 | -14 | 0 | 4 | 5 |
| Z4651D60 | -3 | -9 | -1 | -5 | 7 | 11 |
| Z4652D65 | 2 | -3 | 9 | 8 | 1 | 1 |
| Z4653D60 | -4 | -3 | 2 | 31 | 4 | 7 |
| N4115A75 | -7 | -2 | -15 | -20 | 3 | 8 |
| N4180A80 | 0 | -9 | -5 | -6 | 6 | 11 |
| N4181A80 | -10 | -12 | -26 | -19 | 14 | 22 |
| N4121A90 | -11 | -9 | -10 | -10 | 11 | 16 |
| N4008A80 | -10 | 3 | -30 | -35 | 14 | 26 |
| N0304A75 | -11 | -8 | -30 | -23 | 4 | 10 |
| N4257A85 | -8 | -26 | -25 | -19 | 7 | 11 |
| N4274A85 | -13 | -36 | -17 | 8 | 8 | 12 |
| N4263A90 | -6 | -39 | -8 | 37 | 7 | 12 |
| KB162A80 | -11 | -2 | -16 | -17 | 5 | 7 |
| KB163A90 | -15 | -18 | -23 | -7 | 5 | 8 |
| N4007A95 | -7 | -3 | -14 | -8 | 9 | 15 |
| E4183A80 | -22 | - | -72 | -62 | 84 | 134 |
| E4207A90 | -7 | 11 | 7 | -5 | 8 | 12 |
| E4259A80 | -17 | 6 | -49 | -33 | 57 | 74 |
| E4270A90 | -18 | - | -63 | -51 | - | - |
| V4205A75 | 1 | 1 | 8 | 0 | 0 | 0 |
| V4208A90 | -4 | -1 | -16 | -11 | 1 | 2 |
| V4266A95 | -1 | -3 | 8 | 2 | 1 | 2 |
| V4276A85 | -6 | -52 | -42 | 24 | 8 | 15 |

| | Points Change Hardness | Percent Change | | | | |
|-----------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| EAL 224 Rapeseed Oil | | | | | | |
| P4300A90 | -1 | -2 | 16 | -1 | 2 | 2 |
| P4301A90 | 0 | -3 | 1 | 4 | 2 | 3 |
| P4304D60 | 3 | -4 | 6 | 7 | 2 | 2 |
| P4311A90 | -2 | 2 | -11 | 16 | 3 | 3 |
| P4500A90 | -1 | -2 | 5 | 12 | 2 | 2 |
| P6000A90 | -2 | 3 | -10 | 13 | 1 | 2 |
| Z4651D60 | 2 | -1 | -8 | -1 | 2 | 3 |
| Z4652D65 | -1 | 3 | 6 | 4 | 2 | 2 |
| Z4653D60 | -4 | 5 | 3 | 23 | 3 | 4 |
| N4115A75 | -1 | 20 | 12 | -12 | 1 | 3 |
| N4180A80 | -7 | 3 | 9 | -5 | 0 | 1 |
| N4181A80 | -7 | -7 | -6 | -3 | 11 | 14 |
| N4121A90 | -4 | 9 | 3 | -10 | 2 | 5 |
| N4008A80 | -7 | 4 | -22 | -27 | 10 | 16 |
| N0304A75 | -6 | 7 | -3 | -18 | 1 | 6 |
| N4257A85 | 5 | 69 | 9 | -27 | -3 | -4 |
| N4274A85 | 2 | 4 | 16 | 31 | -2 | -2 |
| N4263A90 | 3 | 15 | 15 | 10 | -1 | -1 |
| KB162A80 | -2 | -1 | 6 | 6 | 8 | 11 |
| KB163A90 | -6 | -4 | -2 | 5 | 8 | 10 |
| N4007A95 | -3 | -2 | 4 | 15 | 1 | 2 |
| E4183A80 | -20 | -18 | -30 | -28 | 26 | 35 |
| E4207A90 | -16 | - | -41 | -22 | 19 | 27 |
| E4259A80 | -19 | -5 | -41 | -23 | 28 | 35 |
| E4270A90 | -11 | -7 | -17 | -9 | 18 | 22 |
| V4205A75 | -1 | 3 | -8 | -7 | 0 | 0 |
| V4208A90 | -3 | 0 | -12 | -6 | 1 | 2 |
| V4266A95 | 0 | -1 | 1 | 9 | 1 | 1 |
| V4276A85 | 5 | -15 | -5 | 34 | 1 | 1 |



Chemical Compatibility



| | Points Change Hardness | Percent Change | | | | |
|--------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| JA Jet Fuel | | | | | | |
| P4300A90 | 1 | -3 | 19 | -7 | 6 | 8 |
| P4301A90 | 0 | -10 | 2 | 9 | 5 | 7 |
| P4304D60 | 0 | -5 | 2 | -1 | 2 | 3 |
| P4311A90 | -2 | -5 | 2 | 10 | 5 | 7 |
| P4500A90 | -2 | -10 | -17 | -6 | 4 | 6 |
| P6000A90 | -2 | -7 | 3 | 4 | 3 | 4 |
| Z4651D60 | -1 | -8 | 12 | 0 | 5 | 7 |
| Z4652D65 | 4 | -3 | 12 | 7 | 0 | 1 |
| Z4653D60 | -4 | -2 | 3 | 30 | 3 | 4 |
| N4115A75 | 4 | -3 | -13 | -17 | 5 | 8 |
| N4180A80 | -3 | -11 | -3 | -7 | 4 | 6 |
| N4181A80 | -8 | -14 | -17 | -11 | 10 | 15 |
| N4121A90 | -6 | -3 | -13 | -19 | 5 | 13 |
| N4008A80 | -8 | 0 | -22 | -25 | 13 | 22 |
| N0304A75 | -11 | -13 | -24 | -18 | 7 | 13 |
| N4257A85 | -3 | -3 | -8 | -10 | 2 | 3 |
| N4274A85 | -1 | -12 | 2 | 13 | 3 | 5 |
| N4263A90 | -2 | -22 | -1 | 27 | 4 | 5 |
| KB162A80 | -1 | 7 | -9 | -11 | 3 | 4 |
| KB163A90 | -3 | -13 | -9 | 10 | 4 | 5 |
| N4007A95 | 0 | 12 | -1 | 8 | 4 | 5 |
| E4183A80 | -22 | - | -72 | -66 | 93 | 141 |
| E4207A90 | -7 | - | -52 | -41 | 39 | 60 |
| E4259A80 | -23 | - | -70 | -60 | 109 | 131 |
| E4270A90 | -15 | - | -63 | -59 | - | - |
| V4205A75 | -1 | 5 | -9 | -8 | 0 | 1 |
| V4208A90 | -6 | 0 | -12 | -8 | 1 | 2 |
| V4266A95 | -1 | -4 | 9 | 13 | 1 | 2 |
| V4276A85 | 2 | -9 | -5 | 12 | 1 | 2 |

| | Points Change Hardness | Percent Change | | | | |
|----------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Ethylene Glycol 97% | | | | | | |
| P4300A90 | -2 | -16 | -30 | -6 | 5 | 5 |
| P4301A90 | -1 | -19 | -32 | 9 | 3 | 4 |
| P4304D60 | -1 | -17 | -38 | 7 | 5 | 5 |
| P4311A90 | -3 | -8 | -52 | 18 | 6 | 6 |
| P4500A90 | -4 | -16 | -47 | 20 | 5 | 5 |
| P6000A90 | -2 | -16 | -59 | 12 | 5 | 6 |
| Z4651D60 | -1 | -8 | -5 | 1 | 3 | 3 |
| Z4652D65 | -2 | -7 | -21 | 8 | 3 | 3 |
| Z4653D60 | -4 | 2 | -37 | -14 | 1 | 1 |
| N4115A75 | 3 | 36 | 4 | -24 | 0 | 1 |
| N4180A80 | -1 | 15 | 9 | -14 | -1 | -1 |
| N4181A80 | -2 | 18 | -4 | -15 | 6 | 7 |
| N4121A90 | 1 | 8 | -2 | -18 | -2 | -2 |
| N4008A80 | 3 | 12 | -10 | -24 | -2 | -2 |
| N0304A75 | 1 | 37 | -8 | -26 | -4 | -4 |
| N4257A85 | 0 | 34 | -9 | -37 | 4 | 3 |
| N4274A85 | -2 | 8 | 7 | 10 | 7 | 7 |
| N4263A90 | 3 | 4 | 6 | 3 | 2 | 3 |
| KB162A80 | 1 | 4 | 5 | 3 | 3 | 3 |
| KB163A90 | 0 | -3 | -2 | 4 | 3 | 3 |
| N4007A95 | -2 | 8 | 4 | 0 | 2 | 2 |
| E4183A80 | 0 | -3 | -11 | -11 | -1 | -1 |
| E4207A90 | -2 | -2 | 8 | 5 | -1 | -1 |
| E4259A80 | -2 | -2 | 5 | 3 | 1 | 1 |
| E4270A90 | -2 | 4 | 15 | 13 | 1 | 1 |
| V4205A75 | -3 | -5 | -20 | 1 | 1 | 1 |
| V4208A90 | -3 | -10 | -27 | -5 | 2 | 3 |
| V4266A95 | -1 | -21 | -20 | 10 | 1 | 2 |
| V4276A85 | 4 | -13 | -7 | 30 | 2 | 1 |



Chemical Compatibility

| | Points Change Hardness | Percent Change | | | | |
|--------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| ASTM Oil #1 | | | | | | |
| P4300A90 | 1 | -2 | -4 | -1 | 0 | 1 |
| P4301A90 | 0 | -2 | 3 | 8 | 0 | 1 |
| P4304D60 | -1 | 0 | 3 | 4 | 0 | 0 |
| P4311A90 | -1 | 3 | 11 | 3 | 0 | 0 |
| P4500A90 | -1 | -1 | 31 | 3 | 0 | 0 |
| P6000A90 | -2 | 7 | 29 | 9 | 0 | 1 |
| Z4651D60 | 4 | 2 | 6 | 1 | 0 | 0 |
| Z4652D65 | 1 | 6 | 1 | 2 | 0 | 0 |
| Z4653D60 | -5 | 4 | -2 | 28 | 1 | 1 |
| N4115A75 | 12 | 88 | 16 | -30 | -7 | -9 |
| N4180A80 | -3 | 26 | 14 | -15 | -3 | -3 |
| N4181A80 | 0 | 30 | 0 | -22 | 1 | 1 |
| N4121A90 | 0 | 13 | 4 | -17 | -3 | -3 |
| N4008A80 | 5 | 15 | -25 | -36 | -5 | -5 |
| N0304A75 | 11 | 72 | 4 | -27 | -7 | -9 |
| N4257A85 | 5 | 102 | 18 | -28 | -5 | -7 |
| N4274A85 | 2 | 53 | 22 | 4 | -4 | -5 |
| N4263A90 | 5 | 35 | 20 | -29 | -3 | -4 |
| KB162A80 | 2 | 2 | -12 | -15 | 0 | -1 |
| KB163A90 | -1 | 6 | 4 | 2 | 0 | -1 |
| N4007A95 | -2 | 5 | -4 | -15 | -1 | -1 |
| E4183A80 | -24 | 1 | -40 | -39 | 65 | 88 |
| E4207A90 | -18 | - | -38 | -32 | 43 | 60 |
| E4259A80 | -22 | - | -56 | -47 | 67 | 84 |
| E4270A90 | -17 | - | -26 | -26 | 45 | 58 |
| V4205A75 | -3 | 3 | -1 | -7 | 0 | 0 |
| V4208A90 | -3 | -2 | -17 | -11 | 1 | 2 |
| V4266A95 | 0 | -4 | 1 | 7 | 1 | 2 |
| V4276A85 | 5 | -6 | 2 | 26 | 1 | 1 |

| | Points Change Hardness | Percent Change | | | | |
|------------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Distilled Water | | | | | | |
| P4300A90 | -1 | -14 | -3 | 3 | 1 | 1 |
| P4301A90 | -1 | -18 | -26 | 14 | 1 | 1 |
| P4304D60 | -5 | -18 | -28 | 16 | 2 | 2 |
| P4311A90 | -2 | 0 | -31 | 19 | 0 | 1 |
| P4500A90 | -5 | -19 | -49 | 38 | 1 | 2 |
| P6000A90 | -2 | -17 | -65 | 9 | 1 | 2 |
| Z4651D60 | -3 | -9 | 2 | 1 | 1 | 1 |
| Z4652D65 | 2 | 2 | -1 | 2 | 0 | 0 |
| Z4653D60 | -5 | 0 | -26 | -10 | 1 | 1 |
| N4115A75 | 2 | 24 | 3 | -28 | 3 | 3 |
| N4180A80 | -1 | 14 | 6 | -24 | 1 | 2 |
| N4181A80 | -7 | 11 | -4 | -14 | 9 | 11 |
| N4121A90 | 1 | 19 | 2 | -24 | 1 | 1 |
| N4008A80 | 0 | 19 | -8 | -19 | 1 | 1 |
| N0304A75 | 4 | 35 | -5 | -23 | 1 | 1 |
| N4257A85 | -2 | 3 | -9 | -21 | 8 | 9 |
| N4274A85 | -7 | -13 | -6 | -1 | 13 | 15 |
| N4263A90 | -2 | -9 | 6 | 21 | 4 | 4 |
| KB162A80 | 3 | 11 | 5 | -1 | 1 | 1 |
| KB163A90 | -3 | 0 | 4 | 4 | 1 | 1 |
| N4007A95 | -2 | 4 | 1 | 15 | 2 | 1 |
| E4183A80 | -3 | -4 | -14 | -14 | 0 | -1 |
| E4207A90 | -2 | 4 | 3 | -2 | 1 | 0 |
| E4259A80 | -3 | 0 | 14 | 8 | 1 | 1 |
| E4270A90 | -3 | 2 | 23 | 26 | 1 | 0 |
| V4205A75 | -1 | 3 | -8 | 0 | 2 | 3 |
| V4208A90 | -6 | -5 | 15 | 7 | 3 | 4 |
| V4266A95 | -3 | -15 | 16 | 11 | 1 | 2 |
| V4276A85 | -3 | -21 | 1 | 28 | 5 | 6 |

D

Chemical Compatibility

| | Points Change Hardness | Percent Change | | | | |
|--------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| IRM Oil 903 | | | | | | |
| P4300A90 | -1 | -6 | -28 | -10 | 8 | 9 |
| P4301A90 | -2 | -8 | 0 | 14 | 9 | 12 |
| P4304D60 | -1 | -1 | 11 | 8 | 5 | 6 |
| P4311A90 | -2 | -1 | 19 | 0 | 6 | 7 |
| P4500A90 | -3 | -4 | 19 | -1 | 6 | 7 |
| P6000A90 | -2 | 0 | 40 | 15 | 5 | 6 |
| Z4651D60 | 0 | -2 | 13 | 0 | 8 | 10 |
| Z4652D65 | -4 | 4 | 10 | 7 | 5 | 7 |
| Z4653D60 | -7 | 4 | 7 | 26 | 6 | 8 |
| N4115A75 | -1 | 26 | 5 | -21 | 3 | 4 |
| N4180A80 | -13 | -2 | 10 | -14 | 8 | 11 |
| N4181A80 | -10 | -2 | -9 | -13 | 15 | 19 |
| N4121A90 | -5 | 8 | 1 | -10 | 5 | 8 |
| N4008A80 | -12 | 11 | -12 | -23 | 18 | 26 |
| N0304A75 | -6 | 24 | 1 | -23 | 7 | 11 |
| N4257A85 | 1 | 50 | 11 | -16 | 5 | 6 |
| N4274A85 | 0 | 15 | 18 | 2 | 7 | 8 |
| N4263A90 | 0 | 2 | 14 | 8 | 7 | 9 |
| KB162A80 | -4 | -3 | -11 | -10 | 8 | 10 |
| KB163A90 | -6 | -2 | -4 | -1 | 7 | 9 |
| N4007A95 | -10 | -6 | 2 | -8 | 10 | 14 |
| E4183A80 | -24 | - | -62 | -55 | 93 | 122 |
| E4207A90 | -21 | - | -60 | -55 | 68 | 91 |
| E4259A80 | -22 | - | -71 | -57 | 107 | 128 |
| E4270A90 | -16 | - | -43 | -44 | 70 | 85 |
| V4205A75 | -3 | 3 | -15 | -10 | 1 | 1 |
| V4208A90 | -3 | -3 | -17 | -11 | 1 | 3 |
| V4266A95 | 0 | -7 | -6 | 6 | 1 | 1 |
| V4276A85 | -1 | -41 | -20 | 31 | 4 | 11 |

| | Points Change Hardness | Percent Change | | | | |
|----------------------|------------------------|--------------------|------------------------|----------------|--------|--------|
| | | 100% Modulus (PSI) | Tensile Strength (PSI) | Elongation (%) | Weight | Volume |
| Oven Air Aged | | | | | | |
| P4300A90 | 0 | 2 | 21 | -3 | 0 | - |
| P4301A90 | 0 | 1 | 2 | -1 | 0 | - |
| P4304D60 | -2 | 0 | 5 | 3 | 0 | 0 |
| P4311A90 | -1 | 3 | 2 | -1 | 0 | 0 |
| P4500A90 | -3 | 0 | 6 | -5 | 0 | 0 |
| P6000A90 | -1 | 6 | 10 | 2 | 0 | 0 |
| Z4651D60 | 0 | 2 | 10 | -1 | 0 | - |
| Z4652D65 | 4 | 4 | 3 | 2 | 0 | 0 |
| Z4653D60 | -2 | 3 | -2 | 21 | 0 | 1 |
| N4115A75 | 11 | 101 | 6 | -44 | -3 | -4 |
| N4180A80 | 5 | 59 | 14 | -34 | -2 | -2 |
| N4181A80 | 5 | 148 | -43 | -72 | -1 | -2 |
| N4121A90 | 4 | 52 | 17 | -33 | -2 | -3 |
| N4008A80 | 13 | 44 | 11 | -19 | -3 | -4 |
| N0304A75 | 11 | 98 | -1 | -40 | -4 | -6 |
| N4257A85 | 6 | 103 | 36 | -23 | -5 | -7 |
| N4274A85 | 3 | 89 | 29 | -25 | -4 | -5 |
| N4263A90 | 5 | - | 37 | -44 | -4 | -6 |
| KB162A80 | 4 | 15 | 5 | -1 | 0 | 0 |
| KB163A90 | 0 | 13 | -9 | -18 | -1 | -1 |
| N4007A95 | 1 | 12 | 2 | 8 | -2 | - |
| E4183A80 | 1 | 3 | -16 | -17 | -2 | -3 |
| E4207A90 | 0 | -6 | -11 | -5 | -1 | -2 |
| E4259A80 | 0 | 4 | 7 | 4 | -1 | -1 |
| E4270A90 | -6 | 9 | 8 | -4 | 0 | 0 |
| V4205A75 | 1 | 9 | 17 | -3 | 0 | 0 |
| V4208A90 | -2 | 0 | -9 | -7 | 1 | 1 |
| V4266A95 | 0 | 3 | 14 | 7 | 0 | 1 |
| V4276A85 | 4 | 7 | 10 | 3 | 0 | -1 |



N4115A75

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|------------|------------|------------|------------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes | Passes |
| 3 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 4 | Passes | Passes | Passes | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes |
| 5 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 6 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 822 (Tests per Grade as shown above, such as A14 for grades 2-6)

N4180A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|------------|------------|------------|------------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes | Passes |
| 3 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 4 | Not Tested | Passes | Passes | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes |
| 5 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 6 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 820 (Tests per Grade as shown above, such as A14 for grades 2-6)

N4181A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|------------|------------|------------|------------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | Not Tested | Not Tested | Passes | Passes | Volume | Passes | Not Tested | Passes | Passes | Not Tested | Passes | Passes |
| 3 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 4 | Passes | Passes | Passes | Passes | Not Tested | Passes | Not Tested | Not BK | Passes | Passes | Not Tested | Passes |
| 5 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 6 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Passes | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 826 (Tests per Grade as shown above, such as A14 for grades 2-6)

N4121A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|------------|------------|------------|------------|--------|------------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes | Passes |
| 3 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested | Passes |
| 4 | Passes | Passes | Passes | Passes | Not Tested | Passes | Passes | Passes | Not Tested | Passes | Not Tested | Passes |
| 5 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Passes |
| 6 | Passes | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Passes | Passes | Not Tested | Passes | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 9 (21 or less) (Tests per Grade as shown above, such as A14 for grades 2-6)

Key:

Passes 
 Not Tested 
 Fails 
 Not Required 

02/15/08



N4008A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|------------|------------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Fails | | Not Tested | Not Tested |
| 3 | | | Not Tested | Not Tested | | | | Fails | Fails | | | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Not Tested | | | Fails | Fails | Fails | Not Tested | | Not Tested |
| 5 | Passes | | Not Tested | Passes | | | | Passes | Passes | | | Not Tested |
| 6 | Passes | | Not Tested | Not Tested | | | | Passes | Passes | | Not Tested | |
| 7 | | | Not Tested | | Passes | Passes | Passes | Passes | Fails | Not Tested | | |

ASTM Call-Out: Grade (BF, BG, BK, CH) 826 (Tests per Grade as shown above, such as A14 for grades 2-6)

N0304A75

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|------------|------------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Not Tested | Not Tested | Passes | Passes | Passes | Fails | Passes | | Not Tested | Not Tested |
| 3 | | | Not Tested | Not Tested | | | | Fails | Fails | | | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Not Tested | | | Fails | Fails | Fails | Not Tested | | Not Tested |
| 5 | Passes | | Not Tested | Not Tested | | | | Passes | Passes | | | Not Tested |
| 6 | Passes | | Not Tested | Not Tested | | | | Passes | Passes | | Not Tested | |
| 7 | | | Not Tested | | Passes | Passes | Passes | Passes | Passes | Not Tested | | |

ASTM Call-Out: Grade (BF, BG, BK, CH) 8 (21 or less) (Tests per Grade as shown above, such as A14 for grades 2-6)

N4257A85

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|--------|--------|--------|--------|--------|------------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Passes | Passes | Passes | Passes | Passes | Not Tested | Passes | | Not Tested | Not Tested |
| 3 | | | Passes | Passes | | | | Fails | Fails | | | Not Tested |
| 4 | Not Tested | Passes | Passes | Passes | | | Fails | BK Only | Passes | Not Tested | | Not Tested |
| 5 | Passes | | Passes | Passes | | | | Fails | Fails | | | Not Tested |
| 6 | Passes | | Passes | Passes | | | | Passes | Passes | | Not Tested | |
| 7 | | | Passes | | Passes | Passes | Passes | Passes | Passes | Not Tested | | |

ASTM Call-Out: Grade (BF, BG, BK, CH) 830 (Tests per Grade as shown above, such as A14 for grades 2-6)

N4274A85

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Passes | Passes | Passes | Passes | Passes | Passes | Passes | | Not Tested | Not Tested |
| 3 | | | Passes | Passes | | | | Passes | Fails | | | Not Tested |
| 4 | Not Tested | Passes | Passes | Passes | | Passes | Fails | Passes | Fails | Not Tested | | Not Tested |
| 5 | Passes | | Passes | Passes | | | | Passes | Passes | | | Not Tested |
| 6 | Passes | | Passes | Passes | | | | Passes | Passes | | Not Tested | |
| 7 | | | Passes | | Passes | Passes | Passes | Passes | Passes | Not Tested | | |


ASTM Call-Out: Grade (BF, BG, BK, CH) 831 (Tests per Grade as shown above, such as A14 for grades 2-6)

Key:

Passes 

 Not Tested 

 Fails 

 Not Required 

N4263A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 3 | | | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Passes | | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Passes | | Passes | Passes | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 7 | | | Passes | | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 932 (Tests per Grade as shown above, such as A14 for grades 2-6)

KB162A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|------------|------------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 3 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Passes | Passes | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 7 | | | Not Tested | | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 8 (21 or less) (Tests per Grade as shown above, such as A14 for grades 2-6)

KB163A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|------------|------------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 3 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Passes | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 7 | | | Not Tested | | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |


ASTM Call-Out: Grade (BF, BG, BK, CH) 8 (21 or less) (Tests per Grade as shown above, such as A14 for grades 2-6)

N4007A95


| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|--------|------------|------------|--------|--------|--------|--------|--------|------------|------------|------------|
| | A14 | A24 | B14 | B34 | EA14 | EF11 | EF21 | EO14 | EO34 | F16 | F17 | F19 |
| 2 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 3 | | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Passes | Passes | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Passes | | Not Tested | Not Tested | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |
| 7 | | | Not Tested | | Passes | Passes | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade (BF, BG, BK, CH) 940 (Tests per Grade as shown above, such as A14 for grades 2-6)

Key:

Passes 

 Not Tested 

 Fails 

 Not Required 

V4205A75

| Grade | Suffix Requirements (Tests) | | | | | | | | | | |
|-------|-----------------------------|------------|------------|------------|--------|------------|------------|--------|------------|------------|------------|
| | A1-10 | A1-11 | B31 | B37 | B38 | C12 | C20 | EF31 | EO88 | F15 | F17 |
| 2 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 3 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade HK 720 (Tests per Grade as shown above, such as A14 for grades 2-6)

V4208A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | |
|-------|-----------------------------|------------|------------|------------|--------|------------|------------|--------|------------|------------|------------|
| | A1-10 | A1-11 | B31 | B37 | B38 | C12 | C20 | EF31 | EO88 | F15 | F17 |
| 2 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 3 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade HK 918 (Tests per Grade as shown above, such as A14 for grades 2-6)

V4266A95

| Grade | Suffix Requirements (Tests) | | | | | | | | | | |
|-------|-----------------------------|------------|------------|------------|--------|------------|------------|--------|------------|------------|------------|
| | A1-10 | A1-11 | B31 | B37 | B38 | C12 | C20 | EF31 | EO88 | F15 | F17 |
| 2 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 3 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade HK 920 (Tests per Grade as shown above, such as A14 for grades 2-6)

E4183A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|--------|------------|------------|------------|------------|------------|------------|------------|------------|
| | A25 | B44 | B35 | EA14 | F17 | F18 | F19 | G11 | G21 | K11 | P2 | R11 |
| 2 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 3 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |
| 8 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested |

ASTM Call-Out: Grade CA 822 (Tests per Grade as shown above, such as A14 for grades 2-6)

Key:

Passes  Not Tested  Fails  Not Required 

E4207A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|--------|------------|------------|--------------|------------|------------|--------------|------------|------------|
| | A25 | B44 | B35 | EA14 | F17 | F18 | F19 | G11 | G21 | K11 | P2 | R11 |
| 2 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 3 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 8 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |

ASTM Call-Out: Grade CA 920 (Tests per Grade as shown above, such as A14 for grades 2-6)

E4259A80

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|--------|--------|------------|------------|--------------|------------|------------|--------------|------------|------------|
| | A25 | B44 | B35 | EA14 | F17 | F18 | F19 | G11 | G21 | K11 | P2 | R11 |
| 2 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 3 | Not Tested | Passes | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 8 | Not Tested | Not Tested | Passes | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |


ASTM Call-Out: Grade CA 822 (Tests per Grade as shown above, such as A14 for grades 2-6)

E4270A90

| Grade | Suffix Requirements (Tests) | | | | | | | | | | | |
|-------|-----------------------------|------------|------------|--------|------------|------------|--------------|------------|------------|--------------|------------|------------|
| | A25 | B44 | B35 | EA14 | F17 | F18 | F19 | G11 | G21 | K11 | P2 | R11 |
| 2 | Not Tested | Passes | Not Tested | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 3 | Not Tested | Passes | Not Tested | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 4 | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 5 | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 6 | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 7 | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Tested | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |
| 8 | Not Tested | Not Tested | Not Tested | Passes | Not Tested | Not Tested | Not Required | Not Tested | Not Tested | Not Required | Not Tested | Not Tested |

ASTM Call-Out: Grade CA 926 (Tests per Grade as shown above, such as A14 for grades 2-6)

Key:

Passes 
 Not Tested 
 Fails 
 Not Required 

Metric Tolerances used for Seal Hardware (per ISO 286-2:1988)


| Basic Size mm | | H8 | H9 | H11 | f7 | f8 | h8 | h9 | h10 |
|------------------|---------------------|-------------|-------------|-------------|------------------|------------------|-------------|-------------|-------------|
| Above | Up To and Including | mm | | | | | | | |
| - | 3 | +0.014 0 | +0.025 0 | +0.060 0 | -0.006 -0.016 | -0.006 -0.020 | 0 -0.014 | 0 -0.025 | 0 -0.040 |
| 3 | 6 | +0.018 0 | +0.030 0 | +0.075 0 | -0.010 -0.022 | -0.010 -0.028 | 0 -0.018 | 0 -0.030 | 0 -0.048 |
| 6 | 10 | +0.022 0 | +0.036 0 | +0.090 0 | -0.013 -0.028 | -0.013 -0.035 | 0 -0.022 | 0 -0.036 | 0 -0.058 |
| 10 | 18 | +0.027 0 | +0.043 0 | +0.110 0 | -0.016 -0.034 | -0.016 -0.043 | 0 -0.027 | 0 -0.043 | 0 -0.070 |
| 18 | 30 | +0.033 0 | +0.052 0 | +0.130 0 | -0.020 -0.041 | -0.020 -0.053 | 0 -0.033 | 0 -0.052 | 0 -0.084 |
| 30 | 50 | +0.039 0 | +0.062 0 | +0.160 0 | -0.025 -0.050 | -0.025 -0.064 | 0 -0.039 | 0 -0.062 | 0 -0.100 |
| 50 | 80 | +0.046 0 | +0.074 0 | +0.190 0 | -0.030 -0.060 | -0.030 -0.076 | 0 -0.046 | 0 -0.074 | 0 -0.120 |
| 80 | 120 | +0.054 0 | +0.087 0 | +0.220 0 | -0.036 -0.071 | -0.036 -0.090 | 0 -0.054 | 0 -0.087 | 0 -0.140 |
| 120 | 180 | +0.063 0 | +0.100 0 | +0.250 0 | -0.043 -0.083 | -0.043 -0.106 | 0 -0.063 | 0 -0.100 | 0 -0.160 |
| 180 | 250 | +0.072 0 | +0.115 0 | +0.290 0 | -0.050 -0.096 | -0.050 -0.122 | 0 -0.072 | 0 -0.115 | 0 -0.185 |
| 250 | 315 | +0.081 0 | +0.130 0 | +0.320 0 | -0.056 -0.108 | -0.056 -0.137 | 0 -0.081 | 0 -0.130 | 0 -0.210 |
| 315 | 400 | +0.089 0 | +0.140 0 | +0.360 0 | -0.062 -0.119 | -0.062 -0.151 | 0 -0.089 | 0 -0.140 | 0 -0.230 |
| 400 | 500 | +0.097 0 | +0.155 0 | +0.400 0 | -0.068 -0.131 | -0.068 -0.165 | 0 -0.097 | 0 -0.155 | 0 -0.250 |
| 500 | 630 | +0.110 0 | +0.175 0 | +0.440 0 | -0.076 -0.146 | -0.076 -0.186 | 0 -0.110 | 0 -0.175 | 0 -0.280 |
| 630 | 800 | +0.125 0 | +0.200 0 | +0.500 0 | -0.080 -0.160 | -0.080 -0.205 | 0 -0.125 | 0 -0.200 | 0 -0.320 |
| 800 | 1000 | +0.140 0 | +0.230 0 | +0.560 0 | -0.086 -0.176 | -0.086 -0.226 | 0 -0.140 | 0 -0.230 | 0 -0.360 |
| 1000 | 1250 | +0.165 0 | +0.260 0 | +0.660 0 | -0.098 -0.203 | -0.098 -0.263 | 0 -0.165 | 0 -0.260 | 0 -0.420 |
| 1250 | 1600 | +0.195 0 | +0.310 0 | +0.780 0 | -0.110 -0.235 | -0.110 -0.305 | 0 -0.195 | 0 -0.310 | 0 -0.500 |
| 1600 | 2000 | +0.230 0 | +0.370 0 | +0.920 0 | -0.120 -0.270 | -0.120 -0.350 | 0 -0.230 | 0 -0.370 | 0 -0.600 |
| 2000 | 2500 | +0.280 0 | +0.440 0 | +1.100 0 | -0.130 -0.305 | -0.130 -0.410 | 0 -0.280 | 0 -0.440 | 0 -0.700 |
| 2500 | 3150 | +0.330 0 | +0.540 0 | +1.350 0 | -0.145 -0.355 | -0.145 -0.475 | 0 -0.330 | 0 -0.540 | 0 -0.860 |



Other Parker EPS Products

Catalog EPS 5370/USA


Parker EPS Division designs and manufactures engineered elastomeric, polymeric and plastic seals and sealing systems for dynamic applications. EPS Division has a worldwide sealing network consisting of manufacturing locations in Utah, Texas, New York, Illinois and Baja, Mexico; and more than 200 distributor and service center locations in nine countries.



See: [Catalog EPS 5340](#)

PTFE Lip Seals

Parker manufactures a wide range of PTFE lip seals to meet the unique temperature, chemical and low friction requirements of high-performance systems. FlexiSeal[®], FlexiLip[™] and FlexiCase[™] lip seals are available in standard inch, metric and custom designs.




rotary shaft seals available in a multitude of configurations.

See: [Catalog EPS 5350](#)

Rotary Shaft Seals

Parker offers a complete line of rotary seal products including the proprietary Clipper[®] Oil Seal design with integrally molded rubber/fiber outer case and elastomeric inner lip. Varying profiles include factory split, MIST, single-lip, dual lip, excluder and molded-in spring. Parker Oil Seals are elastomer-lipped, metal retained



See: [Catalog EPS 5275](#)

ProTech Bearing Isolators

ProTech bearing isolators are the ultimate in bearing protection with unitized, two-piece, non-contact design. ProTech provides zero lubricant leakage and total exclusion of contaminants.

G

09/01/07



Offer of Sale

Catalog EPS 5370/USA

The items described in this document are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in this document, when communicated to Parker Hannifin Corporation, its subsidiary or any authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgements, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.

2. Payment: Payment shall be made by Buyer net 30 days from the date of invoice of the items purchased hereunder. Seller reserves the right to charge interest on all past due amounts. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

3. Delivery: Unless otherwise provided in the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.

4. Warranty: Seller warrants that the items sold hereunder shall be free from defects in material or workmanship at the time of delivery. THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GUARANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING, BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED. NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLLY OR PARTIALLY, TO BUYER'S DESIGNS OR SPECIFICATIONS.

5. Limitation of Remedy: SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING, BUT NOT LIMITED TO, PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.

6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold hereunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.

7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. Buyer's Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be

destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefor upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity for Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after the Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using said item, place or modify said item so as to make it noninfringing, or offer to accept return of said item and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights. If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgements resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Any special requirements for items to be provided by Seller hereunder including without limitation; compliance with military specifications, special documentation, or testing requirements, must be communicated to Seller in writing at the time the items are first requested. Any such requests that are communicated to Seller after preparation to manufacture an item has commenced may result in additional charges for rework or remanufacture of the item.

13. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of the sale of the items sold hereunder or this Agreement may be brought by either more than two (2) years after the cause of action accrues.

09/01/07



Worldwide Fluid Power Sealing

North America

EPS Division, Headquarters
Salt Lake City, Utah
phone 801 972 3000
fax 801 973 4019

EPS Division, Nacogdoches
Nacogdoches, Texas
phone 800 233 3900
fax 936 560 8998

EPS Division, Marion
Marion, New York
phone 315 926 4211
fax 315 926 4496

EPS Division, Chicago
Elgin, Illinois
phone 847 783 4300
fax 847 783 4311

EPS Division, Baja
Baja, Mexico
phone 619 671 3257

Asia Pacific


China
Parker Hannifin Motion & Control (Shanghai) Co., Ltd.
phone 86 21 2899 5181
fax 86 21 5834 8975

Europe

Germany
Parker Prädifa
phone 49 7142 351 0
fax 49 7142 351293

Denmark
Polar Seals ApS
phone 45 49 121700
fax 45 49 121701

Belgium
Parker Hannifin, Advanced Products, NV
phone 32 3 880 81 50
fax 32 3 888 48 62



Your Local Authorized Parker Distributor

EPS 5370 AP 5.0M 09/01/07



Parker Hannifin Corporation
Engineered Polymer Systems Division
2220 South 3600 West
Salt Lake City, UT 84119
phone 801 972 3000
fax 801 973 4019
www.parker.com

U.S. \$75.00